
T | 432.355-3021 W | cwrh2o.com

RSL Membrane

The Next Generation of Filtration

Patent Protected Replaceable Skin Layer Membranes

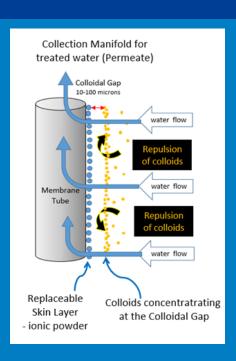

Three Easy Steps

- 1. Add Powder 5 Mins
- 2. Fliter Water 4-30hrs
- 3. Air Backwash at 10 psi 2 minutes






RSL Membrane

Features and Advantages

- Commercialized Technology
- Low Pressure < 10psi
- 99% Oil Recovery
- Turbidity <1 ntu
- Eliminate costly chemicals
- Integral Step in Beneficial Reuse
- Highly Automated
- 800 bpd Pilot Unit Available



cwrh20.com 432.355.3021







Recycling Integral Facilities

- Locations In Orla and Barstow
- > 30K BPD SWD
- ➤ 60K BPD Produced Water Capacity
- Solids and Tank Bottoms Processing and Disposal




remote



RSL Membrane System

- Small Footprint
- 15K BPD
- One 30ft Conex
- Mobile or Fixed Facilities

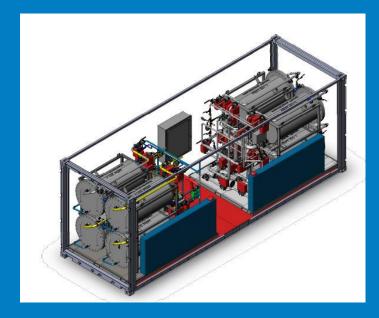

Call 409-730-3242 for help with your produced water and make every barrel of water count!

