




Dowel Replacement Guide

1. Loosen allen head bolts with 7/32" allen wrench and remove dowel.

2. Remove bolt from dowel. **NOTE:** Some bolts are slightly larger in diameter than others. Rotate the bolt with allen wrench in a counter-clockwise direction if necessary while seperating dowel from dowel mounting bolt.

3. Install dowel mounting bolt through dowel in a clockwise direction if necessary until bolt is fully seated in the dowel counter-sink.

4. Install dowel and torque mounting bolt to 30 Ft. Lbs., the bender is now ready for use.

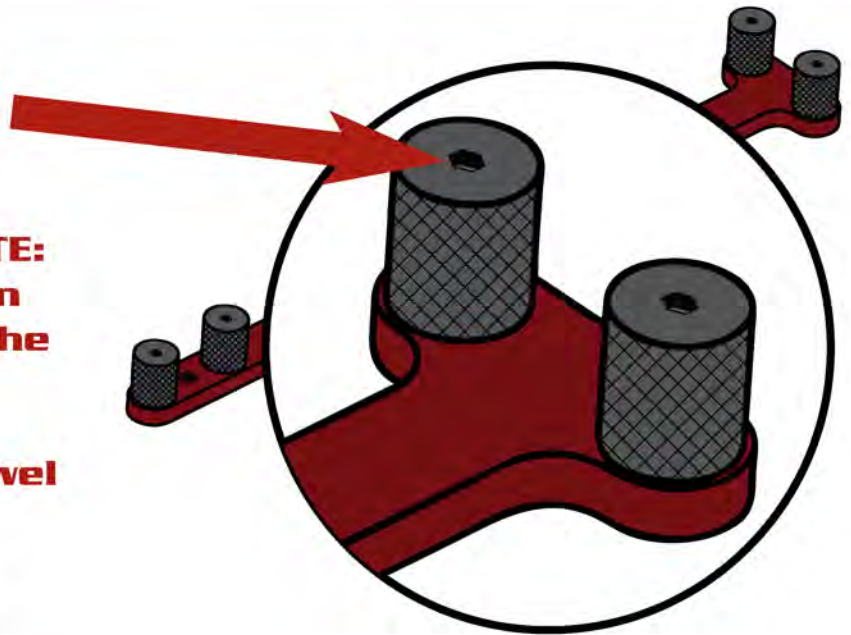

Thank you for purchasing the Bulldog Bender.

Bulldog Manufacturing LLC
Owensboro, Ky 42303

