

Eco-Duo Continuous Isolation Valve

Continuous Isolation Valve for 15mm (Single)
Continuous Isolation Valve for 22mm (Single)
Continuous Isolation Valve for 28mm (Single)
Continuous Isolation Valve for 35mm (Single)
Continuous Isolation Valve for 42mm (Single)
Continuous Isolation Valve for 54mm (Single)

<u>SKU</u>	RRP EX VAT	
W1599 BL	£28.76	
W1600 BL	£45.79	_ "
W1601 BL	£71.96	
W1602 BL	£121.87	
W1603 BL	£150.42	
W1604 BI	I £251 56	

Weight KG / Fittings - Single

Continuous Isolation Valve for 15mm	- 0.30 KG
Continuous Isolation Valve for 22mm	- 0.40 KG
Continuous Isolation Valve for 28mm	- 0.70 KG
Continuous Isolation Valve for 35mm	- 0.90 KG
Continuous Isolation Valve for 42mm	- 1.10 KG
Continuous Isolation Valve for 54mm	- 1.80 KG

<u>Details</u>

Finishing Options:

Copper CP

Max Pressure

16 Bar up to 30°C

Designer:

Maxwell Bridges

Material Type:

Main Body: BRASS Pipes: COPPER

Separators: 316 STAINLESS STEEL

Features and Benefits


- Continues to Circulate water even when Valve is closed
- Patented Pipe-in-a-pipe technology
- Saves 50% energy costs (tested by BRE)
- Maintains temperatures across the whole building.
- · Halves installation time and costs
- 50% reduction in pipe fixings and insulation
- No special installation required
- · Pipework can be cut as normal
- Helps to reduce the risk of Legionella and other water borne pathogens
- Can be used on hot and cold potable water systems

Notes:

- Only for use with potable water (not closed heating systems)
- Only for use with pumped recirculated water



SKU	Description	Α	В	С	D
W1599 BL	15mm	78	46	90	15
W1660 BL	22mm	85	54	95	22
W1601 BL	28mm	100	57	110	28
W1602 BL	35mm	120	62	110	35
W1603 BL	42mm	135	77	140	42
W1604 BL	54mm	160	84	140	54

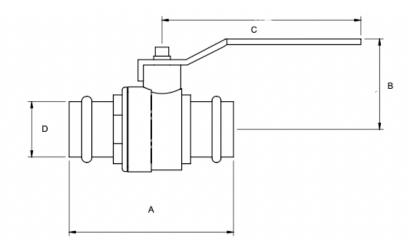



Water Kinetics Eco-Duo Guarantee - Terms and Conditions

Products are subject to a guarantee that is between Water Kinetics, registered at Lomond House 7 Greenbank Road, Darvel, East Ayrshire, United Kingdom, KA17 0NN, Company No: SC632550, VAT: GB 350 116 837, and the final purchaser of the product.

When correctly assembled with the stated tubes and pipe the length of guarantee is as follows:

25 Years

The Eco-Duo Copper and Stainless ranges are guaranteed for a period of 25 years commencing on the date of purchase when installed in conjunction with Eco-Duo fittings and components.

The guarantee is subject to proof of purchase being supplied.

This guarantee does not affect any statutory rights the purchaser may have in law.

The guarantee covers manufacturing or material defects when installed in accordance with our instructions on specified tube materials and applications and does not cover instances of normal wear and tear).

This product range has been designed for the use of domestic and commercial applications and therefore the guarantee is subject to the product being properly selected for their intended service conditions.

The guarantee is not applicable where the product is fitted contrary to the conditions contained within the fitting instructions.

Provided Eco-Duo is installed correctly and receives adequate preventative maintenance it should give years of trouble–free service.

Abusive behaviour, and accidental damage to the product are not covered by this quarantee.

The extent of any liability from this guarantee is limited to the cost of the replacement of the defective item and not to installation or consequential damages.

Eco-Duo is a trademark of Water Kinetics Ltd

Water Kinetics Ltd makes every effort to ensure that the information provided on its website is accurate. However, we cannot guarantee this, and accept no liability for any information or advice given via its website.

* All Weights are accurate to +/- 0.01KG