

Eco-Duo - Continuous Isolation Valve Blue Handle

Continuous Isolation Valve

Eco-Duo Continuous Isolation Valve for 15mm W1599 BL Eco-Duo Continuous Isolation Valve for 22mm W1600 BL Eco-Duo Continuous Isolation Valve for 28mm W1601 BL Eco-Duo Continuous Isolation Valve for 35mm W1602 BL Eco-Duo Continuous Isolation Valve for 42mm W1603 BL Eco-Duo Continuous Isolation Valve for 54mm W1604 BL



Finishing Options:

Brass BR

Material Type

Main Body: BRASS Pipes: COPPER

Separators: 316 STAINLESS STEEL

<u>Weight</u>

Eco-Duo Continuous Isolation Valve for 15mm - 0.27KG Eco-Duo Continuous Isolation Valve for 22mm - 0.45KG Eco-Duo Continuous Isolation Valve for 28mm - 0.69KG Eco-Duo Continuous Isolation Valve for 35mm - 0.89KG Eco-Duo Continuous Isolation Valve for 42mm - 1.62KG Eco-Dup Continuous Isolation Valve for 54mm - 2.62KG

Max Pressure Details

16 Bar up to 30°C

Designer: Maxwell Bridges

Features and Benefits

- Continues to Circulate water even when Valve is closed
- · Patented Pipe-in-a-pipe technology
- Saves 50% energy costs (tested by BRE)
- Maintains temperatures across the whole building.
- · Halves installation time and costs
- 50% reduction in pipe fixings and insulation
- No special installation required
- · Pipework can be cut as normal
- Helps to reduce the risk of Legionella and other water borne pathogens
- Can be used on hot and cold potable water systems

Notes:


- Only for use with potable water (not closed heating systems)
- Only for use with pumped recirculated water



Email: info@water-kinetics.co.uk | Phone: 0141 280 9585 Website: www.water-kinetics.co.uk



Description	Α	В
15mm	78	46
22mm	85	54
28mm	100	57
35mm	120	62
42mm	135	77
54mm	160	84
	15mm 22mm 28mm 35mm 42mm	15mm 78 22mm 85 28mm 100 35mm 120 42mm 135

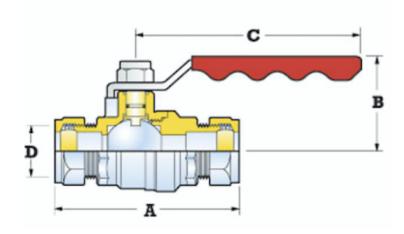

Email: info@water-kinetics.co.uk | Phone: 0141 280 9585 Website: www.water-kinetics.co.uk



Water Kinetics Eco-Duo Guarantee - Terms and Conditions

Products are subject to a guarantee that is between Water Kinetics and the final purchaser of the product. When correctly assembled with the stated tubes and pipe the length of guarantee is as follows:

5 Years

The Eco-Duo Copper and Stainless ranges are guaranteed for 25 years when installed along with Eco-Duo fittings and components.

The guarantee is subject to proof of purchase being supplied.

This guarantee does not affect any statutory rights the consumer may have in law.

The guarantee covers manufacturing or material defects when installed in accordance with our instructions on specified tube materials and applications, and does not cover parts subject to normal wear and tear.

This product range has been designed for the use of domestic and commercial applications and therefore the Guarantee is subject to the product being properly selected for their intended service conditions.

The guarantee is not applicable where the product is fitted contrary to the conditions in the fitting instructions.

Provided Eco-Duo is installed correctly and receives adequate preventative maintenance it should give years of trouble–free service.

Abusive behaviour and accidental damage to the product are not covered by this guarantee. The extent of this liability is limited to the cost of the replacement of the defective item and not to installation or consequential damages.

Eco-Duo is a trademark of Water Kinetics Ltd

Water Kinetics Ltd makes every effort to ensure that the information provided on its website is accurate. However we cannot guarantee this, and accept no liability for any information or advice given via its website.

