

## Eco-Duo - Continuous Isolation Valve Red Handle

### Continuous Isolation Valve

Eco-Duo Continuous Isolation Valve for 15mm	W1599 RD
Eco-Duo Continuous Isolation Valve for 22mm	W1600 RD
Eco-Duo Continuous Isolation Valve for 28mm	W1601 RD
Eco-Duo Continuous Isolation Valve for 35mm	W1602 RD
Eco-Duo Continuous Isolation Valve for 42mm	W1603 RD
Eco-Duo Continuous Isolation Valve for 54mm	W1604 RD



### Finishing Options:

Brass BR

### Material Type

Main Body: BRASS

Pipes: COPPER

Separators: 316 STAINLESS STEEL

### Weight

Eco-Duo Continuous Isolation Valve for 15mm	- 0.27KG
Eco-Duo Continuous Isolation Valve for 22mm	- 0.45KG
Eco-Duo Continuous Isolation Valve for 28mm	- 0.69KG
Eco-Duo Continuous Isolation Valve for 35mm	- 0.89KG
Eco-Duo Continuous Isolation Valve for 42mm	- 1.62KG
Eco-Duo Continuous Isolation Valve for 54mm	- 2.62KG

### Max Pressure Details

5 Bar unto 120°C

Designer : Maxwell Bridges

### Features and Benefits


- Continues to Circulate water even when Valve is closed
- Patented Pipe-in-a-pipe technology
- Saves 50% energy costs (tested by BRE)
- Maintains temperatures across the whole building.
- Halves installation time and costs
- 50% reduction in pipe fixings and insulation
- No special installation required
- Pipework can be cut as normal
- Helps to reduce the risk of Legionella and other water borne pathogens
- Can be used on hot and cold potable water systems

### Notes:

- Only for use with potable water (not closed heating systems)
- Only for use with pumped recirculated water



SKU	Description	A	B
W1599 RD	15mm	78	46
W1600 RD	22mm	85	54
W1601 RD	28mm	100	57
W1602 RD	35mm	120	62
W1603 RD	42mm	135	77
W1604 RD	54mm	160	84

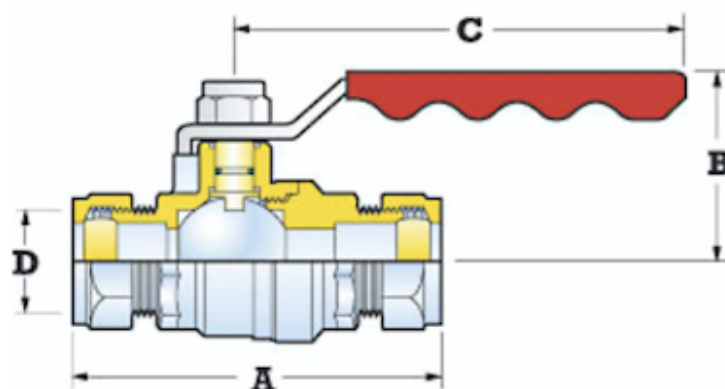

## Water Kinetics Eco-Duo Guarantee - Terms and Conditions

Products are subject to a guarantee that is between Water Kinetics and the final purchaser of the product. When correctly assembled with the stated tubes and pipe the length of guarantee is as follows:

### 5 Years

The Eco-Duo Copper and Stainless ranges are guaranteed for 25 years when installed along with Eco-Duo fittings and components.

The guarantee is subject to proof of purchase being supplied.

This guarantee does not affect any statutory rights the consumer may have in law.

The guarantee covers manufacturing or material defects when installed in accordance with our instructions on specified tube materials and applications, and does not cover parts subject to normal wear and tear.

This product range has been designed for the use of domestic and commercial applications and therefore the Guarantee is subject to the product being properly selected for their intended service conditions.

The guarantee is not applicable where the product is fitted contrary to the conditions in the fitting instructions.

Provided Eco-Duo is installed correctly and receives adequate preventative maintenance it should give years of trouble-free service.

Abusive behaviour and accidental damage to the product are not covered by this guarantee. The extent of this liability is limited to the cost of the replacement of the defective item and not to installation or consequential damages.

## Eco-Duo is a trademark of Water Kinetics Ltd

Water Kinetics Ltd makes every effort to ensure that the information provided on its website is accurate. However we cannot guarantee this, and accept no liability for any information or advice given via its website.

