


Eco-Duo - Coupler Street Reducer Data Sheet 1

Coupler Street Reducer

Eco-Duo Coupler Street Reducer 28mm x 15mm	W1551 CP
Eco-Duo Coupler Street Reducer 35mm x 22mm	W1552 CP
Eco-Duo Coupler Street Reducer 35mm x 28mm	W1553 CP
Eco-Duo Coupler Street Reducer 42mm x 22mm	W1554 CP
Eco-Duo Coupler Street Reducer 42mm x 28mm	W1555 CP
Eco-Duo Coupler Street Reducer 42mm x 35mm	W1556 CP
Eco-Duo Coupler Street Reducer 54mm x 35mm	W1557 CP
Eco-Duo Coupler Street Reducer 54mm x 42mm	W1558 CP

(See Data Sheet 2 for larger sizes)

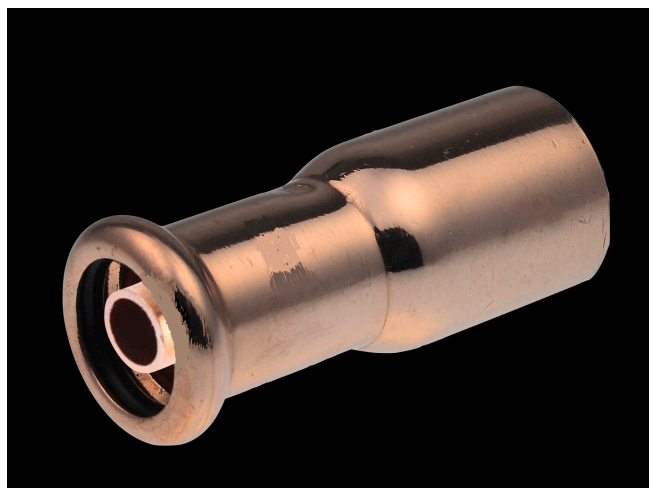

Finishing Options:
Copper CP

Material Type

Main Body: COPPER
Separators: 316 STAINLESS STEEL

Weight

Eco-Duo Coupler Street Reducer 28mm x 15mm	- 0.28 KG
Eco-Duo Coupler Street Reducer 35mm x 22mm	- 0.30 KG
Eco-Duo Coupler Street Reducer 35mm x 28mm	- 0.32 KG
Eco-Duo Coupler Street Reducer 42mm x 22mm	- 0.56 KG
Eco-Duo Coupler Street Reducer 42mm x 28mm	- 0.65 KG
Eco-Duo Coupler Street Reducer 42mm x 35mm	- 0.77 KG
Eco-Duo Coupler Street Reducer 54mm x 35mm	- 0.81 KG
Eco-Duo Coupler Street Reducer 54mm x 42mm	- 0.84 KG

Max Pressure Details

16 Bar

Designer : Maxwell Bridges

Features and Benefits

- Patented Pipe-in-a-pipe technology
- Saves 50% energy costs (tested by BRE)
- Maintains temperatures across the whole building.
- Halves installation time and costs
- 50% reduction in pipe fixings and insulation
- No special installation required
- Pipework can be cut as normal
- Helps to reduce the risk of Legionella and other water borne pathogens
- Can be used on hot and cold potable water systems


Notes:

- Only for use with potable water (not closed heating systems)
- Only for use with pumped recirculated water



Dimensions

SKU	Description	l1	d1	D1	es1	z1	l2	d2	D2	es2	z2	DN1	DN2
W1551 CP	28 x 15mm	25	15	23	20	4	37	28	-	23	14	DN12	DN25
W1552 CP	35 x 22mm	29	22	31	21	9	39	35	-	26	13	DN20	DN32
W1553 CP	35 x 28mm	28	28	37	23	5	35	35	-	26	9	DN25	DN32
W1554 CP	42 x 22mm	25	22	31	21	4	49	42	-	30	19	DN20	DN40
W1555 CP	42 x 28mm	27	28	37	23	4	44	42	-	30	14	DN25	DN40
W1556 CP	42 x 35mm	35	35	44	26	8	38	42	-	30	8	DN32	DN40
W1557 CP	54 x 35mm	35	35	44	26	9	53	54	-	35	18	DN32	DN50
W1558 CP	54 x 42mm	40	42	53	30	9	47	54	-	35	12	DN40	DN50

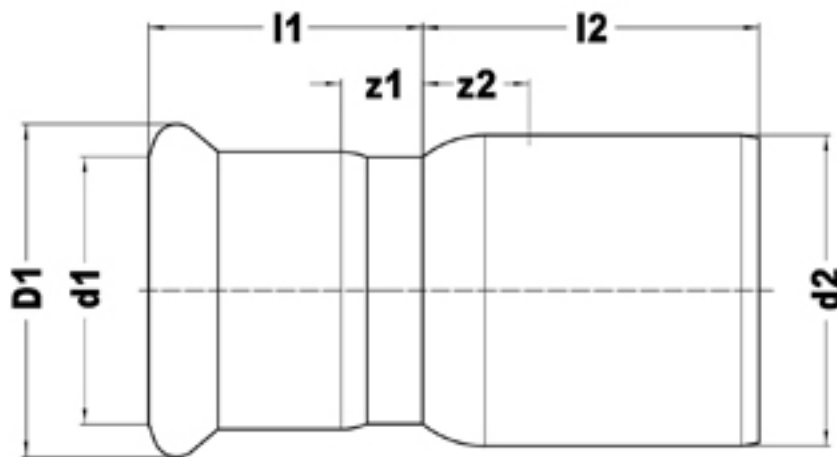

Water Kinetics Eco-Duo Guarantee - Terms and Conditions

Products are subject to a guarantee that is between Water Kinetics and the final purchaser of the product. When correctly assembled with the stated tubes and pipe the length of guarantee is as follows:

25 Years

The Eco-Duo Copper and Stainless ranges are guaranteed for 25 years when installed along with Eco-Duo fittings and components.

The guarantee is subject to proof of purchase being supplied.

This guarantee does not affect any statutory rights the consumer may have in law.

The guarantee covers manufacturing or material defects when installed in accordance with our instructions on specified tube materials and applications, and does not cover parts subject to normal wear and tear.

This product range has been designed for the use of domestic and commercial applications and therefore the Guarantee is subject to the product being properly selected for their intended service conditions.

The guarantee is not applicable where the product is fitted contrary to the conditions in the fitting instructions.

Provided Eco-Duo is installed correctly and receives adequate preventative maintenance it should give years of trouble-free service.

Abusive behaviour and accidental damage to the product are not covered by this guarantee. The extent of this liability is limited to the cost of the replacement of the defective item and not to installation or consequential damages.

Eco-Duo is a trademark of Water Kinetics Ltd

Water Kinetics Ltd makes every effort to ensure that the information provided on its website is accurate. However we cannot guarantee this, and accept no liability for any information or advice given via its website.

* All Weights are accurate to +/- 0.01KG

