

Eco-Duo - Coupling Reducer

Coupling Reducer

Eco-Duo Coupling Reducer 22mm x 15mm	W1549 CP
Eco-Duo Coupling Reducer 28mm x 22mm	W1550 CP
Eco-Duo Coupling Reducer 28mm x 15mm	W1649 CP
Eco-Duo Coupling Reducer 35mm x 28mm	W1650 CP
Eco-Duo Coupling Reducer 42mm x 35mm	W1651 CP
Eco-Duo Coupling Reducer 54mm x 42mm	W1652 CP



Finishing Options:

Copper CP



Main Body: COPPER

Separators: 316 STAINLESS STEEL

<u>Weight</u>

Eco-Duo Coupling Reducer 22mm x 15mm- 0.05 KG Eco-Duo Coupling Reducer 28mm x 22mm- 0.07 KG Eco-Duo Coupling Reducer 28mm x 15mm - 0.07 KG Eco-Duo Coupling Reducer 35mm x 28mm - 0.09 KG Eco-Duo Coupling Reducer 42mm x 35mm - 0.14 KG Eco-Duo Coupling Reducer 54mm x 42mm - 0.21 KG

Max Pressure Details

16 Bar

Designer: Maxwell Bridges



Features and Benefits

- Patented Pipe-in-a-pipe technology
- Saves 50% energy costs (tested by BRE)
- Maintains temperatures across the whole building.
- · Halves installation time and costs
- 50% reduction in pipe fixings and insulation
- No special installation required
- · Pipework can be cut as normal
- Helps to reduce the risk of Legionella and other water borne pathogens
- Can be used on hot and cold potable water systems

Notes:


- Only for use with potable water (not closed heating systems)
- Only for use with pumped recirculated water





Dimensions

sku	Description	11	d1	D1	es1	z1	12	d2	D2	es2	z2	DN1	DN2
W1549 CP	22 x 15mm	28	22	31	21	7	25	15	23	20	5	DN20	DN12
W1649 CP	28 x 15mm	35	28	37	23	12	23	15	23	20	3	DN25	DN12
W1550 CP	28 x 22mm	29	28	37	23	6	26	22	31	21	5	DN25	DN20
W1650 CP	35 x 28mm	33	35	44	26	7	28	28	37	23	5	DN32	DN25
W1651 CP	42 x 35mm	37	42	53	30	7	31	35	44	26	5	DN40	DN32
W1652 CP	54 x 42mm	46	54	65	35	11	34	42	53	30	4	DN50	DN40

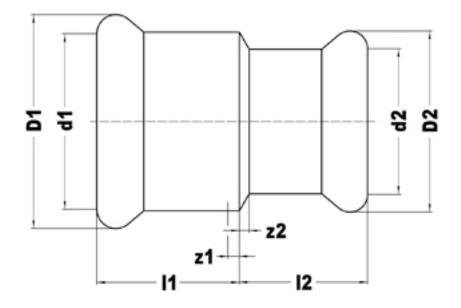

Email: <u>info@water-kinetics.co.uk</u> | Phone: 0141 280 9585 Website: <u>www.water-kinetics.co.uk</u>



Water Kinetics Eco-Duo Guarantee - Terms and Conditions

Products are subject to a guarantee that is between Water Kinetics and the final purchaser of the product. When correctly assembled with the stated tubes and pipe the length of guarantee is as follows:

25 Years

The Eco-Duo Copper and Stainless ranges are guaranteed for 25 years when installed along with Eco-Duo fittings and components.

The guarantee is subject to proof of purchase being supplied.

This guarantee does not affect any statutory rights the consumer may have in law.

The guarantee covers manufacturing or material defects when installed in accordance with our instructions on specified tube materials and applications, and does not cover parts subject to normal wear and tear.

This product range has been designed for the use of domestic and commercial applications and therefore the Guarantee is subject to the product being properly selected for their intended service conditions.

The guarantee is not applicable where the product is fitted contrary to the conditions in the fitting instructions.

Provided Eco-Duo is installed correctly and receives adequate preventative maintenance it should give years of trouble–free service.

Abusive behaviour and accidental damage to the product are not covered by this guarantee. The extent of this liability is limited to the cost of the replacement of the defective item and not to installation or consequential damages.

Eco-Duo is a trademark of Water Kinetics Ltd

Water Kinetics Ltd makes every effort to ensure that the information provided on its website is accurate. However we cannot guarantee this, and accept no liability for any information or advice given via its website.

* All Weights are accurate to +/- 0.01KG

