

## Eco-Duo - Straight Coupling

### Straight Coupling

Eco-Duo Straight Coupling 15mm	W1567 CP
Eco-Duo Straight Coupling 22mm	W1568 CP
Eco-Duo Straight Coupling 28mm	W1569 CP
Eco-Duo Straight Coupling 35mm	W1570 CP
Eco-Duo Straight Coupling 42mm	W1571 CP
Eco-Duo Straight Coupling 54mm	W1572 CP
Eco-Duo Straight Coupling 66.7mm	W1573 CP
Eco-Duo Straight Coupling 76.1mm	W1574 CP
Eco-Duo Straight Coupling 108mm	W1657 CP

### Finishing Options:

Copper CP

### Material Type

Main Body: COPPER  
Separators: 316 STAINLESS STEEL

### Weight

Eco-Duo Straight Coupling 15mm	- 0.03 KG
Eco-Duo Straight Coupling 22mm	- 0.05 KG
Eco-Duo Straight Coupling 28mm	- 0.06 KG
Eco-Duo Straight Coupling 35mm	- 0.09 KG
Eco-Duo Straight Coupling 42mm	- 0.13 KG
Eco-Duo Straight Coupling 54mm	- 0.19 KG
Eco-Duo Straight Coupling 66.7mm	-0.44 KG
Eco-Duo Straight Coupling 76.1mm	-0.58 KG
Eco-Duo Straight Coupling 108mm	- 1.26 KG

### Max Pressure Details

16 Bar

Designer : Maxwell Bridges



### Features and Benefits

- Patented Pipe-in-a-pipe technology
- Saves 50% energy costs (tested by BRE)
- Maintains temperatures across the whole building.
- Halves installation time and costs
- 50% reduction in pipe fixings and insulation
- No special installation required
- Pipework can be cut as normal
- Helps to reduce the risk of Legionella and other water borne pathogens
- Can be used on hot and cold potable water systems


### Notes:

- Only for use with potable water (not closed heating systems)
- Only for use with pumped recirculated water



## Dimensions

SKU	Description	l1	d1	D1	es1	z1	l2	d2	D2	es2	z2	DN1	DN2
W1567 CP	15mm	22	15	23	20	2	22	15	23	20	2	DN12	DN12
W1568 CP	22mm	23	22	31	21	2	23	22	31	21	2	DN20	DN20
W1569 CP	28mm	25	28	37	23	2	25	28	37	23	2	DN25	DN25
W1570 CP	35mm	28	35	44	26	2	28	35	44	26	2	DN32	DN32
W1571 CP	42mm	36	42	53	32	4	36	42	53	32	4	DN40	DN40
W1572 CP	54mm	42	54	65	37	5	42	54	65	37	5	DN50	DN50
W1573 CP	66.7mm	55	67	83	50	5	55	67	83	50	5	DN65	DN65
W1574 CP	76.1mm	55	76	94	50	5	55	76	94	50	5	DN65	DN65
W1657 CP	108mm	72	108	132	68	5	72	108	132	68	5	DN100	DN100

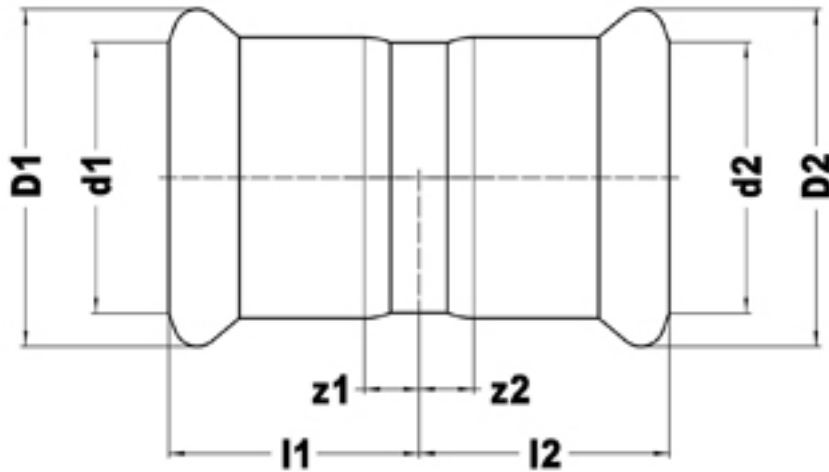

## Water Kinetics Eco-Duo Guarantee - Terms and Conditions

Products are subject to a guarantee that is between Water Kinetics and the final purchaser of the product. When correctly assembled with the stated tubes and pipe the length of guarantee is as follows:

### 25 Years

The Eco-Duo Copper and Stainless ranges are guaranteed for 25 years when installed along with Eco-Duo fittings and components.

The guarantee is subject to proof of purchase being supplied.

This guarantee does not affect any statutory rights the consumer may have in law.

The guarantee covers manufacturing or material defects when installed in accordance with our instructions on specified tube materials and applications, and does not cover parts subject to normal wear and tear.

This product range has been designed for the use of domestic and commercial applications and therefore the Guarantee is subject to the product being properly selected for their intended service conditions.

The guarantee is not applicable where the product is fitted contrary to the conditions in the fitting instructions.

Provided Eco-Duo is installed correctly and receives adequate preventative maintenance it should give years of trouble-free service.

Abusive behaviour and accidental damage to the product are not covered by this guarantee. The extent of this liability is limited to the cost of the replacement of the defective item and not to installation or consequential damages.

### Eco-Duo is a trademark of Water Kinetics Ltd

Water Kinetics Ltd makes every effort to ensure that the information provided on its website is accurate. However we cannot guarantee this, and accept no liability for any information or advice given via its website.

\* All Weights are accurate to +/- 0.01KG

