

## Eco-Duo - 45 Degree Elbow

### **45 Degree Elbow**

Eco-Duo 45 degree elbow for 15mm	W1525 CP
Eco-Duo 45 degree elbow for 22mm	W1526 CP
Eco-Duo 45 degree elbow for 28mm	W1527 CP
Eco-Duo 45 degree elbow for 35mm	W1528 CP
Eco-Duo 45 degree elbow for 42mm	W1529 CP
Eco-Duo 45 degree elbow for 54mm	W1530 CP
Eco-Duo 45 degree elbow for 66.7mm	W1531 CP
Eco-Duo 45 degree elbow for 76.1mm	W1532 CP

### **Finishing Options:**

Copper CP

### **Material Type**

Main Body: COPPER  
Separators: 316 STAINLESS STEEL

### **Weight**

Eco-Duo 45 degree elbow for 15mm	- 0.27 KG
Eco-Duo 45 degree elbow for 22mm	- 0.29 KG
Eco-Duo 45 degree elbow for 28mm	- 0.32 KG
Eco-Duo 45 degree elbow for 35mm	- 0.58 KG
Eco-Duo 45 degree elbow for 42mm	- 0.66 KG
Eco-Duo 45 degree elbow for 54mm	- 1.30 KG
Eco-Duo 45 degree elbow for 66.7mm	- 1.47 KG
Eco-Duo 45 degree elbow for 76.1mm	- 1.50 KG

### **Max Pressure Details**

16 Bar

**Designer** : Maxwell Bridges



### **Features and Benefits**

- Patented Pipe-in-a-pipe technology
- Saves 50% energy costs (tested by BRE)
- Maintains temperatures across the whole building.
- Halves installation time and costs
- 50% reduction in pipe fixings and insulation
- No special installation required
- Pipework can be cut as normal
- Helps to reduce the risk of Legionella and other water borne pathogens
- Can be used on hot and cold potable water systems


### **Notes:**

- Only for use with potable water (not closed heating systems)
- Only for use with pumped recirculated water



## Dimensions

SKU	Description	l1	d1	D1	es1	z1	l2	d2	D2	es2	z2	DN1	DN2
W1525 CP	15mm	28	15	23	20	8	28	15	23	20	8	DN12	DN12
W1526 CP	22mm	31	22	31	19	12	31	22	31	19	12	DN20	DN20
W1527 CP	28mm	37	28	37	21	16	37	28	37	21	16	DN25	DN25
W1528 CP	35mm	44	35	44	26	18	44	35	44	26	18	DN32	DN32
W1529 CP	42mm	51	42	53	30	21	51	42	53	30	21	DN40	DN40
W1530 CP	54mm	62	54	65	35	27	62	54	65	35	27	DN50	DN50
W1531 CP	66.7mm	85	67	83	50	35	85	67	83	50	35	DN65	DN65
W1532 CP	76.1mm	91	76	94	46	45	91	76	94	46	45	DN65	DN65

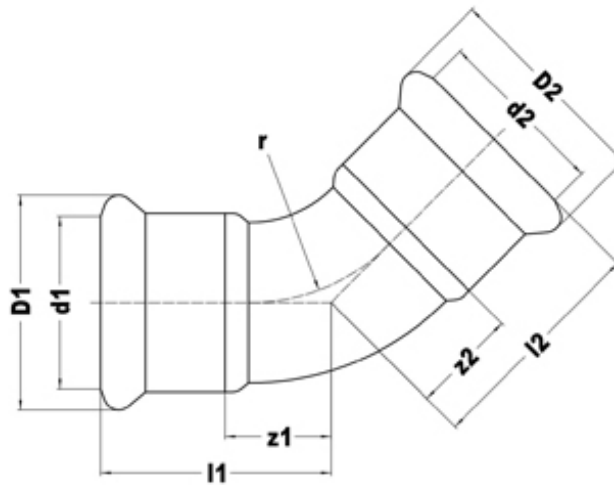

### **Water Kinetics Eco-Duo Guarantee - Terms and Conditions**

Products are subject to a guarantee that is between Water Kinetics and the final purchaser of the product. When correctly assembled with the stated tubes and pipe the length of guarantee is as follows:

#### **25 Years**

The Eco-Duo Copper and Stainless ranges are guaranteed for 25 years when installed along with Eco-Duo fittings and components.

The guarantee is subject to proof of purchase being supplied.

This guarantee does not affect any statutory rights the consumer may have in law.

The guarantee covers manufacturing or material defects when installed in accordance with our instructions on specified tube materials and applications, and does not cover parts subject to normal wear and tear.

This product range has been designed for the use of domestic and commercial applications and therefore the Guarantee is subject to the product being properly selected for their intended service conditions.

The guarantee is not applicable where the product is fitted contrary to the conditions in the fitting instructions.

Provided Eco-Duo is installed correctly and receives adequate preventative maintenance it should give years of trouble-free service.

Abusive behaviour and accidental damage to the product are not covered by this guarantee. The extent of this liability is limited to the cost of the replacement of the defective item and not to installation or consequential damages.

#### **Eco-Duo is a trademark of Water Kinetics Ltd**

Water Kinetics Ltd makes every effort to ensure that the information provided on its website is accurate. However we cannot guarantee this, and accept no liability for any information or advice given via its website.

\* All Weights are accurate to +/- 0.01KG

