

# LGMG

## A30JE

### ARTICULATING BOOM LIFT



- **Narrow and Lightweight Design:** At just 3 feet 11 inches wide and weighing 14,771 lb, the A30JE boom is easy to maneuver in tight spaces.
- **Superior Accessibility:** Comes standard with a rotating jib and platform, providing increased flexibility in reaching difficult areas at no additional cost. (The jib can swing  $\pm 90^\circ$  horizontally providing a wider working range.)
- **Enhanced Maneuverability:** A tight inside turning radius of 5 feet 5 inches and an outside turning radius of 10 feet 4 inches ensure smooth operation in restricted work zones.
- **Reliable Power:** Powered by 8x6V, 390Ah flooded lead-acid batteries, the A30JE boom provides long-lasting performance for extended jobsite use.

# LGMG Electric - Articulating Boom Lift

## SPECIFICATIONS

MODELS	A30JE ( A09JE )	
	Imperial	Metric
Measurements		
Work Height Max.	35'6"	11m
Platform Height Max.	29'6"	9m
Horizontal Outreach	20'6"	6.25m
Up and Over Height	13'6"	4.12m
Platform Length	3'10"	1.17m
Platform Width	2'6"	0.76m
<b>A</b> Stowed Length	17'11"	5.46m
Length-Transport (jib tucked)	11'9"	3.58m
<b>B</b> Overall Width	3'11"	1.19m
<b>C</b> Stowed Height	6'7"	2m
Height-Transport	8'3"	2.52m
<b>D</b> Wheelbase	5'2"	1.58m
<b>E</b> Ground Clearance	4"	0.09m

## PRODUCTIVITY

Max. Platform Occupants	2	
Platform Capacity	507 lbs	230kg
Turntable Rotation	355°	355°
Drive Speed-Stowed	3.1mph	5km/h
Drive Speed-Raised	0.4mph	0.65km/h
Gradeability	30%	30%
Max. Wind Speed	28mph	12.5m/s
Turning Radius-Inside	5'5"	1.65m
Turning Radius-Outside	10'4"	3.15m
Max.Slope	2.5°/4.5°	2.5°/4.5°
Tires Type	Solid Non-Marking	
Tires Size	22x7	
Ground Pressure, Tires	103.7 psi	715 kPa

## POWER

Power Source 48V(8x6V),390Ah,FLA

## HYDRAULIC SYSTEM

Hydraulic Oil Volume 4.5gal 17L

## WEIGHT




Machine Weight 14,771 lbs 6,700kg

## STANDARD FEATURES

Proportional control	Anti-collision protection
Horn/Hour meter	Auto-leveling platform
AC drive motors	Intelligent diagnostic system
AC lifting motor	Over tilt protection system
Power switch	Overload sensing system
Full-height drive	Telematics connector
Emergency descent	Solid non-marking tires

## OPTIONAL

AC power to platform	Telematics
----------------------	------------

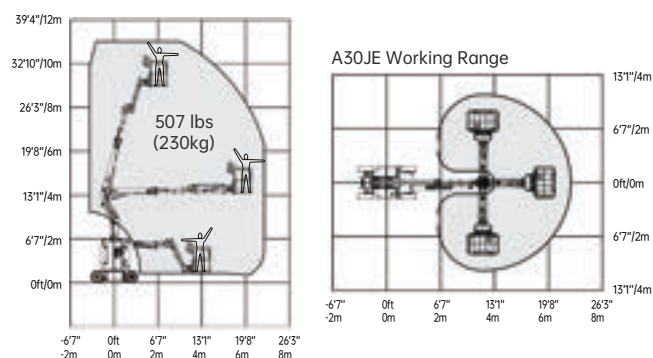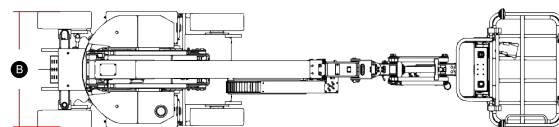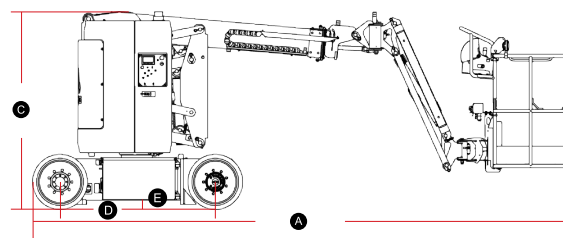

Please contact LGMG or a local dealer for more details.

LGMG reserves the right to change technical data without prior notice. All photos and pictures in this brochure are for promotional purposes only.

## Boland Equipment Rentals

282 Hudson Street  
Hackensack, NJ 07601

[www.berequipment.com](http://www.berequipment.com)

201-342-8020

