

Tractor 3Point Cement Mixer

Uses:

*Mixing feed;Fertilizer;Inoculating seed,potting soil and other mixing jobs.

Features:

*Two pieces steel drum construction with internal paddles for uniform mixing and clean dumping.

*5 cubic foot capacity(1 bag mix).

*Hydraulic top link cylinder provides positive dump control.

*Number 40-roller chain drives mixing drum.

*Adjustable Cat.1 hitch for easy hook up to most tractors(7/8" Dia.Lift pins).

*Sealed ball bearings provide long service life with reduced maintenance.

Specifications:

Model	5CM	5CM-2
Capacity	5cu.	5cu.
Power From	PTO Shaft	Hydraulic Motor
Drive Ratio	8.77:1	500rpm
Blade No	3	3
N.W/G.W	105/130kgs	105/130kgs
Packing Size	1100*940*700mm	1100*940*700mm
Tractor Hp	18-25hp	18-25hp
Qty/20'GP	36pcs/20'GP	36pcs/20'GP



5CM



5CM-2

ATV Flail Mower ATV

Uses:

- *Perfect for use after storm when debris is scattered throughout areas usually maintained with normal mowers;
- *Ideal for thick grass, sticks, undergrowth and light vine mulching;
- *Vegetable & pasture topping;
- *Roadside maintenance.

Features:

- *Cutting height controlled by adjustable skids;
- *High strength mulching blades;
- *Belt driven;
- *Safety flaps to prevent debris being thrown;
- *With engine, Manual or Electric Start.

Specifications

Model	AFM100	AFM120
Cutting Width	990mm	1190mm
Engine Power	13/15hp	13/15hp
Blade Type	T or Y	T or Y
Blade Number	24	28
N.W/G.W	230/265	250/280
Packing Size	1600*860*1020	1950*765*2050/3
Qty/20'GP	27	24
Engine Brand available: Jiangdong/ Loncin / B+S/ Honda /Kama diesel		



ATV Finish Mower ATV

Uses:

- *Perfect for use after storm when debris is scattered throughout areas usually maintained with normal mowers;
- *Ideal for thick grass, sticks, undergrowth and light vine mulching;
- *Vegetable & pasture topping;
- *Roadside maintenance.


Features:

- *Cutting height controlled by adjustable skids;
- *High strength mulching blades;
- *Belt driven;
- *Safety flaps to prevent debris being thrown;
- *With engine, Electric Start.



Specifications

Model	ATFM120	ATFM150	ATFM180
Cutting Width	1190mm	1490mm	1790mm
Engine Brand	Loncin	Loncin	Loncin
Engine Power	9.2kw	9.2kw	9.2kw
Blade Number	3	3	3
N.W/G.W	190/220	215/230	240/270
Packing Size	1250*700*630	1525*815*630	1870*950*630
Qty/20'GP	36	18	18

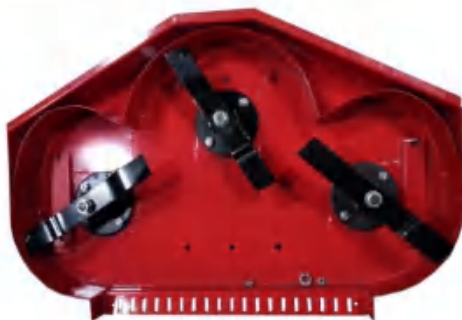

Flail Mower EFGC

Uses:

- *Perfect for use after storm when debris is scattered throughout areas usually maintained with normal mowers;
- *Ideal for thick grass, sticks, undergrowth and light vine mulching;
- *Vegetable & pasture topping;
- *Roadside maintenance.

Features:

- *Cutting height controlled by adjustable skids;
- *High strength mulching blades;
- *Belt driven;
- *Safety flaps to prevent debris being thrown;
- *Extra strong and designed with safety in mind;
- *Support leg for storage;
- *Solid hitch.



Specifications

Model	EFGC-105	EFGC-115	EFGC-125	EFGC-135	EFGC-145	EFGC-155	EFGC-165	EFGC-175
Cutting Width	920	1020	1120	1220	1330	1420	1520	1620
Matched Power	20-30	20-35	25-40	25-45	35-45	40-55	40-55	45-60
PTO Turning Speed	540rpm	540rpm	540rpm	540rpm	540rpm	540rpm	540rpm	540rpm
Blade Type	Y/Hammer	Y/Hammer	Y/Hammer	Y/Hammer	Y/Hammer	Y/Hammer	Y/Hammer	Y/Hammer
Blade Number	32	40	40	48	48	48	56	56
N.W/G.W	210/230	220/242	230/255	240/268	250/280	260/292	270/305	280/320
Packing Size	1100*800*660	1200*800*660	1300*800*660	1400*800*660	1500*800*660	1600*800*660	1700*800*660	1800*800*660
Qty/20'GP	42	33	33	33	30	21	22	22



Flail Mower EFGCH

Uses:

- *Perfect for use after storm when debris is scattered throughout areas usually maintained with normal mowers;
- *Ideal for thick grass, sticks, undergrowth and light vine mulching;
- *Vegetable & pasture topping;
- *Roadside maintenance.

Features:

- *Cutting height controlled by adjustable skids;
- *High strength mulching blades;
- *Belt driven;
- *Safety flaps to prevent debris being thrown;
- *Extra strong and designed with safety in mind;
- *Support leg for storage;
- *Solid hitch.



Specifications

Model	EFGCH-105	EFGCH-115	EFGCH-125	EFGCH-135	EFGCH-145	EFGCH-155	EFGCH-165	EFGCH-175
Cutting Width	920	1020	1120	1220	1330	1420	1520	1620
Matched Power	20-30	20-35	25-40	25-45	35-45	40-55	40-55	45-60
PTO Turning Speed	540rpm	540rpm	540rpm	540rpm	540rpm	540rpm	540rpm	540rpm
Blade Type	Y/Hammer	Y/Hammer	Y/Hammer	Y/Hammer	Y/Hammer	Y/Hammer	Y/Hammer	Y/Hammer
Blade Number	32	40	40	48	48	48	56	56
N.W/G.W	250/275	260/285	270/300	280/310	290/320	300/335	310/350	315/365
Packing Size	1220*850*730	1320*850*730	1420*850*730	1520*850*730	1620*850*730	1720*850*730	1820*850*730	1920*850*730
Qty/20'GP	30	30	30	24	24	18	18	18



Flail Mower EF

Uses:

- *Perfect for use after storm when debris is scattered throughout areas usually maintained with normal mowers;
- *Ideal for thick grass, sticks, undergrowth and light vine mulching;
- *Vegetable & pasture topping;
- *Roadside maintenance.

Features:

- *Cutting height controlled by adjustable skids;
- *High strength mulching blades;
- *Belt driven;
- *Safety flaps to prevent debris being thrown;
- *Extra strong and designed with safety in mind;
- *Support leg for storage;
- *Solid hitch.



Specifications

Model	EF-85	EF-95	EF-105	EF-115	EF-125	EF-135	EF-165
Cutting Width	829	929	1029	1129	1229	1329	1629
Matched Power	14-18	16-20	20-30	20-35	25-35	25-35	25-35
PTO Turning Speed	540rpm	540rpm	540rpm	540rpm	540rpm	540rpm	540rpm
Blade Type	Y	Y	Y	Y	Y	Y	Y
Blade Number	24	24	30	30	36	36	42
N.W/G.W	140/160	150/170	156/180	162/186	170/195	180/205	197/218
Packing Size	1010*760*440	1110*760*440	1210*760*440	1310*760*440	1410*760*440	1510*760*440	1810*760*440
Qty/20'GP	60	60	52	48	48	39	36



Finishing Mower

Uses:

- *Perfect around open grassy areas;
- *Slashing a variety of grasses, small trees and light scrub
- *Clearing roadsides; Creating firebreaks.

Features:

- *Build to last medium duty slasher with re-enforced frame.
- *3 belt-driven blades;
- *Large range of cutting heights;
- Quick coupler PTO driveline shaft included.
- *4 independent height adjustable castor wheels allow the mower to contour over uneven surfaces to provide an even finish.
- *Rear discharge for normal use or side discharge option for use in areas where the cuttings need to be thrown clear.



Specifications

Model	3.5FM	4FM	5FM	6FM	7FM	8FM
Cutting Width	1010mm	1160mm	1460mm	1760mm	2060mm	2360mm
Dimensions	1120*1150*600	1270*1200*600	1570*1300*600	1870*1360*600	2120*1650*800	2420*1750*800
Matched Power	18-25	18-25	20-30	30-50	30-50	30-60
3 Point Hitch	Cat.1	Cat.1	Cat.1	Cat.1	Cat.1	Cat.1
Blade Number	3	3	3	3	3	3
N.W/G.W	137/150	147/160	163/179	204/225	265/285	310/335
Packing Size	1100*650*450	1250*700*450	1510*800*450	1870*950*450	2180*1100*450	2450*1300*450
Qty/20'GP	64	48	42	24	20	10



Finishing Mower

Uses:

- *Perfect for use after storm when debris is scattered throughout areas usually maintained with normal mowers;
- *Ideal for thick grass, sticks, undergrowth and light vine mulching;
- *Vegetable & pasture topping;
- *Roadside maintenance.

Features:

- *Cutting height controlled by adjustable skids;
- *High strength mulching blades;
- *Belt driven;
- *Safety flaps to prevent debris being thrown;



Specifications

Model	FM-100	FM-120	FM-150	FM-180
Cutting Width	960	1160	1460	1760
Dimensions	1050*750*165	1280*750*175	1580*820*190	1850*820*210
Matched Power	15-25	15-25	20-35	25-50
3 Point Hitch	Cat.1	Cat.1	Cat.1	Cat.1
Blade Number	3	3	3	3
N.W/G.W	138/154	148/168	165/190	205/230
Packing Size	1100*650*420	1250*700*420	1550*970*420	1870*950*420
Qty/20'GP	64	48	42	24



Octagon Finishing Mower

Uses:


- *The Octagonal shaped finishing mower is designed to cut a variety of grasses with a single cutting blade.
- *Perfect for presentation use on lawns, golf courses, sports fields, schools, camp sites and other large areas of land.
- *With optional rear or side discharge for areas where cuttings need to be thrown clear.

Features:

- *Height adjustable wheels allow an even finish over uneven surfaces.enforced frame.
- *Recommended for compact tractors with 20-30hp
- *3 Point Linkage
- *Quick coupler PTO driveline shaft included.
- *4 independent height adjustable castor wheels allow the mower to contour over uneven surfaces to provide an even finish.
- *Rear discharge for normal use or side discharge option for use in areas where the cuttings need to be thrown clear.

Specifications

Model	OFM100
Cutting Width	960
Dimensions	1120*1050*710
Matched Power	18-25
3 Point Hitch	Cat.1
Blade Number	2
N.W/G.W	190/170
Packing Size	1100*1100*450
Qty/20'GP	40

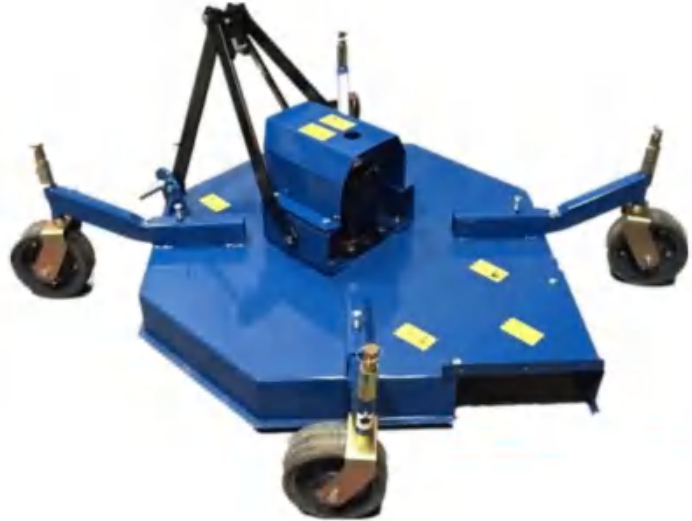

Topper Mower

Uses:

- *Perfect around open grassy areas;
- *Slashing a variety of grasses, small trees and light scrub;
- *Clearing roadsides;
- *Creating firebreaks.

Features:

- *Perfect around open grassy area. Slashing a variety of grasses, small trees and light scrub. Clearing roadsides.
- *Built to last medium duty slasher with re-enforced
- *Strength & Reliability.
- *Quick coupler PTO driveline shaft included.
- *Saucer-shaped blade carrier.
- *Adjustable skids. Collapsible hitch.



Specifications

Model	TM110	TM120	TM140	TM160	TM170	TM180
Cutting Width	1000	1100	1300	1500	1600	1700
Matched Power	18-25	18-30	25-40	25-40	25-50	25-50
3 Point Hitch	Cat.1	Cat.1	Cat.1	Cat.1	Cat.1	Cat.1
Blade Number	2	2	2	2	2	2
N.W/G.W	165/185	175/200	235/260	250/280	270/305	280/320
Packing Size	1350*1250*450	1450/1350*450	1550*1500*450	1850*1750*450	1950*1850*450	2050*1950*450
Qty/40'GP	54	41	37	31	24	24
Rear Wheel	Optional for rear wheel					



Topper Mower

Uses:

- *Perfect around open grassy areas;
- *Slashing a variety of grasses, small trees and light scrub;
- *Clearing roadsides;
- *Creating firebreaks.

Features:

- *Perfect around open grassy area. Slashing a variety of grasses, small trees and light scrub. Clearing roadsides.
- *Built to last medium duty slasher with re-enforced
- *Strength & Reliability.
- *Quick coupler PTO driveline shaft included.
- *Saucer-shaped blade carrier.
- *Adjustable skids. Collapsible hitch.

Specifications

Model	3.5TMB	4TMB	5TMB	6TMB	7TMB
Cutting Width	860	1060	1360	1660	1960
Matched Power	18-25	18-30	25-40	25-40	25-50
3 Point Hitch	Cat.1	Cat.1	Cat.1	Cat.1	Cat.1
Blade Number	2	2	2	2	2
N.W/G.W	160/180	180/202	220/245	300/332	450/515
Packing Size	1100*1100*420	1250*1250*420	1560*1560*420	1860*1860*420	2250*2170*450
Qty/40'GP	88	54	36	30	26
Rear Wheel	Optional for rear wheel				



Topper Mower

Uses:


- *Perfect around open grassy areas;
- *Slashing a variety of grasses, small trees and light scrub;
- *Clearing roadsides;
- *Creating firebreaks.

Features:

- *Perfect around open grassy area. Slashing a variety of grasses, small trees and light scrub. Clearing roadsides.
- *Built to last medium duty slasher with re-enforced
- *Strength & Reliability.
- *Quick coupler PTO driveline shaft included.
- *Saucer-shaped blade carrier.
- *Adjustable skids. Collapsible hitch.

Specifications

Model	3.5TMC	4TMC	5TMC	6TMC	7TMC
Cutting Width	860	1060	1360	1660	1960
Matched Power	18-25	18-30	25-40	25-40	25-50
3 Point Hitch	Cat.1	Cat.1	Cat.1	Cat.1	Cat.1
Blade Number	2	2	2	2	2
N.W/G.W	165/180	185/202	225/245	305/332	450/515
Packing Size	1100*1100*420	1250*1250*420	1560*1560*420	1860*1860*420	2250*2170*450
Qty/40'GP	88	54	36	30	26
Rear Wheel	Optional for rear wheel				

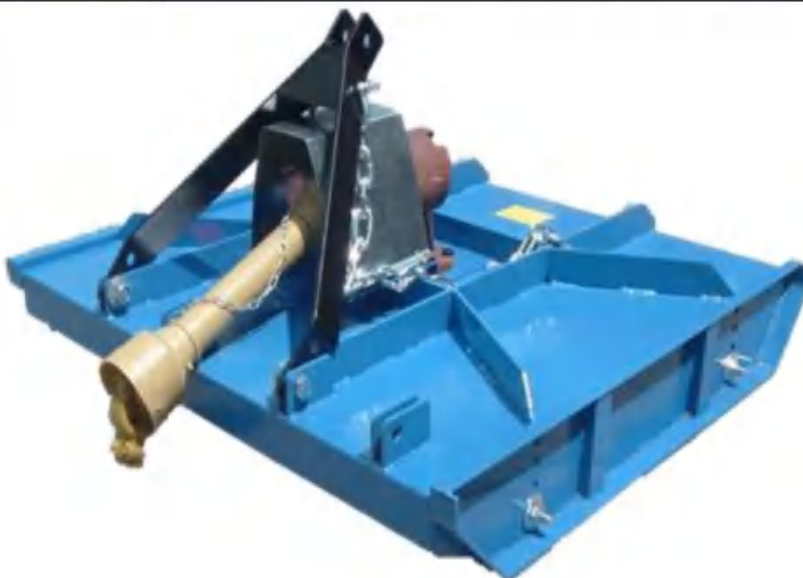

Topper Mower

Uses:

- *Perfect around open grassy areas;
- *Slashing a variety of grasses, small trees and light scrub;
- *Clearing roadsides;
- *Creating firebreaks.

Features:

- *Perfect around open grassy area. Slashing a variety of grasses, small trees and light scrub. Clearing roadsides.
- *Built to last medium duty slasher with re-enforced
- *Strength & Reliability.
- *Quick coupler PTO driveline shaft included.
- *Saucer-shaped blade carrier.
- *Adjustable skids. Collapsible hitch.

Specifications

Model	3.5TMD	4TMD	5TMD	6TMD
Cutting Width	900	1100	1400	1700
Matched Power	18-25	18-30	25-40	25-40
3 Point Hitch	Cat.1	Cat.1	Cat.1	Cat.1
Blade Number	2	2	2	2
N.W/G.W	175/195	200/230	250/285	320/360
Packing Size	1150*1100*450	1300*1250*450	1600*1550*450	1900*1850*450
Qty/40'GP	80	54	36	30
Rear Wheel	Optional for rear wheel			



Rotary Cut Mower

Uses:

- *Perfect around open grassy areas;
- *Slashing a variety of grasses, small trees and light scrub;
- *Clearing roadsides;
- *Creating firebreaks.

Features:

- *Perfect around open grassy area. Slashing a variety of grasses, small trees and light scrub. Clearing roadsides.
- *Built to last medium duty slasher with re-enforced
- *Strength & Reliability.
- *Quick coupler PTO driveline shaft included.
- *Saucer-shaped blade carrier.
- *Adjustable skids. Collapsible hitch.



Specifications

Model	3.5RCM	4RCM	5RCM	6RCM	7RCM
Cutting Width	900	1100	1400	1700	2000
Matched Power	18-25	18-30	20-40	25-50	40-60
3 Point Hitch	Cat.1	Cat.1	Cat.1	Cat.1	Cat.1
Blade Number	2	2	2	2	2
N.W/G.W	170/183	180/196	220/241	285/308	445/490
Packing Size	1050*1050*420	1250*1250*420	1560*1560*420	1860*1860*420	2200*2200*450
Qty/40'GP	88	54	36	30	26



Rotary Cut Mower

Uses:

- *Perfect around open grassy areas;
- *Slashing a variety of grasses, small trees and light scrub;
- *Clearing roadsides;
- *Creating firebreaks.

Features:

- *Perfect around open grassy area. Slashing a variety of grasses, small trees and light scrub. Clearing roadsides.
- *Built to last medium duty slasher with re-enforced
- *Strength & Reliability.
- *Quick coupler PTO driveline shaft included.
- *Saucer-shaped blade carrier.
- *Adjustable skids. Collapsible hitch.



Specifications

Model	4RCMB	5RCMB	6RCMB
Cutting Width	1100	1400	1700
Matched Power	18-30	20-40	25-50
3 Point Hitch	Cat.1	Cat.1	Cat.1
Blade Number	2	2	2
N.W/G.W	180/200	260/285	321/350
Packing Size	1250*1250*420	1560*1560*420	1860*1860*420
Qty/40'GP	54	36	30
Optional	Rear Wheel Assembly Optional		



Slasher Mower

Uses:

- *Perfect around open grassy areas;
- *Slashing a variety of grasses, small trees and light scrub;
- *Clearing roadsides;
- *Creating firebreaks.

Features:

- *Built to last medium duty slasher with re-enforced frame.
- *Quick release off-set options.
- *Strength & Reliability.
- *Collapsible hitch, adjustable skids.
- *Segmented solid rubber rear wheel optional.
- *Solid top link and a simple to attach PTO.



Specifications

Model	3.5SM	4SM	4.5SM	5SM	6SM	7SM
Cutting Width	1030	1180	1330	1480	1780	2080
Matched Power	18-25	20-30	25-40	30-50	40-65	60-80
3 Point Hitch	Cat.1	Cat.1	Cat.1	Cat.1	Cat.1	Cat.1
Blade Number	2	2	2	2	2	2
N.W/G.W	140/260	290/315	318/345	348/375	548/580	675/710
Packing Size	1350*1200*460	1500*1350*460	1650*1500*460	1800*1650*460	2100*1950*460	2400*2250*460
Rear Wheel	Optional for rear wheel					



Slasher Mower

Uses:

- *Perfect around open grassy areas;
- *Slashing a variety of grasses, small trees and light scrub;
- *Clearing roadsides;
- *Creating firebreaks.

Features:

- *Built to last medium duty slasher with re-enforced frame.
- *Quick release off-set options.
- *Strength & Reliability.
- *Collapsible hitch, adjustable skids.
- *Segmented solid rubber rear wheel optional.
- *Solid top link and a simple to attach PTO.

Specifications

Model	SM105A	SM120A	SM135A	SM150A	SM1500-75A	SM1800-75A
Cutting Width	1030	1180	1330	1480	1480	1780
Matched Power	15-30	15-30	20-50	20-50	20-50	25-60
3 Point Hitch	Cat.1	Cat.1	Cat.1	Cat.1	Cat.1	Cat.1
Blade Number	2	2	2	2	2	2
N.W/G.W	200/225	250/275	320/355	360/380	360/380	390/430
Packing Size	1205*1115*510	1405*1345*510	1625*1580*510	1825*1780*510	1825*1780*510	2025*1980*510
Rear Wheel	Optional for rear wheel					



Three Gearbox Rotary Cutter Mower

Uses:

The Grass Topper is a three-point linkage direct drive rotary grass topper that travels directly behind the tractor. When in the topping position it rides independently of the tractor allowing an even cut to uneven pasture. The contra rotating blades reduce wheel marks to a minimum and lessens the problem of swathing. The heavy-duty PTO shaft has a shear bolt protection and the over-run clutch is fitted to prevent any damage to the tractor PTO when stopping.


Features:

- *Heavy Duty Construction.
- *3 Gearboxes. 2 Drive Shaft. Interlocking Rotors.
- *Rubber Couplings.
- *4 High quality updraft blades.
- *Rear and Front chain.
- *Optional: Rear support wheel; Clutch for PTO Shaft.



Specifications

Model	8PRT	9PRT	10PRT	8PRS	9PRS	10PRS
Cutting Width	2330	2630	2930	2310	2610	2910
Matched Power	50-80	50-90	50-90	50-80	50-90	50-90
3 Point Hitch	Cat.2	Cat.2	Cat.2	Cat.2	Cat.2	Cat.2
Blade Number	4	4	4	4	4	4
PTO	540RPM	540RPM	540RPM	540RPM	540RPM	540RPM
Weight	610kgs	670kgs	723kgs	462kgs	520kgs	660kgs
Rear Wheel	Optional for rear wheel					

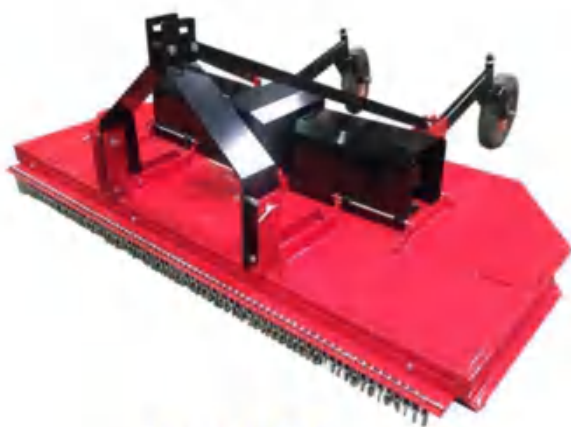

Model: PRT



Model: PRS

2wheel Tipping Trailer

Uses:

*Tipping Trailers are great around any small acreage or hobby farm and can be useful every day of years.

*With a hydraulic lift for tipping they are perfect for transporting soil,sand,feed,fertilisers,tools,small

*Perfect for transporting hay to all corners of your property.

Features:

*Opening rear flap for easy tipping as you drive

*With a hydraulic cylinder ram and hose connecting,with tail lights.

*Side and rear panels easy removable.

*No highway.



Specifications

Model	1T2W	1.5T2W	2T2W	3T2W	4T2W
Internal Length	2200mm	2200mm	2400mm	2800mm	2800mm
Internal Width	1170mm	1170mm	1280mm	1500mm	1500mm
Internal Height	380mm	380mm	380mm	380mm	500mm
Max Load	1000kgs	1500kgs	2000kgs	3000kgs	4000kgs
Drawbar Type	rectangle-frame	rectangle-frame	rectangle-frame	rectangle-frame	rectangle-frame
No. of Axle	1	1	1	1	1
Max Lift Angle	45°	56°	56°	56°	56°
Tire Number	2	2	2	2	2
Tire Size	20*10-8	7.00-12	10.0/75-15.3 6tl	10.0/75-15.3 8tl	10.0/75-15.3 16tl
N.W/G.W	310/335kgs	320/345kgs	380/410kgs	590/630kgs	700/740kgs
Packing Size	2280*1220*455 mm	2280*1220*455 mm	2420*1380*480 mm	2900*1580*500 mm	2900*1600*750 mm
Tractor Hp	18-30hp	18-40hp	25-40hp	30-50hp	30-60hp
Qty/20'GP	17	17	10	8	8
Handbrake ,Wiremesh optional					



2wheel Tipping Trailer

Uses:

- *Tipping Trailers are great around any small acreage or hobby farm and can be useful every day of years.
- *With a hydraulic lift for tipping they are perfect for transporting soil,sand,feed,fertilisers,tools,small
- *Perfect for transporting hay to all corners of your property.


Features:

- *Opening rear flap for easy tipping as you drive
- *With a hydraulic cylinder ram and hose connecting,with tail lights.
- *Side and rear panels easy removable.
- *No highway.



Specifications

Model	1T2W	1.5T2W	2T2W	3T2W	4T2W
Internal Length	2200mm	2200mm	2400mm	2800mm	2800mm
Internal Width	1170mm	1170mm	1280mm	1500mm	1500mm
Internal Height	380mm	380mm	380mm	380mm	500mm
Max Load	1000kgs	1500kgs	2000kgs	3000kgs	4000kgs
Drawbar Type	rectangle-frame	rectangle-frame	rectangle-frame	rectangle-frame	rectangle-frame
No. of Axle	1	1	1	1	1
Max Lift Angle	45°	56°	56°	56°	56°
Tire Number	2	2	2	2	2
Tire Size	20*10-8	7.00-12	10.0/75-15.3 6tl	10.0/75-15.3 8tl	10.0/75-15.3 16tl
N.W/G.W	310/335kgs	320/345kgs	380/410kgs	590/630kgs	700/740kgs
Packing Size	2280*1220*455mm	2280*1220*455mm	2420*1380*480mm	2900*1580*500mm	2900*1600*750mm
Tractor Hp	18-30hp	18-40hp	25-40hp	30-50hp	30-60hp
Qty/20'GP	17	17	10	8	8
Handbrake ,Wirewesh optional					

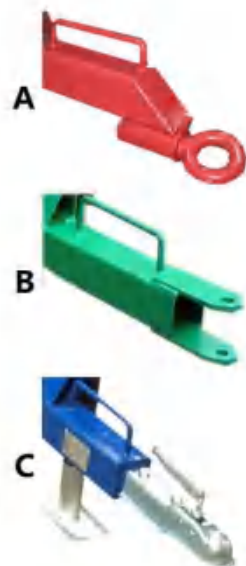

4wheel Tipping Trailer

Uses:

*Tipping Trailers are great around any small acreage or hobby farm and can be useful every day of years.

*With a hydraulic lift for tipping they are perfect for transporting soil, sand, feed, fertilisers, tools, small

*Perfect for transporting hay to all corners of your property.

Features:

*Opening rear flap for easy tipping as you drive

*With a hydraulic cylinder ram and hose connecting, with tail lights.

*Side and rear panels easy removable.


*No highway.



Specifications

Model	2T4W	3T4W	4T4W
Internal Length	2400mm	2800mm	2800mm
Internal Width	1280mm	1500mm	1500mm
Internal Height	380mm	380mm	500mm
Max Load	2000kgs	3000kgs	4000kgs
Drawbar Type	rectangle-frame	rectangle-frame	rectangle-frame
No. of Axle	1	2	2
Max Lift Angle	56°	56°	56°
Tire Number	4	4	4
Tire Size	20*10-8	7.00-12	10.0/75-15.3 6tl
N.W/G.W	315/345kgs	546/590kgs	700/750kgs
Packing Size	2420*1380*480 mm	2900*1580*500 mm	2900*1600*750 mm
Tractor Hp	25-40hp	30-50hp	30-60hp
Qty/20'GP	10	8	8

Handbrake , Mesh panel optional

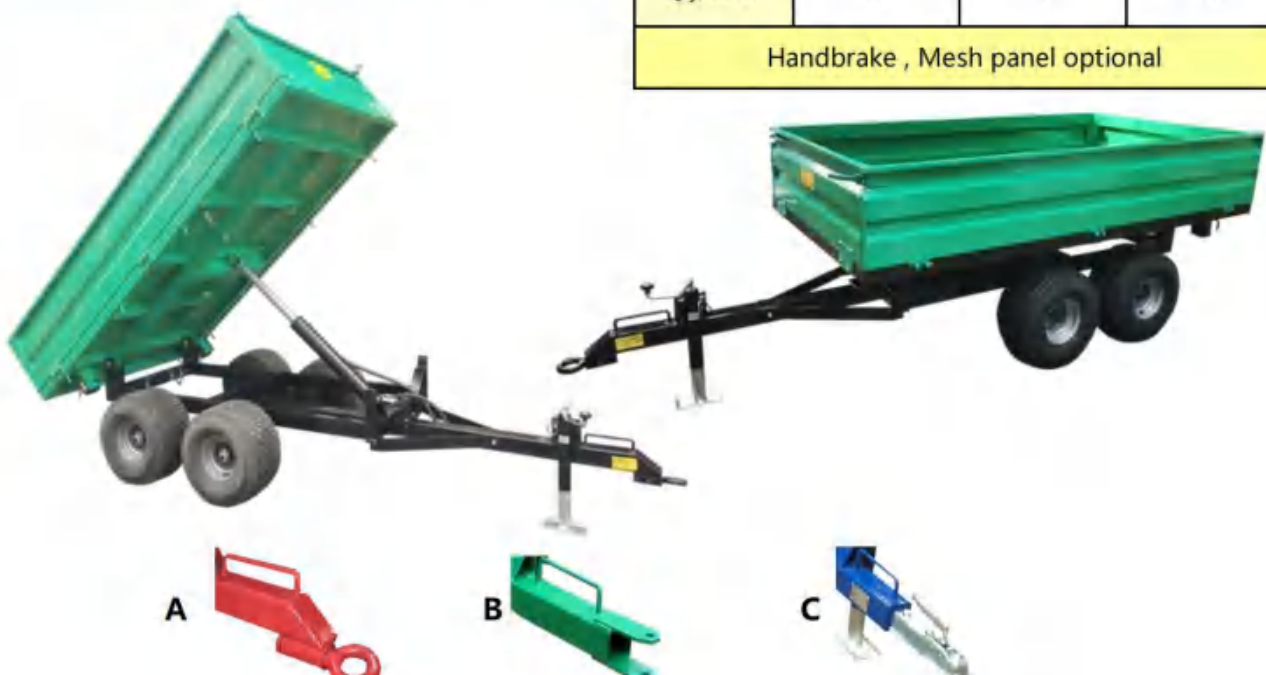

4wheel Tipping Trailer

Uses:

*Tipping Trailers are great around any small acreage or hobby farm and can be useful every day of years.

*With a hydraulic lift for tipping they are perfect for transporting soil, sand, feed, fertilisers, tools, small

*Perfect for transporting hay to all corners of your property.

Features:

*Opening rear flap for easy tipping as you drive

*With a hydraulic cylinder ram and hose connecting, with tail lights.

*Side and rear panels easy removable.

*No highway.

Specifications


Model	2T4WM	3T4WM	4T4WM
Internal Length	2400mm	2800mm	2800mm
Internal Width	1280mm	1500mm	1500mm
Internal Height	380mm	380mm	500mm
Max Load	2000kgs	3000kgs	4000kgs
Drawbar Type	rectangle-frame	rectangle-frame	rectangle-frame
No. of Axle	1	1	1
Max Lift Angle	56°	56°	56°
Tire Number	4	4	4
Tire Size	20*10-8	7.00-12	10.0/75-15.3 6tl
N.W/G.W	343/375kgs	545/590kgs	728/778kgs
Packing Size	2420*1380*480 mm	2900*1580*500 mm	2900*1600*750 mm
Tractor Hp	25-40hp	30-50hp	30-60hp
Qty/20'GP	10	8	8
Handbrake , Mesh panel optional			



Hydraulic Power Unit			
Voltage	DC12V	Flow Rate	1.9L@170Bar
AMPS	235A	Reservoir	5.7L
Power	2.5KW	Dimension	660*170*210
Relief Setting	170Bar	Gear Pump	3.2ML/R



A



B



C



Three way Tipping Trailer

Uses:

- *The 3-way tipper is perfect for tipping gravel, sand, rubble, green waste, firewood and other heavy loads. Choose left or right hand tip or tip to the rear.
- * Flexibility of loading/unloading goods/ materials like farm produce by simply tipping them which saves overall operating cost of transportation.
- * Three side tipping mechanism with single cylinder for easy unloading of goods.
- *Control valve mechanism for side tipping which makes it safer for side unloading.
- * High grade hub, axle, bearings & tipping mechanism enhance life of the trailer (durability & reliability).
- * Easily transportable as it gets easily attached/ mounted.
- *Side and rear panels easy removable.
- *With a hydraulic cylinder,with tail lights.
- *No highway.



Specifications

Model	1.5T3WT	2T3WT	3T3WT	4T3WT
Internal Length	2000mm	2250mm	2500mm	2800mm
Internal Width	1300mm	1400mm	1500mm	1750mm
Internal Height	380mm	380mm	380mm	500mm
Max Load	1500kgs	2000kgs	3000kgs	4000kgs
Drawbar Type	rectangle-frame	rectangle-frame	rectangle-frame	rectangle-frame
No. of Axle	1	1	1	1
Max Lift Angle	56°	56°	56°	56°
Tire Number	2	2	2	2
Tire Size	7.00-12	10.0/75-15.3	10.0/75-15.3	10.0/75-15.3
N.W/G.W	458/413kgs	470/515kgs	645/685kgs	806/846kgs
Packing Size	2050*1350*500 mm	2300*1400*500 mm	2550*1550*500 mm	2850*1800*750 mm
Tractor Hp	18-40hp	25-40hp	30-50hp	30-60hp
Qty/20'GP	18	15	10	10
Handbrake , Mesh panel optional				



ATV Trailer

Uses:

*Hauls Gravels, Fertilizer, Leaves and more.

Features:

- *Removable tailgate for easy loading and unloading.
- *Can be towed behind ATV/UTVs and compact tractors



Specifications

2WCART

Model	WCART	2WCART	4WCART
Internal Length	40 1/2"	61"	61"
Internal Width	32 1/2"	36 1/2"	36 1/2"
Internal Height	13"	14"	14"
Max Load	500lbs	1000lbs	1500lbs
Tire Number	2	2	4
Tire Size	16*400-8	16*6.8-8	16*6.5-8
N.W/G.W	37/35kgs	68/65kgs	95/90kgs
Packing Size	1050*850*300mm	1550*950*310mm	1550*950*310mm
Qty/20'GP	88/20'GP	46/20'GP	46/20'GP



WCART



4WCART

Tipping Transport Box

Uses:

- *Perfect when collecting firewood and clearing other debris around your property.
- *Ideal for moving tools, fuel tanks, sprayers, generators and dirt around even the roughest terrain.

Features:

- *Easy to store.
- *Re-enforced rear base for reversing into loose materials for easy loading.
- *High strength rear base for reversing into loose soil mounds.
- *Heavy duty design.

Specifications

Model	TTB100	TTB110	TTB120	TTB130	TTB150	TTB180	TTB210
Working Width	1000	1100	1200	1300	1500	1800	2100
Dimensions	1000*926*630	1100*926*630	1200*926*630	1300*926*630	1500*926*630	1800*926*630	2100*926*630
Matched Power	14-18	18-20	20-25	25-30	25-30	30-45	30-45
3 Point Hitch	Cat.1	Cat.1	Cat.1	Cat.1	Cat.1	Cat.1	Cat.1
N.W/G.W	78/82	85/89	92/100	100/105	125/130	190/195	260/268
Packing Size	1050*1100* 1190/6	1150*1100* 1190/6	1250*1100* 1190/6	1350*1100* 1190/6	1550*1100* 1190/6	1850*1100* 1190/6	2150*1100* 1190/6
Qty/20'GP	110	110	96	88	80	66	55
Optional	Hydraulic cylinder Optional						
	Hot dip galvanized Optional						



Manual Tipper



Hydraulic Tipper

Tipping Link Box

Uses:

- *Ideal for all types of transporting jobs.
- *Strong,robust construction,removable rear door.

Features:

- *Available with either the universal 3 point linakge.
- *General purpose box for a multitude of duties around today's farm or park.
- *Solid construction of reinforced steel plate with heavy duty tipping hitch mechanism.
- *Category 1 hitch pin.

Specifications

Model	4TTBX	5TTBX	6TTBX	7TTBX
Working Width	1200	1500	1800	2100
Dimensions	1220*920*700	1520*920*700	1820*920*700	2120*920*700
Matched Power	18-25	18-35	25-40	30-50
3 Point Hitch	Cat.1	Cat.1	Cat.1	Cat.1
N.W/G.W	125/135	150/165	175/195	200/220
Packing Size	1230*830*600 /2	1530*830*600 /2	1830*830*600 /2	2130*830*600 /2
Qty/20'GP	90	70	62	56
Optional	Hydraulic cylinder Optional			
	Hot dip galvanized Optional			



Trip Scoop

Uses:

- *Ideal for all types of transporting jobs.
- *Perfect when collecting firewood and clearing other debris around your property.
- *Ideal for moving tools, fuel tanks, sprayers, generators and dirt around even the roughest terrain.

Features:

- *Available with either the universal 3 point linkage.
- *Bucket balances on center-mounted frame bushing for easy dumping.
- *Category 1 hitch pin.suits 15-60hp tractors.

Specifications

Model	4TSCP	5TSCP	6TSCP	7TSCP
Working Width	1200	1500	1800	2100
Dimensions	1200*820*700	1500*820*700	1800*820*700	2100*820*700
Matched Power	18-25	18-40	25-40	30-50
3 Point Hitch	Cat.1	Cat.1	Cat.1	Cat.1
N.W/G.W	82/93	116/129	160/175	200/220
Packing Size	1210*730*600 /2	1510*730*600 /2	1810*730*600 /2	2110*730*600 /2
Qty/20'GP	80	60	54	48
Optional	Hydraulic cylinder Optional			
	Hot dip galvanized Optional			



Dirt Scoop

Uses:

- *Ideal for all types of transporting jobs.
- *Perfect when collecting firewood and clearing other debris around your property.
- *Ideal for moving tools, fuel tanks, sprayers, generators and dirt around even the roughest terrain.

Features:

- *Available with either the universal 3 point linkage.
- *Reinforced tubular steel frame.
- *Bucket balances on center-mounted frame bushing for easy dumping.

Specifications

Model	DSCP24	DSCP30
Working Width	24"	30"
Dimensions	787*780*720	939*932*720
Matched Power	18-25	18-30
3 Point Hitch	Cat.1	Cat.1
N.W/G.W	58/71	68/82
Packing Size	800*680*620	800*840*620
Qty/20'GP	69	56



Hydraulic operated power link Box

Uses:

- *Perfect when collecting firewood and clearing other debris around your property.
- *Ideal for moving tools, fuel tanks, sprayers, generators and dirt around even the roughest terrain.
- *The robust piece of equipment is easy to operate and designed to last. Good lifting capacity.

Features:

- *Reinforced Nose Plate.
- *The computer aided design of the box allows the unit to be used to scoop up material and contain it in transport without the need for a back door.
- *Heavy duty design. Cat.1 hitch pin.

Specifications

Model	4TB1H	5TB1H	6TB1H	7TB1H	4TB2H	5TB2H	6TB2H	7TB2H
Working Width	1000	1100	1200	1300	1000	1100	1200	1300
Matched Power	18-25	18-40	25-40	30-50	18-25	18-40	25-40	30-50
3 Point Hitch	Cat.1	Cat.1	Cat.1	Cat.1	Cat.1	Cat.1	Cat.1	Cat.1
N.W/G.W	152/162	175/190	210/230	265/285	163/173	187/202	225/245	281/301
No. of Hydr.	Single Hydraulic Cylinder				Double Hydraulic Cylinder			
Optional	Hot dip galvanized Optional							



TB1H



TB2H



3-Point Back Bucket

Uses:


- *Perfect when collecting firewood and clearing other debris around your property.
- *Ideal for moving tools, fuel tanks, sprayers, generators and dirt around even the roughest terrain.
- *The robust piece of equipment is easy to operate and designed to last. Good lifting capacity.

Features:

- *Reinforced Nose Plate.
- *The computer aided design of the box allows the unit to be used to scoop up material and contain it in transport without the need for a back door.
- *Cat.1 hitch pin.

Specifications

Model	PL1000	PL1200	PL1400	PL1600	PLD1000	PLD1200	PLD1400	PLD1600
Working Width	1000	1200	1400	1600	1000	1200	1400	1600
Matched Power	15-20	20-25	25-30	30-45	15-20	20-25	25-30	30-45
3 Point Hitch	Cat.1	Cat.1	Cat.1	Cat.1	Cat.1	Cat.1	Cat.1	Cat.1
N.W/G.W	70/75	95/100	125/135	189/199	82/87	110/120	147/157	221/232
W/O Door	without back door				with back door			
Optional	Hydraulic cylinder optional							

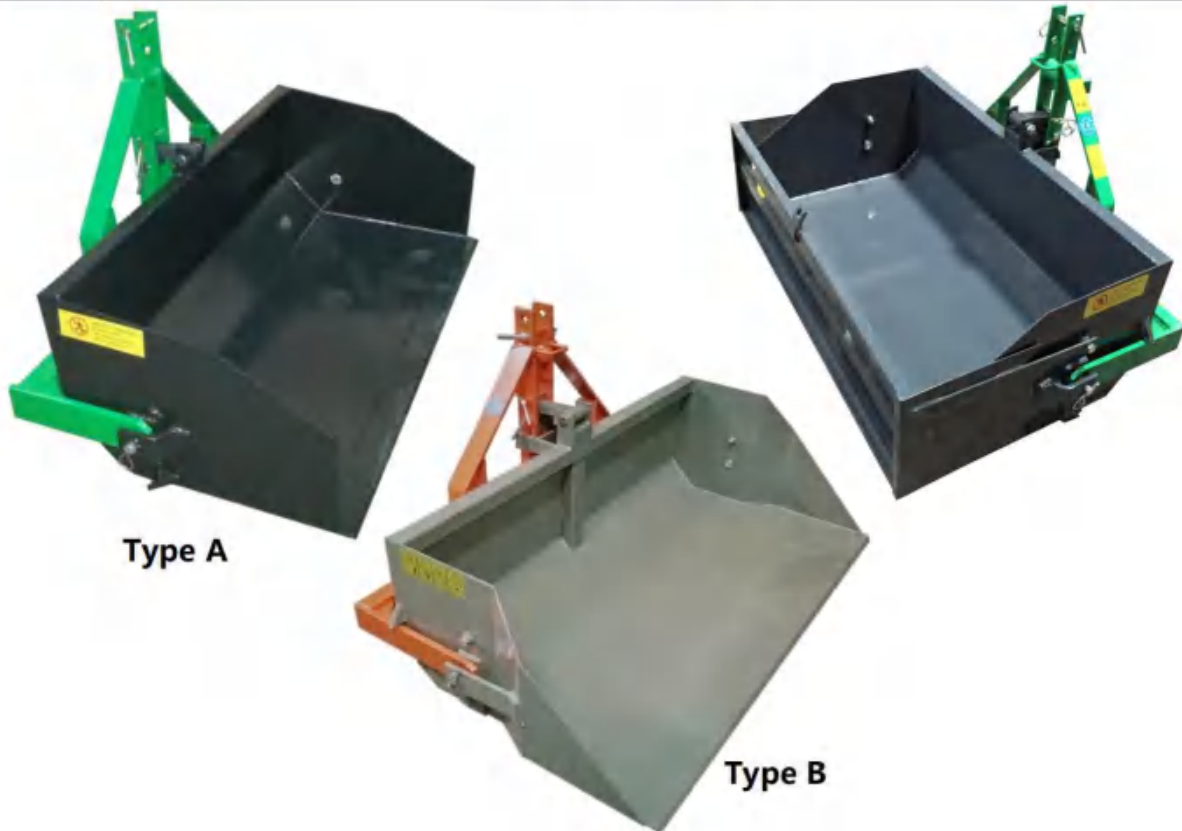

Grapple Bucket

Uses:

*The Grapple Bucket is great for moving scrap, logs, lumber, and bulky materials.

*Ideal for moving tools, fuel tanks, sprayers, generators and dirt around even the roughest terrain.

Specifications

Model	GBK1200
Working Width	1200mm
Dimensions	1220*680*540mm
Hitch	Skid steer
N.W/G.W	139/154kgs
Packing Size	1560*655*560/2units



Carry - Alls

Uses:

- *Perfect for transporting water & diesel tanks, chainsaws, toolboxes, stock feed, small tanks, hay,
- *hoses, generators and even your best mate.

Features:

- *Strong steel frame & base.
- *Easy to attach and store.
- *Heavy duty design. Cat.1 hitch pin.

Specifications

Model	4CAA	5CAA	6CAA	7CAA
Working Width	1200	1500	1800	2100
Dimensions	1200*810*790	1500*810*790	1800*810*790	2100*810*790
Matched Power	18-25	18-30	18-35	30-50
3 Point Hitch	Cat.1	Cat.1	Cat.1	Cat.1
N.W/G.W	105/110	108/123	135/140	152/157
Packing Size	1200*810*1250 /5	1500*810*1250 /5	1800*810*1250 /5	2100*810*1250 /5
Qty/20'GP	110	100	81	70



Assembled by Bolts
detachable

Model	4CAB	5CAB	6CAB	7CAB
Working Width	1200	1500	1800	2100
Dimensions	1200*810*790	1500*810*790	1800*950*800	2100*1100*800
Matched Power	18-25	18-30	18-35	30-50
3 Point Hitch	Cat.1	Cat.1	Cat.1	Cat.1
N.W/G.W	100/105	115/120	130/135	147/152
Packing Size	1200*1050*125 0/6	1500*1050*125 0/6	1800*1150*125 0/6	2100*1300*125 0/6
Qty/20'GP	90	70	60	40



Welded
und detachable

Carry-all Fork attachment

Uses:

- *The fork construction is made from heavy duty steel angle iron.
- *It is not recommended to be used with pallets.

Features:

- *The recommended tractor HP for this carry-all is 15 to 40hp.
- *The carry-all has category 1 hitch pins installed.
- *Solid construction of reinforced steel plate
- * Hitch type: 3-point

Specifications

Model	CAFA500	CAFA1000
Capacity	500lbs	1000lbs
Dimensions	1020*800*620	1020*800*620
Matched Power	15-25	20-40
3 Point Hitch	Cat.1	Cat.1
N.W/G.W	25/26	34/36
Packing Size	1020*240*80	1020*240*80
Qty/20'GP	1120	1120



Pallet Forks

Uses:

- *It can make moving pallets, large boxes or crates easier.
- *The bevel shape of the fork provides you with an easier fit.

Features:

- *This pallet fork is constructed of sturdy steel and the forks are 2 inches thick.
- *Forks taper for easier fit.
- *Category 1 hitch pin.suits 15-30hp tractors.

Specifications

Model	PF1500	PF2000	PM2000
Capacity	1500lbs	2000lbs	2000lbs
Matched Power	18-25	18-30	18-30
3 Point Hitch	Cat.1	Cat.1	Cat.1
N.W/G.W	40/45	45/50	80/85
Packing Size	1770*960*1040/10	1770*960*1040/10	1350*960*940
Qty/20'GP	130	130	108



PF1500



PF2000



PM2000

Clamp on Bucket Forks

Uses:

- *The Clamp on pallet forks slide over the cutting edge of the bucket and clamp down locking the unit in
- *This versatile piece of equipment allows you to easily move fence posts,lumber,pallets and logs around.
- *Perfect for Utility Tractors or Skid Steer loader buckets up to 45 HP.
- *Tractor bucket forks. Bucket pallet forks.

Features:

- *Thick rectangular tube wall.
- *Roll back for secure lifting.
- *Capacity 1000lbs,2000lbs,3000lbs



Specifications:

Model	CPF1000	CPF2000	CPF3000	CPF4000	CPF5000	CPF6000
Loading Capacity	1000lbs	2000lbs	3000lbs	4000lbs	5000lbs	6000lbs
Total Length	1270mm	1270mm	1420mm	1420mm	1640mm	1640mm
Total Weight	44kgs	54kgs	64kgs	73kgs	85kgs	91kgs
Fork Length	900mm	900mm	1050mm	1050mm	1270mm	1270mm
Fork Width	80mm	80mm	100mm	120mm	120mm	120mm
Fork Height	60mm	60mm	50mm	60mm	80mm	80mm
Fork Thickness	5mm	6mm	6mm	6mm	5mm	6mm



Foldable Pallet Forks

Uses:

- *The pallet forks with folding tines are perfect for moving a variety of supplies around paddocks or fields.
- *The pallet forks are ideal for use around small holdings moving a range of items.
- *The pallet forks are width adjustable for moving a variety of items ie pallets,oil drums,hay or straw.
- *It is easy to use and can be folded away securely for storage.
- *It can be attached to the 3 point linkage of a range of small or compact tractors.

Specifications:

Model	PF300	PF700	PF900
Loading Capacity	300kgs	700kgs	900kgs
Tractor Hp	15-40	30-60	30-60
Total Weight	48kgs	98kgs	121kgs
Fork Length	900mm	1000mm	1000mm
Fork Width	80mm	100mm	100mm



PF300



PF700



PF900

Three Point Boom Pole

Uses:

- *Tractor Three point boom poles are lightweight yet durable and easy to mount.
- *It is constructed from reinforced schedule tubing.
- *It fits all three point hitches with category one specifications.
- *This boom pole is designed to save you from back breaking heavy lifting.
- *Attach it directly to your tractor,move farming equipment,logs,and car engines and more.
- *Round tube or Square tube optional.
- *Welded or Bolted frame optional.

Specifications:

Model	BP500	BP1000	EC200
Loading Capacity	500lbs	1000lbs	200kgs
Total Length	2340mm	2340mm	2000mm
Total Weight	33kgs	68kgs	48kgs
Frame Type	Round Tube	Round Tube	Square Tube
Tractor hitch	Cat.1	Cat.1&2	Cat.1
Tractor Hp	15-40hp	20-50hp	18-30hp
Optional	Round Tube or Square Tube		/



EC200



BP500;BP1000

Bale Spear

Main Features


- * Simple robust bale spike is designed .
- * Fit small tractor.It will fit category 1 or 2 hitch pins.
- * It is a tapered steel spear and is designed for hard center bales.
- * It is a hay fork that is specifically designed for hard center bales.
- * It replaces the broken hay fork on your farming equipment.
- * It has a center spear and two short spears.

Specifications

Model	BS500	BS1000	BS1200	BS-1	BSH
Load Capacity	500lbs	1000lbs	1200lbs	1000lbs	2500lbs
Main Fork Length	1000	1000	1000	1000	990
3 Point Hitch	Cat.0&1	Cat.0&1	Cat.1&2	Cat.0&1	Cat.0&1
Matched Power	15-25	18-30	20-35	18-30	18-30
N.W/G.W	35/36	39/40	46/48	36/37	38/40
Packing Size	1000*600*240	1000*600*240	1000*600*240	1000*600*240	1000*600*240
Qty/20'GP	180	180	180	180	180



BS500 ; BS1000;

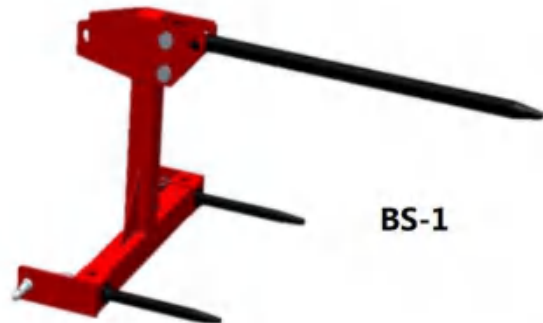

BS-1



BS1200



BSH

Hay Spear

Main Features

- *It comes in varied models to suit the requirement of agriculture.
- *It is used to move larger, tighter, and heavier round bales.
- *Corrosion resistance.
- *Precision Functioning.
- *Durable, High efficiency.
- *Power coated finished.
- *Spear busing sleeve or Nut Fitting.

Hay Spear

Model	HSN3942	HSN4842-A	HSN4842-B	HSN4845	HSP3942	HSP4842-A	HSP4842-B	HSP4845
Load Capacity	2500lbs	2500lbs	2500lbs	3500lbs	2500lbs	2500lbs	2500lbs	3500lbs
Length	39"	48"	48"	48"	39"	48"	48"	48"
Weight	9	11.5	12.3	14.5	9.65	12.5	13	16
Fork Diameter	42mm	42mm	42mm	45mm	42mm	42mm	42mm	45mm
Rod Type	Nut Fixing	Nut Fixing	Nut Fixing	Nut Fixing	Pin Fixing	Pin Fixing	Pin Fixing	Pin Fixing
Material	40Cr	40Cr	40Cr	40Cr	40Cr	40Cr	40Cr	40Cr
Hardness	HRC38-40	HRC38-40	HRC38-40	HRC38-40	HRC38-40	HRC38-40	HRC38-40	HRC38-40
Sleeve Size	59x152	55x120	59x152	71x220	59x152	59x152	59x220	71x155



HSP



HSN



Sleeve Optional



Bracket Optional



LandLeveller

Uses:

- *It is a useful loader attachment ideal for landscapers.
- *It grades, levels sand, mulch and earth in both forward and reverse, peels and removes sod.
- *A simple and useful and efficient attachment for levelling and planing of large areas.
- * It can be used for lifting job site materials like sod rolls, tools etc, almost all manual shoveling at job sites.

Features:

- *Available with either the universal 3 point linkage.
- *Tractor rear 3-point hitch type.

Specifications

Model	4LB	5LB	6LB
Working Width	1200	1500	1800
Matched Power	18-25	20-35	25-40
3 Point Hitch	Cat.1	Cat.1	Cat.1
N.W/G.W	70/75	82/87	95/101



Tractor Rear 3-Point Mounted

Model	LL120	LL150	LL180
Working Width	1200	1500	1800
Matched Power	18-25	20-35	25-40
3 Point Hitch	Cat.1	Cat.1	Cat.1
N.W/G.W	115/120	138/145	155/165



LL-b Euro quick attach type Land Leveller



LL-a Avant type frontloader Land leveller

Box Scraper

Uses:

- *Perfect implement for breaking up.spreading & leveling top soil while tilling as well.
- *Very useful for removing a thin layer of top soil.

Features:

- * Height adjustable and removable tines.
- * Extra strong frame designed for long
- * Reversible 1/2"x6" high-carbon steel

Specifications

Model	BS42	BS48	BS54	BS60	BS66	BS72	BS78	BS84
Working Width	42 "	48"	54 "	60"	66 "	72"	78 "	84"
Dimensions	1085*750*860	1235*750*860	1385*750*860	1535*750*860	1685*750*860	1835*750*860	1985*750*860	2135*750*860
Matched Power	15-25	18-25	18-30	20-35	20-35	25-40	25-50	30-50
3 Point Hitch	Cat.1	Cat.1	Cat.1	Cat.1	Cat.1	Cat.1	Cat.1	Cat.1
Blade Number	3	4	4	5	5	6	6	7
N.W/G.W	128/145	140/160	150/170	165/187	180/205	200/222	210/240	225/260
Packing Size	1130*760*560	1260*760*560	1410*760*560	1560*760*560	1710*760*560	1860*760*560	2010*760*560	2160*760*560
Qty/40'GP	120	108	96	89	80	72	68	64
HBS Model		162/182	175/196	192/214	202/226	215/243	227/257	245/227



Landscape Raker

Uses:

- *Clearing debris to prevent fires spreading.
- *Use in grassy areas where debris has been left after storms.
- *Useful prior to slashing and mowing.

Features:

- * 360rotation allows angular and reverse
- * Raking width with 6tines per feet.
- * Angel adjustable rake for clearing off to the side.



Specifications

Model	4LR	5LR	6LR	7LR	8LR
Working Width	1200	1500	1800	2100	2400
Dimensions	1200*1650*850	1500*1650*850	1800*1650*850	2100*1650*850	2400*1650*850
Matched Power	15-25	20-35	25-40	35-60	35-60
3 Point Hitch	Cat.1	Cat.1	Cat.1	Cat.1	Cat.1
Blade Number	24	30	36	42	48
N.W/G.W	81/83	1490mm	100/115	112/126	122/137
Packing Size	1260*670*250	1560*670*250	1800*670*250	2180*670*250	2480*670*250
Qty/20'GP	104	80	64	64	56
Optional	Wheel kits optional				



Wheel kits optional

ATV Landscape Raker

Uses:

- *Clearing debris to prevent fires spreading.
- *Use in grassy areas where debris has been left after storms.
- *Useful prior to slashing and mowing.

Features:

- * 360rotation allows angular and reverse
- * Raking width with 6tines per feet.
- * Angel adjustable rake for clearing off to the side.



Specifications

Model	3.5ALR	4ALR	5ALR	6ALR
Working Width	1050	1200	1500	1800
Dimensions	1050*1650*850	1200*1650*850	1500*1650*850	1800*1650*850
Hitch Type	ATV	ATV	ATV	ATV
Blade Number	21	24	30	36
N.W/G.W	88/103	93/110	103/123	113/135
Packing Size	1080*700*260	1280*700*260	1580*700*260	1880*700*260
Qty/20'GP	120	104	80	64



Spike Tooth Harrow

Uses:

- *Clearing debris to prevent fires spreading.
- *Use in grassy areas where debris has been left after storms.
- *Useful prior to slashing and mowing.

Features:

- *3-Pt Spike Tooth Harrow is a great cat.1 implements for smoothing garden plots, fields, arenas and landscaping areas.
- *The unit helps to prepare seed beds and encourage new growth, as well as remove gopher mounds, ant hills and ridges left by tillage implements.

Specifications

Model	5STH	6STH	7STH	8STH
Working Width	1500mm	1800mm	2100mm	2400mm
Dimensions	1550*1310*780mm	1850*1310*780mm	2150*1310*780mm	2450*1310*780mm
Hitch Type	3-Point	3-Point	3-Point	3-Point
Blade Number	40	45	50	55
N.W/G.W	102/122kgs	102/122kgs	116/138kgs	122/145kgs
Packing Size	1750*1190*230mm	1750*1190*230mm	2050*1190*230mm	2350*1190*230mm



Grader Blade

Uses:

- *Ideal for a number of grading applications.
- *Grading a road, levelling soil or clearing paths.

Features:

- *Moldboard has adjustable reverse and
- *Replaceable and reversible high carbon
- *Blade rotates 360 on a king pin.
- *Category 1 hitch pin



Specifications

Model	4GB	5GB	6GB	7GB
Working Width	1200	1500	1800	2100
Dimensions	1225*1200* 980	1525*1200* 980	1825*1200* 980	2125*1200* 980
Matched Power	15-25	20-35	25-40	35-60
3 Point Hitch	Cat.1	Cat.1	Cat.1	Cat.1
N.W/G.W	72/83	81/96	89/105	100/118
Packing Size	1250*670* 250	1550*670* 250	1850*670* 250	2150*670* 250
Qty/20'GP	105	85	75	64
Heavy Duty Model Weight	108/118	120/133	135/150	150/170



wheels optional

Grader Blade with Swing Tilt

Model	4GBS	5GBS	6GBS	7GBS
Working Width	1200	1500	1800	2100
Dimensions	1220*1250* 1100	1520*1250* 1100	1820*1250* 1100	2120*1250* 1100
Matched Power	15-25	20-35	25-40	35-60
3 Point Hitch	Cat.1	Cat.1	Cat.1	Cat.1
N.W/G.W	110/122	120/133	135/150	150/167
Packing Size	1250*670* 450	1550*670* 450	1850*670* 450	2150*670* 450
Qty/20'GP	105	85	75	64



Grader Blade

Uses:

- *Ideal for a number of grading applications.
- *Grading a road,levelling soil or clearing paths.

Features:

- *Moldboard has adjustable reverse and
- *Replaceable and reversible high carbon
- *Blade rotates 360 on a king pin.
- *Category 1 hitch pin



Specifications

Model	4HDGB-B	5HDGB-B	6HDGB-B	7HDGB-B
Working Width	1200	1500	1800	2100
Dimensions	1220*1250*1100	1520*1250*1100	1820*1250*1100	2120*1250*1100
Matched Power	18-30	20-40	25-50	25-50
3 Point Hitch	Cat.1	Cat.1	Cat.1	Cat.1
N.W/G.W	131/145	146/160	153/168	165/185
Packing Size	1250*670*450	1550*670*450	1850*670*450	2150*670*450
Qty/20'GP	52	40	36	32
Heavy Duty Model Weight	108/118	120/133	135/150	150/170



Grader Blade with Side Walls

Model	4HDGBW	5HDGBW	6HDGBW	7HDGBW
Working Width	1200	1500	1800	2100
Dimensions	1220*1250*1100	1520*1250*1100	1820*1250*1100	2120*1250*1100
Matched Power	18-30	20-40	25-50	25-50
3 Point Hitch	Cat.1	Cat.1	Cat.1	Cat.1
N.W/G.W	141/155	156/170	163/178	175/190
Packing Size	1250*670*450	1550*670*450	1850*670*450	2150*670*450
Qty/20'GP	52	40	36	32



Grader Blade with Rippers

Uses:

- *Whether you are grading a road, levelling soil or clearing paths, the grader blades are heavy duty.
- *Rotate the ripper and blade 180 degrees and a multi-type ripper for loosening top soil for easier grading.

Features:

- *360 degree adjustable cutting blade plus off-centre settings, forward positions.
- *off-settable cutting blade, steel blade.
- *Support leg for easy storage; Grader
- *Category 1 hitch pin; Heavy duty blade with replacement cutting blades available.

Specifications

Model	4HDGBR	5HDGBR	6HDGBR	7HDGBR
Working Width	1220	1520	1820	2120
Dimensions	1200*1500* 1050	1500*1500* 1050	1800*1500* 1050	2100*1500* 1050
Matched Power	15-25	20-35	25-40	35-60
No. of Rippers	5	6	7	8
N.W/G.W	85/95	105/120	130/150	155/178
Packing Size	1250*670* 450	1550*670* 450	1850*670* 450	2150*670* 450
Qty/20'GP	52	40	36	32
Heavy Duty Model Weight	130/143	150/165	170/190	190/215



Ripper Grader Blade with Real Wheel

Model	4HDGBRW	5HDGBRW	6HDGBRW	7HDGBRW
Working Width	1220	1520	1820	2120
Dimensions	1225*1200* 980	1525*1200* 980	1825*1200* 980	2125*1200* 980
Matched Power	15-25	20-35	25-40	35-60
No. of Rippers	5	6	7	8
N.W/G.W	165/178	180/200	205/225	225/250
Packing Size	1250*670*450	1550*670*450	1850*670*450	2150*670*450
Qty/20'GP	52	40	36	32

ATV Grader Blade

Uses:

- *The ATV Grader Blade is ideal for grading,levelling,spreading top soil or gravel.
- *The rear trailing wheels on the ATV grader blade can be adjusted heights making it easy to transport from one job to another with the tine off the ground.

Features:

- *Tow hitch is also adjustable 4 different
- *Replaceable and reversible high carbon
- *Pneumatic tyres.

Specifications

Model	3.5AGB	4AGB	5AGB	6AGB
Working Width	1050	1200	1500	1800
Dimensions	1025*1200* 980	1225*1200* 980	1525*1200* 980	1825*1200* 980
Matched Power	18-30	20-40	25-50	25-50
Hitch Type	ATV	ATV	ATV	ATV
N.W/G.W	85/94	90/100	93/110	100/125
Packing Size	1050*670*250	1250*670*250	1550*670*250	1850*670*250
Qty/20'GP	120	105	85	75



Snow Blade

Uses:

*Used in removing snow. Also can be used in clearing away or stocking of loose material.

*Compact structure, flexibility, convenient operation.

*Not only can match to the tractor's 3 point linkage, but also to the front of the tractor.

*Snow blade rear attach tractor Removing snow Hydraulic control Cleaning away or stocking of loose material.

Specifications:

Model	SP140	SP160	SP180	SP200	SP220	SP240
Working Width	1400	1600	1800	2000	2200	2400
Match Tractor	20-30	25-35	30-40	40-50	40-55	45-60
N.W/G.W	166/180	172/187	178/195	184/200	190/208	198/218



3-Point type



Skid Steer type



X Disc Harrow

Uses:

- *Clearing debris to prevent fires spreading.
- *Use in grassy areas where debris has been left after storms.
- *Useful prior to slashing and moving.

Features:

- *Angle adjustable rake for clearing off to the side.
- *Sturdy spring steel teeth for contouring over uneven terrain
- *Steel disc for superior penetration.



Specifications:

Model	4DH	5DH	6DH
Working Width	1200	1500	1800
No.of Discs	12	16	20
Hitch Type	Cat.1	Cat.1	Cat.1
Match Tractor	18-25	20-35	25-40
N.W/G.W	186/199	215/230	265/280
Packing Size	1270*1130*610	1530*1260*610	1830*1300*610



Discs 16" can sold separately



V Disc Harrow

Uses:

- *Clearing debris to prevent fires spreading.
- *Use in grassy areas where debris has been left after storms.
- *Useful prior to slashing and moving.

Features:

- *Angle adjustable rake for clearing off to the side.
- *Sturdy spring steel teeth for contouring over uneven terrain.
- *Steel disc for superior penetration.



Specifications:

Model	DH130	DH150	DH190	DH220
Working Width	1300	1500	1900	2200
No.of Discs	14	16	20	24
Hitch Type	Cat.1	Cat.1	Cat.1	Cat.1
Match Tractor	15-18	25-30	35-40	55-60
N.W/G.W	220/225	240/245	290/295	350/355
Packing Size	1600*950*650/6	2050*950*750/6	2050*950*750/6	2200*800*800/4



Discs 18" can sold separately



ATV Disc Harrow

Uses:

- *Clearing debris to prevent fires spreading.
- *Use in grassy areas where debris has been left after storms.
- *Useful prior to slashing and moving.

Features:

- *Angle adjustable rake for clearing off to the side.
- *Sturdy spring steel teeth for contouring over uneven terrain.
- *Steel disc for superior penetration.

Specifications:

Model	ADH120
Working Width	1200
No.of Discs	8
Diameter of Discs	16 "
Hitch Type	Cat.1
Match Tractor	18-25
N.W/G.W	170/193
Packing Size	1560*600*550



Furrow Plow

Features:

- *Applicable for dry sand soil. With whole hanging ,simple structure,good working.
- *It is a simple and reliable machine.Also versatile and compact.
- *It can be coupled with all tractors from 15hp to 35hp.
- *It is specially designed for variety of uses in agriculture for medium,hard and black cotton soil.
- * 6mm thickness Mouldboard

Specifications:

Model	FP1	FP2	FP3	BP01	BP02	BP03
No.of Blade	1	2	3	1	2	3
Hitch Type	Cat.1	Cat.1	Cat.1	Cat.1	Cat.1	Cat.1
Match Tractor	15-25	18-30	20-35	15-25	18-30	20-35
N.W/G.W	55/65	78/90	115/130	91/103	165/182	



FP1




FP2



BP01



FP3

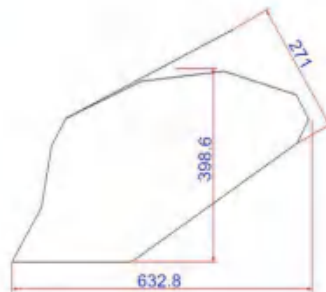

BP02



BP03

Furrow Plow

Features:

- *Applicable for dry sand soil. With whole hanging ,simple structure,good working.
- *It is a simple and reliable machine.Also versatile and compact.
- *It can be coupled with all tractors from 15hp to 35hp.
- *It is specially designed for variety of uses in agriculture for medium,hard and black cotton soil.
- * 6mm thickness Mouldboard

Specifications:

Model	RC1	TRC2	BPS	DRP-25
No.of Blade	1	2	1	4
Hitch Type	Cat.1	Cat.1	Cat.1	Cat.1
Match Tractor	15-25	25-60	30-50	30-50
N.W/G.W	56/70	94/105	126/140	93/108



RC1



TRC2



BPS



DRP-25

3-Point Rippers Pipelayer & Middle Buster

Uses:

*It glides smoothly through a variety of ground types, with adjustable height settings.

*Benefiting from both a soil ripper and pipe layer it is a handy piece of kit for laying cable.

*The middle buster point is great for laying off rows, digging potatoes, pointing a ditch, general filed prep, and many other farm, field, and garden uses.

*The subsoiler point is for ripping sod and loosening compacted soil for better plant growth and production.

Specifications:

Model	RP50	RP80
Dimensions	1100*550*650	1200*870*950
Pipy Diameter	50mm	80mm
Hitch Type	Cat.1	Cat.1
Match Tractor	15-40	25-50
N.W/G.W	55/60	74/80
Packing Size	1200*550*650	1300*870*950



Model	SS-A	SS-B	MB-A	MB-B	TMB
Dimensions	1080*790*250	1080*790*250	1080*790*250	1080*790*250	1385*450*860
Pipy Diameter	8" -20 "	8" -20 "	8"-16"	8"-16"	8"-16"
Hitch Type	Cat.1	Cat.1	Cat.1	Cat.1	Cat.1
Match Tractor	18-30	18-40	18-40	18-40	18-40
N.W/G.W	27/28	31/32	24/25	30/32	85/100
Packing Size	650*1050*1100/6		650*1050*1100/6		1500*530*250



SS-A



SS-B



MB-A



MB-B



TMB

3-Point Cultivator

Uses:

*A cultivator is a farm implement for stirring and pulverizing the soil , either before planting or to remove weeds and to aerate and loosen the soil after the crop has begun to grow.

*It is powered by a tractor and stirs the soil.

usually to a greater depth than does the harrow (which is usually unpowered).

*Similar but much smaller machines are used for gardening.

Specifications:

Model	4PR	5PR	6PR
Working Width	48 "	60"	72 "
No.of Discs	4	5	6
Hitch Type	Cat.1	Cat.1	Cat.1
Match Tractor	15-25	20-30	20-40
N.W/G.W	83/93	94/108	106/122
Packing Size	1260*760*250	1560*760*250	1860*760*250



Model	4TR	5TR	6TR
Working Width	48 "	60"	72 "
No.of Discs	4	5	6
Hitch Type	Cat.1	Cat.1	Cat.1
Match Tractor	15-25	20-30	20-40
N.W/G.W	76/84kgs	90/100kgs	104/117kgs
Packing Size	1230*700*250	1530*700*250	1830*700*250



Model	CLTV
Working Width	1200mm
No.of Discs	6
Hitch Type	Cat.1
Match Tractor	18-30
N.W/G.W	42/43kgs
Packing Size	1260*760*250



3-Point Cultivator

Uses:

- *Clearing debris to prevent fires spreading.
- *Use in grassy areas where debris has been left after storms
- *Useful prior to slashing and moving.



Specifications:

Model	SR54	SR66	SR78	SR90
Working Width	54"	66"	78"	90"
No.of Shanks	5	6	7	8
Hitch Type	Cat.1	Cat.1	Cat.1	
Match Tractor	20-35	25-40	35-60	35-60
N.W/G.W	89/103kgs	99/113kgs	109/125kgs	121/140kgs
Packing Size	1360*760*250	1670*760*250	1960*760*250	2260*760*250

Model	SS03	SS05	SS07
Working Width	900mm	1200mm	1500mm
Deeping Depth	8 "-16"	8 "-16"	8 "-16"
No.of Shanks	3	5	7
Hitch Type	Cat.1	Cat.1	Cat.1
Match Tractor	18-40	18-40	20-40
N.W/G.W	40/50kgs	58/68kgs	79/95kgs



Rotary Tiller -Chain Driven

Uses:

- *Create a smooth finish and is perfect for crop and lawn preparation.
- *Improving productivity, as well as presentation

Features:

- *Adjustable rear flap for safety as well as providing a smooth finish.
- *Height adjustable skids for depth control.Extra strong design for long life & reliability.
- *Chain driven Model suitable for loose soil land.**

Specifications

Model	TL85	TL95	TL105	TL115	TL125	TL135
Working Width	850	950	1050	1150	1250	1350
Tilling Depth	8-12	8-12	8-12	8-12	8-12	8-12
No.of Blade	16	6	20	24	28	28
Matched Power	16-20	20	22	22-25	25-30	30-35
Blade Shaft Speed(rpm)	210	210	210	210	210	210
N.W/G.W	120/152	128/160	138/172	148/182	158/192	168/202
Packing Size	1050*730* 730	1150*730* 730	1250*730* 730	1350*730* 730	1450*730* 730	1550*730* 730
Qty/20'GP	45	45	40	40	36	36



Model	TM120	TM140	TM150	TM160	TM180
Working Width	1200	1400	1500	1600	1800
Tilling Depth	8-12	8-12	8-12	8-12	8-12
No.of Blade	24	28	32	32	36
Matched Power	25-30	30-35	35-40	40-45	50-55
Blade Shaft Speed(rpm)	210	210	210	210	210
N.W/G.W	175/210	200/235	210/250	240/290	290/350
Packing Size	1450*730* 730	1650*730* 730	1750*730* 730	1850*730* 730	2050*730* 730
Qty/20'GP	36	30	27	27	24



Rotary Tiller -Gear Driven

Uses:

- *Create a smooth finish and is perfect for crop and lawn preparation.
- * Improving productivity, as well as presentation

Features:

- *Adjustable rear flap for safety as well as providing a smooth finish.
- *Height adjustable skids for depth control.Extra strong design for long life & reliability.
- *Gear driven Model suitable for hard soil land.**

Specifications

Model	TMZ120	TMZ140	TMZ150	TMZ160	TMZ180	TMZ190
Working Width	1200	1400	1500	1600	1800	1900
Tilling Depth	8-14	8-14	8-14	8-14	8-14	8-14
No.of Blade	24	28	32	32	36	40
Matched Power	25-30	30-35	35-40	40-45	50-55	55-60
Blade Shaft Speed(rpm)	192	192	192	192	192	192
N.W/G.W	242/277	259/294	269/309	274/324	288/348	298/358
Packing Size	1450*730*730	1650*730*730	1750*730*730	1850*730*730	2050*730*730	2150*730*730
Qty/20'GP	36	30	27	27	24	21



Model	TMZ200	TMZ210	TMZ220	TMZ230	TMZ240
Working Width	2000	2100	2200	2300	2400
Tilling Depth	8-14	8-14	8-14	8-14	8-14
No.of Blade	40	44	44	48	48
Matched Power	60-65	65-70	70-80	80-90	90-100
Blade Shaft Speed(rpm)	232	232	232	232	232
N.W/G.W	308/368	320/380	335/395	350/410	365/425
Packing Size	2250*730*730	2350*950*730	2450*950*730	2550*950*730	2650*950*730
Qty/20'GP	21	18	18	12	



Stone Burier -Chain Driven

Uses:

- *Create a smooth finish and is perfect for crop and lawn preparation.
- *Improving productivity, as well as presentation

Features:

- *Adjustable rear flap for safety as well as providing a smooth finish.
- *Height adjustable skids for depth control.Extra strong design for long life & reliability.
- *Heavy duty model with Chain driven.


Specifications

Model	STB105	STB125	STB145	STB165
Working Width	1050	1250	1450	1650
Tilling Depth	18	18	18	18
No.of Blade	24	30	30	36
Matched Power	20-26	28-32	35-38	38-45
Blade Shaft Speed(rpm)	210	210	210	210
N.W/G.W	315/385	370/430	430/500	490/570
Packing Size	1320*1030*760	1520*1030*760	1720*1030*760	1920*1030*760



Black Roller - Specification

Model	R105	R125	R145	R165
Working Width	1050	1250	1450	1650
N.W/G.W	35/55	50/70	70/90	90/100
Roller Size	1320*420*420	1520*420*420	1720*420*420	1920*420*420

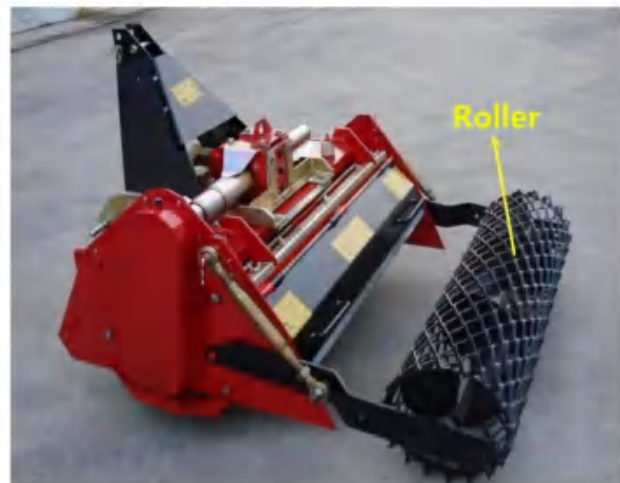

Post Hole Digger

Main Features

- * Create fences with ease to keep wanted things in and unwanted thing out.
- * For use in many soil types.
- * Ideally suited for fence building and tree planting around any type of property.
- * Designed for rugged durability and economy.
- * Augers are available in 6 to 12inches to suit many post sizes and soil types.
- * Shieled PTO shaft shear pin protected.

Specifications

Model	PHD6	PHD8	PHD9	PHD10	PHD12
Tractor HP	18-25	20-30	20-30	20-35	20-40
Auger Diameter	6"	8 "	9"	10 "	12"
Auger Length	1100	1100	1100	1100	1100
Gearbox Hp	25hp/50hp	25hp/50hp	25hp/50hp	25hp/50hp	50HP
Gearbox Rate	3:1	3:1	3:1	3:1	3:1
PTO Speed	540RPM	540RPM	540RPM	540RPM	540RPM
Hitch Type	Cat.1	Cat.1	Cat.1	Cat.1	Cat.1
N.W/G.W	102/120	112/130	114/134	116/136	120/140
Packing Size	1650*550* 340	1650*550* 340	1650*550* 340	1650*550* 340	1650*550* 340

Model	PHD14	PHD16	PHD18	PHD20
Tractor HP	25-50	30-50	30-55	35-60
Auger Diameter	14 "	16"	18"	20"
Auger Length	1100	1100	1100	1100
Gearbox Hp	50HP	50HP	50HP	50HP
Gearbox Rate	3:1	3:1	3:1	3:1
PTO Speed	540RPM	540RPM	540RPM	540RPM
Hitch Type	Cat.1	Cat.1	Cat.1	Cat.1
N.W/G.W	140/160	145/165	150/170	155/175
Packing Size	1650*550* 340	1650*550* 340	1650*550* 340	1650*550* 340



Round Tube



Square Tube



Hydraulic Type Optional



Auger separately optional

3-Point Lawn Aerator Roller

Main Features

- * Level ruts and humps after the wet season on sports fields and paddocks alike.
- * Add water to increase weight for spike penetration in hard soil.
- * Pasture renovation, aerator pasture and turf, incorporate line and fertilizer to improve germination.
- * Remove the spike kit to roll seeded areas improving soil seed contact.
- * Level ruts and humps after the wet season on sports fields and paddocks alike.
- * Removable and adjustable aerator spikes. Water fill to increase ballast weight. Spears.

Specifications

Model	4BR16	4BRT16 (4BRS16)	5BR16	5BRT16 (5BRS16)	6BR16	6BRT16 (6BRS16)
Drum Length	1200	1200	1500	1500	1800	1800
Drum Diameter	16"	16"	16"	16"	16"	16"
Hitch Type	3Point	3Point	3Point	3Point	3Point	3Point
Aerator Spikes	No	Yes	No	Yes	No	Yes

Model	4BR20	4BRT20 (4BRS20)	5BR20	5BRT20 (5BRS20)	6BR20	6BRT20 (6BRS20)
Drum Length	1200	1200	1500	1500	1800	1800
Drum Diameter	20"	20"	20"	20"	20"	20"
Hitch Type	3Point	3Point	3Point	3Point	3Point	3Point
Aerator Spikes	No	Yes	No	Yes	No	Yes

Model	4BR23	4BRT23 (4BRS23)	5BR23	5BRT23 (5BRS23)	6BR23	6BRT23 (6BRS23)
Drum Length	1200	1200	1500	1500	1800	1800
Drum Diameter	23"	23"	23"	23"	23"	23"
Hitch Type	3Point	3Point	3Point	3Point	3Point	3Point
Aerator Spikes	No	Yes	No	Yes	No	Yes



BR



BRT



BRS

ATV Lawn Aerator Roller ATV

Main Features

- * Level rutts and humps after the wet season on sports fields and paddocks alike.
- * Add water to increase weight for spike penetration in hard soil.
- * Pasture renovation, aerat pasture and turf, incorporate line and fertiliser to improve germination.
- * Remove the spike kit to roll seeded areas improving soil need contact.
- * Level rutts and humps after the wet season on sports fields and paddocks alike.
- * Removable and adjustable aerator spikes. Water fill to increase ballast weight. spears.

Specifications

Model	4ALR16	4ALRT16	5ALR16	5ALRT16	6ALR16	6ALRT16
Drum Length	1200	1200	1500	1500	1800	1800
Drum Diameter	16"	16"	16"	16"	16"	16"
Hitch Type	3Point	3Point	3Point	3Point	3Point	3Point
Aerator Spikes	No	Yes	No	Yes	No	Yes

Model	4ALR20	4ALRT20	5ALR20	5ALRT20	6ALR20	6ALRT20
Drum Length	1200	1200	1500	1500	1800	1800
Drum Diameter	20"	20"	20"	20"	20"	20"
Hitch Type	ATV	ATV	ATV	ATV	ATV	ATV
Aerator Spikes	No	Yes	No	Yes	No	Yes

Model	4ALR23	4ALRT23	5ALR23	5ALRT23	6ALR23	6ALRT23
Drum Length	1200	1200	1500	1500	1800	1800
Drum Diameter	23"	23"	23"	23"	23"	23"
Hitch Type	ATV	ATV	ATV	ATV	ATV	ATV
Aerator Spikes	No	Yes	No	Yes	No	Yes



ALR



ALRA



ALRT

3-Point Lawn Aerato

Main Features

- * Level rutts and humps after the wet season on sports fields and paddocks alike.
- * Add water to increase weight for spike penetration in hard soil.
- * Pasture renovation, aerat pasture and turf, incorporate line and fertiliser to improve germination.
- * Remove the spike kit to roll seeded areas improving soil need contact.
- * Level rutts and humps after the wet season on sports fields and paddocks alike.
- * Removable and adjustable aerator spikes. Water fill to increase ballast weight. spears.
- * With different connection part for a

Specifications

Model	4DBR16	4DBRT16	5DBR16	5DBRT16	6DBR16	6DBRT16
Drum Length	1200	1200	1500	1500	1800	1800
Drum Diameter	16"	16"	16"	16"	16"	16"
Hitch Type	3Point/ATV	3Point/ATV	3Point/ATV	3Point/ATV	3Point/ATV	3Point/ATV
Aerator Spikes	No	Yes	No	Yes	No	Yes

Model	4DBR20	4DBRT20	5DBR20	5DBRT20	6DBR20	6DBRT20
Drum Length	1200	1200	1500	1500	1800	1800
Drum Diameter	20"	20"	20"	20"	20"	20"
Hitch Type	3Point/ATV	3Point/ATV	3Point/ATV	3Point/ATV	3Point/ATV	3Point/ATV
Aerator Spikes	No	Yes	No	Yes	No	Yes

Model	4DBR23	4DBRT23	5DBR23	5DBRT23	6DBR23	6DBRT23
Drum Length	1200	1200	1500	1500	1800	1800
Drum Diameter	23"	23"	23"	23"	23"	23"
Hitch Type	3Point/ATV	3Point/ATV	3Point/ATV	3Point/ATV	3Point/ATV	3Point/ATV
Aerator Spikes	No	Yes	No	Yes	No	Yes



3-Point Lawn Aerator Roller

Main Features

- * Level rutts and humps after the wet season on sports fields and paddocks alike.
- * Add water to increase weight for spike penetration in hard soil.
- * Pasture renovation, aerat pasture and turf, incorporate lime and fertiliser to improve germination.
- * Remove the spike kit to roll seeded areas improving soil seed contact.
- * Level rutts and humps after the wet season on sports fields and paddocks alike.
- * Removable and adjustable aerator spikes. Water fill to increase ballast weight. spears.
- * With different connection part for atv and tractor.

Specifications

Model	3LA14	3LAS14	4LA14	4LAS14	5LA14	5LAS14
Drum Length	1050	1050	1200	1200	1500	1500
Drum Diameter	14"	14"	14"	14"	14"	14"
Hitch Type	ATV	ATV	ATV	ATV	ATV	ATV
Aerator Spikes	No	Yes	No	Yes	No	Yes



LA



LAS

Quick Hitch

Uses:

*This tractor hitch lets you quickly and easily attach and release three-point implements without leaving your tractor seat.

* This trailer hitch features four position draw pin adjustments.

Features:

*Heavy duty steel construction.enforced frame.

*Adjustable top link bracket.

*3-Point Linkage Mounted.

Specifications

Model	QKHITCH-1	QKHITCH-2
Dimensions	800*200*600	950*200*600
Matched Power	18-45	60-90
3 Point Hitch	Cat.1	Cat.2
N.W/G.W	27/28	54/55
Packing Size	840*600*200	1000*600*200
Qty/20'GP	264	220



Top Hitch Adapter

optional



Bushing Optional



Model: S-QKHITCH-1

*The skid steer to Quick Hitch adapter which allows the operator to use it non-PTO powered implements on skid steers.

*This quick hitch features allows hooks designed to capture and retain 7/8in,lift pins without the use of bushing.

*Other features include an adjustable top hook for attaching to implements of varying heights and a floating top link bracket for implements that will not accept the top link hook.

Hitch Move

Uses:

- *Receiver inserts to let you easily tow behind your tractor anything you tow behind your truck.
- *Moves the point of attachment away from rear wheels for tighter turning in confined areas.

Features:

- *3-point hitch adapter accepts your 2in.
- *Powder-coated finish.
- *Height is adjustable with your tractor's 3-pt.
- *Heavy duty steel construction.enforced frame.

Specifications

Model	HM-0	HM-1	HM-2	HM-3	HM-4	HM-6
Dimensions	700*250*465	700*250*465	770*325*500	800*610*460	805*190*565	610*250*500
Matched Power	18-45	18-45	18-45	18-45	18-45	18-45
3 Point Hitch	Cat.1/0	Cat.1/0	Cat.1/0	Cat.1/0	Cat.1/2	Cat.0/1
N.W/G.W	21/22	20/21	20/21	20/21	27/29	9/10



HM-0



HM-1



HM-2



HM-3



HM-4



HM-6

Potato Harvester

Uses:

*Our potato harvester is mainly used for reaping potato, sweet potato, peanut, onions, garlic, Chinese yam, taro and other underground rhizome crops.

*It has the advantages of high efficiency, low breakage, fast to leak the soil, long service life.

Features:

* The machine is made up of a vibrating digging plow share with adjustable digging depth that conveys the potatoes and the earth onto a vibrating sieve grid that separates the to potatoes from the earth,thus depositing them on a single cut row.On all the pointsvibrations there are anti-vibrating rubber bushes that allow the machine stability while working.Its reduced dimensions make it possible to use the device on small ground plots,both planes and hills, and make it suitable for digging new potatoes.

Specifications

Model	PH500	PH700
Working Width	500	700
No.of Row	Single-row	Single-row
Dimensions	1400*1060*800	1400*1260*800
Matched Power	15-25	18-35
3 Point Hitch	Cat.1	Cat.1
N.W/G.W	100/120	110/135
Packing Size	1260*750*520	1260*940*520
Qty/20'GP	64	48



Log Splitter

Uses:

*With horizontal or vertical positioning when splitting, the 3-point linkage mounted log splitter is ideal for making logs more manageable and preparing fire wood and fence stumps.

Features:

- *Hydraulic operation makes wood splitting easy and safe;
- *Horizontal or vertical positioning;
- *Wide blade for multiple log splitting;
- *Easy for one person to operate.

Specifications:

Model	LS350	LS310	LS410
Cylinder Diameter	4"	4"	4"
Cylinder Stroke	24"	24"	24"
Splitting Force @ 3000 psi	20 ton/31 ton	20 ton/31 ton	20 ton/31 ton
Splitter Orientation	Vertical	Horizontal	Horizontal
Avg. Stroke Cycle Time	Approx. 7 secs	Approx. 7 secs	Approx. 7 secs
Full Stroke Cycle Time	Approx. 14 secs	Approx. 14 secs	Approx. 14 secs
Weight	239 lbs./110kgs	220 lbs./100kgs	339 lbs./153kgs
Dimensions (L x W x H)	1720*830*610mm	1700*800*540mm	1850*1210*530mm
	68 in x 33 in x 24 in	67 in x 31.5 in x 21.5 in	73 in x 48 in x 21 in
Recom. Min. Hyd. Flow	16Mpa	16Mpa	16Mpa



LS350

LS310

LS410

Backhoe

Main Features

*Digging Trenches, breaking up rocky soil, piping preparation, channelling rainfall runoffs, tree planting and relocating, Reaching over obstacles for easier truck loading in confined spaces.

*Suits tractors Cat.1, 3-point linkage kit.

*Rugged design, large working area, padded seat safety belt, individually controlled support legs.

*Narrow boom increases viewing area to the bucket and trench, bracing chains in transit.

*Simple for one person to attach.

Specifications

Model	BHM5	BH5	BH6	BH7	BH8
Maximum Digging Depth	1530mm	1830mm	2133mm	2438mm	2745mm
Digging Depth (two foot flat bottom)	1350mm	1676mm	1980mm	2286mm	2590mm
Swing Arc	180 °	180 °	180 °	180 °	180
Loading Height (bucket at 60 °)	1020mm	1270mm	1524mm	1778mm	2032mm
Reach from Center Line of Swing Pivot	1900mm	2286mm	2590mm	2895mm	3200mm
Transport Height (maximum)	1010mm	1245mm	1498mm	1752mm	2032mm
Bucket Rotation	180	180	180 °	180 °	180
Loading Reach (bucket at 60 °)	750mm	865mm	965mm	1092mm	1220mm
Transport Overhang	980mm	1016mm	1042mm	1066mm	1092mm
Undercut	610mm	660mm	712mm	762mm	812mm
Stabilizer Spread, Down Position	1500mm	1700mm	1980mm	2260mm	2565mm
Stabilizer Spread, Up Position	920mm	1066mm	1194mm	1550mm	1828mm
Bucket Cylinder Digging Force	720kgs	930kgs	1112kgs	1288kgs	1360kgs
Dipper Stick Cylinder Digging Force	350kgs	476kgs	566kgs	910kgs	1135kgs
Shipping Weight (less bucket)	230kgs	252kgs	296kgs	356kgs	498kgs
Hydraulic Volume 3'4" Requirements	3 to 4 GPM	3 to 4 GPM	3 to 4 GPM	4 to 5 GPM	5 to 6 GPM
Hydraulic Pressure Requirements	2000psi	2000psi	2000 psi	2000 psi	2000 psi
Recommended Tractor HP	16-25HP	18-25HP	20 - 35 HP	25 - 45 HP	35 - 65 HP



Bucket attachment



backhoe-ripper attachment

Tractor 3Point Wood Chipper

Uses:

- *Perfect for those clean-ups after a storm, pruning or just processing general gardening wastes.
- *Creating mulch for garden plants and trees for conserving water.

Features:

- *All the heart of the BX Chipper is an oversize heavy duty rotor and reversible chipping blades;
- *The self-feed hopper is designed to angle the brush against the rotor and blades, pulling the branches into the chipper;
- *Easily control where you want the chipp with the double adjustable exit chute.
- *The Chute swivels 360° and the top deflector adjusts the distance.

Specifications:

Model	BX42S	BX42R	BX62S	BX62R
Max Chipping Diameter	100mm/4"	100mm/ 4"	150mm/ 6"	150mm/ 6"
Chipping House Opening	4"x10"	4"x10"	6.5"x12"	6.5"x12"
No.of Blades	4	4	4	4
Rotor Size	25"	25"	30"	30"
Feeding System	Self Feed	Hydraulic Feed	Self Feed	Hydraulic Feed
Dimensions	40"Lx42"Wx60"H	40"Lx42"Wx60"H	50"Lx52"Wx74"H	50"Lx52"Wx74"H
Hopper Opening	20"x20"	20"x20"	25"x25"	25"x25"
Mounting System	3point hitch	3 Point Hitch	3 Point Hitch	3 Point Hitch
Hopper Discharge Rotation	360°	360°	360°	360°
Hopper Discharge Height	60"	60"	74"	74"
Net Weight	195kg	260kg	350kg	448kg
Tractor Hp	18-30hp	18-30hp	30-100hp	30-100hp

