

PRODUCT DESCRIPTION:

The troffer provides maximum light distribution. It is ideal for commercial and industrial uses. This luminaire was engineered as an energy efficient and eco-friendly alternative to traditional lighting solutions.

FEATURES:

High quality LED chips with 50,000 hours


No flicker

0-10V dimming available

LED30WTrofferSpec 2 ft. x 2ft.



WIRING DIAGRAM:

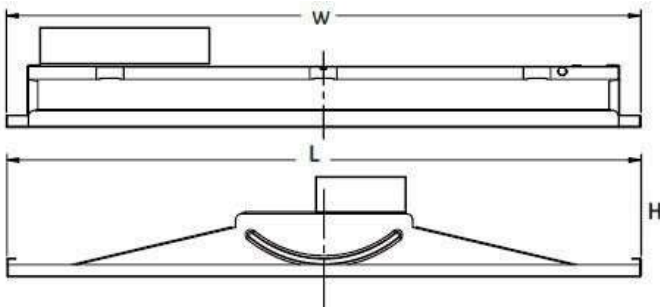

PURE BRIGHT

L I G H T I N G

SPECIFICATIONS:

| SPECIFICATION | Details | |
|-----------------------|-----------------------------|------------|
| Model | PBL-TR22-30CDS | |
| Input Wattage (W) | 30W | |
| Lumens Delivered (LM) | 3,987LM | 3,991LM |
| Efficacy (LM/W) | 126.41LM/W | 127.96LM/W |
| CRI | 80 | 80 |
| Lifespan | 50,000 hours | |
| Color Temperature | 4,000K | 5,000K |
| Wattage Equivalent | 70W | |
| Dimmable | 0-10V | |
| IP Rating | IP40 | |
| Beam Angle | 150 | |
| Input Voltage | AC120-277V | |
| Power Factor | 0.9 | 0.9 |
| THD | 15% | 15% |
| Housing | Aluminum | |
| Lens | Frosted | |
| Mounting | T bar | |
| Weight (LBS) | 7.09 lbs | |
| Size | 23.7" x 23.7" x 3.62" | |
| Certification | DLC, UL, FCC, CE, RoHS, TUV | |
| Operating Temperature | -207-507 | |
| Environment | Indoor | |
| Warranty | 5 years limited | |

