





Product Catalog

Exclusively
Distributed By





Founded in 1989 in USA



Founded by legendary AV industry guru Peter Tribeman

Atlantic Technology designs and manufactures home audio entertainment products that emphasize engineering excellence and innovation. Atlantic has consistently produced award-winning products that deliver performance beyond customer expectations. Atlantic is one of the most experienced companies in the industry. It's a group of engineers, designers, and marketing professionals who have spent their careers in high performance audio. Their impact on the industry is unmistakable, and Atlantic's reputation for technical excellence is widely known. The numerous positive reviews Atlantic has received are testimony to the success of their efforts. Today, Atlantic's products carry on this legacy performance without compromise at surprisingly affordable prices.





CEPro
BEST
PRODUCT
AWARDS @ CEDIA EXPO 2023
WINNER





SLEEK, MODERN DESIGN

Elegantly Refined Cabinets

The 8600i Series redefines elegance with its rounded edges and glossy finishes. Enhanced with painted baffles for superior sound and style.





Precision Sound Imaging

Elevated tweeter placement optimizes imaging, aligning perfectly with ear height. Dual woofers deliver balanced, powerful bass down to $30\text{Hz} \pm 3\text{dB}$.











IN-CEILING SPEAKERS

IC Series

AZURE Series



IC SERIES

IC-6.1

6 1/2" 2 WAY THIN BEZEL IN-CEILING SPEAKER-SINGLE

WOOFER: 6 1/2": POLYPROPYLENE

TWEETER: 1" PIVOTING SILK DOME

CUT-OUT SIZE: 8" (202MM)

MOUNTING DEPTH: 4.5" (115MM)

SENSITIVITY: 88DB

RECOMMENDED AMPLIFIER POWER: 10-100 WATTS RMS



IC SERIES

IC-6SLM

6 1/2" SHALLOW DEPTH
CEILING SPEAKER-SINGLE

WOOFER: 6.5" PPM CONE, RUBBER SURROUND

TWEETER: 1" SILK DOME, WIDE DISPERSION, 30 DEGREES OF TILT

CUT-OUT SIZE: 8" (202MM)

MOUNTING DEPTH: 2 3/4" (70MM)

SENSITIVITY: 92 DB

RECOMMENDED AMPLIFIER POWER: 10-100 WATTS RMS



IC SERIES

IC-6 OBA

6 1/2" OBJECT BASED AUDIO IN-CEILING
SPEAKER-SINGLE

WOOFER: 6 1/2" (165MM) POLYPROPYLENE 1" VOICE COIL

TWEETER: DUAL 1" (25MM) SILK DOME

CUT-OUT SIZE: 8" (202MM)

MOUNTING DEPTH: 5 1/6" (128MM)

SENSITIVITY: 88DB

RECOMMENDED AMPLIFIER POWER: 10-140 WATTS RMS



IC SERIES

IC-6HT

6 1/2" 2 WAY THIN BEZEL HT CEILING
LCR SPEAKER -SINGLE

WOOFER: 6.5" PPM CONE, RUBBER SURROUND

TWEETER: 1" SILK DOME, WIDE DISPERSION, 30 DEGREES OF TILT

CUT-OUT SIZE: 8" (202MM)

MOUNTING DEPTH: 5 1/6" (128MM)

SENSITIVITY: 88DB

RECOMMENDED AMPLIFIER POWER: 10-100 WATTS RMS



IC SERIES

IC-6.3

WOOFER: 6.5" PPM CONE

TWEETER: 1" SILK DOME, WIDE DISPERSION, 30 DEGREES
OF TILT

CUT-OUT SIZE: 8" (202MM)

MOUNTING DEPTH: 4" (10.16 CM)

SENSITIVITY: 88DB

RECOMMENDED AMPLIFIER POWER: 10-125 WATTS RMS



IC SERIES

IC-8.3

WOOFER: 8" PPM CONE

TWEETER: 1" SILK DOME, WIDE DISPERSION, 30 DEGREES
OF TILT

CUT-OUT SIZE: 9 5/8" (244MM)

MOUNTING DEPTH: 4 3/4" (12.07 CM)

SENSITIVITY: 89DB

RECOMMENDED AMPLIFIER POWER: 10-150 WATTS RMS



AZURE SERIES

AZ610

AZURE 6.5 INCH 2 WAY CEILING SPEAKER-SINGLE

WOOFER: 6 1/2 " HUMIDITY-RESISTANT LOW DISTORTION

TWEETER: 1" LRT™ COATED SILK DOME WIDE DISPERSION

CUT-OUT SIZE: 8" (202MM)

SENSITIVITY: 88DB

RECOMMENDED AMPLIFIER POWER : 10-125 WATTS
RMS



AZURE SERIES

AZ810

AZURE 8 INCH 2 WAY CEILING SPEAKER-SINGLE

WOOFER: 8" HUMIDITY-RESISTANT, LOW DISTORTION

TWEETER: 1" LRT™ COATED SILK DOME WIDE DISPERSION

CUT-OUT SIZE: 9 5/8" (244MM)

SENSITIVITY: 89DB

RECOMMENDED AMPLIFIER POWER : 10-150
WATTS RM



AZURE SERIES

AZ600

AZURE 6.5 INCH THIN BEZEL CEILING SPEAKER-SINGLE

WOOFER: 6 1/2 " HUMIDITY-RESISTANT LOW DISTORTION

TWEETER: 1" LRT™ COATED SILK DOME WIDE DISPERSION

CUT-OUT SIZE: 8" (202MM)

SENSITIVITY: 87DB

RECOMMENDED AMPLIFIER POWER : 10-125 WATTS
RMS



AZURE SERIES
AZ620

AZURE TRIMODE 6.5 INCH CEILING SPEAKER-SINGLE

WOOFER: 6.5" DUAL 1" VOICE COIL, VENTED POLE PIECE

TWEETER: DUAL 3/4" LRT™ COATED WIDE DISPERSION

CUT-OUT SIZE: 8" (202MM)

SENSITIVITY: 88DB

RECOMMENDED AMPLIFIER POWER: 10-125 WATTS
RMS



AZURE SERIES
AZ820

AZURE TRIMODE 8 INCH CEILING SPEAKER-SINGLE

WOOFER: 8" DUAL 1" VOICE COIL, VENTED POLE PIECE

TWEETER: DUAL 1" LRT™ COATED WIDE DISPERSION

CUT-OUT SIZE: 9 5/8" (244MM))

SENSITIVITY: 89DB

RECOMMENDED AMPLIFIER POWER: 10-150 WATTS
RMS



IN-WALL SPEAKERS



IW SERIES

IW-105LCR

6 1/2" TWO WAY TRIM BEZEL IN-WALL LCR
SPEAKER

WOOFER: (1) 6 1/2" MINERAL DAMPED
POLYMER

TWEETER: (1) 1" DOME

SENSITIVITY: 87DB

AMPLIFIER POWER : 25-150 WATTS



IW SERIES

IW-110LCR

DUAL 6 1/2" TWO WAY TRIM BEZEL IN-WALL LCR
SPEAKER

WOOFER: (2) 6 1/2" MINERAL DAMPED
POLYMER

TWEETER: (1) 1" DOME

SENSITIVITY: 89DB

AMPLIFIER POWER : 28-150 WATTS



IW SERIES

IW-155LCR


THX DUAL 5 1/4" THIN BEZEL IN-WALL LCR
SPEAKER

WOOFER: (2) 5 1/4" (135MM) GLH*

TWEETER: 1" (25MM) SOFT DOME LRT™

SENSITIVITY: 89DB

RECOMMENDED AMPLIFIER: 10 - 150 WATTS
RMS



IW SERIES

IW-30LCR

THX ULTRA2 3 WAY THIN BEZEL IN-WALL LCR
SPEAKER

WOOFER: 8" (203MM) GLH*

TWEETER: 1" (25MM) SOFT DOME LRT™

SENSITIVITY : 89DB

RECOMMENDED AMPLIFIER: 25 - 200 WATTS
RMS



IW-8.3

3 WAY INWALL SPEAKER - IDEAL FOR LCR

TYPE: 3-WAY

WOOFER : 8" MINERAL DAMPED POLYMER

MIDRANGE: 1.25" DOME

TWEETER: 0.75" DOME

FREQUENCY RESPONSE: 30 – 25kHz ±3dB

SENSITIVITY: 91 dB

IMPEDANCE: 4 Ω

CROSSOVER FREQUENCY: 1500 Hz, 8000 Hz

DIMENSIONS: 10 3/8" x 14 3/8" x 4 1/2"(264x366x115 mm)

CUTOUT DIMENSIONS: 8 3/4" x 12 13/16"(223x326 mm)



SURROUND SERIES

IW-115SR

4.5" DIPOLE/BIPOLE THIN BEZEL IN-WALL SURROUND
SPEAKERS

WOOFER : (2) 4 ½" (115MM) GLH*

TWEETER: (2) 1" (25.4MM) SOFT DOME

SENSITIVITY: 88DB

RECOMMENDED AMPLIFIER: 25 – 150 WATTS



SURROUND SERIES

IW-155SR

THX SELECT2 DIPOLE/BIPOLE IN-WALL SURROUND
SPEAKERS

WOOFER : (2) 5 ¼" (135MM) GLH*

TWEETER: (2) 1" (25.4MM) SOFT DOME

SENSITIVITY: 88DB

RECOMMENDED AMPLIFIER: 25 – 150 WATTS



SUBWOOFERS



SUBWOOFERS

SB-900

POWERED BOX SUBWOOFER - 8" 125 WATT -SATIN BLACK

FEATURES: 1.5-INCH, VENTED ALUMINUM VOICE COIL, VENTED MOTOR

BASS DRIVER: 8" (203MM) LONG-THROW COMPOSITE CONE

OUTPUT POWER : 125W RMS

FREQUENCY RESPONSE: 32HZ - 250HZ ± 3 DB

PEAK OUTPUT: 103DB SPL INTO 1500 CUBIC FEET

CONTROLS: ABSOLUTE PHASE INVERT SWITCH, AUTO SIGNAL SENSING

DIMENSIONS W/ GRILLES(W X H X D) : 11 X 13 X 13.125 IN (279 X 330 X 333MM)



SUBWOOFERS

SB8

DOWN-FIRING 8" 125 WATT POWERED SUBWOOFER - GLOSS BLACK

BASS DRIVER: 8" LONG-THROW

OUTPUT POWER : 125W RMS

FREQUENCY RESPONSE: 32HZ - 200HZ ± 3 DB

PEAK OUTPUT: 103DB SPL INTO 2000 CUBIC FEET

DIMENSIONS W/ GRILLES(W X H X D) : 10 7/8

X 13 1/8 X 13 1/16; 277 X 334 X 332MM

ADD 1.75" (45MM) H FOR FEET

ADD 1.5" (38MM) D FOR KNOBS & GRILLE



SUBWOOFERS

224SB

POWERED BOX SUBWOOFER - 10" 180 WATT - SATIN BLACK

FEATURES: 2-INCH, FOUR LAYER VENTED ALUMINUM VOICE COIL, VENTED

BASS DRIVER: 10" LONG-THROW COMPOSITE CONE

OUTPUT POWER : 180W RMS

FREQUENCY RESPONSE: 25HZ - 250HZ ± 3 DB

PEAK OUTPUT: 103DB SPL INTO 1500 CUBIC FEET

CONTROLS: ABSOLUTE PHASE INVERT SWITCH, AUTO SIGNAL SENSING

DIMENSIONS (WXHXD) INCLUDING GRILLE: 14.25 X 13.25 X 15.4 IN. (368 X 337 X 391MM)



SUBWOOFERS

444SB

POWERED BOX SUBWOOFER - 12" 325 WATT - SATIN BLACK

FEATURES: 2-INCH, FOUR LAYER VENTED ALUMINUM VOICE COIL, VENTED MOTOR

BASS DRIVER: 12" LONG-THROW COMPOSITE CONE

OUTPUT POWER : 325W RMS

FREQUENCY RESPONSE: 25HZ - 250HZ ± 3 DB

PEAK OUTPUT: 105DB SPL INTO 2000 CUBIC FEET

CONTROLS: ABSOLUTE PHASE INVERT SWITCH, AUTO SIGNAL SENSING

DIMENSIONS (WXHXD) INCLUDING GRILLE: 16.5 X 16.9 X 16 IN. (418 X 430 X 407MM)



SUBWOOFERS

642eSB - GLB/BLK

THX SELECT® CERTIFIED

POWERED BOX SUBWOOFER - 12" 350 WATT - SATIN BLACK/GLOSS BLACK

TYPE: POWERED SUBWOOFER, SEALED ENCLOSURE

BASS DRIVER: 12" LONG-THROW COMPOSITE CONE

FEATURES: 2-INCH, FOUR LAYER VENTED
ALUMINUM VOICE COIL, VENTED MOTOR

OUTPUT POWER: 350W RMS

FREQUENCY RESPONSE: 25HZ - 300HZ ± 3 DB

LOW LEVEL (LINE): 20K OHM

PEAK OUTPUT: 107DB SPL INTO 2000 CUBIC FEET

DIMENSIONS W/ GRILLES(W X H X D): 19.00 X 21.00 X 20.50IN; 483 X 534
X 521MM (DEPTH W/GRILLE)

FINISH: GLOSS BLACK



SATIN BLACK





SUBWOOFERS

SBT1000

DUAL DRIVER POWERED SUBWOOFER 10" 500 WATT

FINISHES : GLOSS BLACK, MATTE BLACK

BASS DRIVER X 2: 12" LONG THROW COMPOSITE
CONE

OUTPUT POWER: 1000W RMS

DISTORTION (AMPLIFIER): <0.5%

FREQUENCY RESPONSE: 20HZ - 300HZ $\pm$ 3DB (MAX
RANGE) 27HZ - 300HZ $\pm$ 3DB (MAX SPL)

LOW LEVEL (LINE): 20K OHMS

PEAK OUTPUT (2500 CU FT): 107DB SPL

DIMENSIONS: 22.4W X 22.9H X 22.4D IN (568 X 581 X
568MM)



SUBWOOFERS

SBT500

DUAL DRIVER POWERED SUBWOOFER 12" 1000 WATT

FINISHES : GLOSS BLACK, MATTE BLACK

BASS DRIVER X 2: 10" LONG THROW COMPOSITE
CONE

OUTPUT POWER: 500W RMS

DISTORTION (AMPLIFIER): <0.5%

FREQUENCY RESPONSE: 23HZ - 300HZ $\pm$ 3DB (MAX
RANGE) 29HZ - 300HZ $\pm$ 3DB (MAX SPL)

LOW LEVEL (LINE): 20K OHMS

PEAK OUTPUT (2500 CU FT): 107DB SPL

DIMENSIONS: 18.5W X 18.8H X 18.5D IN (470 X 477 X
470MM)



BOOKSHELF



**BOOKSHELF
LCR3-GLB/WHT**

COMPACT HIGH PERFORMANCE LCR SPEAKER

WOOFER: (2) 3½" COMPOSITE POLYPROPYLENE/PAPER

TWEETER: (1) ¾" SILK DOME

SENSITIVITY/PEAK OUTPUT: 88DB

RECOMMENDED AMPLIFIER POWER/AMPLIFIER POWER-THD: 10 - 125 WATTS RMS

FINISH: GLOSS BLACK

WHITE





SOUNDBARS



Experience the next level of home audio with the Vista 500, Atlantic Technology's latest Dolby Atmos soundbar that delivers crystal-clear front-stage audio and immersive overhead sound, making it the perfect addition to any home theater setup.

With three front-stage channels for balanced Left, Center, and Right sound, plus two top-firing Atmos speakers, the Vista 500 transforms your living space into a cinematic experience. Whether wall-mounted or placed on a shelf, its sleek, slim design fits seamlessly into any room while providing powerful sound performance.

Bring the power of Dolby Atmos to your home and upgrade your audio with the Vista 500. Perfect for movie nights, music, and gaming, this soundbar redefines your entertainment experience.



SOUNDBAR

FS3-BLK

43" SLIM PROFILE FRONT STAGE LCR LOUDSPEAKER -MATTE BLACK

WOOFER: (2) 3 1/2" CPP PER CHANNEL

TWEETER: (1) 3/4" SILK DOME

SENSITIVITY/PEAK OUTPUT: 88DB

RECOMMENDED AMPLIFIER POWER/AMPLIFIER POWER-THD: 10 - 125 WATTS RMS



SOUNDBAR

FS5-GLB


50" SLIM PROFILE FRONT STAGE LCR LOUDSPEAKER-GLOSS BLACK

WOOFER: (2) 4 1/2" CPP PER CHANNEL

TWEETER: (1) 3/4" SILK DOME

SENSITIVITY/PEAK OUTPUT: 89DB

RECOMMENDED AMPLIFIER POWER/AMPLIFIER POWER-THD: 10 - 140 WATTS RMS

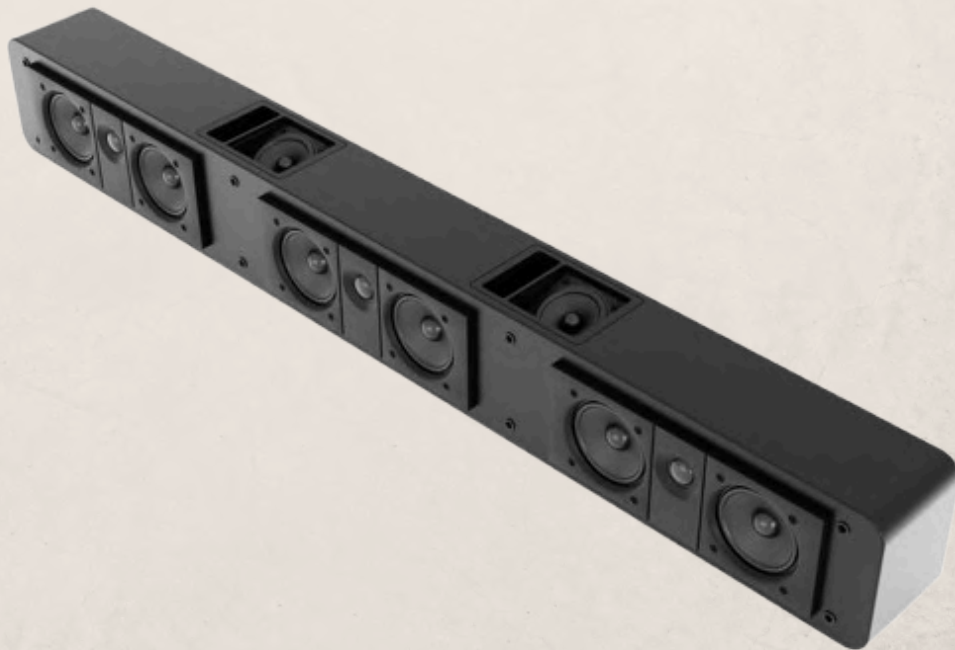

**SOUNDBAR
VISTA 500**

50" SLIM PROFILE FRONT STAGE DOLBY ATMOS LCR LOUDSPEAKER -
MATTE BLACK

WOOFER: (2) 4 1/2" CPP PER CHANNEL

TWEETER: (1) 3/4" SILK DOME

SENSITIVITY/PEAK OUTPUT: 92DB

RECOMMENDED AMPLIFIER POWER/AMPLIFIER POWER-THD: 10 - 140 WATTS RMS



FLOOR STANDING SPEAKERS



Discover the Pinnacle of Sound

The Atlantic Technology 8600i series epitomizes the fusion of design elegance and acoustic accuracy, setting a new benchmark in the realm of audio systems. Building upon the solid foundation of the 8600eLR, the 8600i series elevates the listening experience to new heights, offering sound that is not only visually impressive but also rich in auditory detail and depth. This series represents a meticulous enhancement of its predecessor, marrying sophisticated design with unparalleled sound quality.



8600iLR



8600i HOME THEATRE SERIES

8600iLR

ENHANCED FLAGSHIP TOWER FRONT SPEAKER - WHITE / BLACK

WOOFER: (2) 8" GLASS FIBER

TWEETER: 1" SOFT DOME LOW RESONANCE TWEETER™

MIDRANGE: (2) 5.25" GLASS FIBER

PASSIVE RADIATOR: (2) 8" GLASS FIBER

SENSITIVITY: 93DB

RECOMMENDED AMPLIFIER POWER: 50 - 300 WATTS RMS

DIMENSIONS W/ GRILLES(W X H X D): 10.6 X 51.4 X 10IN | 269 X 1305 X 276MM

FINISH:

BLACK

WHITE





8600eC



8600e HOME THEATRE SERIES

8600eC

FLAGSHIP CENTER CHANNEL - GLOSS BLACK / MAKASSAR EBONY

WOOFER: (4) 6.5" GLASS FIBER

TWEETER: (1) 1" SILK DOME

SENSITIVITY: 93DB

RECOMMENDED AMPLIFIER POWER: 25 - 300 WATTS RMS

DIMENSIONS W/ GRILLES(W X H X D): 37.6 X 13.7 X 14.5IN (955 X 347 X 369MM)

FINISH:

GLOSS BLACK

MAKASSAR EBONY





8600ic



8600i HOME THEATRE SERIES

8600iC

ENHANCED FLAGSHIP CENTER CHANNEL SPEAKER - WHITE / BLACK

WOOFER: (2) 8" GLASS FIBER

MIDRANGE: (2) 5.25" GLASS FIBER

TWEETER: 1" SOFT DOME LOW RESONANCE TWEETER™

FREQUENCY RESPONSE ($\pm 3\text{DB}$): 30HZ - 23KHZ

NOMINAL IMPEDANCE: 6 Ω

SENSITIVITY: 93DB

RECOMMENDED AMPLIFIER POWER: 50 - 300 WATTS RMS

DIMENSIONS W/ GRILLES(W X H X D): 29.8 X 11.3 X 12.8IN (756 X 288 X 325MM)

CROSSOVER TYPE: COMPUTER DESIGNED BUTTERWORTH 4TH ORDER ASYMMETRICAL TIME ALIGNED LINKWITZ-RILEY

FINISH:

BLACK

WHITE





8600eLR



8600e HOME THEATRE SERIES

8600eLR

FLAGSHIP TOWER SPEAKER - GLOSS BLACK / MAKSSAR EBONY

WOOFER: (4) 8" GLASS FIBER

TWEETER: (1) 1" ALUMINUM-MAGNESIUM

FREQUENCY RESPONSE ($\pm$ 3DB): 42HZ - 25KHZ

FREQUENCY RESPONSE ($\pm$ 6DB): 35HZ - 25KHZ

SENSITIVITY: 91DB

RECOMMENDED AMPLIFIER POWER: 25 - 300 WATTS RMS

DIMENSIONS W/ GRILLES(W X H X D): 10.9 X 51.7 X 11.4IN ; 278 X 1314 X 291MM

FINISH:

GLOSS BLACK

MAKASSAR EBONY





8200e HOME THEATRE SERIES

8200eC - GLB

THX ULTRA2 CENTER CHANNEL SPEAKER-GLOSS BLACK

WOOFER: (2) 8" GLH

TWEETER: (1) 1" SILK DOME

SENSITIVITY: 90 DB

RECOMMENDED AMPLIFIER POWER: 25 – 200 WATTS RMS

DIMENSIONS W/ GRILLES(W X H X D): 28.5 X 15.2 X 13.3IN*



8200e HOME THEATRE SERIES

8200eLR - GLB

THX ULTRA2 FRONT CHANNEL SPEAKER-GLOSS BLACK

WOOFER: (2) 8" GLH

MIDRANGE: (2) 5.25" GLH

TWEETER: (1) 1" SILK DOME

CROSSOVER TYPE: COMPUTER DESIGNED BUTTERWORTH 4TH ORDER ASYMMETRICAL (TIME-ALIGNED)
LINKWITZ-RILEY

SENSITIVITY: 90 DB

RECOMMENDED AMPLIFIER POWER: 25 – 200 WATTS RMS



8200e HOME THEATRE SERIES

8200eSR - BLK

THX ULTRA2 DIPOLE-BIPOLE SURROUND CHANNEL SPEAKERS-SATIN BLACK


WOOFER: (2) 5¼" GLH

TWEETER: (2) 1" SILK DOME

CROSSOVER TYPE : COMPUTER DESIGNED BUTTERWORTH 4TH ORDER ASYMMETRICAL (TIME-ALIGNED)

LINKWITZ-RILEY

SENSITIVITY: 90dB



6200e HOME THEATRE SERIES

6200eLR-BLK

THX ULTRA2 FRONT CHANNEL SPEAKER-SATIN BLACK

WOOFER: (2) 6.5" GLH

TWEETER: (1) 1" SILK DOME

SENSITIVITY: 90DB

RECOMMENDED AMPLIFIER POWER: 15 - 150 WATTS RMS

DIMENSIONS W/ GRILLES(W X H X D): 9.1 X 23.1 X 11.5IN (231 X 587 X 292MM)



6200e HOME THEATRE SERIES

6200eC-BLK

THX ULTRA2 CENTER CHANNEL SPEAKER-SATIN BLACK

WOOFER: (2) 6.5" GLH

TWEETER: (1) 1" SILK DOME

SENSITIVITY: 90DB

RECOMMENDED AMPLIFIER POWER: 15 - 150 WATTS RMS

DIMENSIONS W/ GRILLES(W X H X D): 21.5 X 11.1 X 12IN* (547 X 282 X 305MM*)



44 Series

44DA

THX SELECT® CENTER CHANNEL SPEAKER -GLOSS
BLACK

FINISHES : GLOSS BLACK, SATIN BLACK

TYPE: SEALED BOX, CONCENTRIC DRIVER ARRAY (CDA™)

WOOFER: 5¼" (135MM) DAMPED POLYPROPYLENE

TWEETER: 1" (25MM) DOME, SILK-DAMPED

CROSSOVER TYPE: OPTIMIZED 1ST-ORDER BUTTERWORTH



THX
ULTRA2

4400 Series

4400 C

THX SELECT® CENTER CHANNEL SPEAKER
GLOSS BLACK

WOOFER: (2) 5 ¼" GLH

TWEETER: (1) 1" SILK DOME

SENSITIVITY: 90DB

RECOMMENDED AMPLIFIER POWER: 10 – 150
WATTS RMS

DIMENSIONS W/ GRILLES(W X H X D): 18.4X8.4X9.7"
(467 X 213 X 246MM)



THX
ULTRA2

4400 Series

4400 LR

THX SELECT® FRONT CHANNEL SPEAKERS
GLOSS BLACK

FINISHES : GLOSS BLACK, MATTE BLACK

WOOFER: (2) 5 ¼" GLH

TWEETER: (1) 1" SILK DOME

SENSITIVITY: 90DB

RECOMMENDED AMPLIFIER POWER: 10 – 150 WATTS
RMS

DIMENSIONS W/ GRILLES(W X H X D): 8.3X15X9.5"
(211 X 382 X 242MM)



H-PAS™

AT Home Theatre Series

AT-3

H-PAS TOWER SPEAKER -GLOSS BLACK FLECK


WOOFER: 6.5" HIGH RESONANCE, HIGH XMAS, FIBERGLASS

TWEETER: 1" LIQUID COOLED, SILK SOFT DOME

SENSITIVITY: 85DB

RECOMMENDED AMPLIFIER POWER: 50 – 250 WATTS RMS

DIMENSIONS W/ GRILLES(W X H X D): 9.5"W X 39.6"H X 12"D (12.4"W X 41.9"H X 15"D WITH FEET)

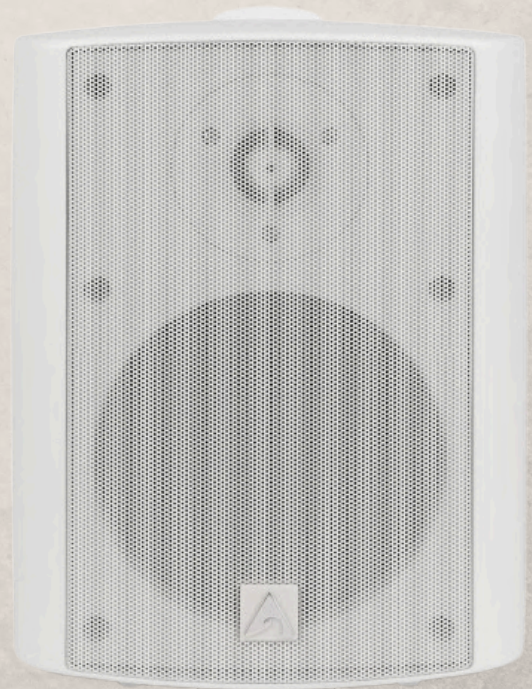

OUTDOOR SPEAKERS



AW-SD Series



FINISH:

BLACK



WHITE



SIZE:

AW-SD100

4 INCH 4 OHM CONSTANT-CURRENT
ALL WEATHER SPEAKERS (BLACK/WHITE)

TYPE: 2-WAY SEALED INDOOR/OUTDOOR SPEAKER

WOOFER: (1) 4" (102 MM) MLH

TWEETER: (1) 1" (25MM) TITANIUM

FREQUENCY RESPONSE : 65HZ - 20KHZ ±2DB

SENSITIVITY: 90 dB

AW-SD200

5 1/2 INCH 4 OHM CONSTANT-CURRENT
ALL WEATHER SPEAKERS (BLACK/WHITE)

TYPE: 2-WAY SEALED INDOOR/OUTDOOR SPEAKER

WOOFER: (1) 5 1/2" (140 MM) MLH

TWEETER: (1) 1" (25MM) TITANIUM

FREQUENCY RESPONSE : 50Hz - 20kHz ±2dB

SENSITIVITY: 90 dB

AW-SD300

6 1/2 INCH 4 OHM CONSTANT-CURRENT
ALL WEATHER SPEAKERS (BLACK/WHITE)

TYPE: 2-WAY SEALED INDOOR/OUTDOOR SPEAKER

WOOFER: (1) 6 1/2" (165 MM) MLH

TWEETER: (1) 1" (25MM) TITANIUM

FREQUENCY RESPONSE : 45HZ - 20KHZ ±2DB

SENSITIVITY: 90 dB



AW Series

AW-5-BLK/WHT

5 1/4" OUTDOOR SPEAKER -BLACK / WHITE

TYPE: 2-WAY SEALED INDOOR/OUTDOOR SPEAKER

WOOFER: (1) 5 1/4" (134MM) MLH

TWEETER: (1) 1" (25MM) TITANIUM

FREQUENCY RESPONSE : 60HZ - 20KHZ ± 3 DB

SENSITIVITY: 88 dB

FINISH:

BLACK

WHITE



AW Series

AW-TR300(Pair)

6 1/2 INCH 100 VOLT CONSTANT-CURRENT ALL WEATHER SPEAKERS (BLACK/WHITE)

TYPE: 2-WAY SEALED INDOOR/OUTDOOR SPEAKER

WOOFER: (1) 6 1/2" (165 MM) MLH

TWEETER: (1) 1" (25MM) TITANIUM

FREQUENCY RESPONSE : 45HZ - 20KHZ ± 2 DB

SENSITIVITY: 90 DB

FINISH:

BLACK

WHITE

