



ROYAL WOOD

PREMIUM WOOD FOR
EXTERIOR DESIGN
EXCELLENCE

royal-wood.com

ROYAL WOOD

Royal Wood is a premium timber supplier from Latvia, specialising in high-quality wood products for saunas, exterior cladding and decking. We provide a full cycle of production, starting with sawing logs, drying, edging and cross-cutting timber and finishing with planing the material to precise profiles.

Our range covers a wide selection of wood species including Aspen, Alder, Spruce and Radiata, as well as thermally modified materials: Thermo Aspen, Thermo Alder, Thermo Radiata, Thermo Taeda, Thermo Pine, Thermo Spruce and Thermo Ash, giving our clients the freedom to choose the right material for every project and application.

Our sauna range includes wall panels and bench boards crafted from carefully selected species, resin free, defect free and smooth to the touch, designed to perform beautifully in high heat and humidity. Our cladding and decking materials brings the warmth and character out like nothing else.

+371 20681708

Matrožu iela 7a,


LV-1048,

Rīga, Latvia

adrians@royal-wood.com






DECKING

Decking: SENOFIX / 20x118&132 MIX / Thermo Ash



A modern outdoor terrace with grey decking, a wooden door, and a cat sitting on the steps. The terrace is bordered by a low wall and has a small garden area with lavender and greenery. The background shows a dark fence and trees.

Quality decking never goes out of style. An elegant terrace beside your home or in your garden adds a new dimension to everyday living. It becomes a place to slow down, enjoy relaxed weekend breakfasts, and celebrate special moments with family and friends. Thermo-treated decking boards offer durability, stability, and lasting beauty — and, being completely natural with no chemical additives, they are the perfect choice for creating a timeless and inviting terrace.

DECKING

PRODUCT	WOOD TYPE	THICKNESS (mm)	WIDTH (mm)	COVERING WIDTH (mm)	PCS PER BUNDLE/PACK*
SENOFIX 	Thermo pine	26	115	115	3/243
		26	140	140	3/216
	Thermo ash	20	112	112	4/252
		20	132	132	4/224
FLOOR BOARD 	Thermo pine	19	115	115	4/360
		19	140	140	4/320
		26	115	115	3/243
		26	140	140	3/216
TRUST 	Thermo pine	26	115	115	3/243
		26	140	140	3/216
TRUST V SHARP 	Thermo pine	26	115	121	3/243
		26	140	146	3/216
SHP 	Thermo pine	19	115	115	4/360
		19	140	140	4/320
		26	115	115	3/243
		26	140	140	3/216
	Thermo spruce	19	140	140	4/320

DECKING CONSTRUCTION BEAMS

PRODUCT	WOOD TYPE	THICKNESS (mm)	WIDTH (mm)	COVERING WIDTH (mm)	PCS PER BUNDLE/PACK*
SHP 	Thermo pine, Thermo spruce	42	42	42	1/462
		42	68	68	1/288
		42	90	90	1/216
		42	115	115	1/162
		42	140	140	1/144
S4S 	Thermo pine, Thermo spruce	42	42	42	1/462
		42	68	68	1/288
		42	90	90	1/216
		42	115	115	1/162
		42	140	140	1/144



SENOFIX / 20x132 / Thermo Ash




SENOFIX / 20x132 / Thermo Ash / End matched

SUGGESTED FIXING OPTIONS

SENOFIX

The Senofix system for decking is a premium solution that creates a clean, modern surface with no visible screws, while its concealed fixing method ensures proper ventilation and allows individual boards to be easily removed if maintenance or access beneath the decking is needed.

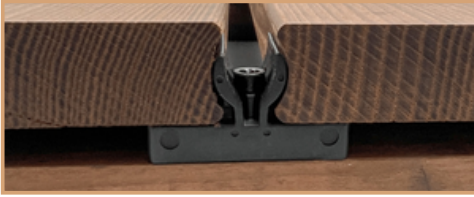

TENI

The TENI fixing system secures decking boards from below, keeping the surface completely free of exposed screws while creating a uniform gap that promotes continuous airflow under the boards for enhanced structural support and long-term performance.



TRUST LIGO

The TRUST LIGO system uses a concealed fixing approach that locks decking boards firmly in place without visible screws, delivering a smooth, uninterrupted surface while maintaining optimal spacing and steady airflow beneath the boards for reliable durability over time.



SCREWS ARE NOT RECOMMENDED

We do not recommend fixing decking boards directly with visible screws, as this method can weaken the board over time, expose the surface to moisture through open screw holes, and restrict proper movement and ventilation beneath the decking.

Using one of the concealed fixing systems instead helps maintain the board's structural integrity, allows natural expansion and contraction, improves airflow underneath, and preserves a cleaner, longer-lasting finish.




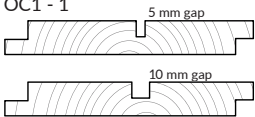
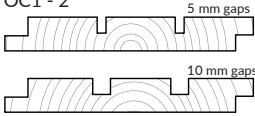







CLADDING

A photograph of a modern building facade. The building is clad in vertical, light-colored wood panels. A dark metal frame structure, possibly a pergola or canopy, is attached to the facade. The sky is blue with some clouds. The overall aesthetic is clean and contemporary.







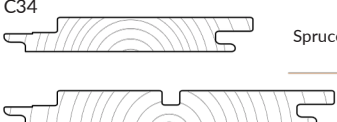


Cladding: Rhombo / 28x68 / Thermo Pine

Thermo-treated wood cladding is a durable and design-focused solution for modern facades. Its natural texture, warm tones, and clean lines create a sophisticated architectural expression that enhances both contemporary and traditional buildings. Carefully crafted for exterior use, thermally modified wood allows architects and designers to achieve a harmonious balance between performance and visual elegance, adding depth, authenticity, and lasting character to any facade.

CLADDING

PRODUCT	WOOD TYPE	THICKNESS (mm)	WIDTH (mm)	COVERING WIDTH (mm)	PCS PER BUNDLE/PACK*
 OC1	Thermo pine	19	90	80	4/360
		19	115	105	4/324
		19	140	130	4/252
 OC1 - 1	Thermo pine	19	90	80	4/360
		19	115	105	4/324
		19	140	130	4/252
 OC1 - 2	Thermo pine	19	115	105	4/324
		19	140	130	4/252
				19	140
 DVS	Thermo radiata	19	140	130	4/252
		19	185	175	5/216
	Thermo pine	19	90	80	4/360
		19	115	105	4/324
		19	140	130	4/252
 KYTE S	Radiata	20	140	128	4/224
 OC V1	Thermo pine	19	115	105	4/324
		19	140	130	4/252
 OC V2	Thermo pine	19	115	105	4/324
		19	140	130	4/252
 VERDUS	Thermo pine	19	135	117	4/228
	Thermo spruce				
 OC 3	Thermo pine	19	115	105	4/324
		19	140	130	4/252
 C34	Spruce	19	140	120	4/252
		26	140	120	3/216
	Spruce	19	186	166	4/192

CLADDING

PRODUCT	WOOD TYPE	THICKNESS (mm)	WIDTH (mm)	COVERING WIDTH (mm)	PCS PER BUNDLE/PACK*
C-6 	Thermo pine	19	115	104	4/324
		19	140	129	4/252
C-9 	Thermo pine	20	95	95	5/385
RHOMBO 	Thermo pine	20	68	68	5/560
	Thermo radiata	26	68	68	6/432
DOUBLE RHOMBO 	Thermo pine	26	140	120	3/216
BLOCKBOHLEN MINI 	Thermo pine	26	115	103	3/243
		26	140	128	3/216
BLOCKBOHLEN 	Thermo pine Thermo spruce	42	68	56	3/288
		42	90	78	2/216
		42	115	103	1/120
		42	140	128	2/144
BAREL 	Thermo pine Thermo spruce	42	68	56	3/288
		42	90	78	2/216
		42	115	103	1/120
		42	140	128	2/144
BAREL FIN 	Thermo pine Thermo spruce	42	68	56	3/288
		42	90	78	2/216
		42	115	103	1/120
		42	140	128	2/144
SHP 	Thermo pine	19	90	90	4/360
		19	115	115	4/324
		19	140	140	4/252
		26	115	115	3/243
		26	140	140	3/216
	Thermo radiata	26	185	185	2/156





















SHP / 19x140 / Thermo Pine / Painted



SHP / 32x240 / Thermo treated White Fir / Brushed

ACCESSORIES

PRODUCT			WOOD TYPE	DIMENSIONS (mm)
HEADREST 370LIGHT			Aspen, Alder	90x315x370
HEADREST 450 LIGHT			Aspen, Alder	90x315x450
HEADREST LINEN			Aspen, Alder	120x315x450
SAND TIMER			Aspen, Alder, Thermo ash	43x40x275
SAUNA HANGER			Aspen, Alder, Thermo aspen	150x40x730
SAUNA HANGER WITH SHELVES			Aspen, Alder, Thermo aspen	175x103x730
VENTILATION VALVE D100			Aspen, Alder, Thermo aspen	30xD145
VENTILATION VALVE D125			Aspen, Alder, Thermo aspen	30xD169
BENCH			Aspen, Alder, Thermo aspen	800x294x365 800x294x430 800x325x365 800x325x430 800x405x365 800x405x430 1000x294x430 1000x325x430 1000x405x430

MODIFICATIONS

BRUSHING

Upon request, we offer brushing / aging of wooden boards in three levels – light, medium, and hard – to enhance grain, create a distinctive texture, add character, and help conceal minor wear.



PAINTED / OILED

Professional painting or finishing with lacquer, oil, or protective lasure is available as a separate service upon request, enhancing the wood's color while providing additional protection and durability.



END MATCHING

End matching of the boards is available upon request, ensuring perfectly aligned joints, a seamless visual flow, and a refined, high-quality finish while supporting efficient installation.






SENOFIX / 26x140 / Thermo Pine



Cladding: DVS / 19x115 / Thermo Pine / Painted
Decking: SENOFIX / 26x110 / Thermo Pine



SENOFIX / 26x140 / Thermo Pine

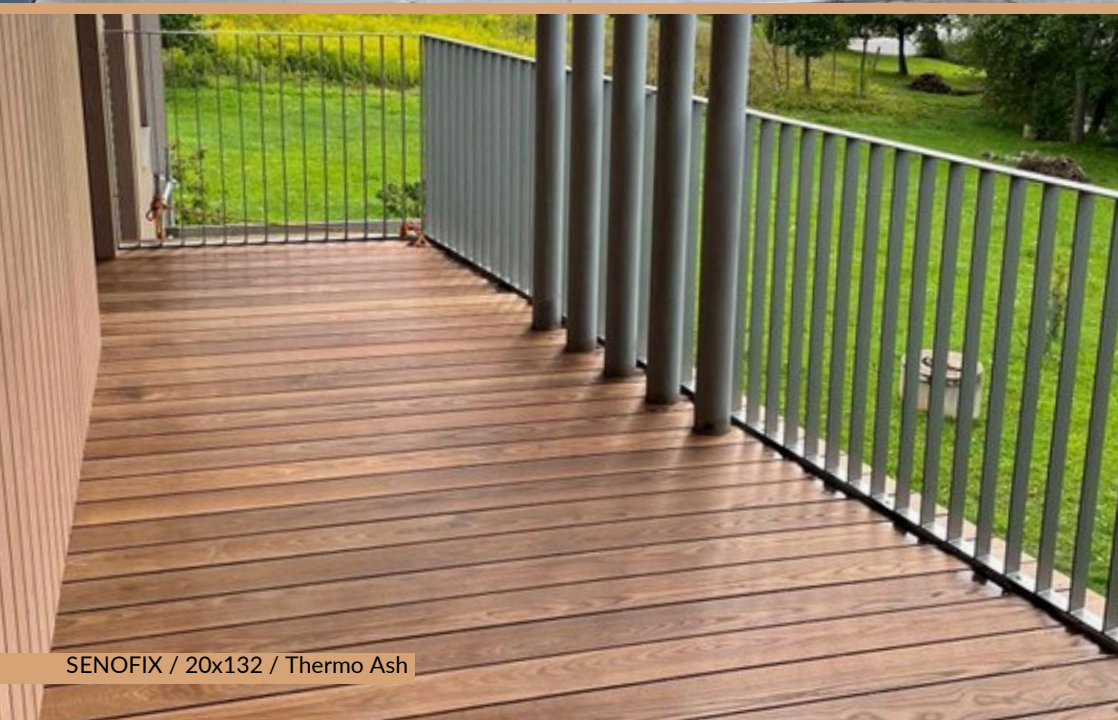

SENOFIX / 20x132 / Thermo Ash

OUR TIMBER



Used in conditions of high temperature and humidity



Does not emit resin



Has a natural anti-fungal and insect protection that reduces the risk of wood damage such as mold or wood pests



Has a smooth texture, providing a comfortable seating surface



Suitable for people with more sensitive skin or respiratory problems



Able to effectively retain heat and reduce energy losses



Has a mild and pleasant scent, adding to the overall sensory experience in the sauna



Easy to process, which facilitates installation work, ensuring a convenient assembly process



Less likely to cause allergies

Our export markets



Europe

- Austria
- Belgium
- Croatia
- Czech Republic
- Denmark
- Estonia
- Finland
- France
- Germany
- Greece
- Hungary
- Iceland
- Ireland
- Italy
- Latvia
- Lithuania
- Netherlands
- Norway
- Poland
- Portugal
- Romania
- Serbia
- Slovenia
- Spain
- Sweden
- Ukraine
- United Kingdom

Asia

- Israel
- United Arab Emirates

North America

- USA

CONTACT US

+371 20681708



adrians@royal-wood.com



royal-wood.com



[royal.wood.ltd](https://www.instagram.com/royal.wood.ltd)