



Silex Eye-Clarity HDC-AT2

Motorized auto tracking PTZ camera with dual built-in mics



Silex Eye-Clarity HDC-AT2 is a professional 2k auto tracking motorised PTZ camera with dual embedded digital microphones. Designed for personal use and for small huddle rooms, this camera provides high quality video and audio, with smooth face motion tracking to constantly follow the speaker's movements in the room. With its noise reduction feature, the voice pick up is clear even in noisy environments. The images captured by the camera are crisp and clear even in low light conditions. This motorized compact webcam is easy to install and operate with any videoconferencing software or streaming and recording application.

Main Features

- 2k image quality output up to 2560*1440@30fps, QHD video
- AI interaction, multi-gesture control, fast facial recognition and locking, PTZ auto-tracking
- Dual microphone with noise reduction
- Double brushless motor two-axis drive, image stabilization Six-axis gyroscope, and maximum 120°/s control speed
- 2x auto zoom, achieved through gesture control
- Type-C universal interface for wide compatibility
- Standard USB drive free protocol
- Supports mainstream operating system
- Plug & Play
- Auto camera tilt-down to protect personal privacy

Specifications

Video:


- Imaging sensor: 1/3 inch CMOS Sensor
- Effective pixel: 4 Megapixel
- FOV: 95°
- Video output format: MJPEG, YUY2, YUV, H.264 video compression
- Resolution: Support 2560x1440, 1920x1080, 1280x720, 1024x576, 960x540, 800x600, 640x360, 480x360, 352x288, 160x120
- Refresh rate: 30fps

Built-in microphone:

- 2 microphones
- Automatic Noise reduction
- Sensitivity: -38 dB
- Pickup Range: 6m (20ft)

Auto tracking:

- Pan: Left 90°, right 90°
- Tilt: Up 20°, down 30°
- Maximum control speed: 120° /s
- AI face motion tracking and locking, multi-gesture control
- Brushless motor

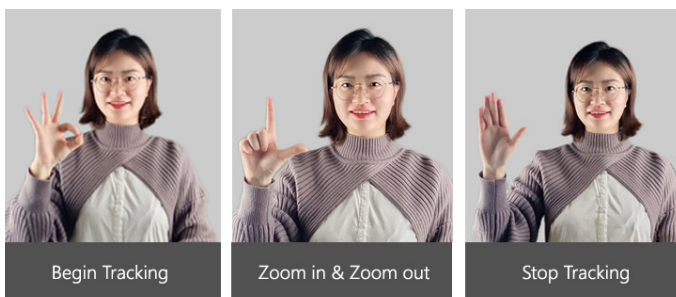

General specifications:

- Interface: type C USB2.0
- USB cable length: 150cm
- Driver-free
- Support UVC and UAC
- Motorized for auto tracking
- Image Stabilization: 6 axis gyroscope
- Status indicator: green (auto-tracking), blue (no auto-tracking)

System requirements: Windows® 7,8,10,11, Mac OS, Android 9.0, Ubuntu

Power: Power supply: 5V, 1000mA

Temperature and humidity:

- Temperature: -20° ~ 75°
- Humidity: 75%

Weight: 160g

Dimension: 122x60x64mm



© 2023 SillexPro. All rights reserved. SillexPro and any SillexPro product or service name or logo used herein are trademarks of SillexPro. All other trademarks used herein belong to their respective owners. The trademarks and logos displayed herein may not be used without the prior written consent of SillexPro or their respective owners. No portion hereof may be reproduced or transmitted in any form or by any means, for any purpose other than the recipient's personal use, without the express written permission of SillexPro.

www.Sillexpro.com