



LED Strip Lights  
Aluminum Profile




# ENTERPRISE CONTENTS

Aluminum LED Profile — 03

LEDLINE FLEX — 02




LED STRIP LIGHTS — 01

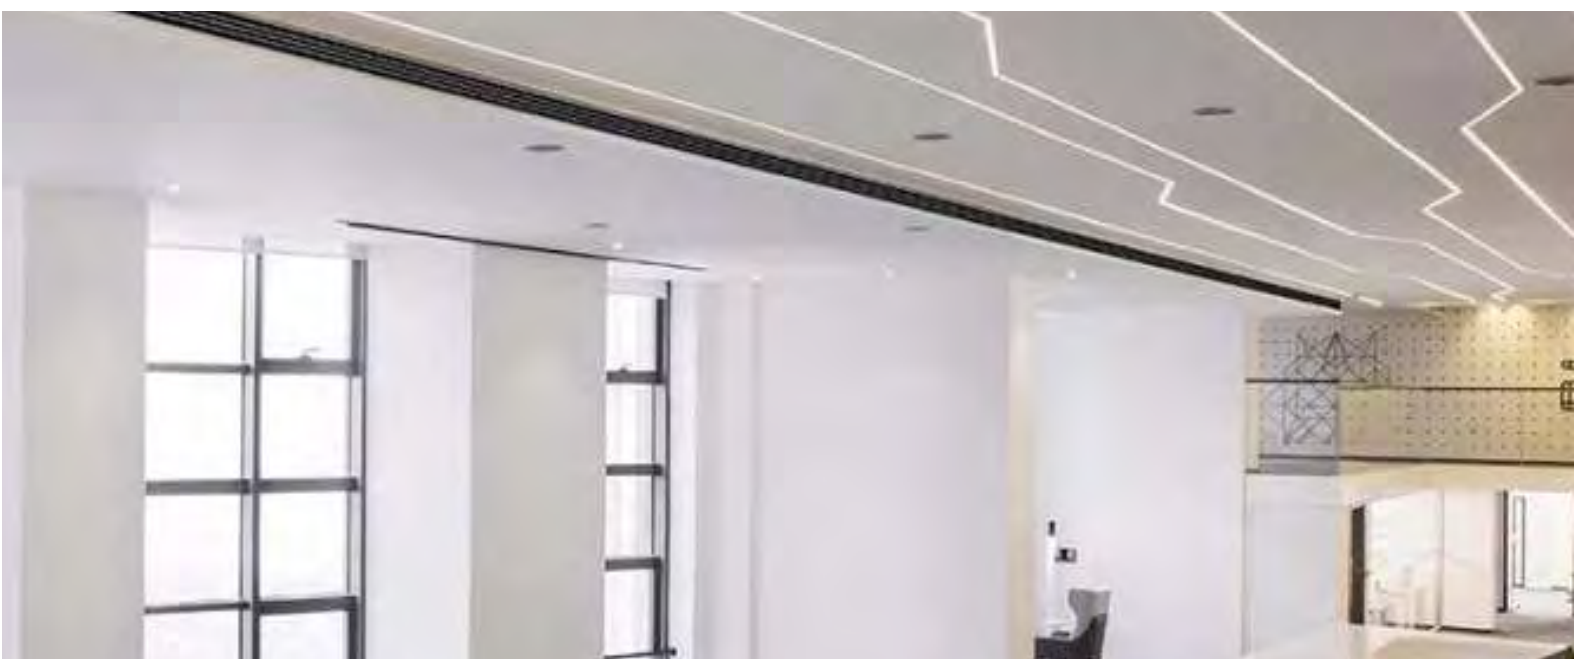

# LED Strip


---

---

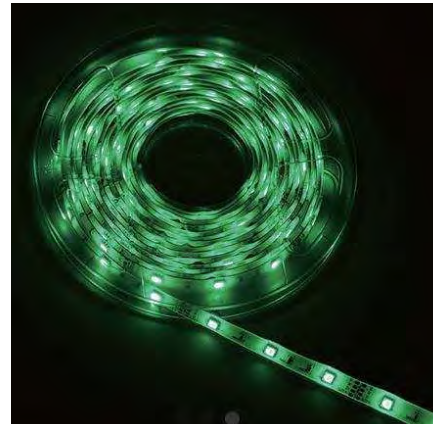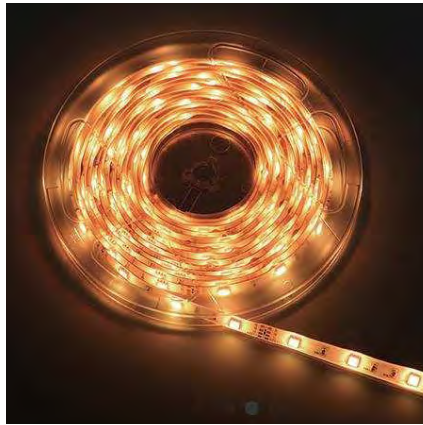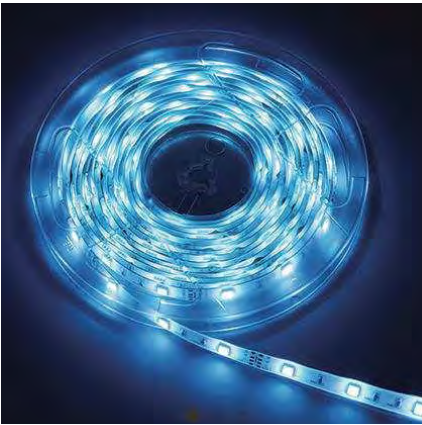


# 2835SMD 60LEDs LED STRIP

- ▶ 2835 LED with broad luminous surface
- ▶ Self-encapsulated design offers optional 2100-10000K
- ▶ White lights and R/G/B/Y and others colourful lights for option
- ▶ High quality PCB, high thermal 3M adhesive
- ▶ Provide 1 BIN delivery

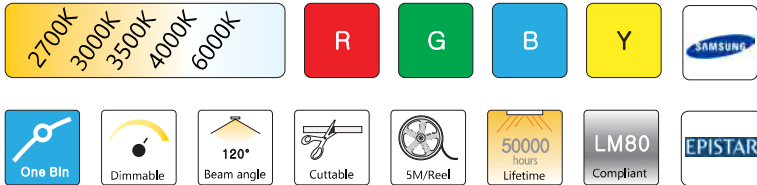


## DIMENSIONS & WATERPROOF

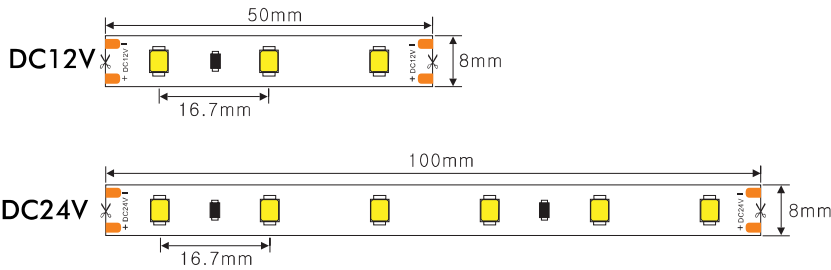

## PRODUCT SPECIFICATION

Dimension	5000mmx8mmx1.2mm
Chip density	60LED, 16.7mm LED pitch
Step LEDs	6LED(24V)/3LED(12V)
Step Length	6LED(24V)/3LED(12V)
Power(W)	3W 4.8W 7.2W 9.6W 12W 14.4W/meter
Efficacy	115lm/W
Voltage(V)	DC24V/DC12V
Current(A/m)	0.5A(24V)/1A(12V)

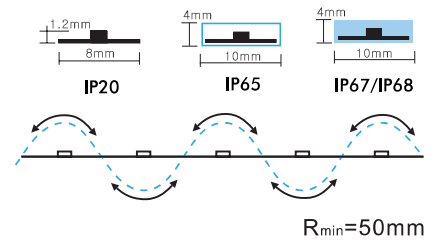


## PRODUCT PHOTOMETRICS

CCT (K)	Watt/Lumen (W/lm/m)	Watt/Lumen (W/lm/m)	Watt/Lumen (W/lm/m)	Watt/Lumen (W/lm/m)	Watt/Lumen (W/lm/m)	Watt/Lumen (W/lm/m)	CRI
2700K	3W/240lm	4.8W/384lm	7.2W/576lm	9.6W/768lm	12W/960lm	14.4W/1152lm	83/93
3000K	3W/255lm	4.8W/405lm	7.2W/612lm	9.6W/816lm	12W/1020lm	14.4W/1224lm	83/93
3500K	3W/261lm	4.8W/418lm	7.2W/626lm	9.6W/835lm	12W/1044lm	14.4W/1252lm	83/93
4000K	3W/270lm	4.8W/432lm	7.2W/648lm	9.6W/864lm	12W/1080lm	14.4W/1296lm	83/93
6000K	3W/285lm	4.8W/456lm	7.2W/684lm	9.6W/912lm	12W/1140lm	14.4W/1638lm	83/93




# 2835SMD 120LEDs LED STRIP

- ▶ 2835 LED with broad luminous surface
- ▶ Self-encapsulated design offers optional 2100-10000K
- ▶ White lights and R/G/B/Y and others colourful lights for option
- ▶ High quality PCB, high thermal 3M adhesive
- ▶ Provide 1 BIN delivery

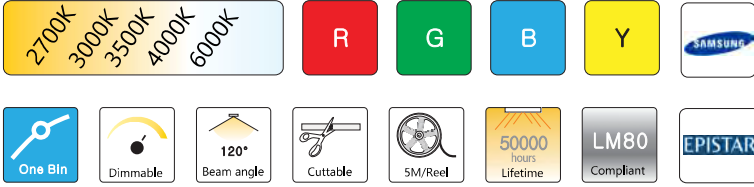


## DIMENSIONS & WATERPROOF

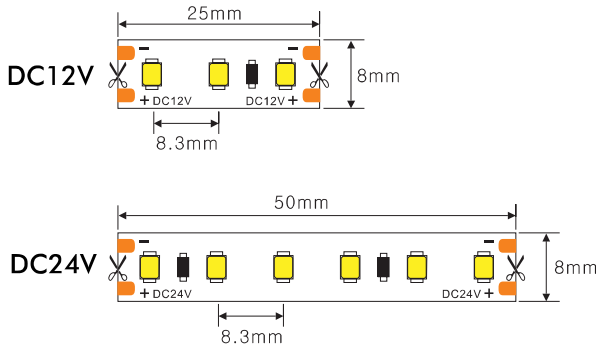

## PRODUCT SPECIFICATION

Dimension	5000mmx8mmx1.2mm
Chip density	120LED, 8.3mm LED pitch
Step LEDs	6LED(24V)/3LED(12V)
Step Length	6LED(24V)/3LED(12V)
Power(W)	3W 4.8W 7.2W 9.6W 12W 14.4W 18W/meter
Efficacy	115lm/W
Voltage(V)	DC24V/DC12V
Current(A/m)	0.5A(24V)/1A(12V)

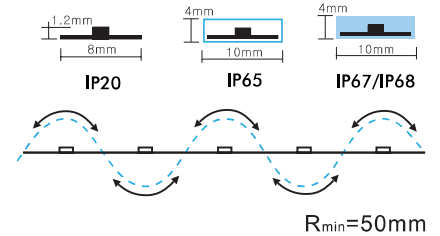


## PRODUCT PHOTOMETRICS


CCT (K)	Watt/Lumen (W/lm/m)	Watt/Lumen (W/lm/m)	Watt/Lumen (W/lm/m)	Watt/Lumen (W/lm/m)	Watt/Lumen (W/lm/m)	Watt/Lumen (W/lm/m)	Watt/Lumen (W/lm/m)	CRI
2700K	3W/285lm	4.8W/456lm	7.2W/684lm	9.6W/912lm	12W/1114lm	14.4W/1368lm	18W/1710lm	83/93
3000K	3W/315lm	4.8W/504lm	7.2W/756lm	9.6W/1008lm	12W/1260lm	14.4W/1512lm	18W/1890lm	83/93
3500K	3W/323lm	4.8W/516lm	7.2W/775lm	9.6W/1033lm	12W/1291lm	14.4W/1549lm	18W/1936lm	83/93
4000K	3W/338lm	4.8W/540lm	7.2W/811lm	9.6W/1081lm	12W/1351lm	14.4W/1621lm	18W/2026lm	83/93
6000K	3W/350lm	4.8W/560lm	7.2W/840lm	9.6W/1119lm	12W/1339lm	14.4W/1679lm	18W/2098lm	83/93

# 2835SMD 180LEDs LED STRIP

- ▶ 2835 LED with broad luminous surface
- ▶ Self-encapsulated design offers optional 2100-10000K
- ▶ White lights and R/G/B/Y and others colourful lights for option
- ▶ High quality PCB, high thermal 3M adhesive
- ▶ Provide 1 BIN delivery

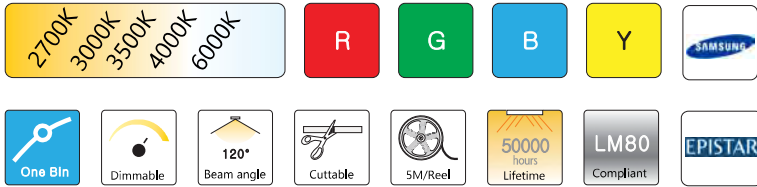


## DIMENSIONS & WATERPROOF

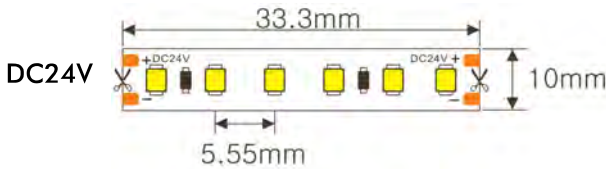

## PRODUCT SPECIFICATION

Dimension	5000mmx10mmx1.2mm
Chip density	180LED, 5.55mm LED pitch
Step LEDs	6LED(24V)
Step Length	6LED(24V)
Power(W)	3W 4.8W 7.2W 9.6W 12W 14.4W 18W/meter
Efficacy	115lm/W
Voltage(V)	DC24V
Current(A/m)	0.5A(24V)

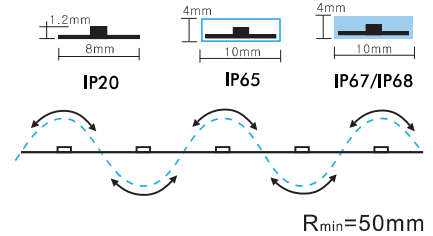


## PRODUCT PHOTOMETRICS


CCT (K)	Watt/Lumen (W/lm/m)	Watt/Lumen (W/lm/m)	Watt/Lumen (W/lm/m)	Watt/Lumen (W/lm/m)	Watt/Lumen (W/lm/m)	Watt/Lumen (W/lm/m)	Watt/Lumen (W/lm/m)	CRI
2700K	3W/285lm	4.8W/456lm	7.2W/684lm	9.6W/912lm	12W/1114lm	14.4W/1368lm	18W/1710lm	83/93
3000K	3W/315lm	4.8W/504lm	7.2W/756lm	9.6W/1008lm	12W/1260lm	14.4W/1512lm	18W/1890lm	83/93
3500K	3W/323lm	4.8W/516lm	7.2W/775lm	9.6W/1033lm	12W/1291lm	14.4W/1549lm	18W/1936lm	83/93
4000K	3W/338lm	4.8W/540lm	7.2W/811lm	9.6W/1081lm	12W/1351lm	14.4W/1621lm	18W/2026lm	83/93
6000K	3W/350lm	4.8W/560lm	7.2W/840lm	9.6W/1119lm	12W/1339lm	14.4W/1679lm	18W/2098lm	83/93

# 2835SMD 240LEDs LED STRIP

- ▶ 2835 LED with broad luminous surface
- ▶ Self-encapsulated design offers optional 2100-10000K
- ▶ White lights and R/G/B/Y and others colourful lights for option
- ▶ High quality PCB, high thermal 3M adhesive
- ▶ Provide 1 BIN delivery

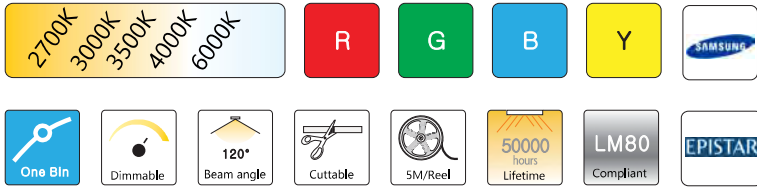


## DIMENSIONS & WATERPROOF

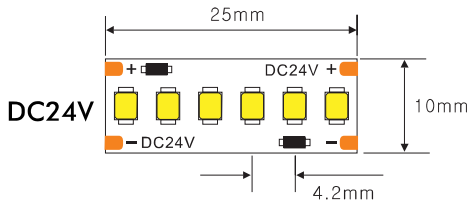

## PRODUCT SPECIFICATION

Dimension	5000mmx10mmx1.2mm
Chip density	240LED, 4.2mm LED pitch
Step LEDs	6LED(24V)
Step Length	6LED(24V)
Power(W)	3W 4.8W 7.2W 9.6W 12W 14.4W 18W/meter
Efficacy	115lm/W
Voltage(V)	DC24V
Current(A/m)	0.5A(24V)

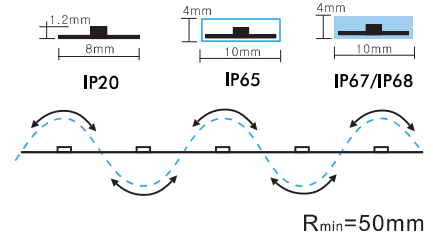


## PRODUCT PHOTOMETRICS


CCT (K)	Watt/Lumen (W/lm/m)	Watt/Lumen (W/lm/m)	Watt/Lumen (W/lm/m)	Watt/Lumen (W/lm/m)	Watt/Lumen (W/lm/m)	Watt/Lumen (W/lm/m)	Watt/Lumen (W/lm/m)	CRI
2700K	3W/305lm	4.8W/489lm	7.2W/734lm	9.6W/1008lm	12W/1260lm	14.4W/1512lm	18W/1890lm	83/93
3000K	3W/315lm	4.8W/528lm	7.2W/792lm	9.6W/1056lm	12W/1320lm	14.4W/1584lm	18W/1980lm	83/93
3500K	3W/330lm	4.8W/552lm	7.2W/828lm	9.6W/1104lm	12W/1380lm	14.4W/1656lm	18W/1070lm	83/93
4000K	3W/360lm	4.8W/576lm	7.2W/864lm	9.6W/1152lm	12W/1440lm	14.4W/1728lm	18W/2160lm	83/93
6000K	3W/375lm	4.8W/600lm	7.2W/900lm	9.6W/1200lm	12W/1500lm	14.4W/1800lm	18W/2250lm	83/93

# 2835SMD 120LEDs Tunable

- ▶ 2835 LED Warm white+cool white tunable strip
- ▶ Self-encapsulated design offers optional 2100-10000K
- ▶ White lights and R/G/B/Y and others colourful lights for option
- ▶ High quality PCB, high thermal 3M adhesive
- ▶ Provide 1 BIN delivery

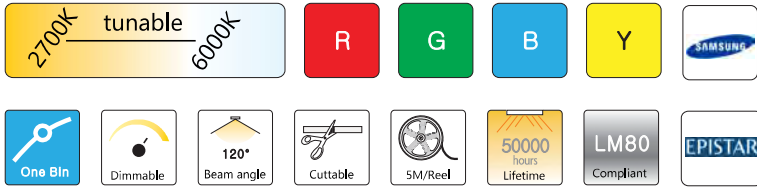


## DIMENSIONS & WATERPROOF

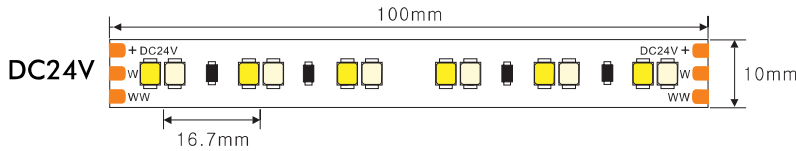

## PRODUCT SPECIFICATION

Dimension	5000mmx10mmx1.2mm
Chip density	120LED, 16.7mm LED pitch
Step LEDs	12LED(24V)
Step Length	12LED(24V)
Power(W)	3W 4.8W 7.2W 9.6W 12W 14.4W 18W/meter
Efficacy	115lm/W
Voltage(V)	DC24V
Current(A/m)	0.5A(24V)

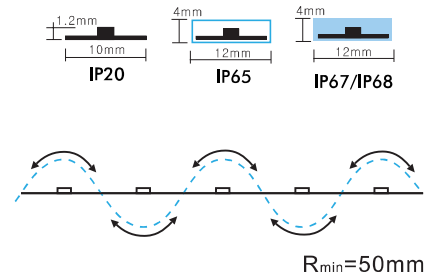


## PRODUCT PHOTOMETRICS


CCT (K)	Watt/Lumen (W/lm/m)	Watt/Lumen (W/lm/m)	Watt/Lumen (W/lm/m)	Watt/Lumen (W/lm/m)	Watt/Lumen (W/lm/m)	Watt/Lumen (W/lm/m)	CRI
2700K	3W/305lm	4.8W/489lm	7.2W/734lm	9.6W/1008lm	12W/1260lm	14.4W/1512lm	83/93
							83/93
							83/93
							83/93
6000K	3W/375lm	4.8W/600lm	7.2W/900lm	9.6W/1200lm	12W/1500lm	14.4W/1800lm	83/93

# 5050SMD 60LEDs LED STRIP

- ▶ 5050 LED with broad luminous surface
- ▶ Self-encapsulated design offers optional 2100-10000K
- ▶ White lights and R/G/B/Y and others colourful lights for option
- ▶ High quality PCB, high thermal 3M adhesive
- ▶ Provide 1 BIN delivery

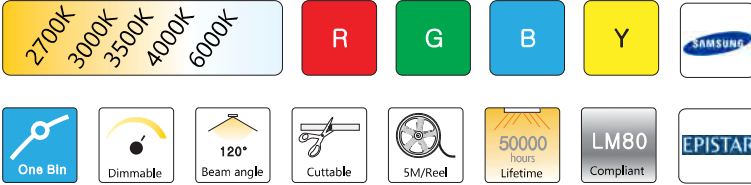


## DIMENSIONS & WATERPROOF

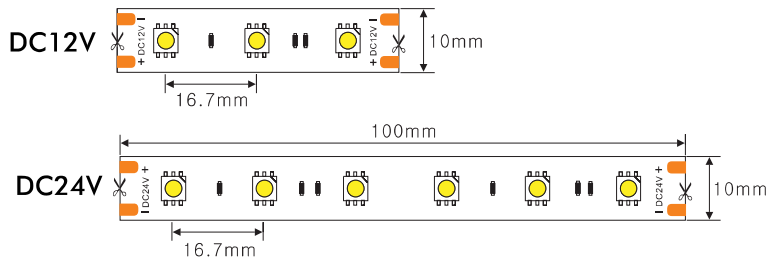

## PRODUCT SPECIFICATION

Dimension	5000mmx8mmx2mm
Chip density	60LED, 16.7mm LED pitch
Step LEDs	6LED(24V)/3LED(12V)
Step Length	6LED(24V)/3LED(12V)
Power(W)	3W 4.8W 7.2W 9.6W 12W 14.4W/meter
Efficacy	115lm/W
Voltage(V)	DC24V/DC12V
Current(A/m)	0.6A(24V)/1.2A(12V)

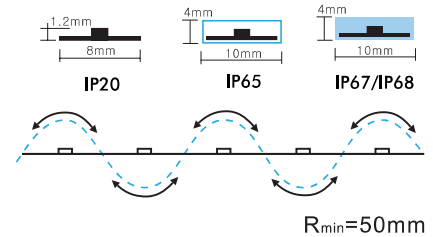


## PRODUCT PHOTOMETRICS


CCT (K)	Watt/Lumen (W/lm/m)	Watt/Lumen (W/lm/m)	Watt/Lumen (W/lm/m)	Watt/Lumen (W/lm/m)	Watt/Lumen (W/lm/m)	Watt/Lumen (W/lm/m)	CRI
2700K	3W/240lm	4.8W/384lm	7.2W/576lm	9.6W/768lm	12W/960lm	14.4W/1152lm	83/93
3000K	3W/255lm	4.8W/405lm	7.2W/612lm	9.6W/816lm	12W/1020lm	14.4W/1224lm	83/93
3500K	3W/261lm	4.8W/418lm	7.2W/626lm	9.6W/835lm	12W/1044lm	14.4W/1252lm	83/93
4000K	3W/270lm	4.8W/432lm	7.2W/648lm	9.6W/864lm	12W/1080lm	14.4W/1296lm	83/93
6000K	3W/285lm	4.8W/456lm	7.2W/684lm	9.6W/912lm	12W/1140lm	14.4W/1638lm	83/93

# 5050SMD 120LEDs LED STRIP

- ▶ 5050 LED with broad luminous surface
- ▶ Self-encapsulated design offers optional 2100-10000K
- ▶ White lights and R/G/B/Y and others colourful lights for option
- ▶ High quality PCB, high thermal 3M adhesive
- ▶ Provide 1 BIN delivery




## DIMENSIONS & WATERPROOF

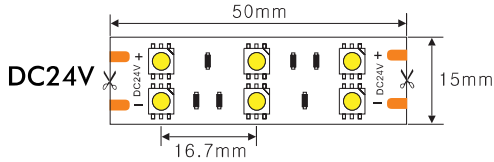

## PRODUCT SPECIFICATION

Dimension	5000mmx15mmx2mm
Chip density	120LED, 16.7mm LED pitch
Step LEDs	6LED(24V)
Step Length	6LED(24V)
Power(W)	4.8W 7.2W 9.6W 12W 14.4W 18W 24W/meter
Efficacy	115lm/W
Voltage(V)	DC24V/DC12V
Current(A/m)	0.6A(24V)/1.2A(12V)

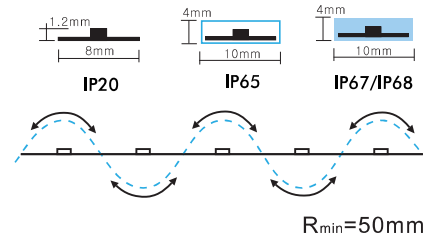


## PRODUCT PHOTOMETRICS

CCT (K)	Watt/Lumen (W/lm/m)	Watt/Lumen (W/lm/m)	Watt/Lumen (W/lm/m)	Watt/Lumen (W/lm/m)	Watt/Lumen (W/lm/m)	Watt/Lumen (W/lm/m)	CRI
2700K	3W/240lm	4.8W/384lm	7.2W/576lm	9.6W/768lm	12W/960lm	14.4W/1152lm	83/93
3000K	3W/255lm	4.8W/405lm	7.2W/612lm	9.6W/816lm	12W/1020lm	14.4W/1224lm	83/93
3500K	3W/261lm	4.8W/418lm	7.2W/626lm	9.6W/835lm	12W/1044lm	14.4W/1252lm	83/93
4000K	3W/270lm	4.8W/432lm	7.2W/648lm	9.6W/864lm	12W/1080lm	14.4W/1296lm	83/93
6000K	3W/285lm	4.8W/456lm	7.2W/684lm	9.6W/912lm	12W/1140lm	14.4W/1638lm	83/93




# 5050SMD 60LEDs LED STRIP

- ▶ 5050 LED with broad luminous surface
- ▶ Self-encapsulated design
- ▶ High quality PCB, high thermal 3M adhesive
- ▶ Widely adaptable to all types of controllers




## DIMENSIONS & WATERPROOF

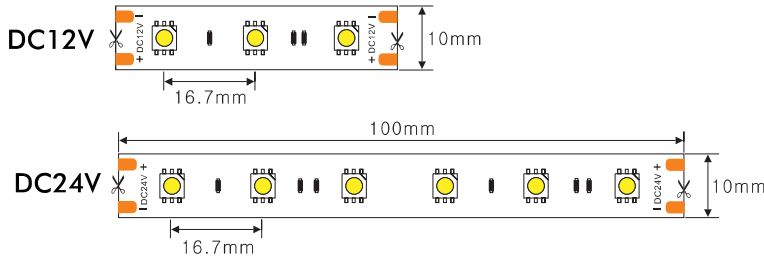

## PRODUCT SPECIFICATION

Dimension	5000mmx8mmx2mm
Chip density	60LED, 16.7mm LED pitch
Step LEDs	6LED(24V)/3LED(12V)
Step Length	6LED(24V)/3LED(12V)
Power(W)	3W 4.8W 7.2W 9.6W 12W 14.4W/meter
Efficacy	115lm/W
Voltage(V)	DC24V/DC12V
Current(A/m)	0.6A(24V)/1.2A(12V)

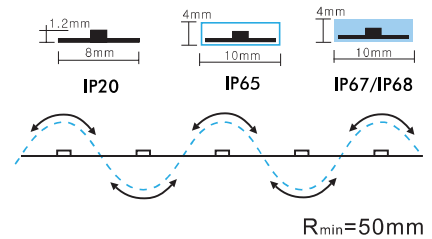


## PRODUCT PHOTOMETRICS


CCT (K)	Watt/Lumen (W/lm/m)	Watt/Lumen (W/lm/m)	Watt/Lumen (W/lm/m)	Watt/Lumen (W/lm/m)	Watt/Lumen (W/lm/m)	Watt/Lumen (W/lm/m)	CRI
RGB	3W/129lm	4.8W/206lm	7.2W/610lm	9.6W/413lm	12W/516lm	14.4W/619lm	83/93

# 5050SMD 120LEDs RGB Strip

- ▶ 5050 LED with broad luminous surface
- ▶ Self-encapsulated design
- ▶ High quality PCB, high thermal 3M adhesive
- ▶ Widely adaptable to all types of controllers

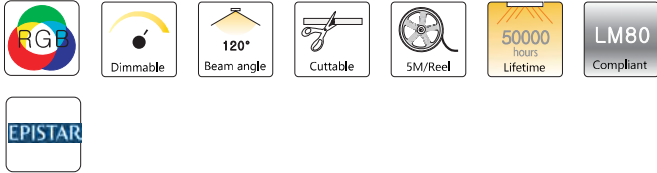


## DIMENSIONS & WATERPROOF

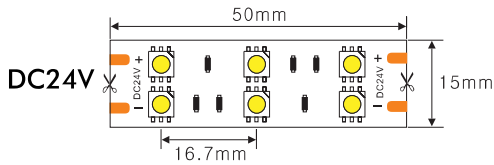

## PRODUCT SPECIFICATION

Dimension	5000mmx15mmx2mm
Chip density	120LED, 16.7mm LED pitch
Step LEDs	6LED(24V)
Step Length	6LED(24V)
Power(W)	7.2W 9.6W 12W 14.4W 18W 28W/meter
Efficacy	115lm/W
Voltage(V)	DC24V
Current(A/m)	0.6A(24V)/1.2A(12V)

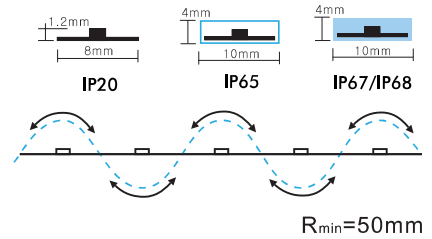


## PRODUCT PHOTOMETRICS

CCT (K)	Watt/Lumen (W/lm/m)	Watt/Lumen (W/lm/m)	Watt/Lumen (W/lm/m)	Watt/Lumen (W/lm/m)	Watt/Lumen (W/lm/m)	CRI
RGB	9.6W/421lm	14.4W/630lm	19.2W/841lm	24W/1052lm	28.8W/1261lm	83/93




# 5050SMD 60LEDs RGBW(4in 1)

- ▶ RGB+white 4 chips in 1 led colorful strip
- ▶ High quality PCB,high thermal 3M adhesive
- ▶ Widely adaptable to all types of RGBW controllers

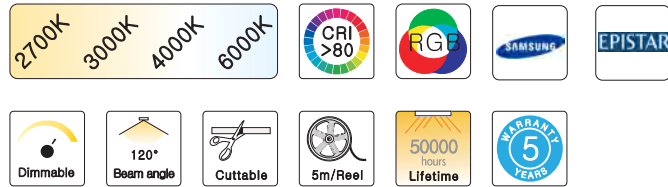


## DIMENSIONS & WATERPROOF

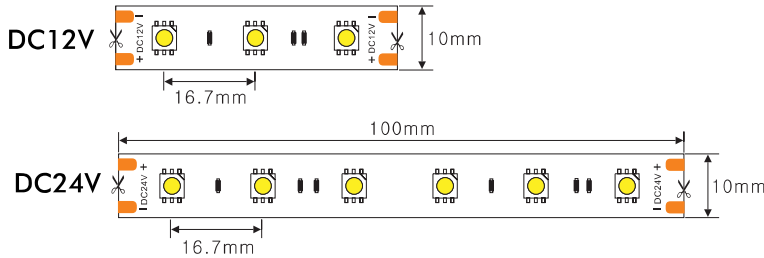

## PRODUCT SPECIFICATION

Dimension	5000mmx8mmx2mm
Chip density	60LED,16.7mm LED pitch
Step LEDs	6LED(24V)/3LED(12V)
Step Length	6LED(24V)/3LED(12V)
Power(W)	3W 4.8W 7.2W 9.6W 12W 14.4W/meter
Efficacy	115lm/W
Voltage(V)	DC24V/DC12V
Current(A/m)	0.6A(24V)/1.2A(12V)

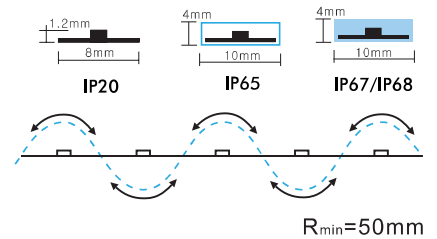


## PRODUCT PHOTOMETRICS


CCT (K)	Watt/Lumen (W/lm/m)	Watt/Lumen (W/lm/m)	Watt/Lumen (W/lm/m)	Watt/Lumen (W/lm/m)	Watt/Lumen (W/lm/m)	Watt/Lumen (W/lm/m)	CRI
RGB	3W/129lm	4.8W/206lm	7.2W/610lm	9.6W/413lm	12W/516lm	14.4W/619lm	83/93

# F051X 2835 60LEDs LED STRIP

- ▶ 2835 LED with broad luminous surface
- ▶ Self-encapsulated design offers optional 2100-10000K
- ▶ White lights and R/G/B/Y and others colourful lights for option
- ▶ High quality PCB, high thermal 3M adhesive
- ▶ Provide 1 BIN delivery

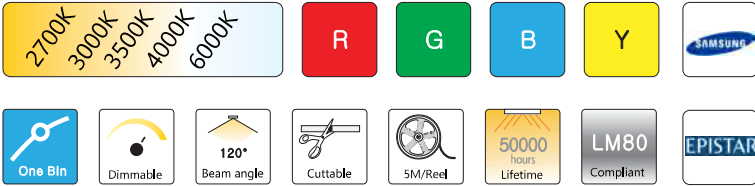


## DIMENSIONS & WATERPROOF

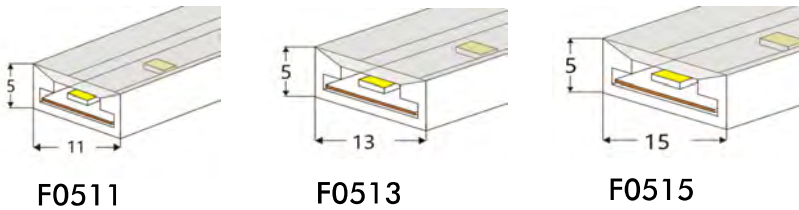

## PRODUCT SPECIFICATION

Dimension	5000mmx8mmx1.2mm
Chip density	120LED, 8.33mm LED pitch
Step LEDs	6LED(24V)/3LED(12V)
Step Length	6LED(24V)/3LED(12V)
Power(W)	3W 4.8W 7.2W 9.6W 12W 14.4W/meter
Efficacy	115lm/W
Voltage(V)	DC24V/DC12V
Current(A/m)	0.5A(24V)/1A(12V)

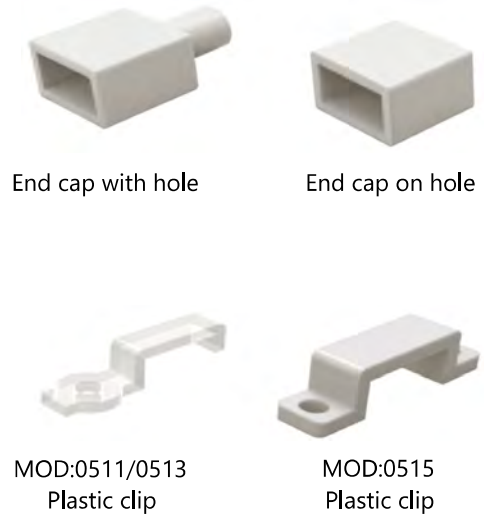


## PRODUCT PHOTOMETRICS

CCT (K)	Watt/Lumen (W/lm/m)	Watt/Lumen (W/lm/m)	Watt/Lumen (W/lm/m)	Watt/Lumen (W/lm/m)	Watt/Lumen (W/lm/m)	Watt/Lumen (W/lm/m)	CRI
2700K	3W/240lm	4.8W/384lm	7.2W/576lm	9.6W/768lm	12W/960lm	14.4W/1152lm	83/93
3000K	3W/255lm	4.8W/405lm	7.2W/612lm	9.6W/816lm	12W/1020lm	14.4W/1224lm	83/93
3500K	3W/261lm	4.8W/418lm	7.2W/626lm	9.6W/835lm	12W/1044lm	14.4W/1252lm	83/93
4000K	3W/270lm	4.8W/432lm	7.2W/648lm	9.6W/864lm	12W/1080lm	14.4W/1296lm	83/93
6000K	3W/285lm	4.8W/456lm	7.2W/684lm	9.6W/912lm	12W/1140lm	14.4W/1638lm	83/93



# LEDline Flex

---


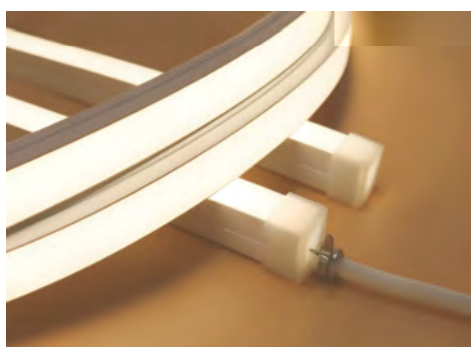


# F0606 2835 120LEDs LED STRIP

- ▶ 2835 LED with broad luminous surface
- ▶ Self-encapsulated design offers optional 2100-10000K
- ▶ White lights and R/G/B/Y and others colourful lights for option
- ▶ High quality PCB, high thermal 3M adhesive
- ▶ Provide 1 BIN delivery

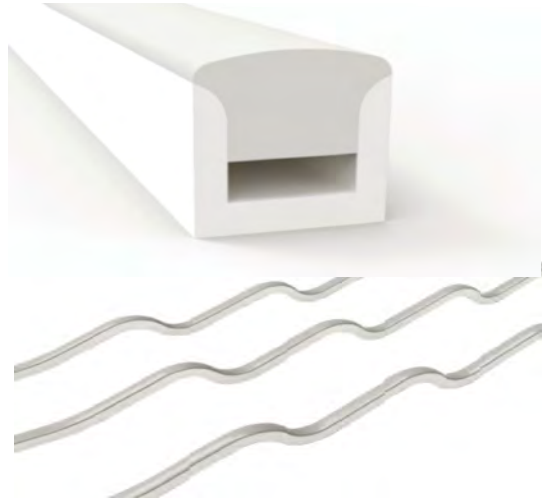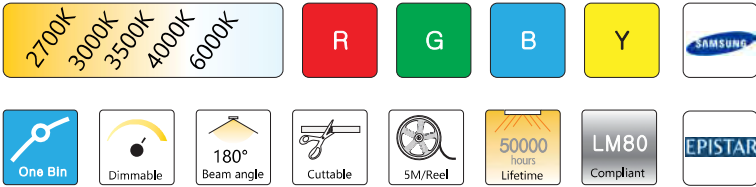

## DIMENSIONS & WATERPROOF



## PRODUCT SPECIFICATION

Dimension	5000mmx6mmx1.2mm
Chip density	120LED, 8.33mm LED pitch
Step LEDs	6LED(24V)/3LED(12V)
Step Length	6LED(24V)/3LED(12V)
Power(W)	3W 4.8W 6W 7.2W 9.6W/meter
Efficacy	115lm/W
Voltage(V)	DC24V/DC12V
Current(A/m)	0.5A(24V)/1A(12V)



End cap with hole




End cap on hole

## PRODUCT PHOTOMETRICS


CCT (K)	Watt/Lumen (W/lm/m)	Watt/Lumen (W/lm/m)	Watt/Lumen (W/lm/m)	Watt/Lumen (W/lm/m)	Watt/Lumen (W/lm/m)	CRI
2700K	3W/150lm	4.8W/240lm	6W/300lm	7.2W/360lm	9.6W/480lm	83/93
3000K	3W/165lm	4.8W/264lm	6W/330lm	7.2W/396lm	9.6W/528lm	83/93
3500K	3W/180lm	4.8W/288lm	6W/360lm	7.2W/432lm	9.6W/576lm	83/93
4000K	3W/195lm	4.8W/312lm	6W/390lm	7.2W/468lm	9.6W/624lm	83/93
6000K	3W/210lm	4.8W/336lm	6W/420lm	7.2W/504lm	9.6W/672lm	83/93

# F1010 2835 120LEDs LED STRIP

- ▶ 2835 LED with broad luminous surface
- ▶ Self-encapsulated design offers optional 2100-10000K
- ▶ White lights and R/G/B/Y and others colourful lights for option
- ▶ High quality PCB, high thermal 3M adhesive
- ▶ Provide 1 BIN delivery

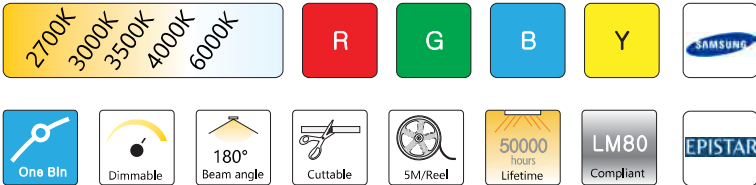


## DIMENSIONS & WATERPROOF

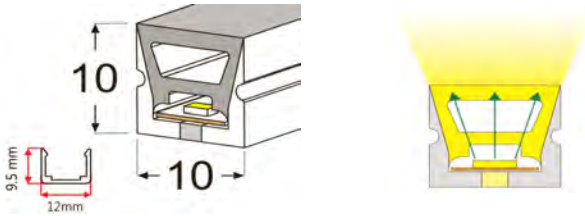

## PRODUCT SPECIFICATION

Dimension	5000mmx6mmx1.2mm
Chip density	120LED, 8.33mm LED pitch
Step LEDs	6LED(24V)/3LED(12V)
Step Length	6LED(24V)/3LED(12V)
Power(W)	3W 4.8W 6W 7.2W 9.6W /meter
Efficacy	115lm/W
Voltage(V)	DC24V/DC12V
Current(A/m)	0.5A(24V)/1A(12V)

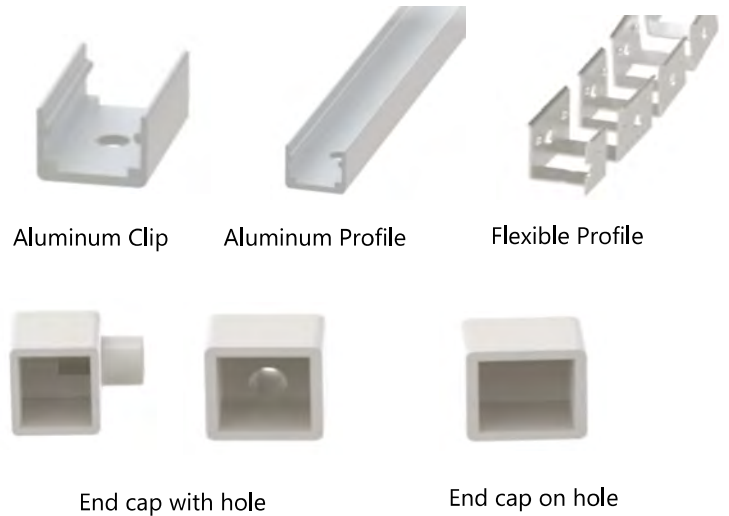


## PRODUCT PHOTOMETRICS


CCT (K)	Watt/Lumen (W/lm/m)	Watt/Lumen (W/lm/m)	Watt/Lumen (W/lm/m)	Watt/Lumen (W/lm/m)	Watt/Lumen (W/lm/m)	CRI
2700K	3W/150lm	4.8W/240lm	6W/300lm	7.2W/360lm	9.6W/480lm	83/93
3000K	3W/165lm	4.8W/264lm	6W/330lm	7.2W/396lm	9.6W/528lm	83/93
3500K	3W/180lm	4.8W/288lm	6W/360lm	7.2W/432lm	9.6W/576lm	83/93
4000K	3W/195lm	4.8W/312lm	6W/390lm	7.2W/468lm	9.6W/624lm	83/93
6000K	3W/210lm	4.8W/336lm	6W/420lm	7.2W/504lm	9.6W/672lm	83/93

# F1414 2835 120LEDs LED STRIP

- ▶ 2835 LED with broad luminous surface
- ▶ Self-encapsulated design offers optional 2100-10000K
- ▶ White lights and R/G/B/Y and others colourful lights for option
- ▶ High quality PCB, high thermal 3M adhesive
- ▶ Provide 1 BIN delivery

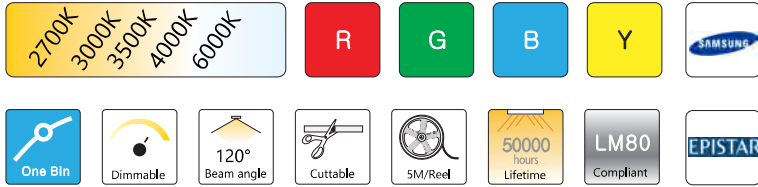

## DIMENSIONS & WATERPROOF

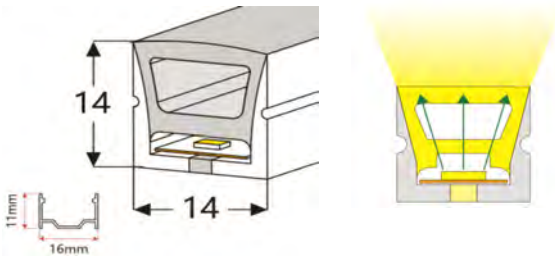

## PRODUCT SPECIFICATION

Dimension	5000mmx10mmx1.2mm
Chip density	120LED, 8.33mm LED pitch
Step LEDs	6LED(24V)/3LED(12V)
Step Length	6LED(24V)/3LED(12V)
Power(W)	3W 4.8W 7.2W 9.6W 12W/meter
Efficacy	115lm/W
Voltage(V)	DC24V/DC12V
Current(A/m)	0.5A(24V)/1A(12V)



Aluminum Clip



Aluminum Profile



End cap with hole



End cap on hole


## PRODUCT PHOTOMETRICS

CCT (K)	Watt/Lumen (W/lm/m)	Watt/Lumen (W/lm/m)	Watt/Lumen (W/lm/m)	Watt/Lumen (W/lm/m)	Watt/Lumen (W/lm/m)	CRI
2700K	3W/150lm	4.8W/240lm	7.2W/360lm	9.6W/480lm	12W/600lm	83/93
3000K	3W/165lm	4.8W/264lm	7.2W/396lm	9.6W/528lm	12W/660lm	83/93
3500K	3W/180lm	4.8W/288lm	7.2W/432lm	9.6W/576lm	12W/720lm	83/93
4000K	3W/195lm	4.8W/312lm	7.2W/468lm	9.6W/624lm	12W/780lm	83/93
6000K	3W/210lm	4.8W/336lm	7.2W/504lm	9.6W/672lm	12W/840lm	83/93




# F1414A 2835 120LEDs LED STRIP

- ▶ 2835 LED with broad luminous surface
- ▶ Self-encapsulated design offers optional 2100-10000K
- ▶ White lights and R/G/B/Y and others colourful lights for option
- ▶ High quality PCB, high thermal 3M adhesive
- ▶ Provide 1 BIN delivery

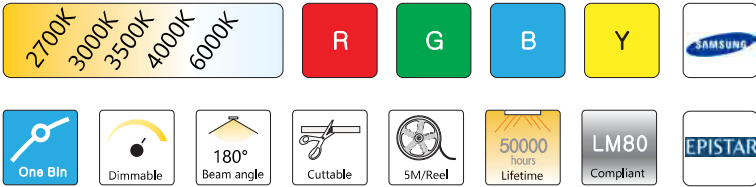

## DIMENSIONS & WATERPROOF

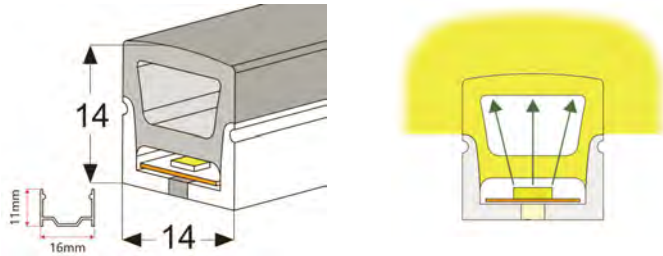

## PRODUCT SPECIFICATION

Dimension	5000mmx10mmx1.2mm
Chip density	120LED, 8.33mm LED pitch
Step LEDs	6LED(24V)/3LED(12V)
Step Length	6LED(24V)/3LED(12V)
Power(W)	3W 4.8W 7.2W 9.6W 12W/meter
Efficacy	115lm/W
Voltage(V)	DC24V/DC12V
Current(A/m)	0.5A(24V)/1A(12V)



Aluminum Clip



Aluminum Profile



End cap with hole




End cap on hole

## PRODUCT PHOTOMETRICS


CCT (K)	Watt/Lumen (W/lm/m)	Watt/Lumen (W/lm/m)	Watt/Lumen (W/lm/m)	Watt/Lumen (W/lm/m)	Watt/Lumen (W/lm/m)	CRI
2700K	3W/150lm	4.8W/240lm	7.2W/360lm	9.6W/480lm	12W/600lm	83/93
3000K	3W/165lm	4.8W/264lm	7.2W/396lm	9.6W/528lm	12W/660lm	83/93
3500K	3W/180lm	4.8W/288lm	7.2W/432lm	9.6W/576lm	12W/720lm	83/93
4000K	3W/195lm	4.8W/312lm	7.2W/468lm	9.6W/624lm	12W/780lm	83/93
6000K	3W/210lm	4.8W/336lm	7.2W/504lm	9.6W/672lm	12W/840lm	83/93

# F1212 2835 120LEDs LED STRIP

- ▶ 2835 LED with broad luminous surface
- ▶ Self-encapsulated design offers optional 2100-10000K
- ▶ White lights and R/G/B/Y and others colourful lights for option
- ▶ High quality PCB, high thermal 3M adhesive
- ▶ Provide 1 BIN delivery

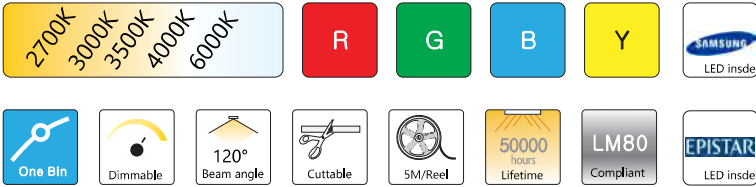


## DIMENSIONS & WATERPROOF

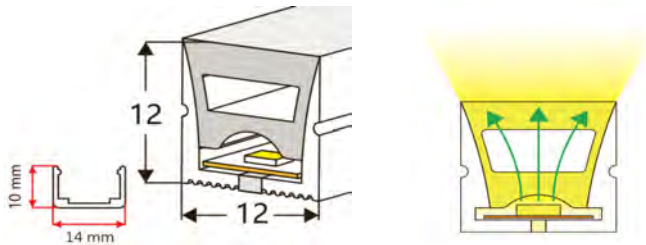

## PRODUCT SPECIFICATION

Dimension	5000mmx8mmx1.2mm
Chip density	120LED, 8.33mm LED pitch
Step LEDs	6LED(24V)/3LED(12V)
Step Length	6LED(24V)/3LED(12V)
Power(W)	3W 4.8W 7.2W 9.6W 12W/meter
Efficacy	115lm/W
Voltage(V)	DC24V/DC12V
Current(A/m)	0.5A(24V)/1A(12V)

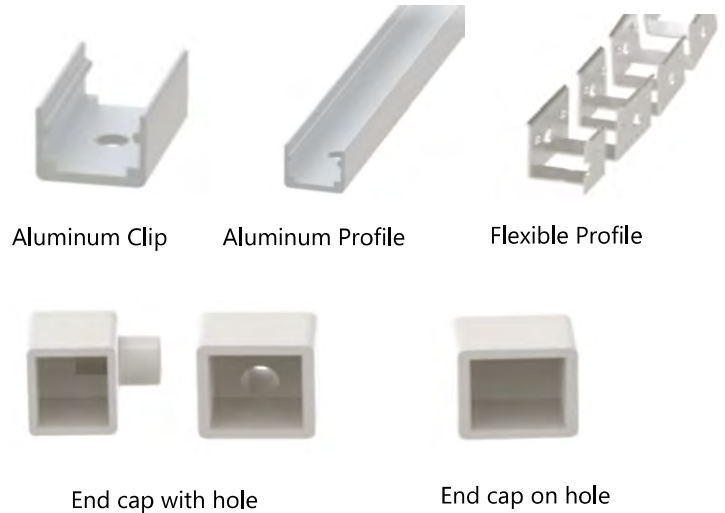


## PRODUCT PHOTOMETRICS

CCT (K)	Watt/Lumen (W/lm/m)	Watt/Lumen (W/lm/m)	Watt/Lumen (W/lm/m)	Watt/Lumen (W/lm/m)	Watt/Lumen (W/lm/m)	CRI
2700K	3W/150lm	4.8W/240lm	7.2W/360lm	9.6W/480lm	12W/600lm	83/93
3000K	3W/165lm	4.8W/264lm	7.2W/396lm	9.6W/528lm	12W/660lm	83/93
3500K	3W/180lm	4.8W/288lm	7.2W/432lm	9.6W/576lm	12W/720lm	83/93
4000K	3W/195lm	4.8W/312lm	7.2W/468lm	9.6W/624lm	12W/780lm	83/93
6000K	3W/210lm	4.8W/336lm	7.2W/504lm	9.6W/672lm	12W/840lm	83/93




# F1212A 2835 120LEDs LED STRIP

- ▶ 2835 LED with broad luminous surface
- ▶ Self-encapsulated design offers optional 2100-10000K
- ▶ White lights and R/G/B/Y and others colourful lights for option
- ▶ High quality PCB, high thermal 3M adhesive
- ▶ Provide 1 BIN delivery

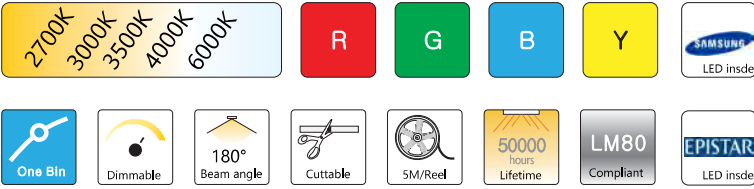


## DIMENSIONS & WATERPROOF

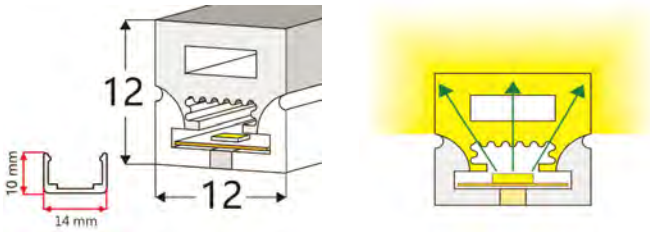

## PRODUCT SPECIFICATION

Dimension	5000mmx8mmx1.2mm
Chip density	120LED, 8.33mm LED pitch
Step LEDs	6LED(24V)/3LED(12V)
Step Length	6LED(24V)/3LED(12V)
Power(W)	3W 4.8W 7.2W 9.6W 12W/meter
Efficacy	115lm/W
Voltage(V)	DC24V/DC12V
Current(A/m)	0.5A(24V)/1A(12V)

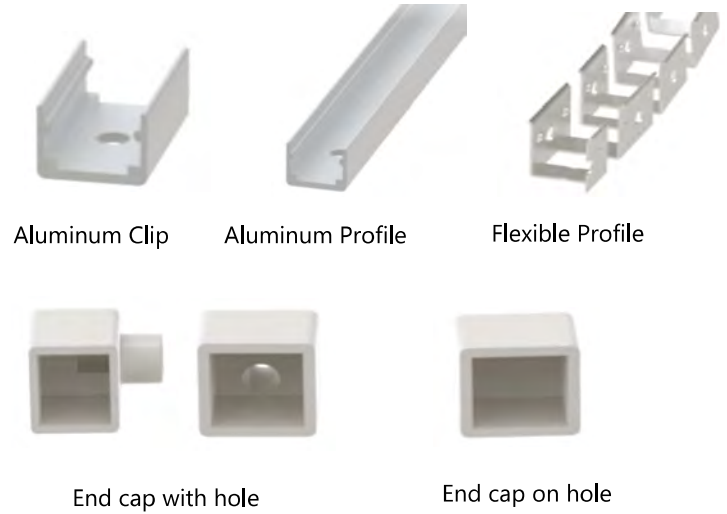


## PRODUCT PHOTOMETRICS


CCT (K)	Watt/Lumen (W/lm/m)	Watt/Lumen (W/lm/m)	Watt/Lumen (W/lm/m)	Watt/Lumen (W/lm/m)	Watt/Lumen (W/lm/m)	CRI
2700K	3W/150lm	4.8W/240lm	7.2W/360lm	9.6W/480lm	12W/600lm	83/93
3000K	3W/165lm	4.8W/264lm	7.2W/396lm	9.6W/528lm	12W/660lm	83/93
3500K	3W/180lm	4.8W/288lm	7.2W/432lm	9.6W/576lm	12W/720lm	83/93
4000K	3W/195lm	4.8W/312lm	7.2W/468lm	9.6W/624lm	12W/780lm	83/93
6000K	3W/210lm	4.8W/336lm	7.2W/504lm	9.6W/672lm	12W/840lm	83/93

# F1212B 2835 120LEDs LED STRIP

- ▶ 2835 LED with broad luminous surface
- ▶ Self-encapsulated design offers optional 2100-10000K
- ▶ White lights and R/G/B/Y and others colourful lights for option
- ▶ High quality PCB, high thermal 3M adhesive
- ▶ Provide 1 BIN delivery

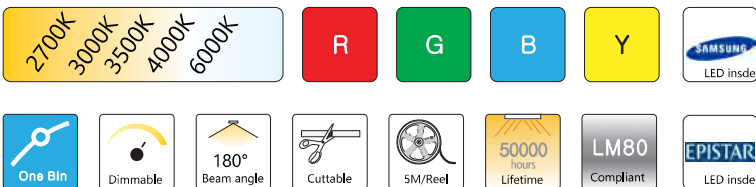


## DIMENSIONS & WATERPROOF

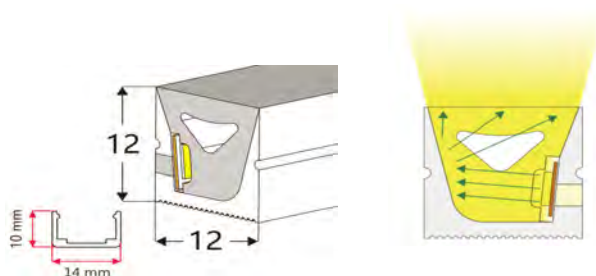

## PRODUCT SPECIFICATION

Dimension	5000mmx5mmx1.2mm
Chip density	120LED, 8.33mm LED pitch
Step LEDs	6LED(24V)/3LED(12V)
Step Length	6LED(24V)/3LED(12V)
Power(W)	3W 4.8W 6W 7.2W 9.6W/meter
Efficacy	115lm/W
Voltage(V)	DC24V/DC12V
Current(A/m)	0.5A(24V)/1A(12V)


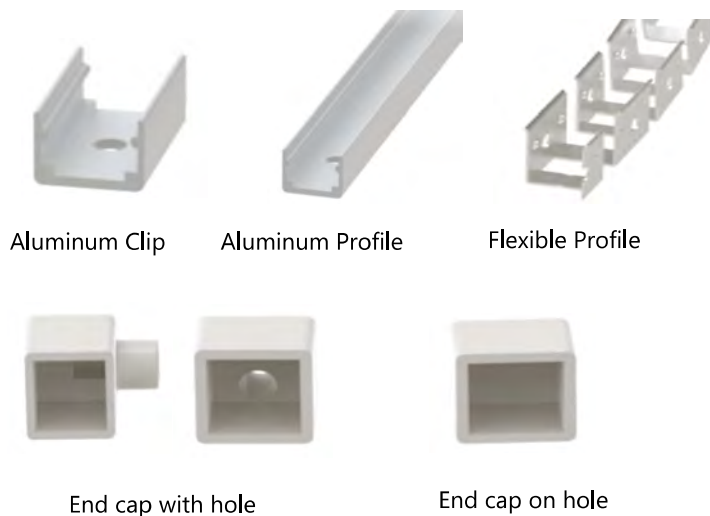


## PRODUCT PHOTOMETRICS


CCT (K)	Watt/Lumen (W/lm/m)	Watt/Lumen (W/lm/m)	Watt/Lumen (W/lm/m)	Watt/Lumen (W/lm/m)	Watt/Lumen (W/lm/m)	CRI
2700K	3W/150lm	4.8W/240lm	6W/300lm	7.2W/360lm	9.6W/480lm	83/93
3000K	3W/165lm	4.8W/264lm	6W/330lm	7.2W/396lm	9.6W/528lm	83/93
3500K	3W/180lm	4.8W/288lm	6W/360lm	7.2W/432lm	9.6W/576lm	83/93
4000K	3W/195lm	4.8W/312lm	6W/390lm	7.2W/468lm	9.6W/624lm	83/93
6000K	3W/210lm	4.8W/336lm	6W/420lm	7.2W/504lm	9.6W/672lm	83/93

# F1616 2835 120LEDs LED STRIP

- ▶ 2835 LED with broad luminous surface
- ▶ Self-encapsulated design offers optional 2100-10000K
- ▶ White lights and R/G/B/Y and others colorful lights for option
- ▶ High quality PCB, high thermal 3M adhesive
- ▶ Provide 1 BIN delivery

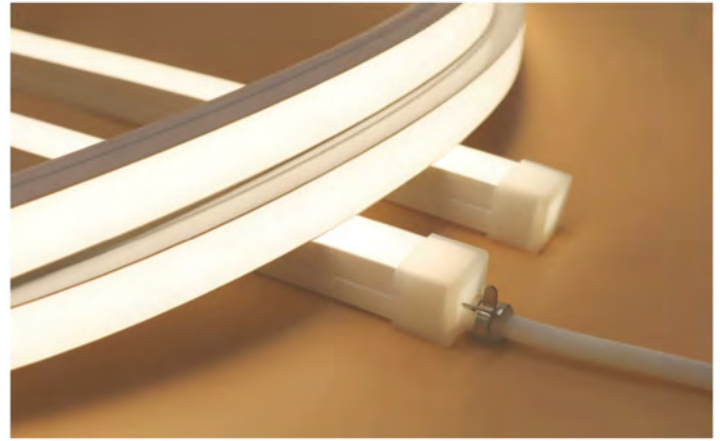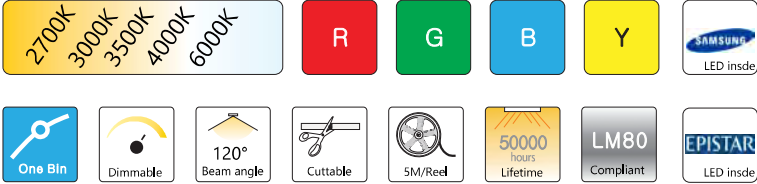


## DIMENSIONS & WATERPROOF

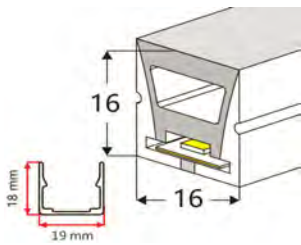

## PRODUCT SPECIFICATION

Dimension	5000mmx10mmx1.2mm
Chip density	120LED, 8.33mm LED pitch
Step LEDs	6LED(24V)/3LED(12V)
Step Length	6LED(24V)/3LED(12V)
Power(W)	3W 4.8W 7.2W 9.6W 12W/meter
Efficacy	115lm/W
Voltage(V)	DC24V/DC12V
Current(A/m)	0.5A(24V)/1A(12V)


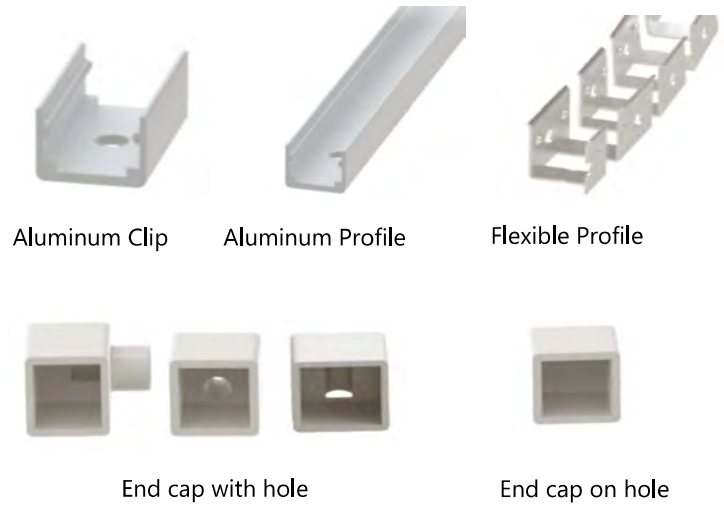


## PRODUCT PHOTOMETRICS


CCT (K)	Watt/Lumen (W/lm/m)	Watt/Lumen (W/lm/m)	Watt/Lumen (W/lm/m)	Watt/Lumen (W/lm/m)	Watt/Lumen (W/lm/m)	CRI
2700K	3W/150lm	4.8W/240lm	7.2W/360lm	9.6W/480lm	12W/600lm	83/93
3000K	3W/165lm	4.8W/264lm	7.2W/396lm	9.6W/528lm	12W/660lm	83/93
3500K	3W/180lm	4.8W/288lm	7.2W/432lm	9.6W/576lm	12W/720lm	83/93
4000K	3W/195lm	4.8W/312lm	7.2W/468lm	9.6W/624lm	12W/780lm	83/93
6000K	3W/210lm	4.8W/336lm	7.2W/504lm	9.6W/672lm	12W/840lm	83/93

# F1616A 2835 120LEDs LED STRIP

- ▶ 2835 LED with broad luminous surface
- ▶ Self-encapsulated design offers optional 2100-10000K
- ▶ White lights and R/G/B/Y and others colourful lights for option
- ▶ High quality PCB, high thermal 3M adhesive
- ▶ Provide 1 BIN delivery

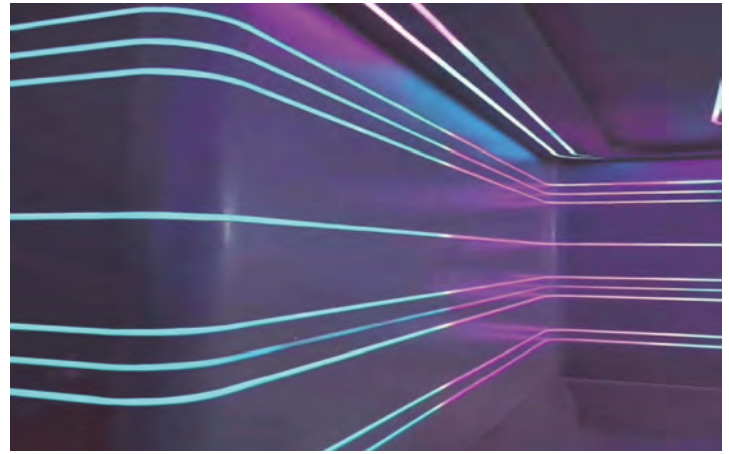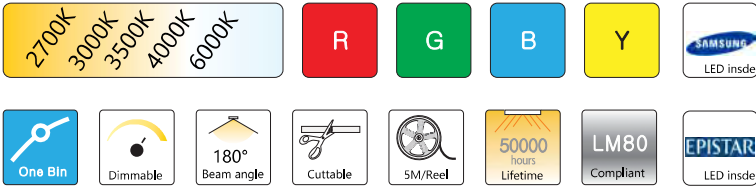


## DIMENSIONS & WATERPROOF

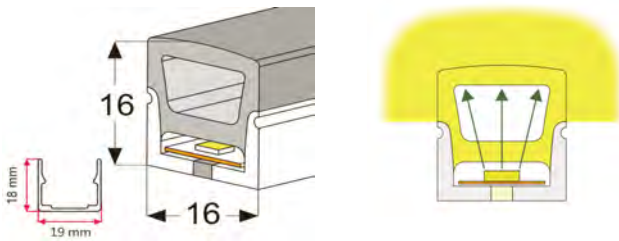

## PRODUCT SPECIFICATION

Dimension	5000mmx10mmx1.2mm
Chip density	120LED, 8.33mm LED pitch
Step LEDs	6LED(24V)/3LED(12V)
Step Length	6LED(24V)/3LED(12V)
Power(W)	3W 4.8W 7.2W 9.6W 12W/meter
Efficacy	115lm/W
Voltage(V)	DC24V/DC12V
Current(A/m)	0.5A(24V)/1A(12V)

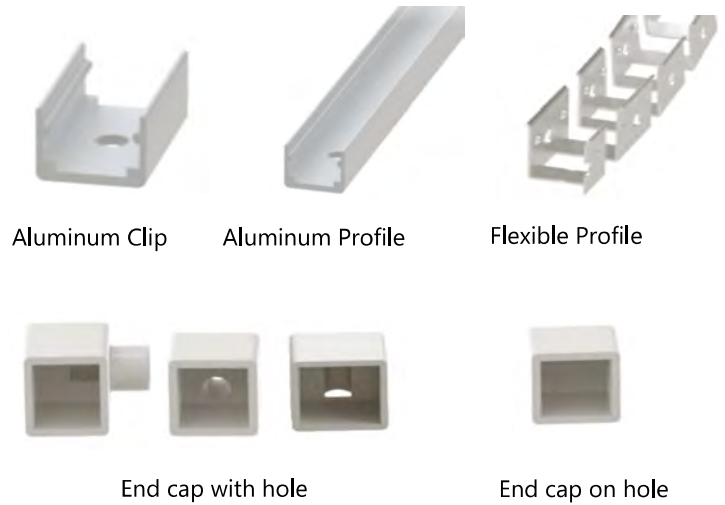


## PRODUCT PHOTOMETRICS


CCT (K)	Watt/Lumen (W/lm/m)	Watt/Lumen (W/lm/m)	Watt/Lumen (W/lm/m)	Watt/Lumen (W/lm/m)	Watt/Lumen (W/lm/m)	CRI
2700K	3W/150lm	4.8W/240lm	7.2W/360lm	9.6W/480lm	12W/600lm	83/93
3000K	3W/165lm	4.8W/264lm	7.2W/396lm	9.6W/528lm	12W/660lm	83/93
3500K	3W/180lm	4.8W/288lm	7.2W/432lm	9.6W/576lm	12W/720lm	83/93
4000K	3W/195lm	4.8W/312lm	7.2W/468lm	9.6W/624lm	12W/780lm	83/93
6000K	3W/210lm	4.8W/336lm	7.2W/504lm	9.6W/672lm	12W/840lm	83/93

# F2020 2835 120LEDs LED STRIP

- ▶ 2835 LED with broad luminous surface
- ▶ Self-encapsulated design offers optional 2100-10000K
- ▶ White lights and R/G/B/Y and others colourful lights for option
- ▶ High quality PCB, high thermal 3M adhesive
- ▶ Provide 1 BIN delivery

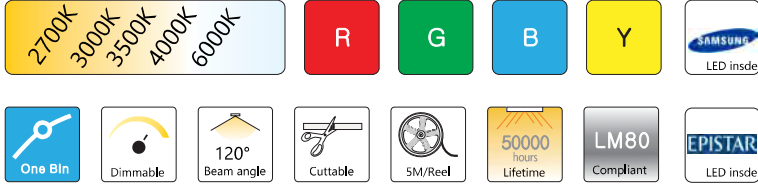


## DIMENSIONS & WATERPROOF

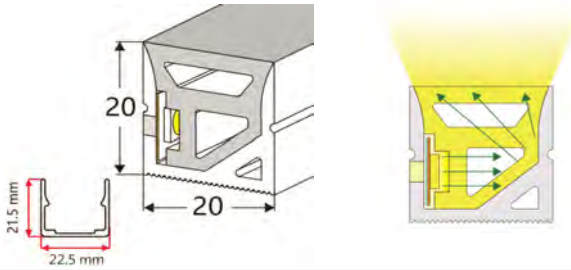

## PRODUCT SPECIFICATION

Dimension	5000mmx10mmx1.2mm
Chip density	120LED, 8.33mm LED pitch
Step LEDs	6LED(24V)/3LED(12V)
Step Length	6LED(24V)/3LED(12V)
Power(W)	3W 4.8W 7.2W 9.6W 12W/meter
Efficacy	115lm/W
Voltage(V)	DC24V/DC12V
Current(A/m)	0.5A(24V)/1A(12V)

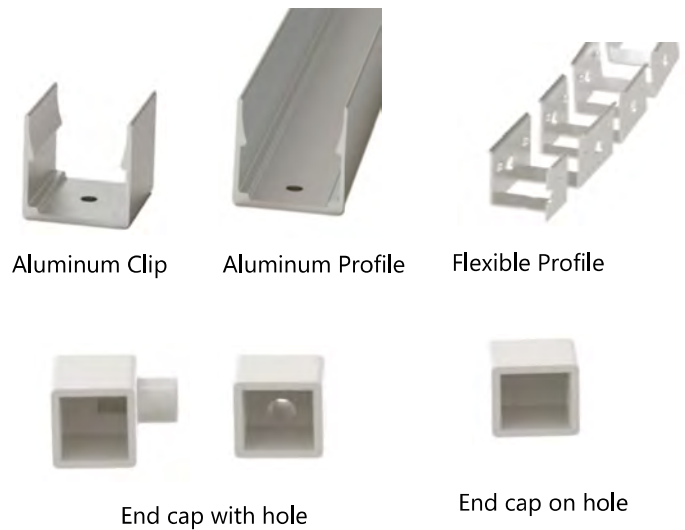



## PRODUCT PHOTOMETRICS

CCT (K)	Watt/Lumen (W/lm/m)	Watt/Lumen (W/lm/m)	Watt/Lumen (W/lm/m)	Watt/Lumen (W/lm/m)	Watt/Lumen (W/lm/m)	CRI
2700K	3W/150lm	4.8W/240lm	7.2W/360lm	9.6W/480lm	12W/600lm	83/93
3000K	3W/165lm	4.8W/264lm	7.2W/396lm	9.6W/528lm	12W/660lm	83/93
3500K	3W/180lm	4.8W/288lm	7.2W/432lm	9.6W/576lm	12W/720lm	83/93
4000K	3W/195lm	4.8W/312lm	7.2W/468lm	9.6W/624lm	12W/780lm	83/93
6000K	3W/210lm	4.8W/336lm	7.2W/504lm	9.6W/672lm	12W/840lm	83/93




# F2020A 2835 120LEDs LED STRIP

- ▶ 2835 LED with broad luminous surface
- ▶ Self-encapsulated design offers optional 2100-10000K
- ▶ White lights and R/G/B/Y and others colourful lights for option
- ▶ High quality PCB, high thermal 3M adhesive
- ▶ Provide 1 BIN delivery

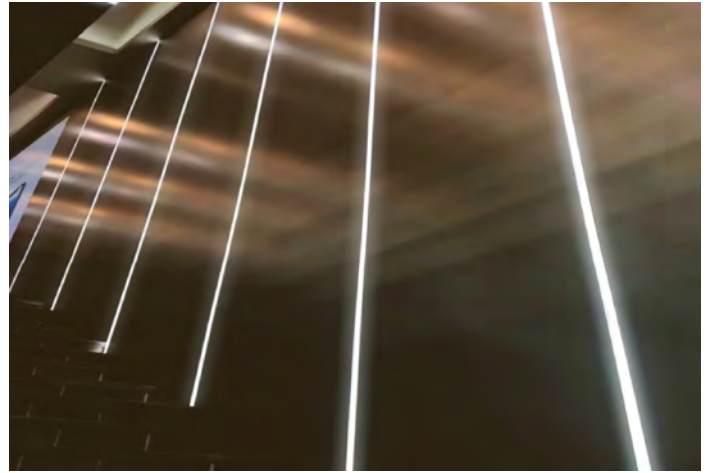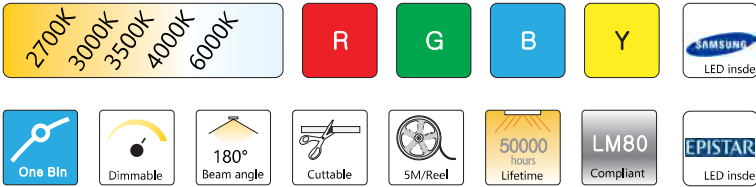


## DIMENSIONS & WATERPROOF

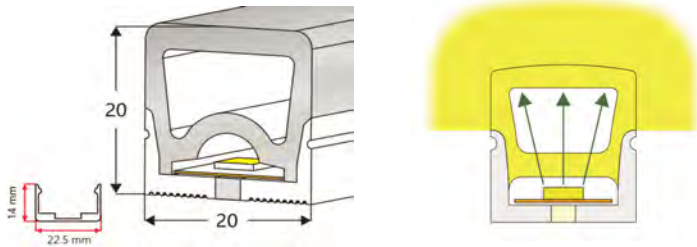

## PRODUCT SPECIFICATION

Dimension	5000mmx10mmx1.2mm
Chip density	120LED, 8.33mm LED pitch
Step LEDs	6LED(24V)/3LED(12V)
Step Length	6LED(24V)/3LED(12V)
Power(W)	3W 4.8W 7.2W 9.6W 12W/meter
Efficacy	115lm/W
Voltage(V)	DC24V/DC12V
Current(A/m)	0.5A(24V)/1A(12V)


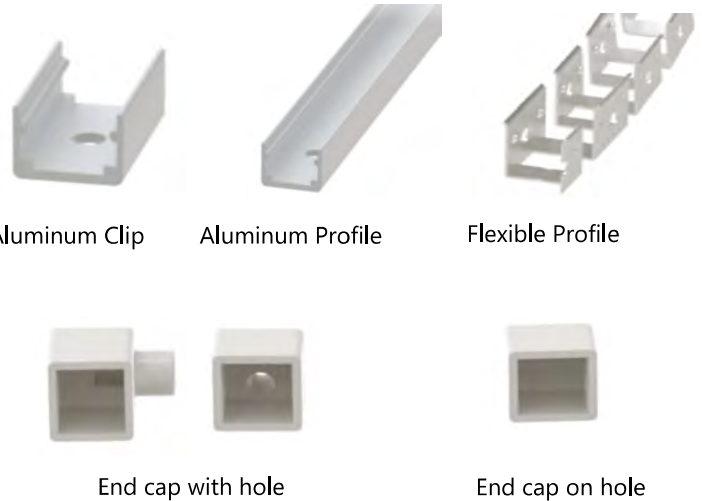


## PRODUCT PHOTOMETRICS


CCT (K)	Watt/Lumen (W/lm/m)	Watt/Lumen (W/lm/m)	Watt/Lumen (W/lm/m)	Watt/Lumen (W/lm/m)	Watt/Lumen (W/lm/m)	CRI
2700K	3W/150lm	4.8W/240lm	7.2W/360lm	9.6W/480lm	12W/600lm	83/93
3000K	3W/165lm	4.8W/264lm	7.2W/396lm	9.6W/528lm	12W/660lm	83/93
3500K	3W/180lm	4.8W/288lm	7.2W/432lm	9.6W/576lm	12W/720lm	83/93
4000K	3W/195lm	4.8W/312lm	7.2W/468lm	9.6W/624lm	12W/780lm	83/93
6000K	3W/210lm	4.8W/336lm	7.2W/504lm	9.6W/672lm	12W/840lm	83/93

# F2020B 2835 120LEDs LED STRIP

- ▶ 2835 LED with broad luminous surface
- ▶ Self-encapsulated design offers optional 2100-10000K
- ▶ White lights and R/G/B/Y and others colourful lights for option
- ▶ High quality PCB, high thermal 3M adhesive
- ▶ Provide 1 BIN delivery

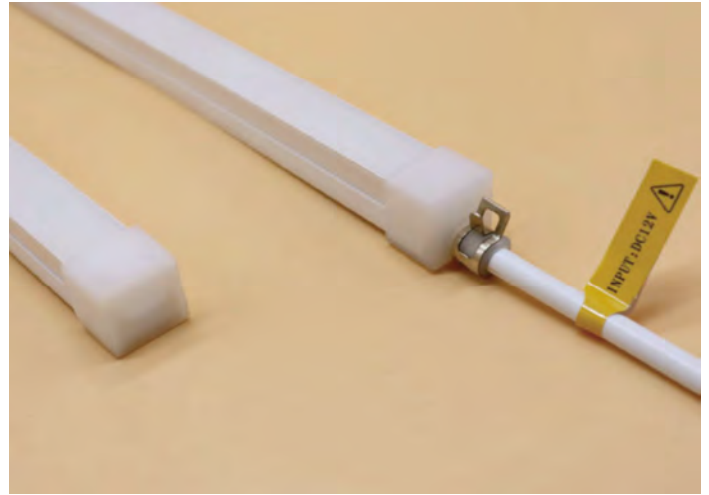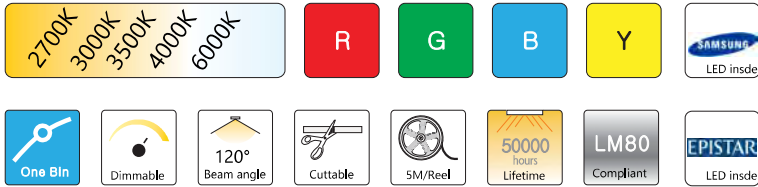


## DIMENSIONS & WATERPROOF

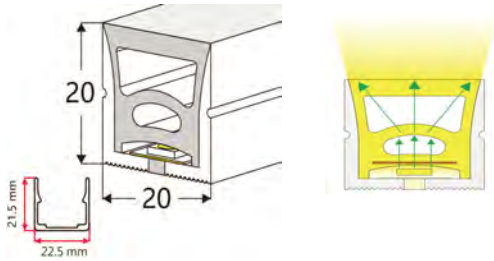

## PRODUCT SPECIFICATION

Dimension	5000mmx10mmx1.2mm
Chip density	120LED, 8.33mm LED pitch
Step LEDs	6LED(24V)/3LED(12V)
Step Length	6LED(24V)/3LED(12V)
Power(W)	3W 4.8W 7.2W 9.6W 12W/meter
Efficacy	115lm/W
Voltage(V)	DC24V/DC12V
Current(A/m)	0.5A(24V)/1A(12V)


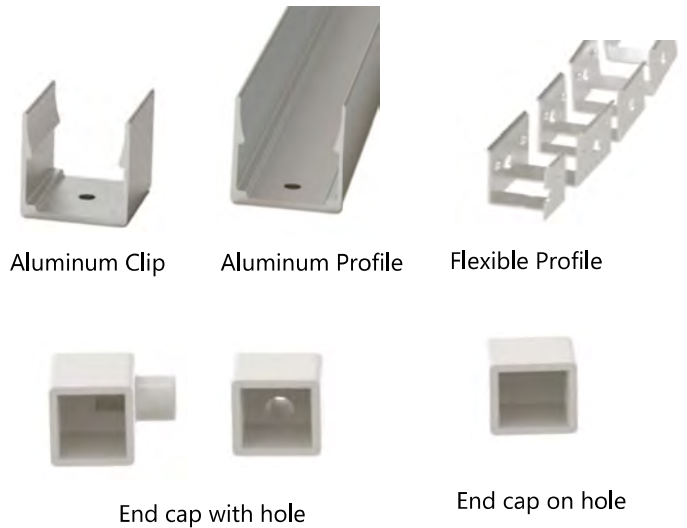


## PRODUCT PHOTOMETRICS


CCT (K)	Watt/Lumen (W/lm/m)	Watt/Lumen (W/lm/m)	Watt/Lumen (W/lm/m)	Watt/Lumen (W/lm/m)	Watt/Lumen (W/lm/m)	CRI
2700K	3W/150lm	4.8W/240lm	7.2W/360lm	9.6W/480lm	12W/600lm	83/93
3000K	3W/165lm	4.8W/264lm	7.2W/396lm	9.6W/528lm	12W/660lm	83/93
3500K	3W/180lm	4.8W/288lm	7.2W/432lm	9.6W/576lm	12W/720lm	83/93
4000K	3W/195lm	4.8W/312lm	7.2W/468lm	9.6W/624lm	12W/780lm	83/93
6000K	3W/210lm	4.8W/336lm	7.2W/504lm	9.6W/672lm	12W/840lm	83/93

# F2014 2835 120LEDs LED STRIP

- ▶ 2835 LED with broad luminous surface
- ▶ Self-encapsulated design offers optional 2100-10000K
- ▶ White lights and R/G/B/Y and others colourful lights for option
- ▶ High quality PCB, high thermal 3M adhesive
- ▶ Provide 1 BIN delivery

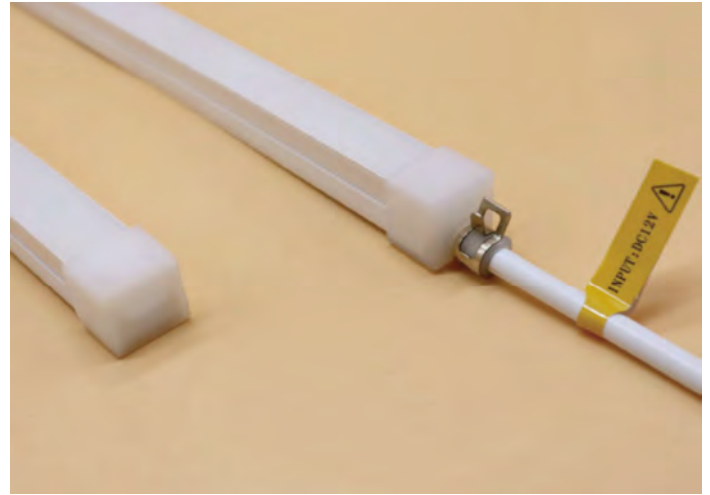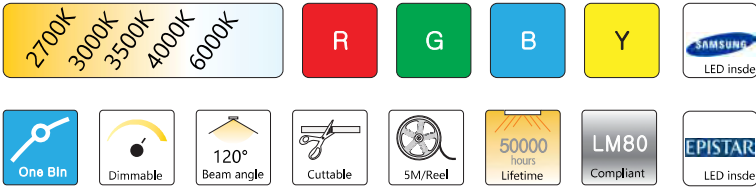

## DIMENSIONS & WATERPROOF

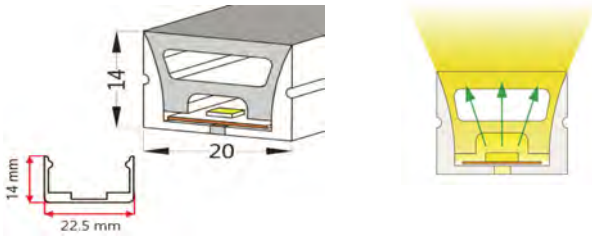

## PRODUCT SPECIFICATION

Dimension	5000mmx10mmx1.2mm
Chip density	120LED, 8.33mm LED pitch
Step LEDs	6LED(24V)/3LED(12V)
Step Length	6LED(24V)/3LED(12V)
Power(W)	3W 4.8W 7.2W 9.6W 12W/meter
Efficacy	115lm/W
Voltage(V)	DC24V/DC12V
Current(A/m)	0.5A(24V)/1A(12V)




## PRODUCT PHOTOMETRICS

CCT (K)	Watt/Lumen (W/lm/m)	Watt/Lumen (W/lm/m)	Watt/Lumen (W/lm/m)	Watt/Lumen (W/lm/m)	Watt/Lumen (W/lm/m)	CRI
2700K	3W/150lm	4.8W/240lm	7.2W/360lm	9.6W/480lm	12W/600lm	83/93
3000K	3W/165lm	4.8W/264lm	7.2W/396lm	9.6W/528lm	12W/660lm	83/93
3500K	3W/180lm	4.8W/288lm	7.2W/432lm	9.6W/576lm	12W/720lm	83/93
4000K	3W/195lm	4.8W/312lm	7.2W/468lm	9.6W/624lm	12W/780lm	83/93
6000K	3W/210lm	4.8W/336lm	7.2W/504lm	9.6W/672lm	12W/840lm	83/93




# F2020B<sub>2835</sub> 120LEDs LED STRIP

- ▶ 2835 LED with broad luminous surface
- ▶ Self-encapsulated design offers optional 2100-10000K
- ▶ White lights and R/G/B/Y and others colourful lights for option
- ▶ High quality PCB, high thermal 3M adhesive
- ▶ Provide 1 BIN delivery

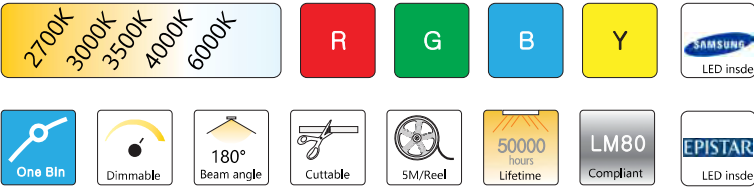

## DIMENSIONS & WATERPROOF

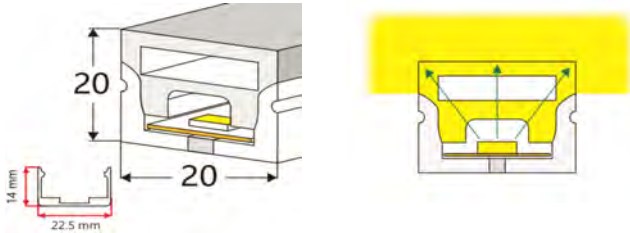

## PRODUCT SPECIFICATION

Dimension	5000mmx10mmx1.2mm
Chip density	120LED, 8.33mm LED pitch
Step LEDs	6LED(24V)/3LED(12V)
Step Length	6LED(24V)/3LED(12V)
Power(W)	3W 4.8W 7.2W 9.6W 12W/meter
Efficacy	115lm/W
Voltage(V)	DC24V/DC12V
Current(A/m)	0.5A(24V)/1A(12V)





## PRODUCT PHOTOMETRICS


CCT (K)	Watt/Lumen (W/lm/m)	Watt/Lumen (W/lm/m)	Watt/Lumen (W/lm/m)	Watt/Lumen (W/lm/m)	Watt/Lumen (W/lm/m)	CRI
2700K	3W/150lm	4.8W/240lm	7.2W/360lm	9.6W/480lm	12W/600lm	83/93
3000K	3W/165lm	4.8W/264lm	7.2W/396lm	9.6W/528lm	12W/660lm	83/93
3500K	3W/180lm	4.8W/288lm	7.2W/432lm	9.6W/576lm	12W/720lm	83/93
4000K	3W/195lm	4.8W/312lm	7.2W/468lm	9.6W/624lm	12W/780lm	83/93
6000K	3W/210lm	4.8W/336lm	7.2W/504lm	9.6W/672lm	12W/840lm	83/93

# F2517 2835 120LEDs LED STRIP

- ▶ 2835 LED with broad luminous surface
- ▶ Self-encapsulated design offers optional 2100-10000K
- ▶ White lights and R/G/B/Y and others colourful lights for option
- ▶ High quality PCB, high thermal 3M adhesive
- ▶ Provide 1 BIN delivery

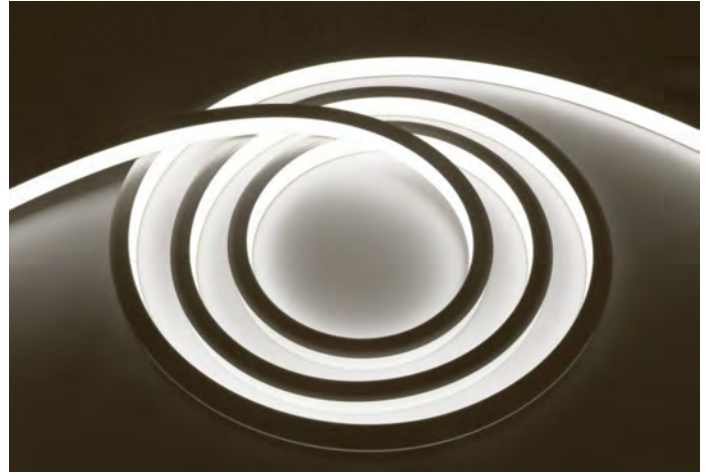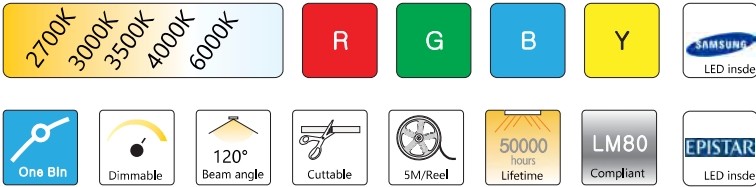


## DIMENSIONS & WATERPROOF

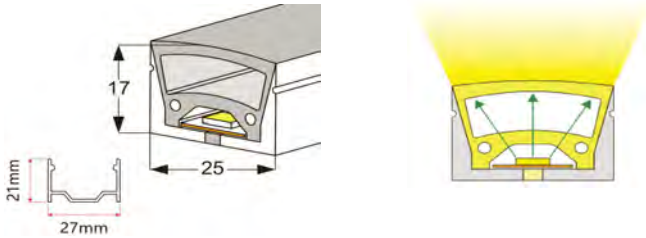

## PRODUCT SPECIFICATION

Dimension	5000mmx12mmx1.2mm
Chip density	120LED, 8.33mm LED pitch
Step LEDs	6LED(24V)/3LED(12V)
Step Length	6LED(24V)/3LED(12V)
Power(W)	3W 4.8W 7.2W 9.6W 12W/meter
Efficacy	115lm/W
Voltage(V)	DC24V/DC12V
Current(A/m)	0.5A(24V)/1A(12V)

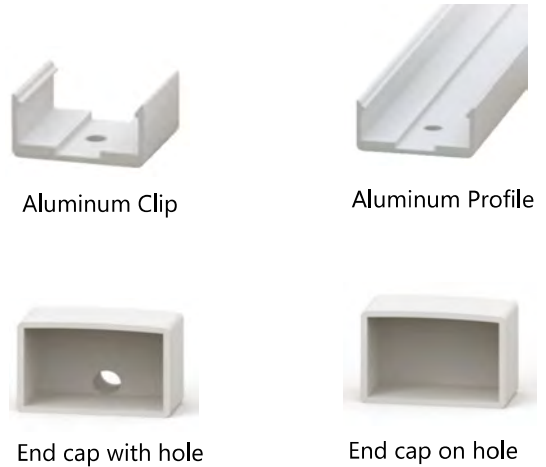


## PRODUCT PHOTOMETRICS


CCT (K)	Watt/Lumen (W/lm/m)	Watt/Lumen (W/lm/m)	Watt/Lumen (W/lm/m)	Watt/Lumen (W/lm/m)	Watt/Lumen (W/lm/m)	CRI
2700K	3W/150lm	4.8W/240lm	7.2W/360lm	9.6W/480lm	12W/600lm	83/93
3000K	3W/165lm	4.8W/264lm	7.2W/396lm	9.6W/528lm	12W/660lm	83/93
3500K	3W/180lm	4.8W/288lm	7.2W/432lm	9.6W/576lm	12W/720lm	83/93
4000K	3W/195lm	4.8W/312lm	7.2W/468lm	9.6W/624lm	12W/780lm	83/93
6000K	3W/210lm	4.8W/336lm	7.2W/504lm	9.6W/672lm	12W/840lm	83/93

# F2720 2835 240LEDs LED STRIP

- ▶ 2835 LED with broad luminous surface
- ▶ Self-encapsulated design offers optional 2100-10000K
- ▶ White lights and R/G/B/Y and others colourful lights for option
- ▶ High quality PCB, high thermal 3M adhesive
- ▶ Provide 1 BIN delivery

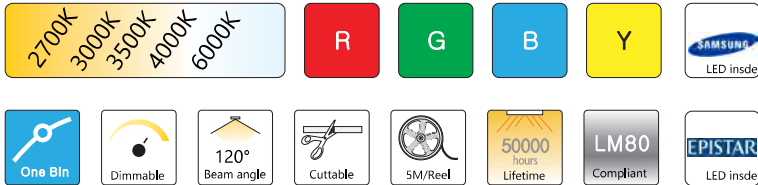


## DIMENSIONS & WATERPROOF

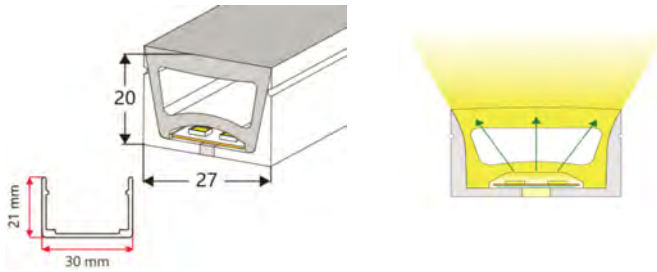

## PRODUCT SPECIFICATION

Dimension	5000mmx12mmx1.2mm
Chip density	240LED, 8.33mm LED pitch
Step LEDs	12LED(24V)
Step Length	12LED(24V)
Power(W)	3W 4.8W 7.2W 9.6W 12W 14.4W/meter
Efficacy	115lm/W
Voltage(V)	DC24V/DC12V
Current(A/m)	0.5A(24V)/1A(12V)


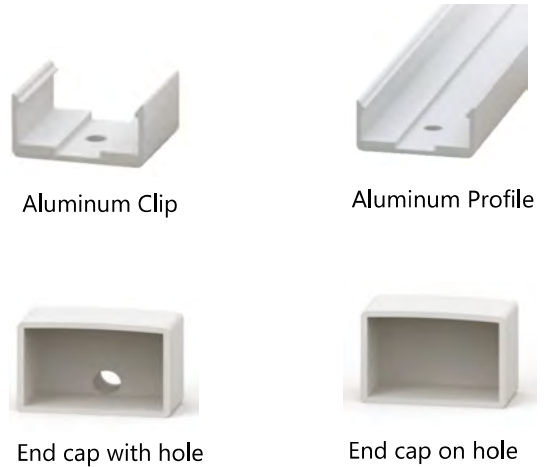


## PRODUCT PHOTOMETRICS


CCT (K)	Watt/Lumen (W/lm/m)	Watt/Lumen (W/lm/m)	Watt/Lumen (W/lm/m)	Watt/Lumen (W/lm/m)	Watt/Lumen (W/lm/m)	Watt/Lumen (W/lm/m)	CRI
2700K	3W/240lm	4.8W/384lm	7.2W/576lm	9.6W/768lm	12W/960lm	14.4W/1152lm	83/93
3000K	3W/255lm	4.8W/405lm	7.2W/612lm	9.6W/816lm	12W/1020lm	14.4W/1224lm	83/93
3500K	3W/261lm	4.8W/418lm	7.2W/626lm	9.6W/835lm	12W/1044lm	14.4W/1252lm	83/93
4000K	3W/270lm	4.8W/432lm	7.2W/648lm	9.6W/864lm	12W/1080lm	14.4W/1296lm	83/93
6000K	3W/285lm	4.8W/456lm	7.2W/684lm	9.6W/912lm	12W/1140lm	14.4W/1638lm	83/93

# V2214 2835 120LEDs LED STRIP

- ▶ 2835 LED with broad luminous surface
- ▶ Self-encapsulated design offers optional 2100-10000K
- ▶ White lights and R/G/B/Y and others colourful lights for option
- ▶ High quality PCB, high thermal 3M adhesive
- ▶ Provide 1 BIN delivery

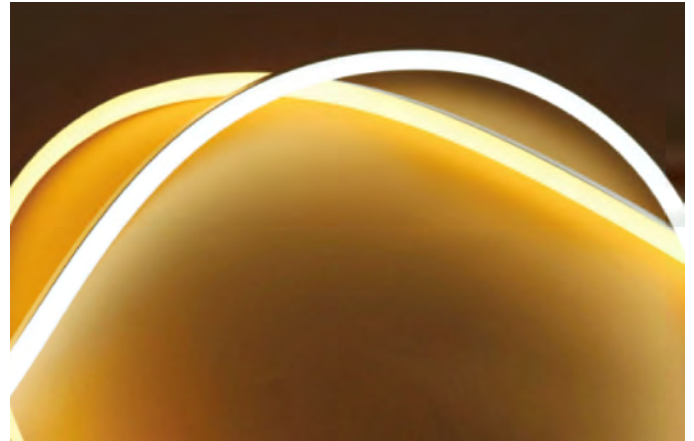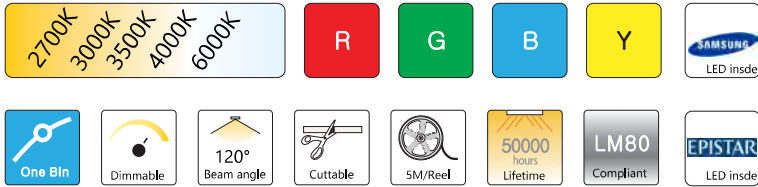

## DIMENSIONS & WATERPROOF

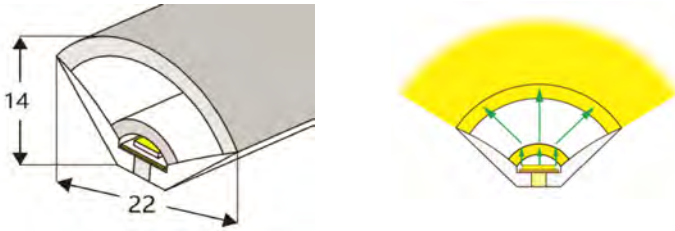

## PRODUCT SPECIFICATION

Dimension	5000mmx5mmx1.2mm
Chip density	120LED, 8.33mm LED pitch
Step LEDs	12LED(24V)
Step Length	12LED(24V)
Power(W)	3W 4.8W 6W 7.2W 9.6W/meter
Efficacy	115lm/W
Voltage(V)	DC24V/DC12V
Current(A/m)	0.5A(24V)/1A(12V)



Aluminum Clip



End cap with hole




End cap on hole

## PRODUCT PHOTOMETRICS


CCT (K)	Watt/Lumen (W/lm/m)	Watt/Lumen (W/lm/m)	Watt/Lumen (W/lm/m)	Watt/Lumen (W/lm/m)	Watt/Lumen (W/lm/m)	CRI
2700K	3W/150lm	4.8W/240lm	6W/300lm	7.2W/360lm	9.6W/480lm	83/93
3000K	3W/165lm	4.8W/264lm	6W/330lm	7.2W/396lm	9.6W/528lm	83/93
3500K	3W/180lm	4.8W/288lm	6W/360lm	7.2W/432lm	9.6W/576lm	83/93
4000K	3W/195lm	4.8W/312lm	6W/390lm	7.2W/468lm	9.6W/624lm	83/93
6000K	3W/210lm	4.8W/336lm	6W/420lm	7.2W/504lm	9.6W/672lm	83/93

# F2020C<sub>2835</sub> 120LEDs LED STRIP

- ▶ 2835 LED with broad luminous surface
- ▶ Self-encapsulated design offers optional 2100-10000K
- ▶ White lights and R/G/B/Y and others colourful lights for option
- ▶ High quality PCB, high thermal 3M adhesive
- ▶ Provide 1 BIN delivery

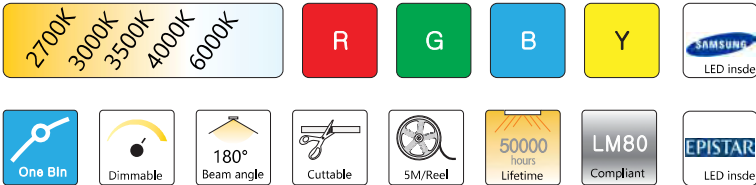

## DIMENSIONS & WATERPROOF

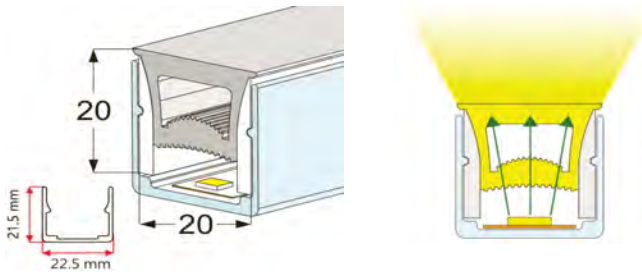

## PRODUCT SPECIFICATION

Dimension	5000mmx10mmx1.2mm
Chip density	120LED, 8.33mm LED pitch
Step LEDs	6LED(24V)/3LED(12V)
Step Length	6LED(24V)/3LED(12V)
Power(W)	3W 4.8W 7.2W 9.6W 12W 14.4W/meter
Efficacy	115lm/W
Voltage(V)	DC24V/DC12V
Current(A/m)	0.5A(24V)/1A(12V)



Aluminum Profile



## PRODUCT PHOTOMETRICS

CCT (K)	Watt/Lumen (W/lm/m)	Watt/Lumen (W/lm/m)	Watt/Lumen (W/lm/m)	Watt/Lumen (W/lm/m)	Watt/Lumen (W/lm/m)	CRI
2700K	3W/150lm	4.8W/240lm	7.2W/360lm	9.6W/480lm	12W/600lm	83/93
3000K	3W/165lm	4.8W/264lm	7.2W/396lm	9.6W/528lm	12W/660lm	83/93
3500K	3W/180lm	4.8W/288lm	7.2W/432lm	9.6W/576lm	12W/720lm	83/93
4000K	3W/195lm	4.8W/312lm	7.2W/468lm	9.6W/624lm	12W/780lm	83/93
6000K	3W/210lm	4.8W/336lm	7.2W/504lm	9.6W/672lm	12W/840lm	83/93




# F0410 2835 120LEDs LED STRIP

- ▶ 2835 LED with broad luminous surface
- ▶ Self-encapsulated design offers optional 2100-10000K
- ▶ White lights and R/G/B/Y and others colourful lights for option
- ▶ High quality PCB, high thermal 3M adhesive
- ▶ Provide 1 BIN delivery

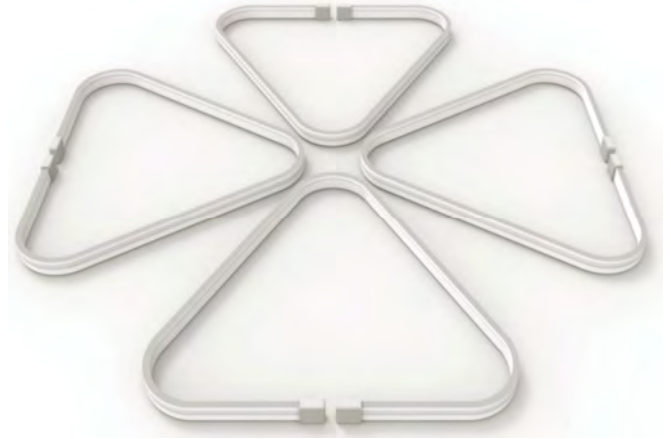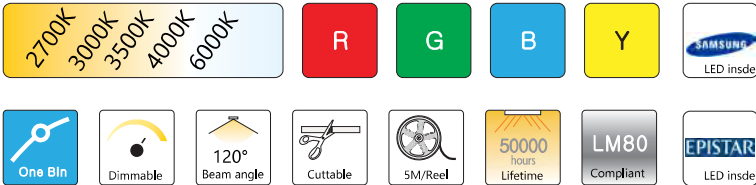

## DIMENSIONS & WATERPROOF

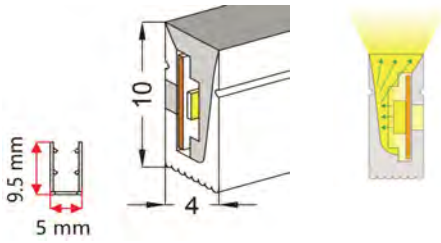

## PRODUCT SPECIFICATION

Dimension	5000mmx5mmx1.2mm
Chip density	120LED, 8.33mm LED pitch
Step LEDs	6LED(24V)
Step Length	6LED(24V)
Power(W)	3W 4.8W 6W 7.2W 9.6W/meter
Efficacy	115lm/W
Voltage(V)	DC24V/DC12V
Current(A/m)	0.5A(24V)/1A(12V)



Aluminum Clip



flexible Profile



End cap with hole




End cap on hole

## PRODUCT PHOTOMETRICS


CCT (K)	Watt/Lumen (W/lm/m)	Watt/Lumen (W/lm/m)	Watt/Lumen (W/lm/m)	Watt/Lumen (W/lm/m)	Watt/Lumen (W/lm/m)	CRI
2700K	3W/150lm	4.8W/240lm	6W/300lm	7.2W/360lm	9.6W/480lm	83/93
3000K	3W/165lm	4.8W/264lm	6W/330lm	7.2W/396lm	9.6W/528lm	83/93
3500K	3W/180lm	4.8W/288lm	6W/360lm	7.2W/432lm	9.6W/576lm	83/93
4000K	3W/195lm	4.8W/312lm	6W/390lm	7.2W/468lm	9.6W/624lm	83/93
6000K	3W/210lm	4.8W/336lm	6W/420lm	7.2W/504lm	9.6W/672lm	83/93

# F0816 2835 120LEDs LED STRIP

- ▶ 2835 LED with broad luminous surface
- ▶ Self-encapsulated design offers optional 2100-10000K
- ▶ White lights and R/G/B/Y and others colourful lights for option
- ▶ High quality PCB, high thermal 3M adhesive
- ▶ Provide 1 BIN delivery

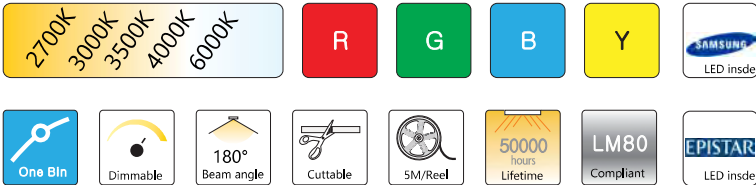


## DIMENSIONS & WATERPROOF

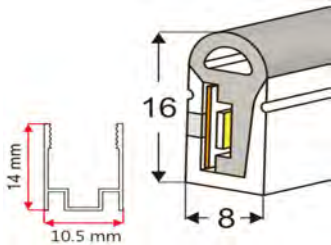

## PRODUCT SPECIFICATION

Dimension	5000mmx10mmx1.2mm
Chip density	120LED, 8.33mm LED pitch
Step LEDs	6LED(24V)
Step Length	6LED(24V)
Power(W)	3W 4.8W 7.2W 9.6W 12W/meter
Efficacy	115lm/W
Voltage(V)	DC24V/DC12V
Current(A/m)	0.5A(24V)/1A(12V)

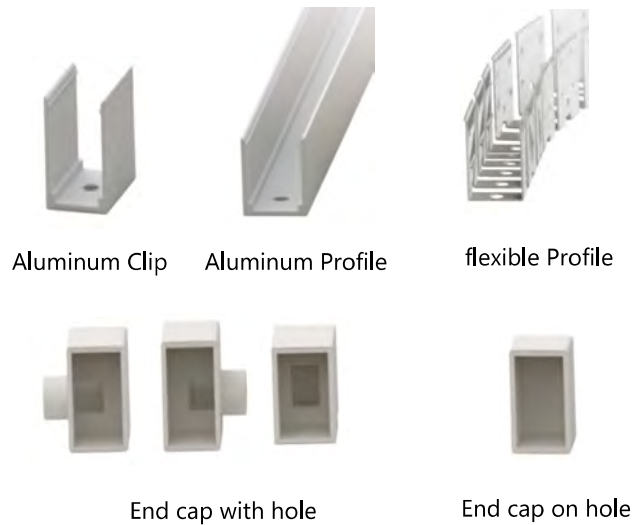


## PRODUCT PHOTOMETRICS


CCT (K)	Watt/Lumen (W/lm/m)	Watt/Lumen (W/lm/m)	Watt/Lumen (W/lm/m)	Watt/Lumen (W/lm/m)	Watt/Lumen (W/lm/m)	CRI
2700K	3W/150lm	4.8W/240lm	7.2W/360lm	9.6W/480lm	12W/600lm	83/93
3000K	3W/165lm	4.8W/264lm	7.2W/396lm	9.6W/528lm	12W/660lm	83/93
3500K	3W/180lm	4.8W/288lm	7.2W/432lm	9.6W/576lm	12W/720lm	83/93
4000K	3W/195lm	4.8W/312lm	7.2W/468lm	9.6W/624lm	12W/780lm	83/93
6000K	3W/210lm	4.8W/336lm	7.2W/504lm	9.6W/672lm	12W/840lm	83/93

# F0612 2835 120LEDs LED STRIP

- ▶ 2835 LED with broad luminous surface
- ▶ Self-encapsulated design offers optional 2100-10000K
- ▶ White lights and R/G/B/Y and others colourful lights for option
- ▶ High quality PCB, high thermal 3M adhesive
- ▶ Provide 1 BIN delivery

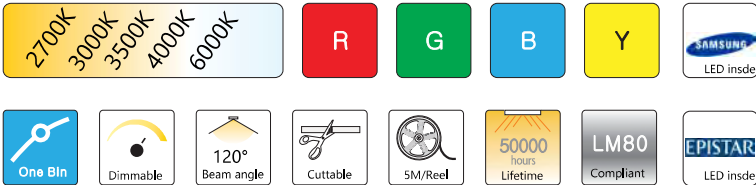


## DIMENSIONS & WATERPROOF

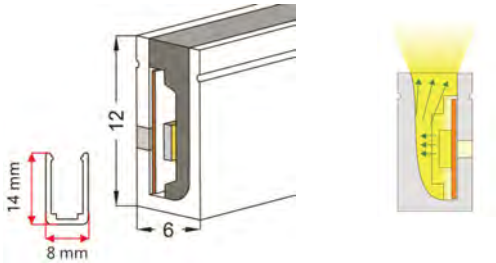

## PRODUCT SPECIFICATION

Dimension	5000mmx8mmx1.2mm
Chip density	120LED, 8.33mm LED pitch
Step LEDs	6LED(24V)
Step Length	6LED(24V)
Power(W)	3W 4.8W 7.2W 9.6W 12W 14.4W/meter
Efficacy	115lm/W
Voltage(V)	DC24V/DC12V
Current(A/m)	0.5A(24V)/1A(12V)

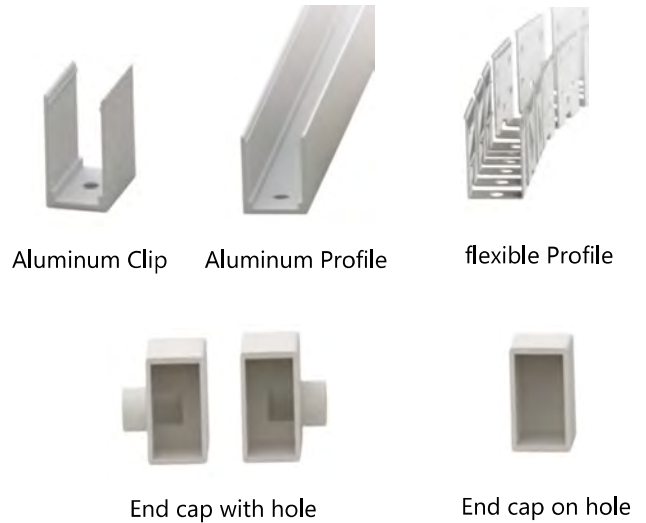


## PRODUCT PHOTOMETRICS

CCT (K)	Watt/Lumen (W/lm/m)	Watt/Lumen (W/lm/m)	Watt/Lumen (W/lm/m)	Watt/Lumen (W/lm/m)	Watt/Lumen (W/lm/m)	CRI
2700K	3W/150lm	4.8W/240lm	7.2W/360lm	9.6W/480lm	12W/600lm	83/93
3000K	3W/165lm	4.8W/264lm	7.2W/396lm	9.6W/528lm	12W/660lm	83/93
3500K	3W/180lm	4.8W/288lm	7.2W/432lm	9.6W/576lm	12W/720lm	83/93
4000K	3W/195lm	4.8W/312lm	7.2W/468lm	9.6W/624lm	12W/780lm	83/93
6000K	3W/210lm	4.8W/336lm	7.2W/504lm	9.6W/672lm	12W/840lm	83/93




# F1220 2835 120LEDs LED STRIP

- ▶ 2835 LED with broad luminous surface
- ▶ Self-encapsulated design offers optional 2100-10000K
- ▶ White lights and R/G/B/Y and others colourful lights for option
- ▶ High quality PCB, high thermal 3M adhesive
- ▶ Provide 1 BIN delivery

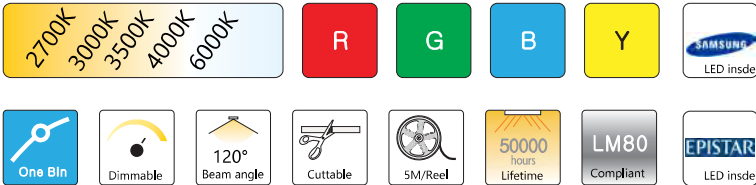


## DIMENSIONS & WATERPROOF

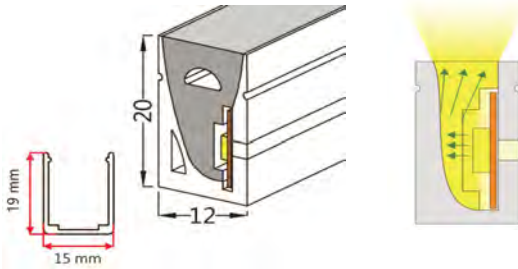

## PRODUCT SPECIFICATION

Dimension	5000mmx10mmx1.2mm
Chip density	120LED, 8.33mm LED pitch
Step LEDs	6LED(24V)
Step Length	6LED(24V)
Power(W)	3W 4.8W 7.2W 9.6W 12W/meter
Efficacy	115lm/W
Voltage(V)	DC24V/DC12V
Current(A/m)	0.5A(24V)/1A(12V)

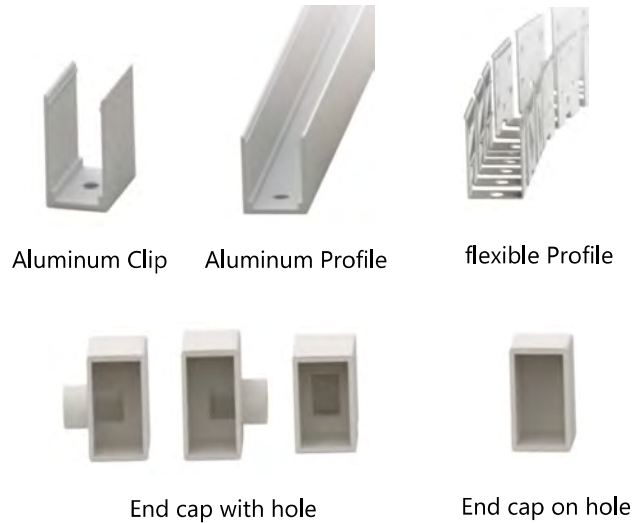


## PRODUCT PHOTOMETRICS


CCT (K)	Watt/Lumen (W/lm/m)	Watt/Lumen (W/lm/m)	Watt/Lumen (W/lm/m)	Watt/Lumen (W/lm/m)	Watt/Lumen (W/lm/m)	CRI
2700K	3W/150lm	4.8W/240lm	7.2W/360lm	9.6W/480lm	12W/600lm	83/93
3000K	3W/165lm	4.8W/264lm	7.2W/396lm	9.6W/528lm	12W/660lm	83/93
3500K	3W/180lm	4.8W/288lm	7.2W/432lm	9.6W/576lm	12W/720lm	83/93
4000K	3W/195lm	4.8W/312lm	7.2W/468lm	9.6W/624lm	12W/780lm	83/93
6000K	3W/210lm	4.8W/336lm	7.2W/504lm	9.6W/672lm	12W/840lm	83/93

# F1220B<sub>2835</sub> 120LEDs LED STRIP

- ▶ 2835 LED with broad luminous surface
- ▶ Self-encapsulated design offers optional 2100-10000K
- ▶ White lights and R/G/B/Y and others colourful lights for option
- ▶ High quality PCB, high thermal 3M adhesive
- ▶ Provide 1 BIN delivery

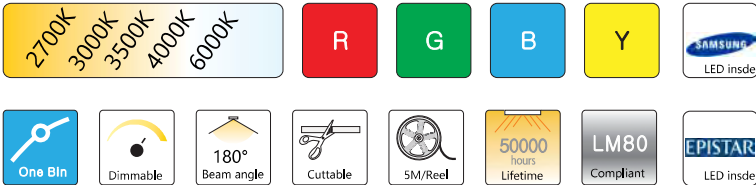


## DIMENSIONS & WATERPROOF

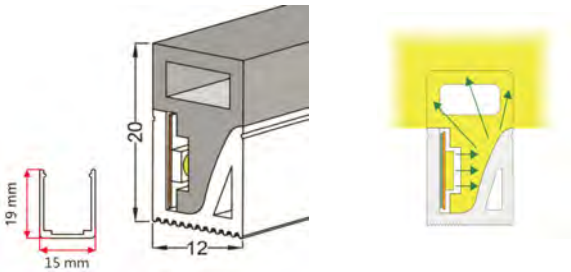

## PRODUCT SPECIFICATION

Dimension	5000mmx10mmx1.2mm
Chip density	120LED, 8.33mm LED pitch
Step LEDs	6LED(24V)
Step Length	6LED(24V)
Power(W)	3W 4.8W 7.2W 9.6W 12W/meter
Efficacy	115lm/W
Voltage(V)	DC24V/DC12V
Current(A/m)	0.5A(24V)/1A(12V)

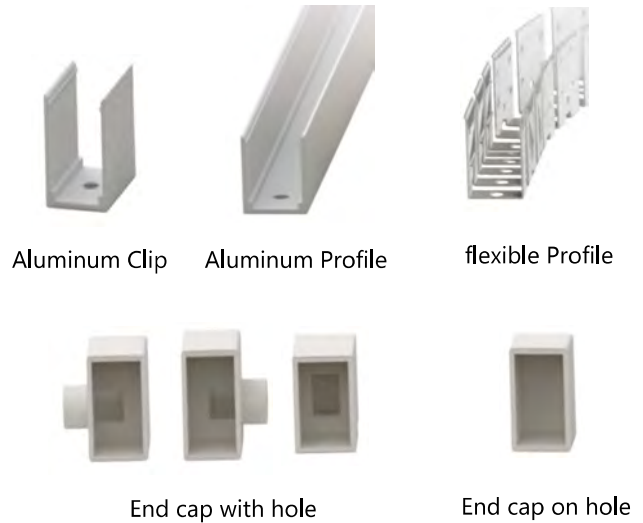


## PRODUCT PHOTOMETRICS


CCT (K)	Watt/Lumen (W/lm/m)	Watt/Lumen (W/lm/m)	Watt/Lumen (W/lm/m)	Watt/Lumen (W/lm/m)	Watt/Lumen (W/lm/m)	CRI
2700K	3W/150lm	4.8W/240lm	7.2W/360lm	9.6W/480lm	12W/600lm	83/93
3000K	3W/165lm	4.8W/264lm	7.2W/396lm	9.6W/528lm	12W/660lm	83/93
3500K	3W/180lm	4.8W/288lm	7.2W/432lm	9.6W/576lm	12W/720lm	83/93
4000K	3W/195lm	4.8W/312lm	7.2W/468lm	9.6W/624lm	12W/780lm	83/93
6000K	3W/210lm	4.8W/336lm	7.2W/504lm	9.6W/672lm	12W/840lm	83/93

# F1018 2835 120LEDs LED STRIP

- ▶ 2835 LED with broad luminous surface
- ▶ Self-encapsulated design offers optional 2100-10000K
- ▶ White lights and R/G/B/Y and others colourful lights for option
- ▶ High quality PCB, high thermal 3M adhesive
- ▶ Provide 1 BIN delivery

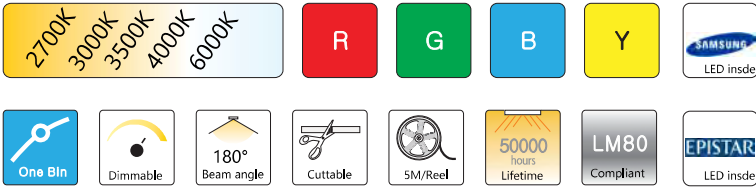


## DIMENSIONS & WATERPROOF

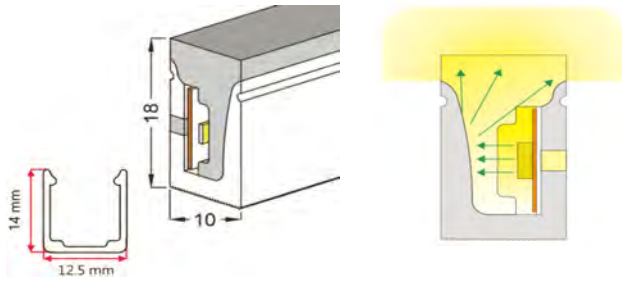

## PRODUCT SPECIFICATION

Dimension	5000mmx10mmx1.2mm
Chip density	120LED, 8.33mm LED pitch
Step LEDs	6LED(24V)
Step Length	6LED(24V)
Power(W)	3W 4.8W 7.2W 9.6W 12W/meter
Efficacy	115lm/W
Voltage(V)	DC24V/DC12V
Current(A/m)	0.5A(24V)/1A(12V)

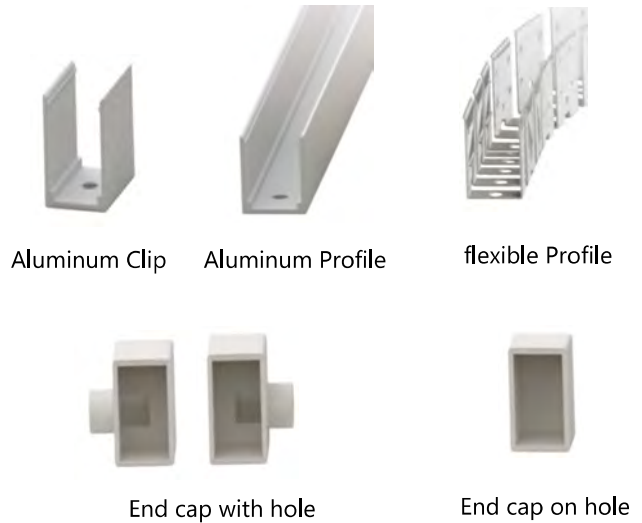


## PRODUCT PHOTOMETRICS


CCT (K)	Watt/Lumen (W/lm/m)	Watt/Lumen (W/lm/m)	Watt/Lumen (W/lm/m)	Watt/Lumen (W/lm/m)	Watt/Lumen (W/lm/m)	CRI
2700K	3W/150lm	4.8W/240lm	7.2W/360lm	9.6W/480lm	12W/600lm	83/93
3000K	3W/165lm	4.8W/264lm	7.2W/396lm	9.6W/528lm	12W/660lm	83/93
3500K	3W/180lm	4.8W/288lm	7.2W/432lm	9.6W/576lm	12W/720lm	83/93
4000K	3W/195lm	4.8W/312lm	7.2W/468lm	9.6W/624lm	12W/780lm	83/93
6000K	3W/210lm	4.8W/336lm	7.2W/504lm	9.6W/672lm	12W/840lm	83/93

# F3032 2835 240LEDs LED STRIP

- ▶ 2835 LED with broad luminous surface
- ▶ Self-encapsulated design offers optional 2100-10000K
- ▶ White lights and R/G/B/Y and others colourful lights for option
- ▶ High quality PCB, high thermal 3M adhesive
- ▶ Provide 1 BIN delivery

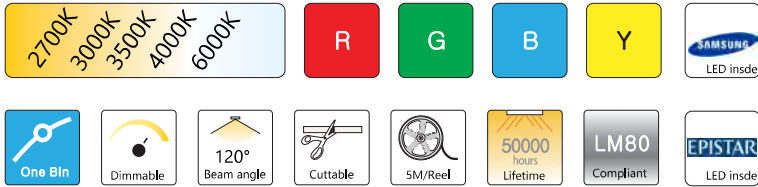

## DIMENSIONS & WATERPROOF

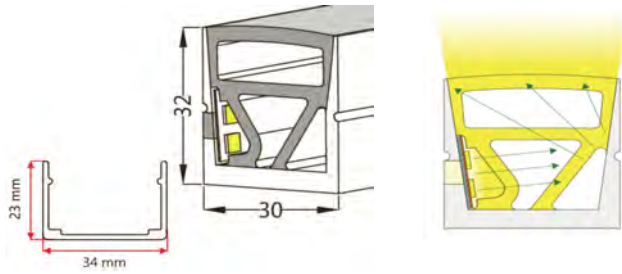

## PRODUCT SPECIFICATION

Dimension	5000mmx12mmx1.2mm
Chip density	240LED, 8.33mm LED pitch
Step LEDs	12LED(24V)
Step Length	12LED(24V)
Power(W)	3W 4.8W 7.2W 9.6W 12W 14.4W/meter
Efficacy	115lm/W
Voltage(V)	DC24V/DC12V
Current(A/m)	0.5A(24V)/1A(12V)




## PRODUCT PHOTOMETRICS


CCT (K)	Watt/Lumen (W/lm/m)	Watt/Lumen (W/lm/m)	Watt/Lumen (W/lm/m)	Watt/Lumen (W/lm/m)	Watt/Lumen (W/lm/m)	Watt/Lumen (W/lm/m)	CRI
2700K	3W/240lm	4.8W/384lm	7.2W/576lm	9.6W/768lm	12W/960lm	14.4W/1152lm	83/93
3000K	3W/255lm	4.8W/405lm	7.2W/612lm	9.6W/816lm	12W/1020lm	14.4W/1224lm	83/93
3500K	3W/261lm	4.8W/418lm	7.2W/626lm	9.6W/835lm	12W/1044lm	14.4W/1252lm	83/93
4000K	3W/270lm	4.8W/432lm	7.2W/648lm	9.6W/864lm	12W/1080lm	14.4W/1296lm	83/93
6000K	3W/285lm	4.8W/456lm	7.2W/684lm	9.6W/912lm	12W/1140lm	14.4W/1638lm	83/93

# F0817 2835 120LEDs LED STRIP

- ▶ 2835 LED with broad luminous surface
- ▶ Self-encapsulated design offers optional 2100-10000K
- ▶ White lights and R/G/B/Y and others colourful lights for option
- ▶ High quality PCB, high thermal 3M adhesive
- ▶ Provide 1 BIN delivery

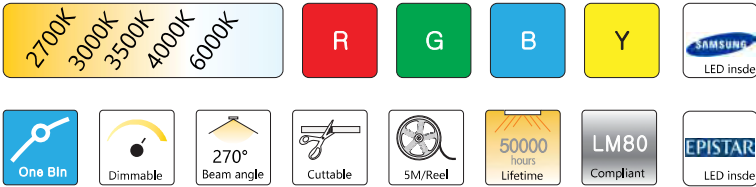


## DIMENSIONS & WATERPROOF

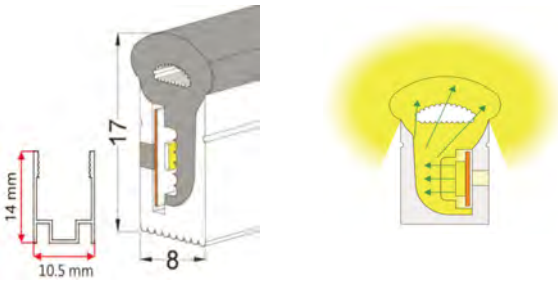

## PRODUCT SPECIFICATION

Dimension	5000mmx8mmx1.2mm
Chip density	120LED, 8.33mm LED pitch
Step LEDs	6LED(24V)
Step Length	6LED(24V)
Power(W)	3W 4.8W 7.2W 9.6W 12W 14.4W/meter
Efficacy	115lm/W
Voltage(V)	DC24V/DC12V
Current(A/m)	0.5A(24V)/1A(12V)

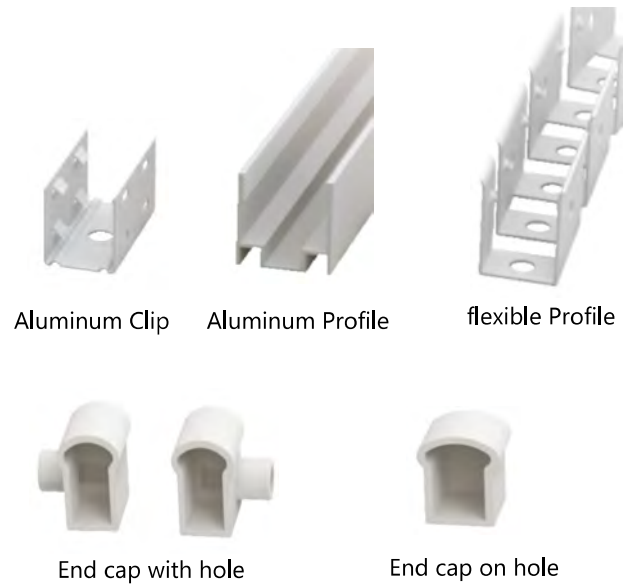


## PRODUCT PHOTOMETRICS

CCT (K)	Watt/Lumen (W/lm/m)	Watt/Lumen (W/lm/m)	Watt/Lumen (W/lm/m)	Watt/Lumen (W/lm/m)	Watt/Lumen (W/lm/m)	CRI
2700K	3W/150lm	4.8W/240lm	7.2W/360lm	9.6W/480lm	12W/600lm	83/93
3000K	3W/165lm	4.8W/264lm	7.2W/396lm	9.6W/528lm	12W/660lm	83/93
3500K	3W/180lm	4.8W/288lm	7.2W/432lm	9.6W/576lm	12W/720lm	83/93
4000K	3W/195lm	4.8W/312lm	7.2W/468lm	9.6W/624lm	12W/780lm	83/93
6000K	3W/210lm	4.8W/336lm	7.2W/504lm	9.6W/672lm	12W/840lm	83/93




# F1023 2835 120LEDs LED STRIP

- ▶ 2835 LED with broad luminous surface
- ▶ Self-encapsulated design offers optional 2100-10000K
- ▶ White lights and R/G/B/Y and others colourful lights for option
- ▶ High quality PCB, high thermal 3M adhesive
- ▶ Provide 1 BIN delivery

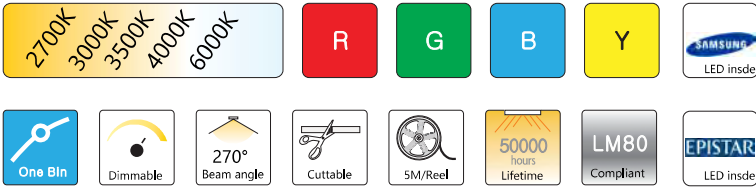


## DIMENSIONS & WATERPROOF

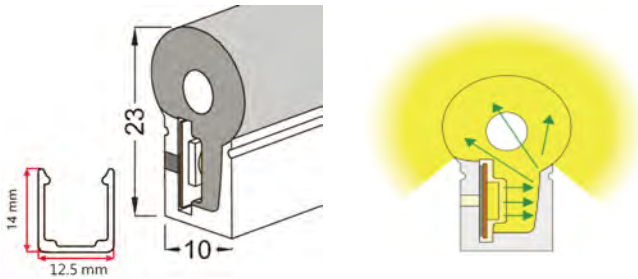

## PRODUCT SPECIFICATION

Dimension	5000mmx10mmx1.2mm
Chip density	120LED, 8.33mm LED pitch
Step LEDs	6LED(24V)
Step Length	6LED(24V)
Power(W)	3W 4.8W 7.2W 9.6W 12W /meter
Efficacy	115lm/W
Voltage(V)	DC24V/DC12V
Current(A/m)	0.5A(24V)/1A(12V)

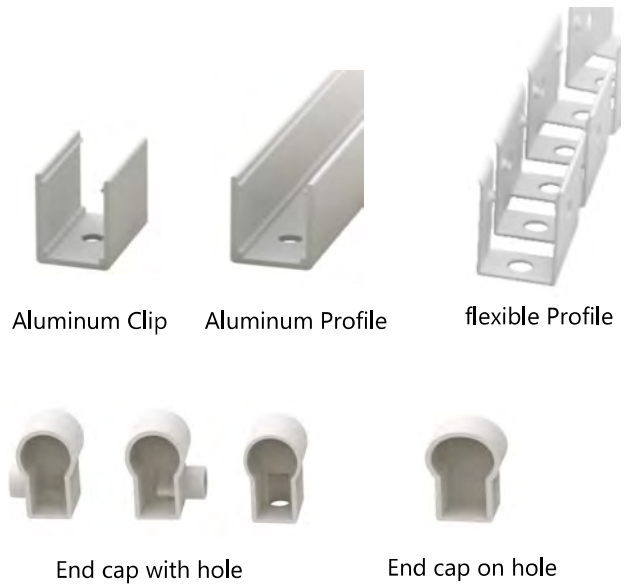


## PRODUCT PHOTOMETRICS


CCT (K)	Watt/Lumen (W/lm/m)	Watt/Lumen (W/lm/m)	Watt/Lumen (W/lm/m)	Watt/Lumen (W/lm/m)	Watt/Lumen (W/lm/m)	CRI
2700K	3W/150lm	4.8W/240lm	7.2W/360lm	9.6W/480lm	12W/600lm	83/93
3000K	3W/165lm	4.8W/264lm	7.2W/396lm	9.6W/528lm	12W/660lm	83/93
3500K	3W/180lm	4.8W/288lm	7.2W/432lm	9.6W/576lm	12W/720lm	83/93
4000K	3W/195lm	4.8W/312lm	7.2W/468lm	9.6W/624lm	12W/780lm	83/93
6000K	3W/210lm	4.8W/336lm	7.2W/504lm	9.6W/672lm	12W/840lm	83/93

# F1225 2835 120LEDs LED STRIP

- ▶ 2835 LED with broad luminous surface
- ▶ Self-encapsulated design offers optional 2100-10000K
- ▶ White lights and R/G/B/Y and others colourful lights for option
- ▶ High quality PCB, high thermal 3M adhesive
- ▶ Provide 1 BIN delivery

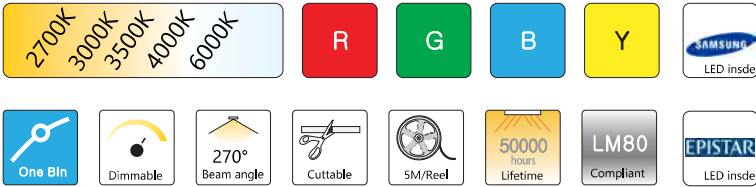


## DIMENSIONS & WATERPROOF

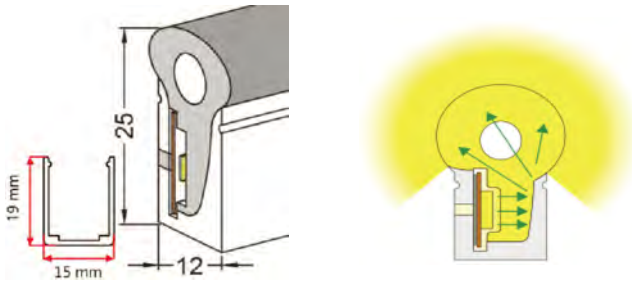

## PRODUCT SPECIFICATION

Dimension	5000mmx10mmx1.2mm
Chip density	120LED, 8.33mm LED pitch
Step LEDs	6LED(24V)
Step Length	6LED(24V)
Power(W)	3W 4.8W 7.2W 9.6W 12W/meter
Efficacy	115lm/W
Voltage(V)	DC24V/DC12V
Current(A/m)	0.5A(24V)/1A(12V)


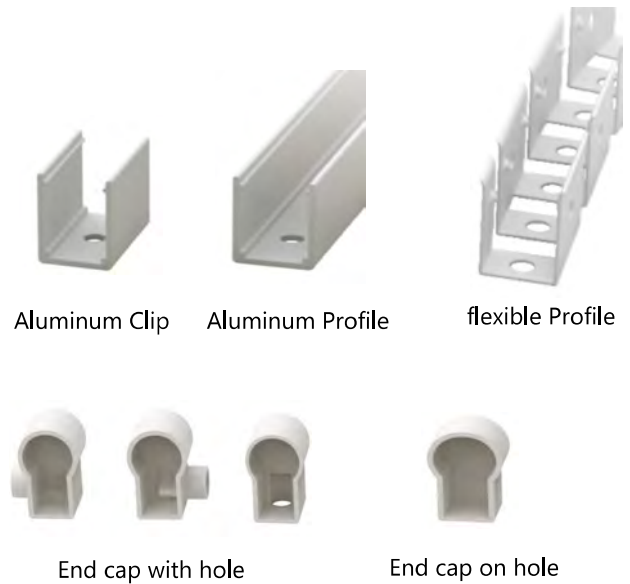


## PRODUCT PHOTOMETRICS


CCT (K)	Watt/Lumen (W/lm/m)	Watt/Lumen (W/lm/m)	Watt/Lumen (W/lm/m)	Watt/Lumen (W/lm/m)	Watt/Lumen (W/lm/m)	CRI
2700K	3W/150lm	4.8W/240lm	7.2W/360lm	9.6W/480lm	12W/600lm	83/93
3000K	3W/165lm	4.8W/264lm	7.2W/396lm	9.6W/528lm	12W/660lm	83/93
3500K	3W/180lm	4.8W/288lm	7.2W/432lm	9.6W/576lm	12W/720lm	83/93
4000K	3W/195lm	4.8W/312lm	7.2W/468lm	9.6W/624lm	12W/780lm	83/93
6000K	3W/210lm	4.8W/336lm	7.2W/504lm	9.6W/672lm	12W/840lm	83/93

# F1313 2835 120LEDs LED STRIP

- ▶ 2835 LED with broad luminous surface
- ▶ Self-encapsulated design offers optional 2100-10000K
- ▶ White lights and R/G/B/Y and others colourful lights for option
- ▶ High quality PCB, high thermal 3M adhesive
- ▶ Provide 1 BIN delivery

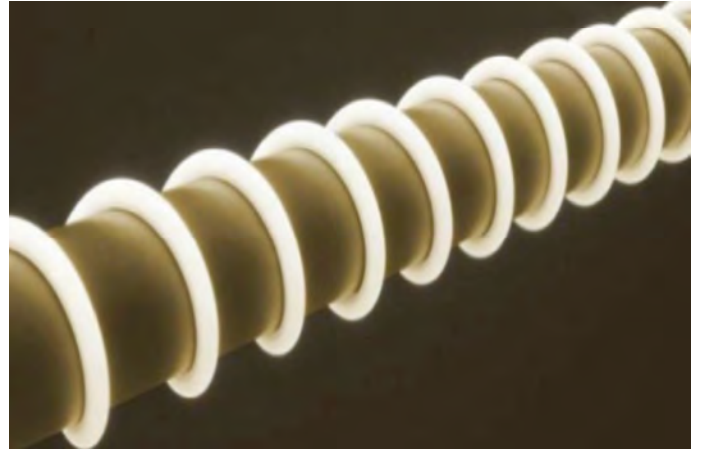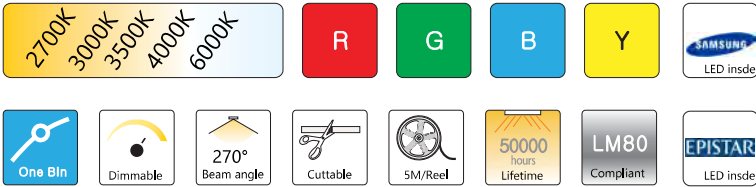

## DIMENSIONS & WATERPROOF



## PRODUCT SPECIFICATION

Dimension	5000mmx8mmx1.2mm
Chip density	120LED, 8.33mm LED pitch
Step LEDs	6LED(24V)
Step Length	6LED(24V)
Power(W)	3W 4.8W 7.2W 9.6W 12W/meter
Efficacy	115lm/W
Voltage(V)	DC24V/DC12V
Current(A/m)	0.5A(24V)/1A(12V)



Plastic Clip



End cap with hole





End cap on hole

## PRODUCT PHOTOMETRICS


CCT (K)	Watt/Lumen (W/lm/m)	Watt/Lumen (W/lm/m)	Watt/Lumen (W/lm/m)	Watt/Lumen (W/lm/m)	Watt/Lumen (W/lm/m)	CRI
2700K	3W/150lm	4.8W/240lm	7.2W/360lm	9.6W/480lm	12W/600lm	83/93
3000K	3W/165lm	4.8W/264lm	7.2W/396lm	9.6W/528lm	12W/660lm	83/93
3500K	3W/180lm	4.8W/288lm	7.2W/432lm	9.6W/576lm	12W/720lm	83/93
4000K	3W/195lm	4.8W/312lm	7.2W/468lm	9.6W/624lm	12W/780lm	83/93
6000K	3W/210lm	4.8W/336lm	7.2W/504lm	9.6W/672lm	12W/840lm	83/93

# F1315 2835 120LEDs LED STRIP

- ▶ 2835 LED with broad luminous surface
- ▶ Self-encapsulated design offers optional 2100-10000K
- ▶ White lights and R/G/B/Y and others colourful lights for option
- ▶ High quality PCB, high thermal 3M adhesive
- ▶ Provide 1 BIN delivery

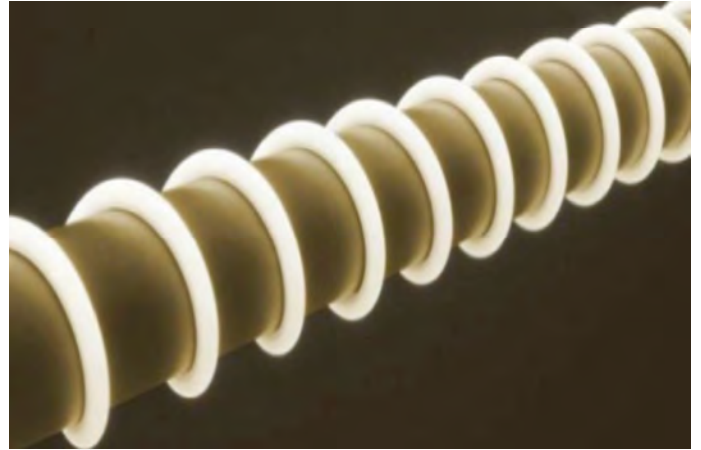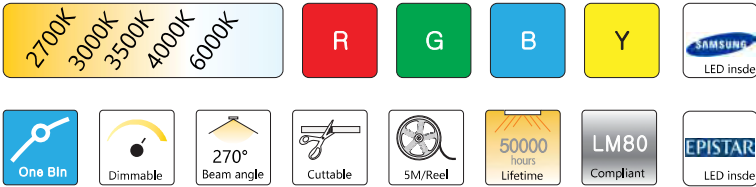

## DIMENSIONS & WATERPROOF

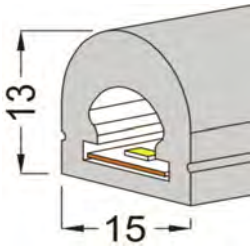

## PRODUCT SPECIFICATION

Dimension	5000mmx10mmx1.2mm
Chip density	120LED, 8.33mm LED pitch
Step LEDs	6LED(24V)
Step Length	6LED(24V)
Power(W)	3W 4.8W 7.2W 9.6W 12W 14.4W/meter
Efficacy	115lm/W
Voltage(V)	DC24V/DC12V
Current(A/m)	0.5A(24V)/1A(12V)



Plastic Clip



End cap with hole





End cap on hole

## PRODUCT PHOTOMETRICS


CCT (K)	Watt/Lumen (W/lm/m)	Watt/Lumen (W/lm/m)	Watt/Lumen (W/lm/m)	Watt/Lumen (W/lm/m)	Watt/Lumen (W/lm/m)	Watt/Lumen (W/lm/m)	CRI
2700K	3W/150lm	4.8W/240lm	7.2W/360lm	9.6W/480lm	12W/600lm	14.4W/720lm	83/93
3000K	3W/165lm	4.8W/264lm	7.2W/396lm	9.6W/528lm	12W/660lm	14.4W/792lm	83/93
3500K	3W/180lm	4.8W/288lm	7.2W/432lm	9.6W/576lm	12W/720lm	14.4W/864lm	83/93
4000K	3W/195lm	4.8W/312lm	7.2W/468lm	9.6W/624lm	12W/780lm	14.4W/936lm	83/93
6000K	3W/210lm	4.8W/336lm	7.2W/504lm	9.6W/672lm	12W/840lm	14.4W/1008lm	83/93

# D13 2835 120LEDs LED STRIP

- ▶ 2835 LED with broad luminous surface
- ▶ Self-encapsulated design offers optional 2100-10000K
- ▶ White lights and R/G/B/Y and others colourful lights for option
- ▶ High quality PCB, high thermal 3M adhesive
- ▶ Provide 1 BIN delivery

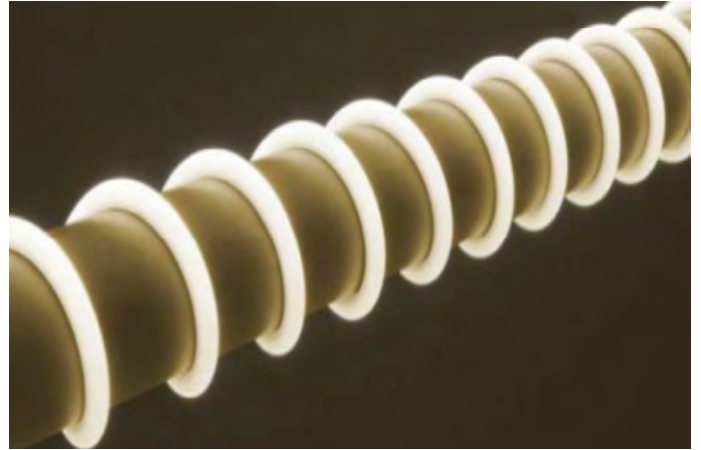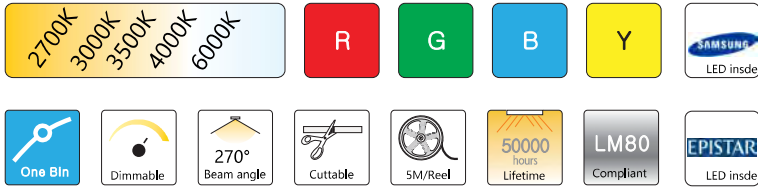

## DIMENSIONS & WATERPROOF



## PRODUCT SPECIFICATION

Dimension	5000mmx10mmx1.2mm
Chip density	120LED, 8.33mm LED pitch
Step LEDs	6LED(24V)
Step Length	6LED(24V)
Power(W)	3W 4.8W 7.2W 9.6W 12W 14.4W/meter
Efficacy	115lm/W
Voltage(V)	DC24V/DC12V
Current(A/m)	0.5A(24V)/1A(12V)



Plastic Clip



End cap with hole



End cap on hole


## PRODUCT PHOTOMETRICS

CCT (K)	Watt/Lumen (W/lm/m)	Watt/Lumen (W/lm/m)	Watt/Lumen (W/lm/m)	Watt/Lumen (W/lm/m)	Watt/Lumen (W/lm/m)	Watt/Lumen (W/lm/m)	CRI
2700K	3W/240lm	4.8W/384lm	7.2W/576lm	9.6W/768lm	12W/960lm	14.4W/1152lm	83/93
3000K	3W/255lm	4.8W/405lm	7.2W/612lm	9.6W/816lm	12W/1020lm	14.4W/1224lm	83/93
3500K	3W/261lm	4.8W/418lm	7.2W/626lm	9.6W/835lm	12W/1044lm	14.4W/1252lm	83/93
4000K	3W/270lm	4.8W/432lm	7.2W/648lm	9.6W/864lm	12W/1080lm	14.4W/1296lm	83/93
6000K	3W/285lm	4.8W/456lm	7.2W/684lm	9.6W/912lm	12W/1140lm	14.4W/1638lm	83/93





# D22 2835 240LEDs LED STRIP

- ▶ 2835 LED with broad luminous surface
- ▶ Self-encapsulated design offers optional 2100-10000K
- ▶ White lights and R/G/B/Y and others colourful lights for option
- ▶ High quality PCB, high thermal 3M adhesive
- ▶ Provide 1 BIN delivery

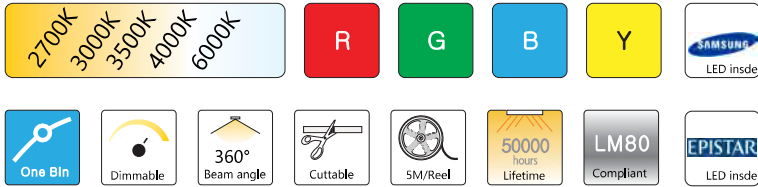

## DIMENSIONS & WATERPROOF



## PRODUCT SPECIFICATION

Dimension	5000mmx8mmx1.2mm
Chip density	240LED, 8.33mm LED pitch
Step LEDs	12LED(24V)
Step Length	12LED(24V)
Power(W)	3W 4.8W 7.2W 9.6W 12W 14.4W/meter
Efficacy	115lm/W
Voltage(V)	DC24V/DC12V
Current(A/m)	0.5A(24V)/1A(12V)



Plastic Clip



End cap with hole




End cap on hole

## PRODUCT PHOTOMETRICS


CCT (K)	Watt/Lumen (W/lm/m)	Watt/Lumen (W/lm/m)	Watt/Lumen (W/lm/m)	Watt/Lumen (W/lm/m)	Watt/Lumen (W/lm/m)	Watt/Lumen (W/lm/m)	CRI
2700K	3W/240lm	4.8W/384lm	7.2W/576lm	9.6W/768lm	12W/960lm	14.4W/1152lm	83/93
3000K	3W/255lm	4.8W/405lm	7.2W/612lm	9.6W/816lm	12W/1020lm	14.4W/1224lm	83/93
3500K	3W/261lm	4.8W/418lm	7.2W/626lm	9.6W/835lm	12W/1044lm	14.4W/1252lm	83/93
4000K	3W/270lm	4.8W/432lm	7.2W/648lm	9.6W/864lm	12W/1080lm	14.4W/1296lm	83/93
6000K	3W/285lm	4.8W/456lm	7.2W/684lm	9.6W/912lm	12W/1140lm	14.4W/1638lm	83/93

# D40 2835 240LEDs LED STRIP

- ▶ 2835 LED with broad luminous surface
- ▶ Self-encapsulated design offers optional 2100-10000K
- ▶ White lights and R/G/B/Y and others colourful lights for option
- ▶ High quality PCB, high thermal 3M adhesive
- ▶ Provide 1 BIN delivery

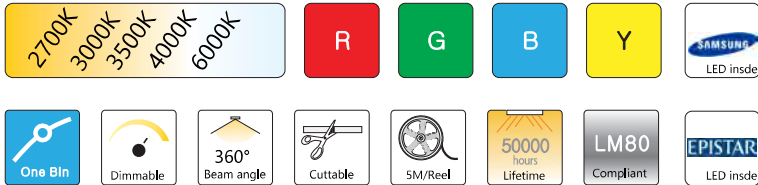

## DIMENSIONS & WATERPROOF



## PRODUCT SPECIFICATION

Dimension	5000mmx10mmx1.2mm
Chip density	240LED, 8.33mm LED pitch
Step LEDs	12LED(24V)
Step Length	12LED(24V)
Power(W)	3W 4.8W 7.2W 9.6W 12W 14.4W/meter
Efficacy	115lm/W
Voltage(V)	DC24V/DC12V
Current(A/m)	0.5A(24V)/1A(12V)



End cap with hole



End cap on hole



## PRODUCT PHOTOMETRICS

CCT (K)	Watt/Lumen (W/lm/m)	Watt/Lumen (W/lm/m)	Watt/Lumen (W/lm/m)	Watt/Lumen (W/lm/m)	Watt/Lumen (W/lm/m)	Watt/Lumen (W/lm/m)	CRI
2700K	4.8W/240lm	7.2W/384lm	9.6W/576lm	12W/768lm	14.4W/960lm	18W/1152lm	83/93
3000K	4.8W/255lm	7.2W/405lm	9.6W/612lm	12W/816lm	14.4W/1020lm	18W/1224lm	83/93
3500K	4.8W/261lm	7.2W/418lm	9.6W/626lm	12W/835lm	14.4W/1044lm	18W/1252lm	83/93
4000K	4.8W/270lm	7.2W/432lm	9.6W/648lm	12W/864lm	14.4W/1080lm	18W/1296lm	83/93
6000K	4.8W/285lm	7.2W/456lm	9.6W/684lm	12W/912lm	14.4W/1140lm	18W/1638lm	83/93





# Aluminum Profile

---

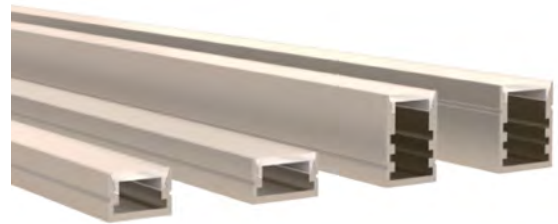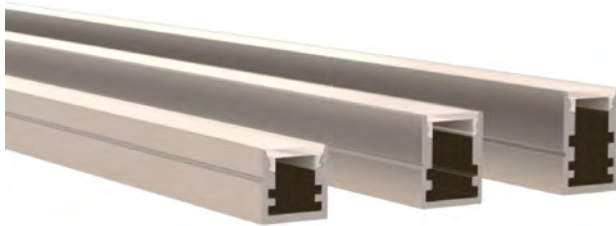

# Aluminum Profile



CE RoHS

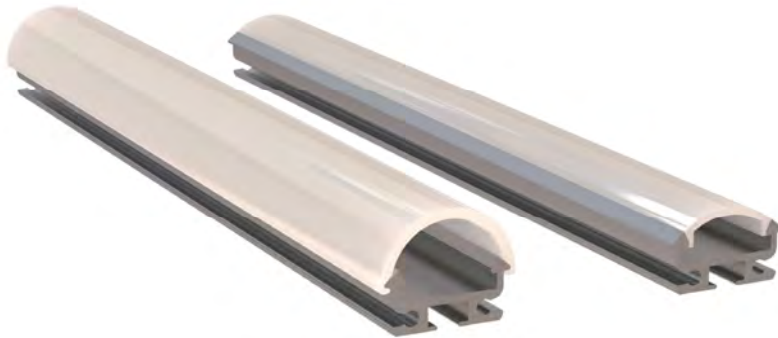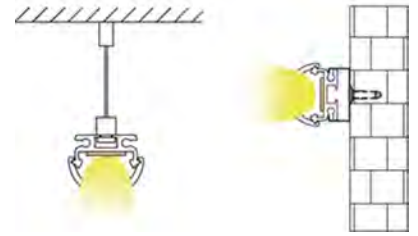

YD-01 metal end cap

YD-01

YD-06



Material: AL6063-T5

Surface: black/white/silver

Pc cover option:

opal diffuser, transparent, frosted

Available length: 0.5-3m



YD-06 metal end cap



YD-01 plastic end cap



YD-01 plastic end cap




YD-01/06 metal clip



suspended wire



YD-01-1




Material: AL6063-T5

Surface: black/white/silver

Pc cover option:

opal diffuser, transparent, frosted


Available length: 0.5-3m

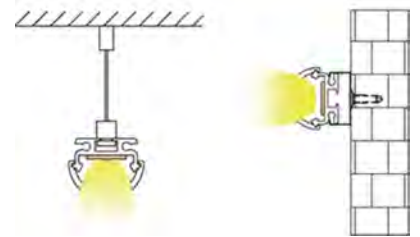

YD-01-1 metal end cap



YD-01-1 metal clip



YD-01-1 plastic end cap





YD-01-1 plastic clip





suspended wire

# Aluminum Profile

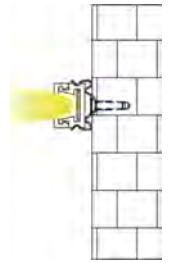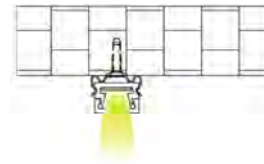

## YD-07

## YD-08



Material: AL6063-T5

Surface: black/white/silver

Pc cover option:

opal diffuser, transparent, frosted

Available length: 0.5-3m



YD-07 plastic end cap



YD-07 metal clip



YD-08 plastic end cap



YD-08 metal clip



## YD-16




Material: AL6063-T5

Surface: black/white/silver

Pc cover option:

opal diffuser, transparent, frosted

Available length: 0.5-4m





YD-16 plastic end cap



YD-16 metal clip




# Aluminum Profile

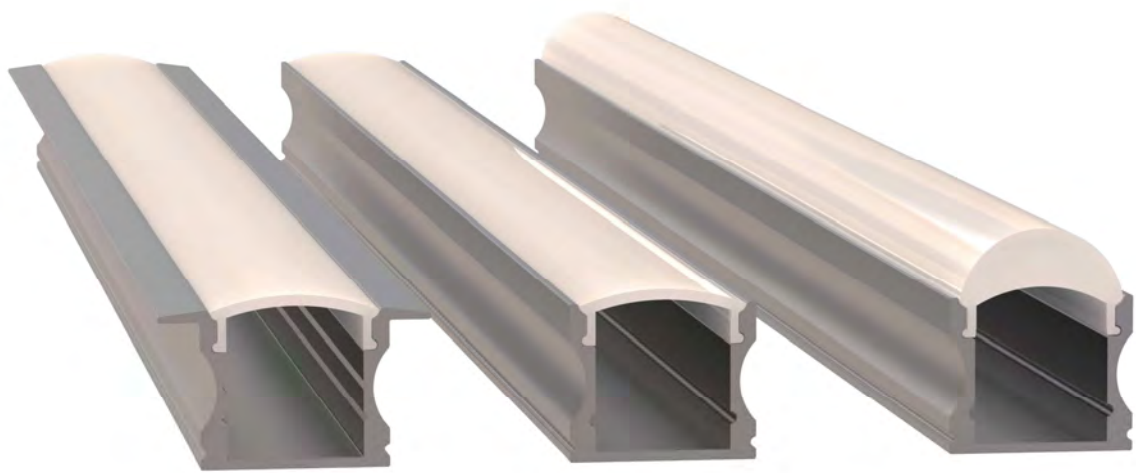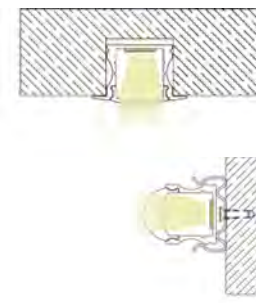


**YD-1201**

**YD-1202**




**YD-1303**



YD-1201  
black diffuser cover



YD-1202  
black diffuser cover



Material: AL6063-T5  
 Surface: black/white/silver  
 Pc/PMMA Cover Option:  
 opal diffuser, transparent, frosted  
 Available length: 0.5-4m  
 YD-1201/1202: Pc Cover Option  
 YD-1303: PMMA Cover Option




YD-1201  
plastic end cap



YD-1202  
plastic end cap



YD-1303  
plastic end cap


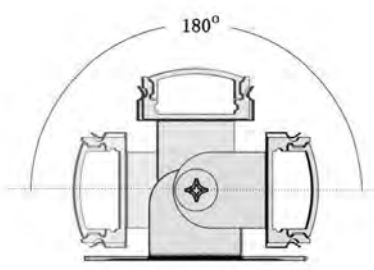


YD-1201/1202/1303  
metal clip




YD-1201/1202/1303  
plastic clip


# Aluminum Profile

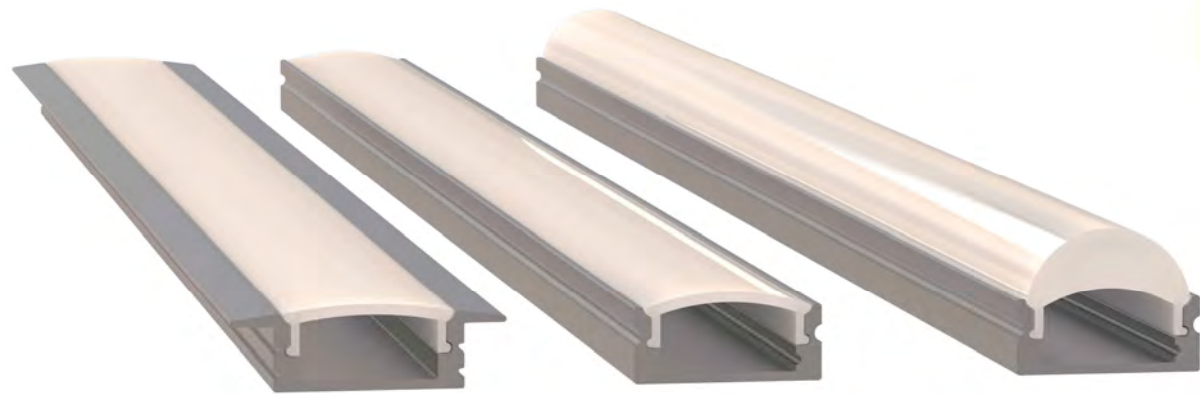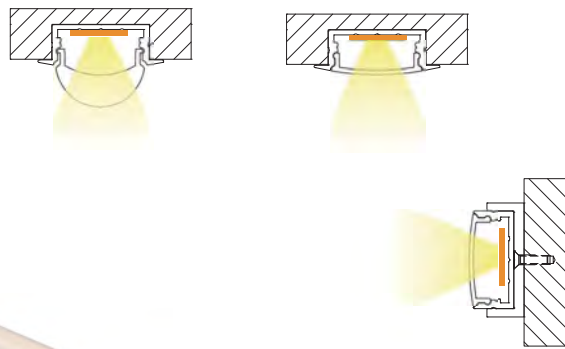



**YD-1204**

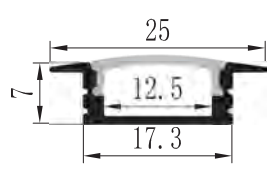


**YD-1205**



**YD-1302**



YD-1204  
black diffuser cover



YD-1205  
black diffuser cover



Material: AL6063-T5

Surface: black/white/silver

Pc/PMMA Cover Option:

opal diffuser, transparent, frosted

Available length: 0.5-4m

YD-1204/1205: Pc Cover Option

YD-1302: PMMA Cover Option




YD-1204  
plastic end cap



YD-1205  
plastic end cap



YD-1302  
plastic end cap


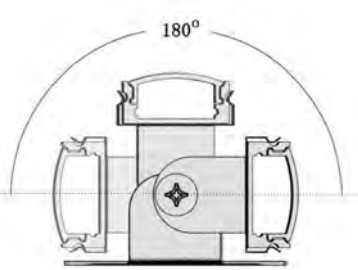


YD-1204/1205/1302  
metal clip




YD-1204/1205/1302  
plastic clip

# Aluminum Profile

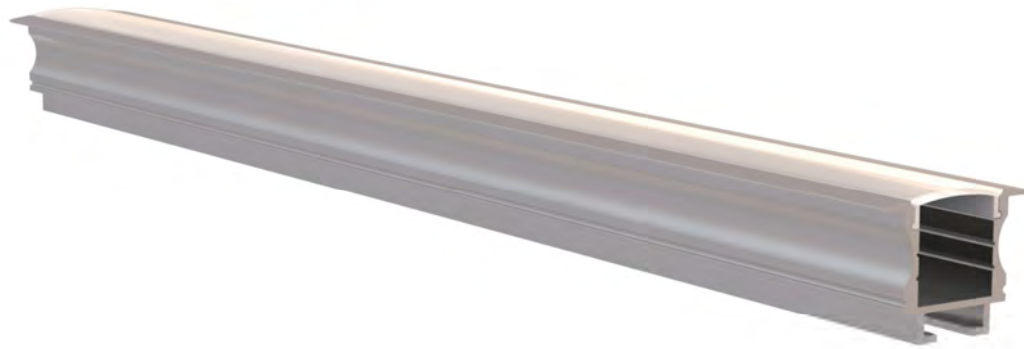

## YD-1207



Material: AL6063-T5

Surface: black/white/silver

Pc cover option:

opal diffuser, transparent, frosted

Available length: 0.5-4m




YD-1207  
black diffuser cover




YD-1207  
Plastic end ca'p



YD-1207  
spring clip



Step01



Step03




Step02




Step04

# Aluminum Profile

CE RoHS



YD-09



Material: AL6063-T5

Surface: black/white/silver

Pc cover option:

opal diffuser, transparent, frosted

Available length: 0.5-3m



YD-09  
plastic end cap




YD-09  
metal clip







# Aluminum Profile

CE RoHS



**YD-1001**

**YD-1002**



Material: AL6063-T5

Surface: black/white/silver

Pc cover option:



opal diffuser, transparent, frosted

Available length: 0.5-3m



**YD-2003**

**YD-2004**



YD-1001  
plastic end cap



YD-1002  
plastic end cap



YD-1001/102  
plastic clip



YD-1001/1002  
metal clip



YD-2003  
plastic end cap



YD-2004  
plastic end cap





YD-2003/2004  
plastic clip




suspended  
wire




# Aluminum Profile

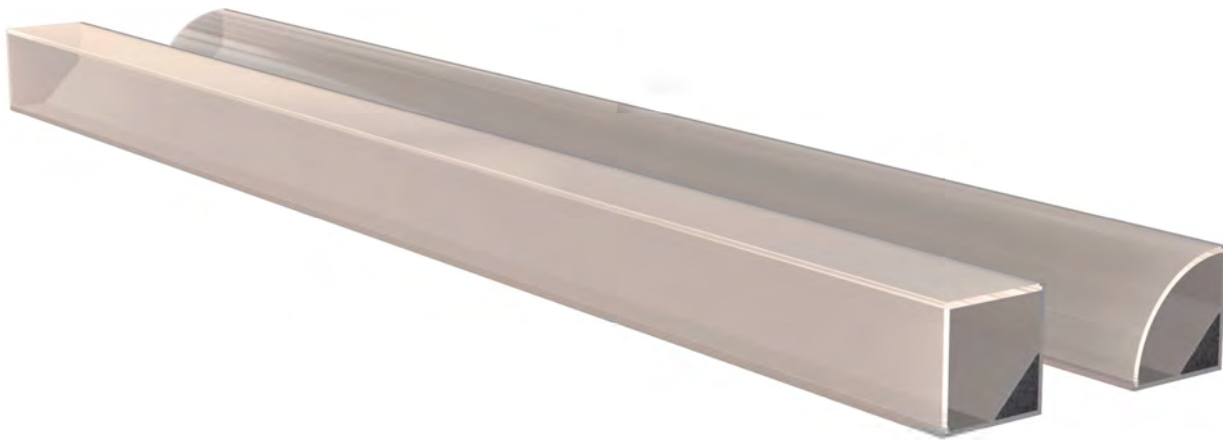

**YD-3030-R**



**YD-3030-S**



Material: AL6063-T5

Surface: black/white/silver

Pc cover option:

opal diffuser, transparent, frosted

Available length: 0.5-4m



YD-3030-R  
plastic end cap




YD-3030-S  
plastic end cap





YD-3030-R/3030-S  
plastic clip

# Aluminum Profile



**YD-1203**

**YD-1301**



Material: AL6063-T5

Surface: black/white/silver


Pc/PMMA Cover Option:

opal diffuser, transparent, frosted

Available length: 0.5-4m

YD-1203: Pc Cover Option

YD-1301: PMMA Cover Option



YD-1203  
black diffuser cover



YD-1301  
plastic end cap



YD-1203  
plastic end cap



YD-1301/1203  
metal clip




YD-1203/1301  
plastic clip





# Aluminum Profile

CE RoHS

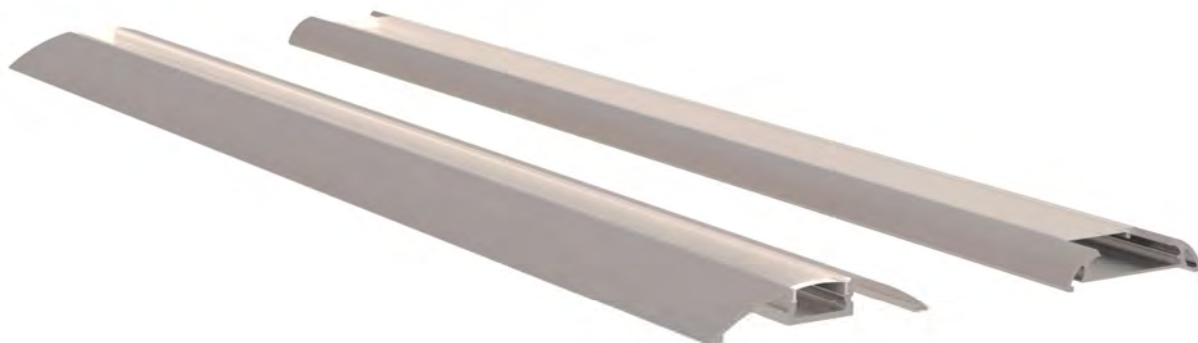

**YD-1206**

**YD-2601**

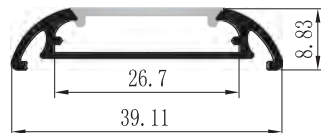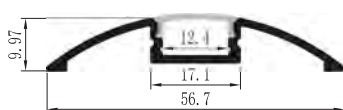

Material: AL6063-T5

Surface: black/white/silver

Pc cover option:

opal diffuser, transparent, frosted

Available length: 0.5-4m




YD-1206  
plastic end cap

YD-2601  
plastic end cap



YD-1206  
metal clip

YD-1206  
plastic clip




YD-2601  
metal clip


YD-1206  
black diffuser cover



# Aluminum Profile

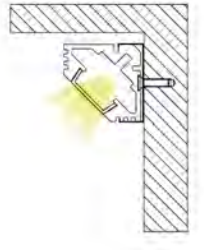

## YD-1101

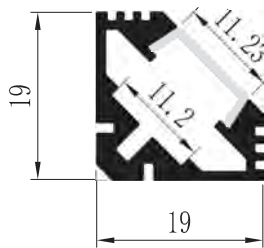

Material: AL6063-T5


Surface: black/white/silver

Pc cover option:

opal diffuser, transparent, frosted

Available length: 0.5-4m

## YD-1101-1




YD-1101/1101-1  
plastic end cap




YD-1101/1101-1  
metal clip

YD-1101  
Insert the installation

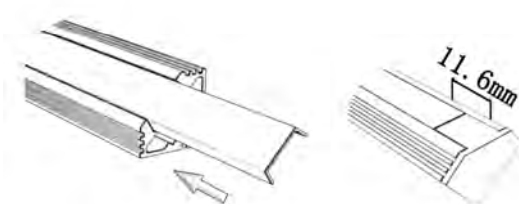


YD-1101-1  
Press the install

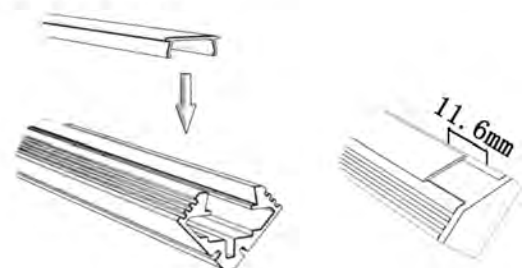




# Aluminum Profile



## YD-1102



Material: AL6063-T5


Surface: black/white/silver

Pc cover option:


opal diffuser, transparent, frosted

Available length: 0.5-4m

## YD-1102-1

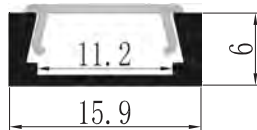

YD- 1102  
plastic end cap





YD-1102-1  
plastic end cap





YD-1102/1102-1  
metal clip

YD-1102  
Insert the installation




YD-1102-1  
Press the install






# Aluminum Profile



## YD-1103



Material: AL6063-T5


Surface: black/white/silver

Pc cover option:

opal diffuser, transparent, frosted

Available length: 0.5-4m

## YD-1103-1



YD-1103  
plastic end cap




YD-1103-1  
plastic end cap




YD-1103/1103-1  
metal clip



YD-1103  
Insert the installation




YD-1103-1  
Press the install



# Aluminum Profile

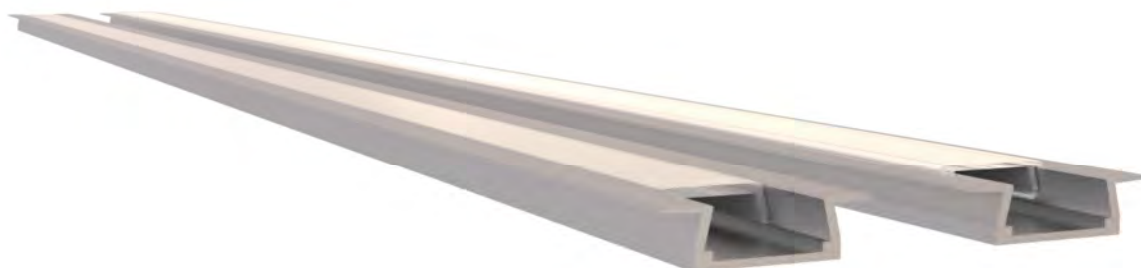

## YD-1104



Material: AL6063-T5


Surface: black/white/silver

Pc cover option:

opal diffuser, transparent, frosted

Available length: 0.5-3m

## YD-1104-1

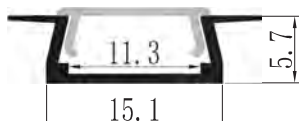


YD-1104/1104-1  
plastic end cap




YD-1104/1104-1  
metal clip



YD-1104  
Insert the installation

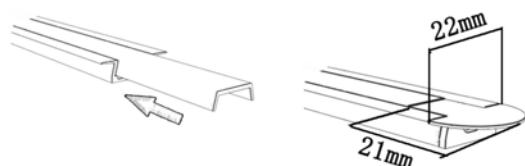

YD-1104-1  
Press the install

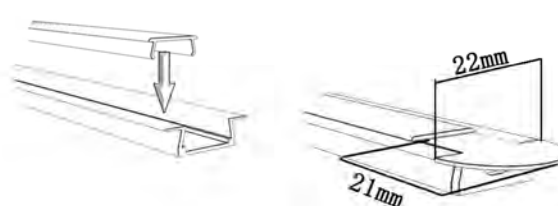


# Aluminum Profile

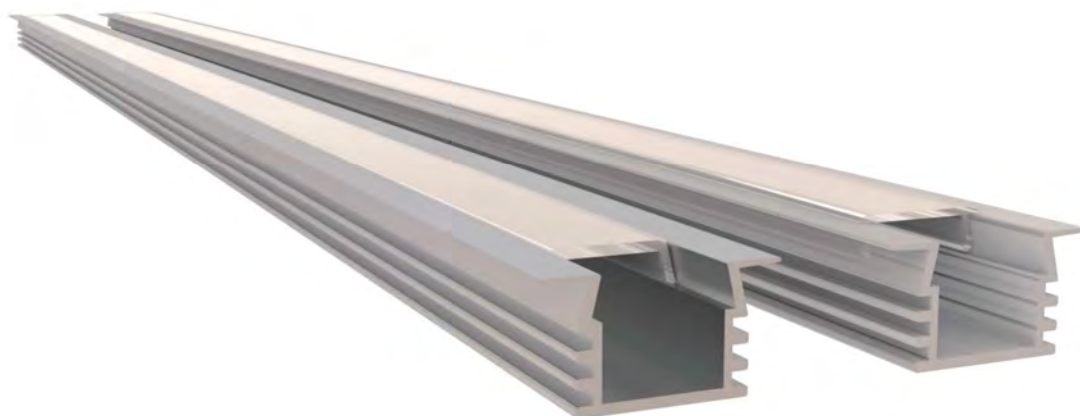


## YD-1105



Material: AL6063-T5  
 Surface: black/white/silver  
 Pc cover option:  
 opal diffuser, transparent, frosted  
 Available length: 0.5-3m



## YD-1105-1




YD-1105/1105-1  
plastic end cap




YD-1105/1105-1  
metal clip


YD-1105  
Insert the installation

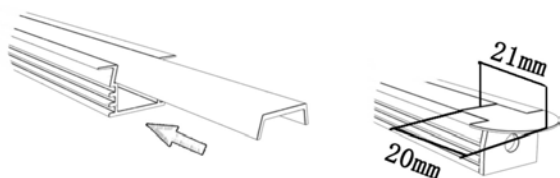


YD-1105-1  
Press the install

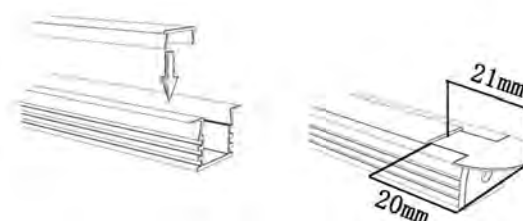

# Aluminum Profile



## YD-1106



Material: AL6063-T5


Surface: black/white/silver

Pc cover option:

opal diffuser, transparent, frosted

Available length: 0.5-3m

## YD-1106-1

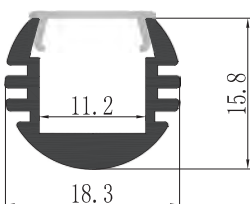


YD-1106/1106-1  
plastic end cap




YD-1106/1106-1  
metal clip

YD-1106  
Insert the installation

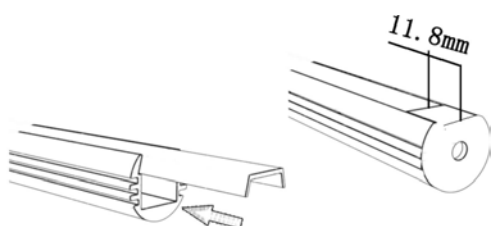

YD-1106-1  
Press the install

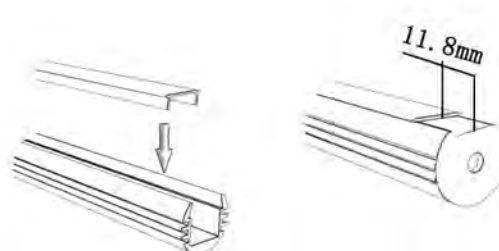




# Aluminum Profile



**YD-1304**

**YD-1601**

**YD-1602**



Material: AL6063-T5

Surface: black/white/silver

Pc/PMMA Cover Option:

opal diffuser, transparent, frosted

Available length: 0.5-4m

YD-1601/1602: Pc Cover Option

YD-1304: PMMA Cover Option



YD-1304 plastic end cap






YD-1601 plastic end cap





YD-1602 plastic end cap

## STEP:

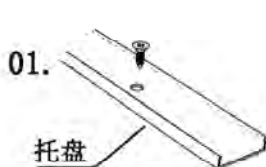




# Aluminum Profile

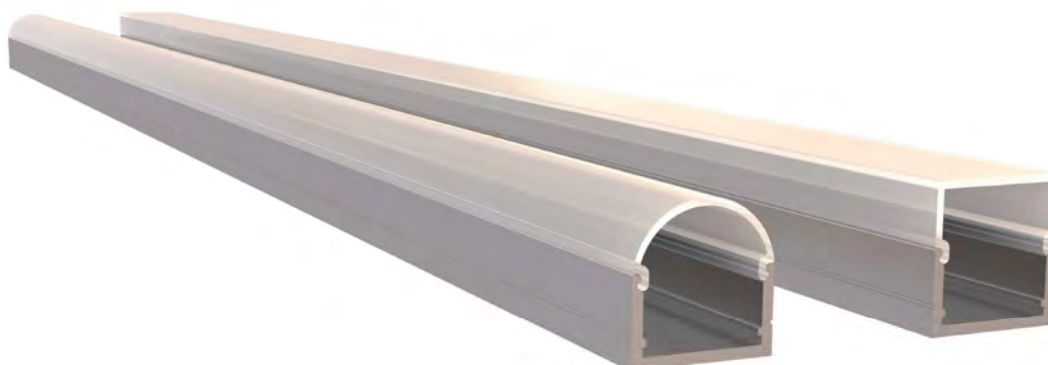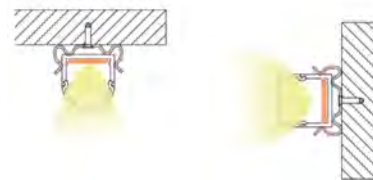

## YD-1608

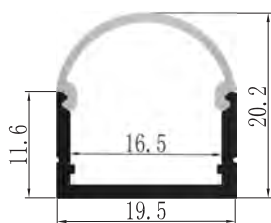

Material: AL6063-T5


Surface: black/white/silver

Pc cover option:

opal diffuser, transparent, frosted

Available length: 0.5-4m

## YD-1609




YD-1608  
plastic end cap



YD-1609  
plastic end cap



YD-1608/1609  
metal clip


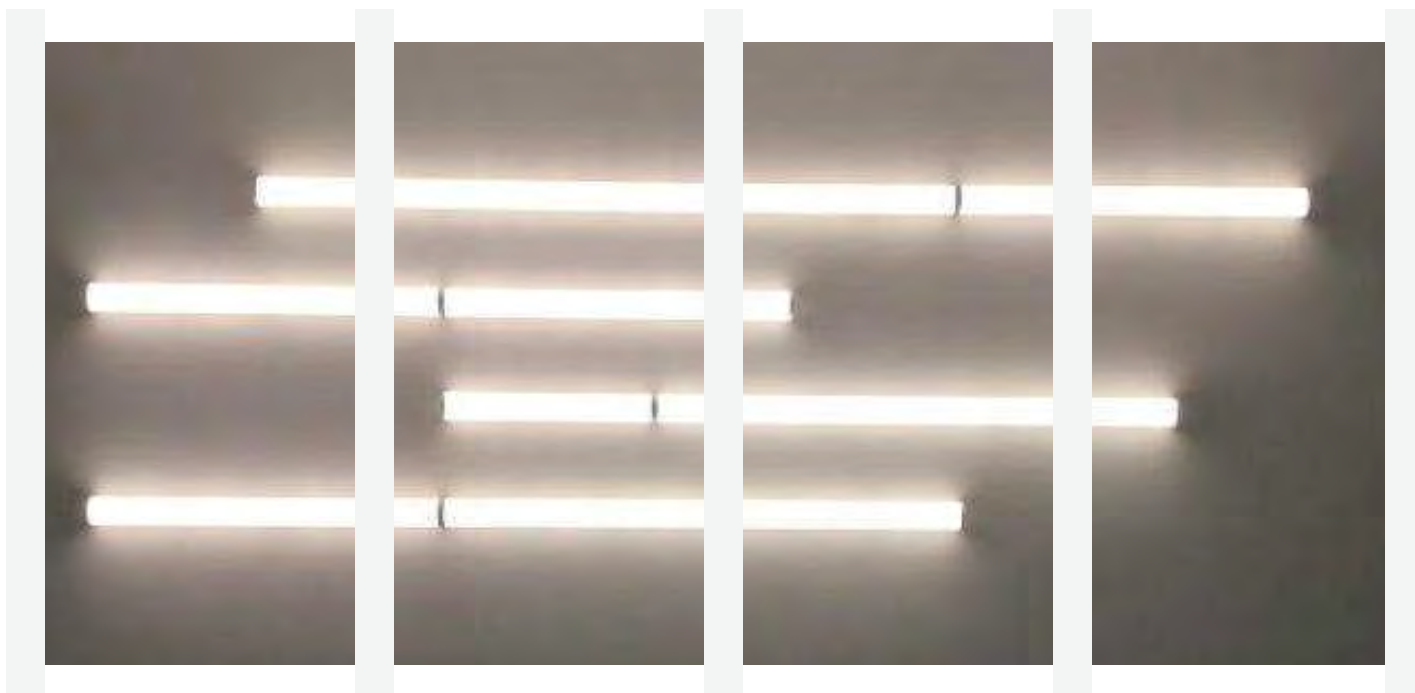


# Aluminum Profile



## YD-1603

## YD-1604



Material: AL6063-T5

Surface: black/white/silver

Pc cover option:

opal diffuser, transparent, frosted

Available length: 0.5-4m



YD-1603 plastic end cap



YD-1604 plastic end cap




YD-1603/1604 metal clip



suspended wire



## YD-2019

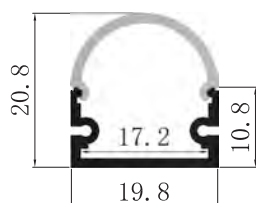

Material: AL6063-T5

Surface: black/white/silver

Pc cover option:

opal diffuser, transparent, frosted

Available length: 0.5-3m





YD-2019 plastic end cap



YD-2019 metal clip

# Aluminum Profile

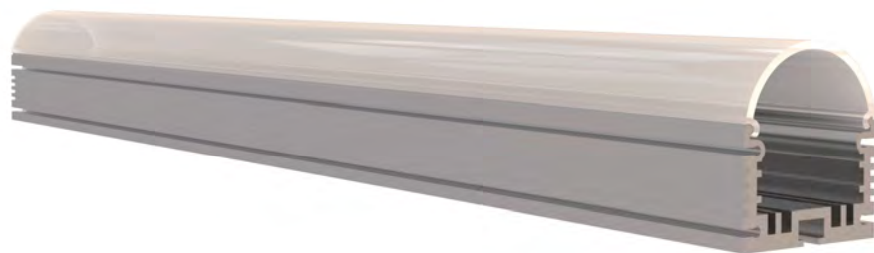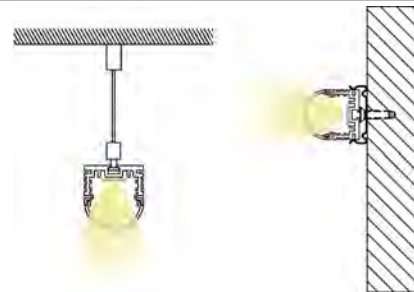


YD-2831 plastic end cap

## YD-2831





Material: AL6063-T5  
 Surface: black/white/silver  
 Pc cover option:  
 opal diffuser, transparent, frosted  
 Available length: 0.5-3m

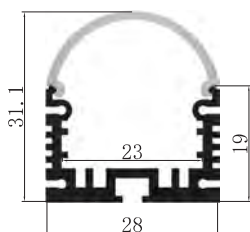

YD-2831 metal clip




suspended wire

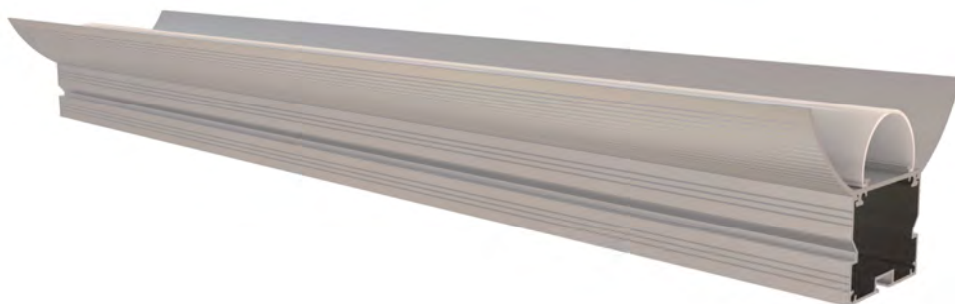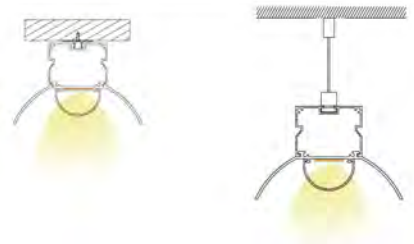

Material: AL6063-T5  
 Surface: black/white/silver  
 Pc cover option:  
 opal diffuser, transparent, frosted  
 Available length: 0.5-6m





YD-9358 metal end cap




YD-9358 metal clip

## YD-9358

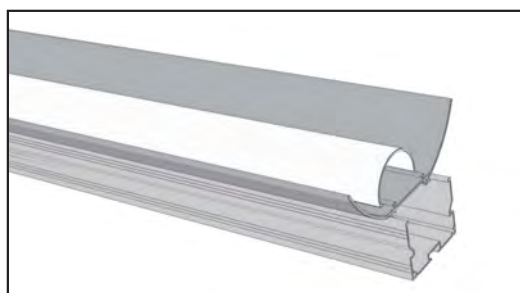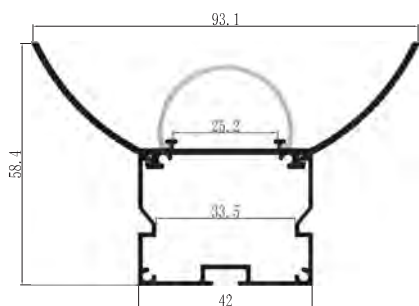



suspended wire

# Aluminum Profile



YD-1305 plastic end cap


## YD-1305

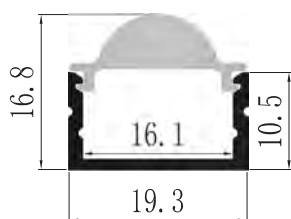

Material: AL6063-T5  
 Surface: black/white/silver  
 PMMA cover option:  
 opal diffuser, transparent, frosted  
 Available length: 0.5-4m





YD-1305 metal clip

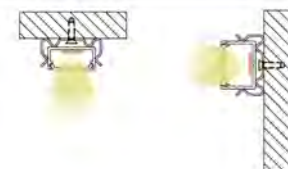

## YD-1605

## YD-1606



Material: AL6063-T5  
 Surface: black/white/silver  
 Pc cover option:  
 opal diffuser, transparent, frosted  
 Available length: 0.5-4m



YD-1605 plastic end cap





YD-1606 plastic end cap




YD-1605/1606 metal clip

# Aluminum Profile

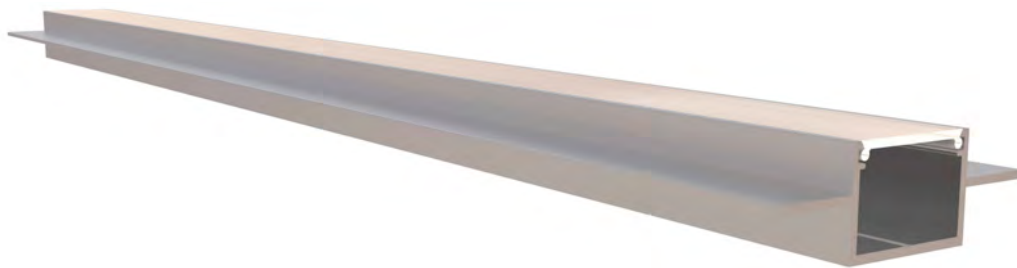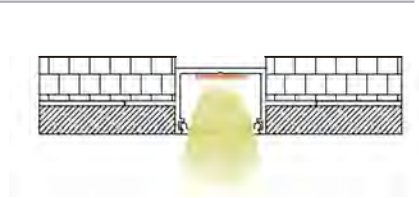

## YD-3813


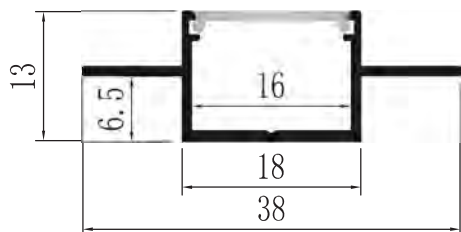


Material: AL6063-T5  
Surface: black/white/silver


Pc cover option:

opal diffuser, transparent, frosted  
Available length: 0.5-3m

YD-3813  
plastic end cap

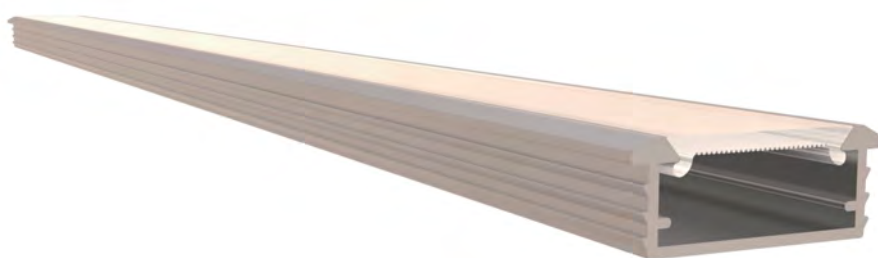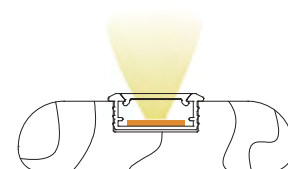

## YD-1607

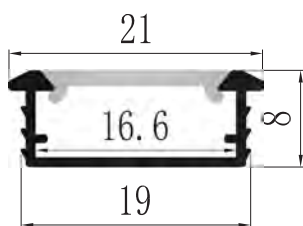

Material: AL6063-T5  
Surface: black/white/silver

Pc cover option:

opal diffuser, transparent, frosted  
Available length: 0.5-3m



YD-1607  
plastic end cap



YD-1607  
metal clip



YD-1401




YD-3518

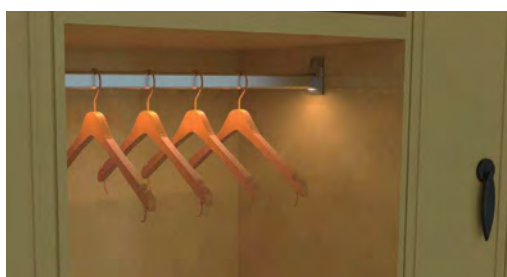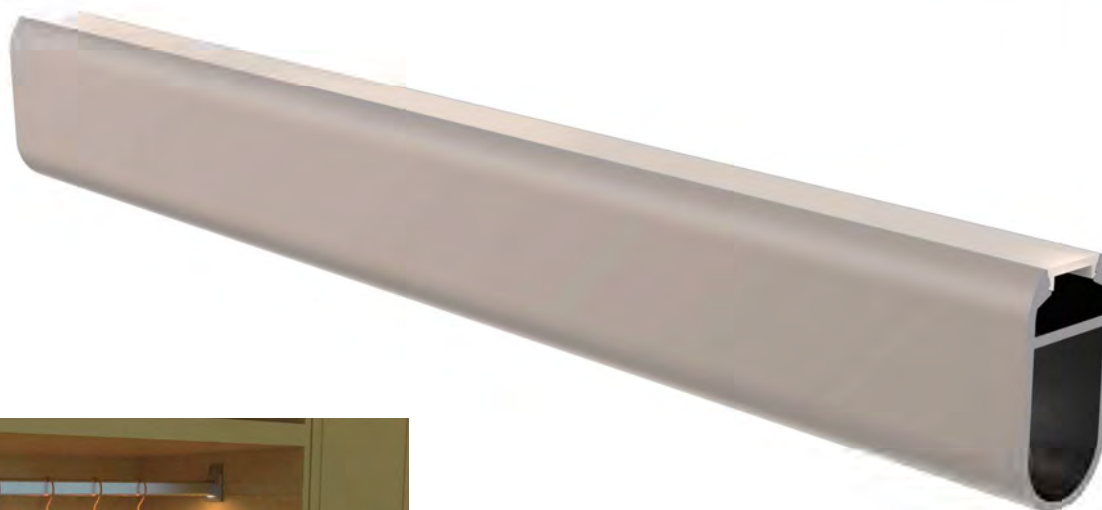

# Aluminum Profile


## YD-1401

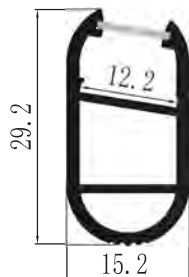

YD-1401 plastic end cap



YD-1401 metal end cap

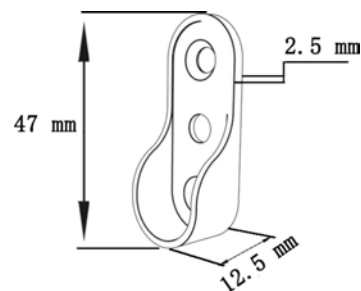

Material: AL6063-T5

Surface: black/white/silver



Pc cover option:

opal diffuser, transparent, frosted


Available length: 0.5-6m




YD-1401 bracket

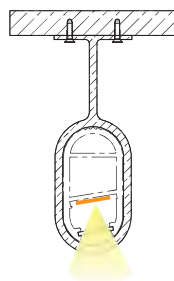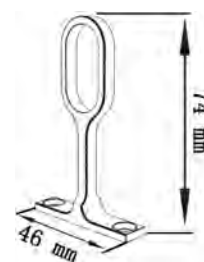

## YD-3518

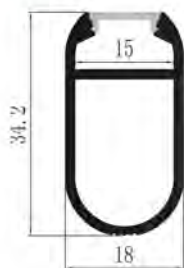

YD-3518 metal end cap

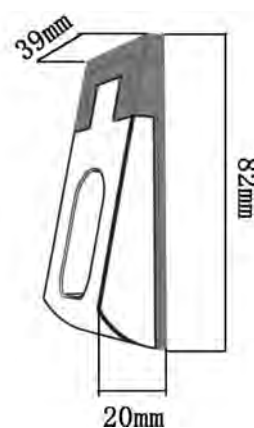

Material: AL6063-T5

Surface: black/white/silver



Pc cover option:

opal diffuser, transparent, frosted


Available length: 0.5-4m

# Aluminum Profile


CE RoHS

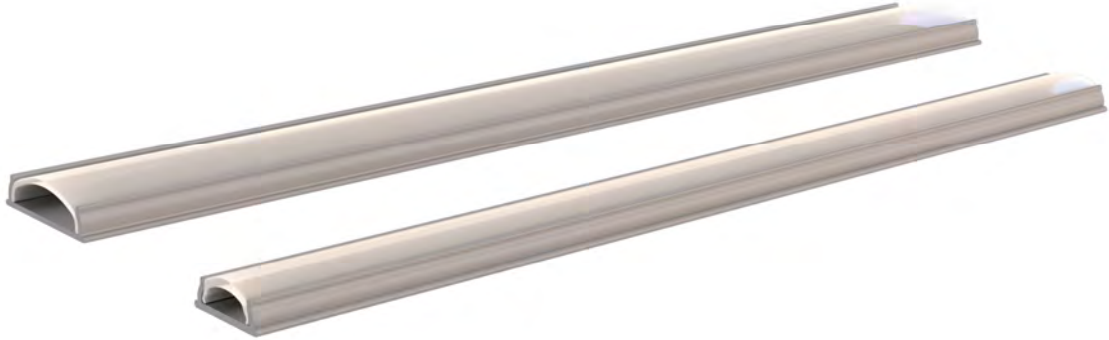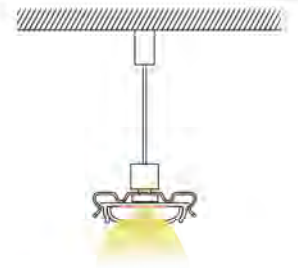

## YD-1806

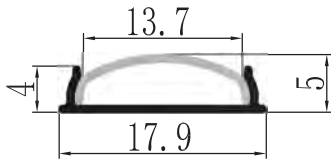

## YD-1145




Material: AL6063-T5

Surface: black/white/silver

Pc cover option:

opal diffuser, transparent, frosted

Available length: 0.5-3m

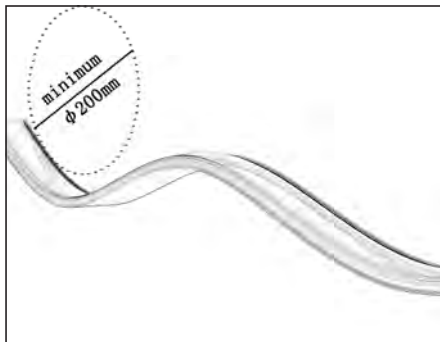

YD-1806 plastic end cap




YD-1806 metal clip




YD-1145 plastic end cap




YD-1145 metal clip

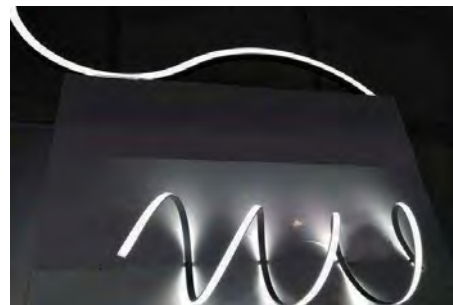

# Aluminum Profile

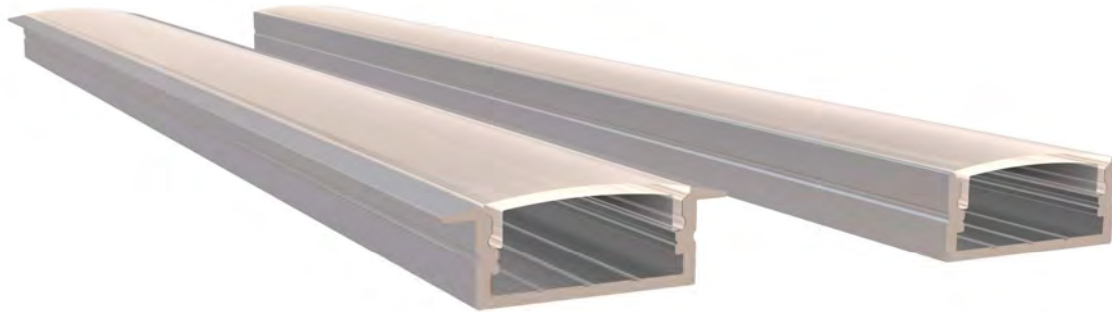

## YD-2001



Material: AL6063-T5


Surface: black/white/silver

## YD-2002

Pc cover option:

opal diffuser, transparent, frosted

Available length: 0.5-4m




YD-2001  
plastic end cap



YD-2002  
plastic end cap



YD-2001/2002  
plastic clip

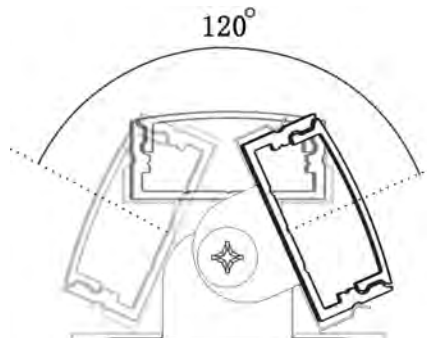


YD-2001/2002  
metal clip




YD-2001/2002  
metal clip


# Aluminum Profile

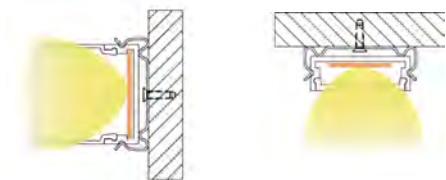


## YD-2005

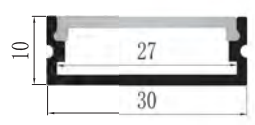

## YD-2005-1

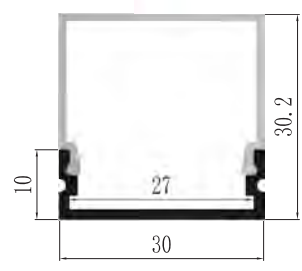

YD-2005 plastic end cap





YD-2005-1 plastic end cap




YD-2005/2005-1 metal clip



Material: AL6063-T5  
 Surface: black/white/silver  
 Pc cover option:  
 opal diffuser, transparent, frosted  
 Available length: 0.5-4m

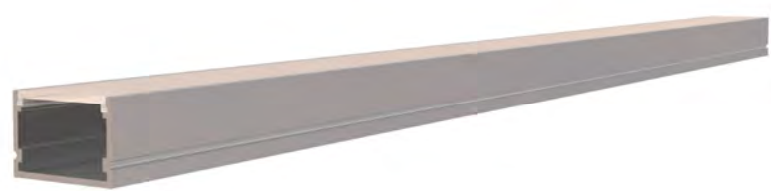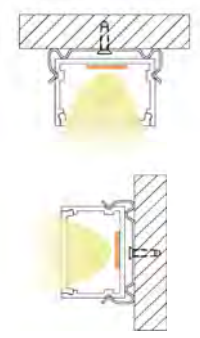

## YD-2006




YD-2006 plastic end cap



YD-2006 metal clip





# Aluminum Profile

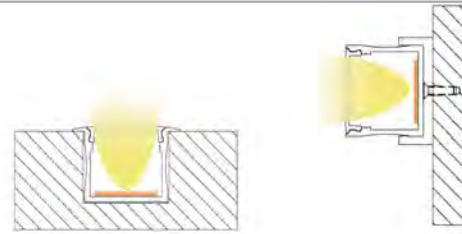

## YD-2007

## YD-2008




YD-2007  
plastic end cap



YD-2008  
plastic end cap



YD-2007/2008  
metal clip



YD-2007/2008  
plastic clip



Material: AL6063-T5


Surface: black/white/silver

Pc cover option:

opal diffuser, transparent, frosted

Available length: 0.5-4m

## YD-2008-A

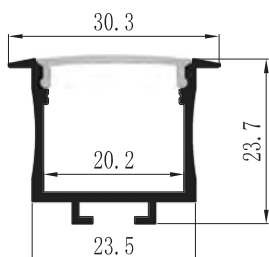

YD-2008-A  
plastic end cap




YD-2008-A  
spring clip



# Aluminum Profile



## YD-2020

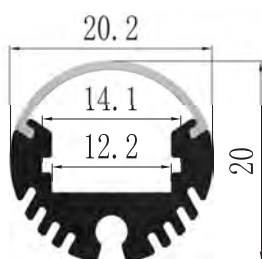

Material: AL6063-T5

Surface: black/white/silver

Pc cover option:

opal diffuser, transparent, frosted

Available length: 0.5-6m





YD-2020 plastic end cap



YD-2020 metal clip



suspended wire

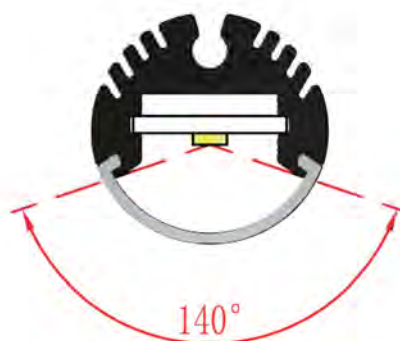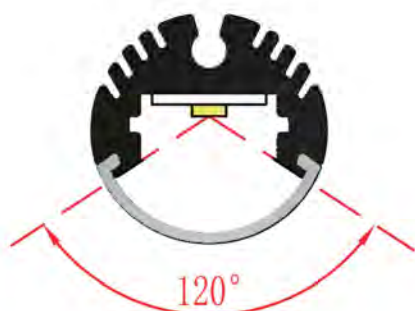






# Aluminum Profile



## YD-60

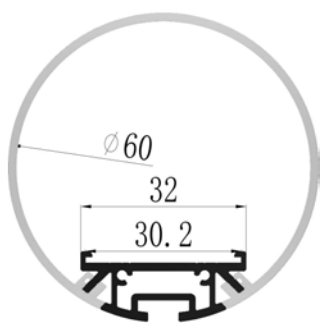

Material: AL6063-T5

Surface: black/white/silver

Pc cover option:


opal diffuser, transparent, frosted

Available length: 0.5-6m




YD-60 plastic end cap

## YD-120

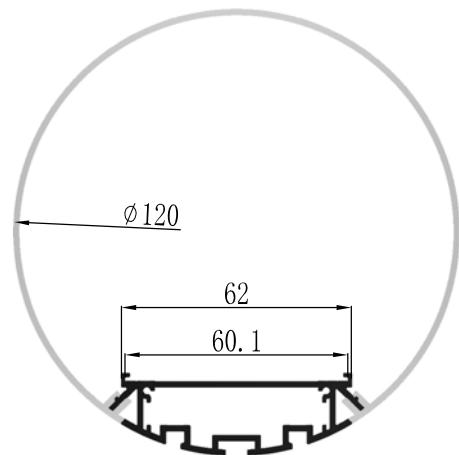

YD-120 plastic end cap




YD-60/120 metal clip




suspended wire



# Aluminum Profile

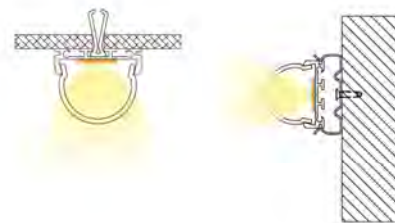

## YD-2401

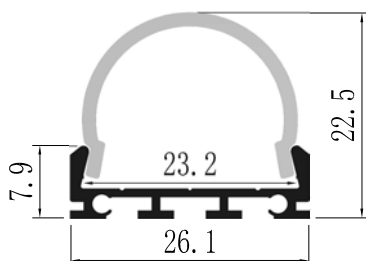

Material: AL6063-T5


Surface: black/white/silver

Pc cover option:

opal diffuser, transparent, frosted

Available length: 0.5-4m

## YD-2402

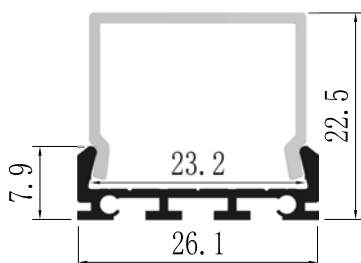


YD-2401  
plastic end cap



YD-2402  
plastic end cap




YD-2401/2402  
metal clip



YD-2401/2402  
spring clip

# Aluminum Profile



## YD-2403




Material: AL6063-T5

Surface: black/white/silver


Pc cover option:

opal diffuser, transparent, frosted

Available length: 0.5-4m

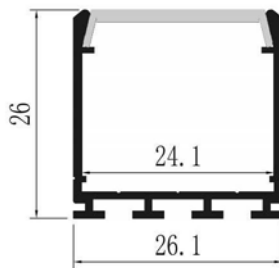

## YD-2404

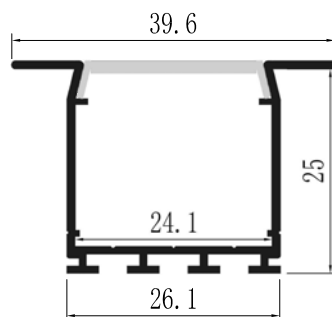


YD-2403  
plastic end cap



YD-2404  
plastic end cap





YD-2403/2404  
metal clip





YD-2404  
spring clip

# Aluminum Profile

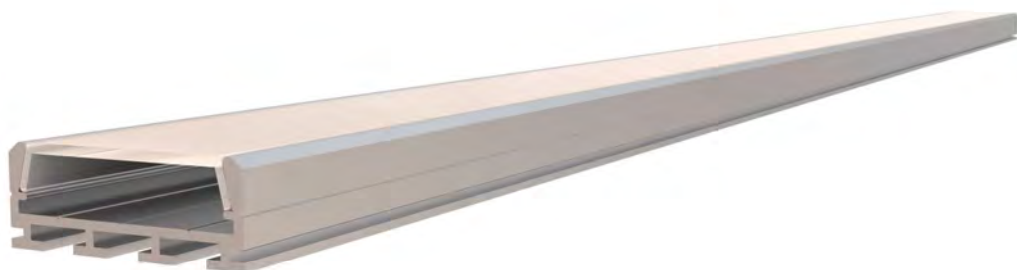


Material: AL6063-T5  
 Surface: black/white/silver  
 Pc cover option:  
 opal diffuser, transparent, frosted  
 Available length: 0.5-4m


## YD-2405

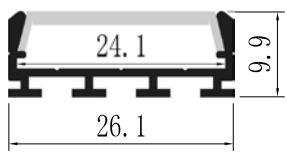

YD-2405 plastic end cap




YD-2405 metal clip

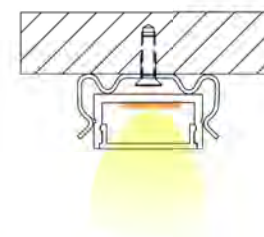


## YD-2010



Material: AL6063-T5  
 Surface: black/white/silver  
 Pc cover option:  
 opal diffuser, transparent, frosted  
 Available length: 0.5-4m






YD-2010 plastic end cap




YD-2010 metal clip

# Aluminum Profile

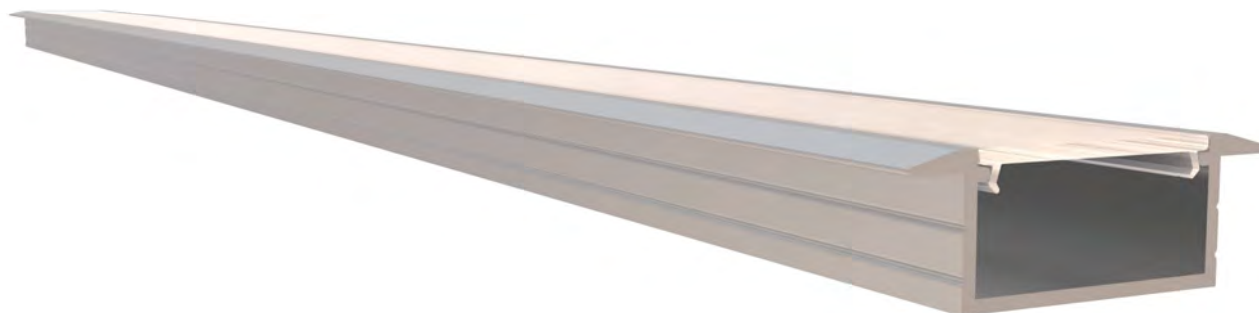


## YD-2308




Material: AL6063-T5  
 Surface: black/white/silver  
 Pc cover option:  
 opal diffuser, transparent, frosted  
 Available length: 0.5-4m



YD-2308 plastic end cap

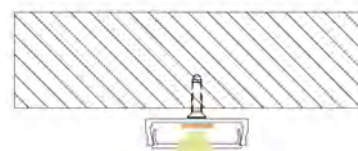

## YD-2406

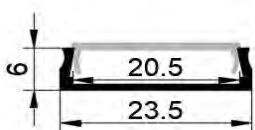

Material: AL6063-T5  
 Surface: black/white/silver  
 Pc cover option:  
 opal diffuser, transparent, frosted  
 Available length: 0.5-4m



YD-2406 plastic clip




YD-2406 metal clip







# Aluminum Profile

CE RoHS

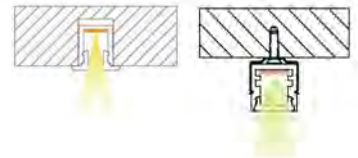

**YD-078**

**YD-078-1**

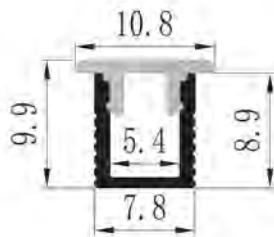

Material: AL6063-T5

Surface: black/white/silver

Pc cover option:

opal diffuser, transparent, frosted

Available length: 0.5-3m



YD-078  
plastic end cap





YD-078-1  
plastic end cap




YD-078/078-1  
metal clip


# Aluminum Profile

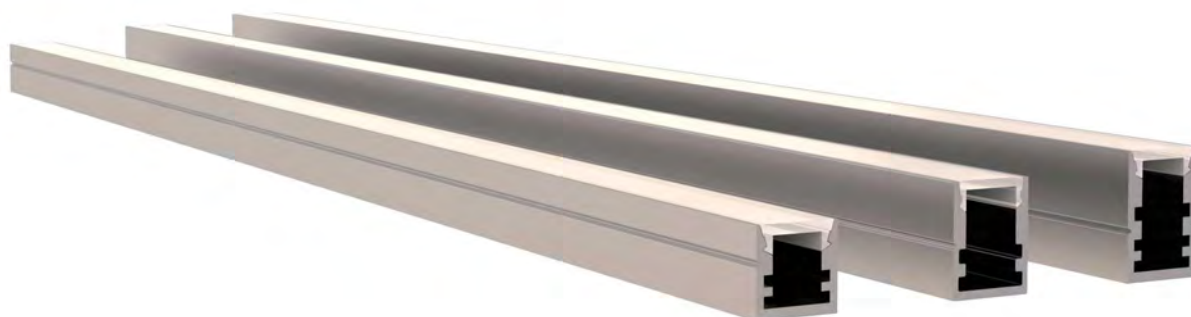


**YD-1010**



**YD-1013**



**YD-1015**



Material: AL6063-T5

Surface: black/white/silver

Pc cover option:

opal diffuser, transparent, frosted

Available length: 0.5-4m



YD-1010  
plastic end cap



YD-1013  
plastic end cap




YD-1015  
plastic end cap





YD-1010/1013/1015  
metal clip

# Aluminum Profile

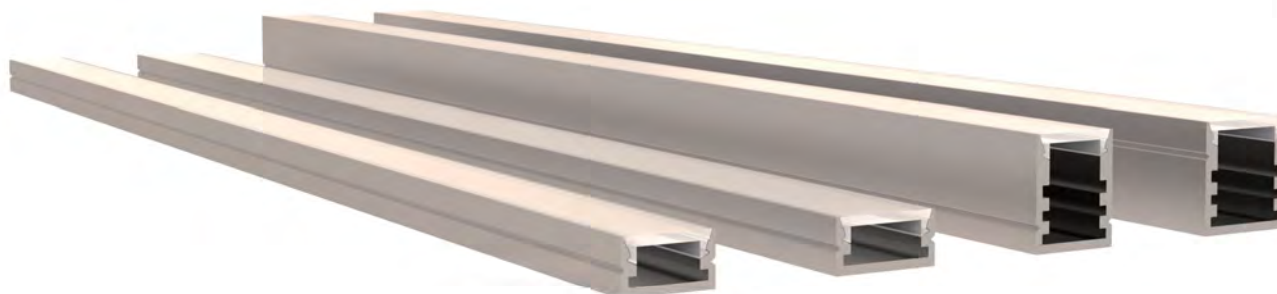

## YD-1208

## YD-1407



Material: AL6063-T5

Surface: black/white/silver



Pc cover option:

opal diffuser, transparent, frosted

Available length: 0.5-4m

## YD-1215

## YD-1415







YD-1208  
plastic end cap

YD-1407  
plastic end cap

YD-1215  
plastic end cap

YD-1415  
plastic end cap





YD-1208  
metal clip

YD-1407  
metal clip


YD-1215  
metal clip

YD-1415  
metal clip


# Aluminum Profile

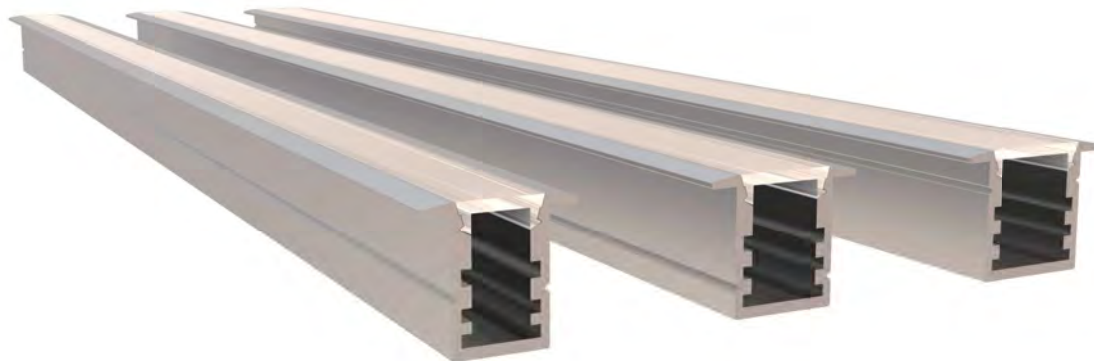


**YD-1615**



**YD-1815**



**YD-2015**




Material: AL6063-T5

Surface: black/white/silver

Pc cover option:

opal diffuser, transparent, frosted

Available length: 0.5-4m



YD-1615 plastic end cap




YD-1815 plastic end cap




YD-2015 plastic end cap



YD-1615 metal clip





YD-1815 metal clip




YD-2015 metal clip


# Aluminum Profile

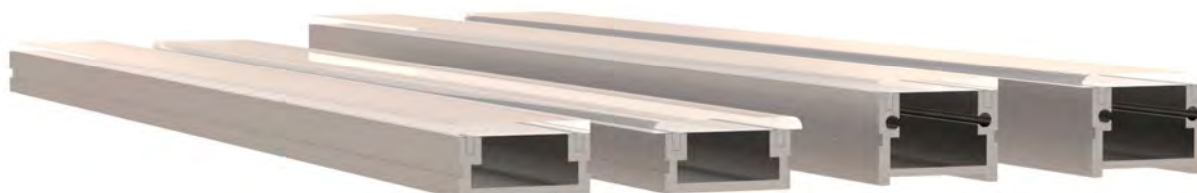


## YD-1610




## YD-1612



## YD-1610-1



## YD-1612-1



Material: AL6063-T5

Surface: black/white/silver

Pc cover option:

opal diffuser, transparent, frosted

Available length: 0.5-4m



YD-1610/1610-1 plastic end cap



YD-1612/1612-1 plastic end cap




YD-1610/1610-1 metal clip






YD-1612/1612-1 metal clip


FOR IP65





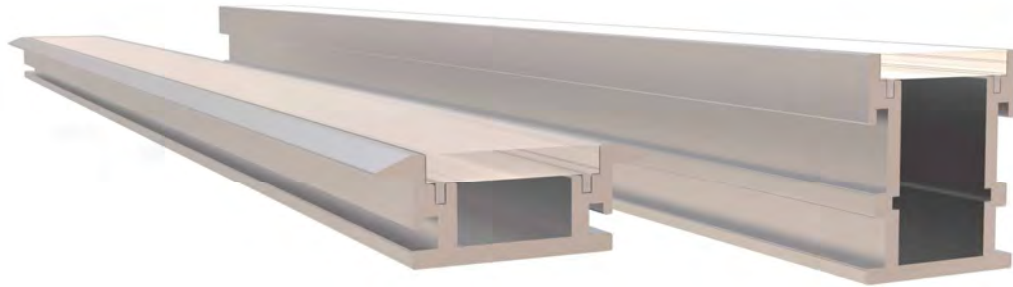

**YD-2610**

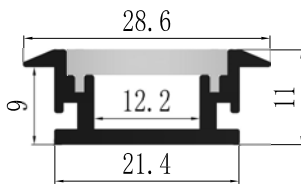

Material: AL6063-T5


Surface: black/white/silver

Pc cover option:

opal diffuser, transparent, frosted

Available length: 0.5-4m

**YD-2126**

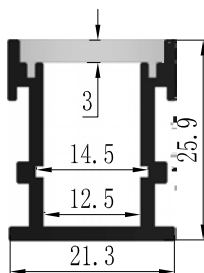

YD-2610 plastic end cap




YD-2126 plastic end cap




YD-2610/2126 metal clip


FOR IP65

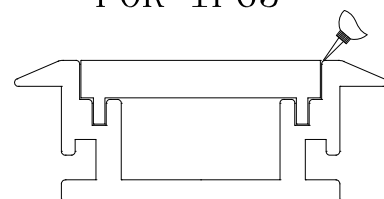

# Aluminum Profile

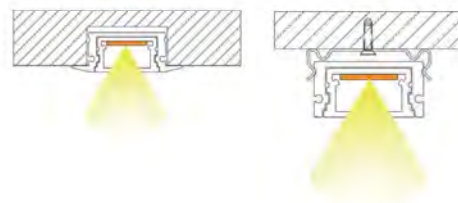

## YD-1910

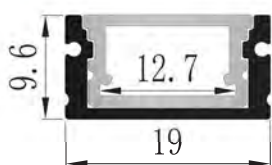

YD-1910 plastic end cap




YD-2810 plastic end cap



YD-1910/2810 plastic end cap

## YD-2810

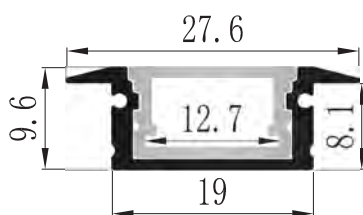

YD-1910/2810 metal clip



YD-1910/2810 Aluminum bar




Material: AL6063-T5

Surface: black/white/silver



Pc cover option:

opal diffuser, transparent, frosted


Available length: 0.5-4m

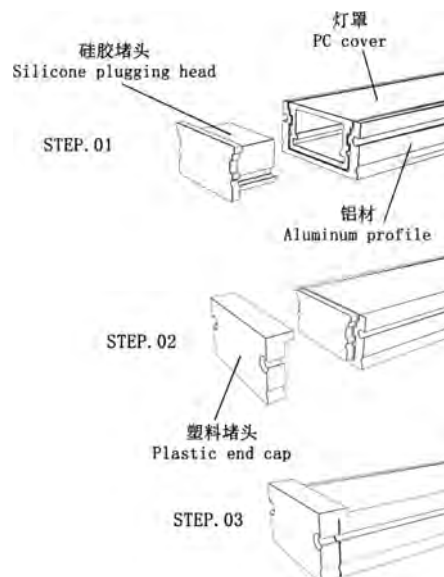


# Aluminum Profile

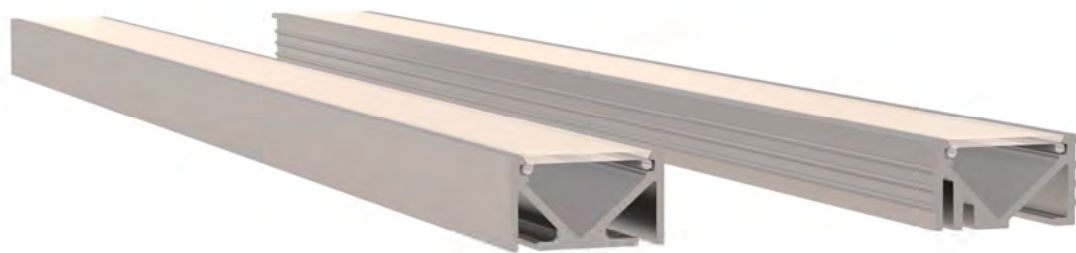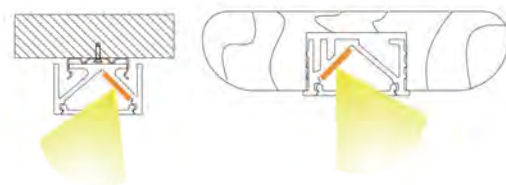

## YD-1911

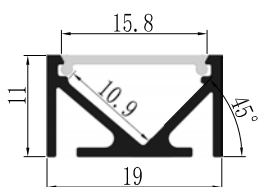

## YD-2111

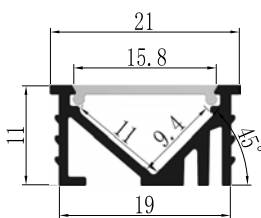

Material: AL6063-T5

Surface: black/white/silver

Pc cover option:

opal diffuser, transparent, frosted

Available length: 0.5-6m



YD-1911  
plastic end cap





YD-2111  
plastic end cap




YD-1911  
metal clip




# Aluminum Profile

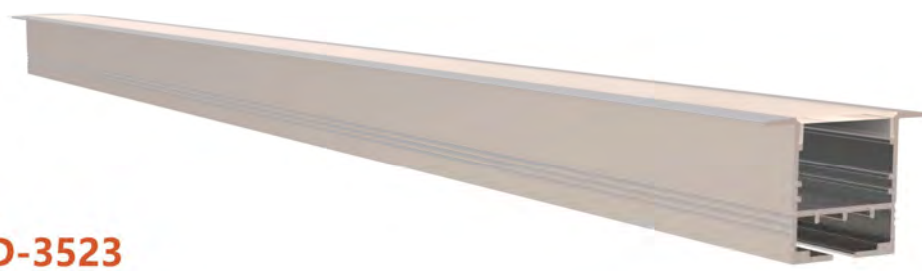

## YD-3523

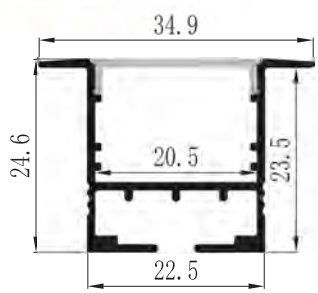

Material: AL6063-T5  
 Surface: black/white/silver  
 Pc cover option:  
 opal diffuser, transparent, frosted  
 Available length: 0.5-4m






YD-3523 plastic end cap




YD-3523 spring clip

step:

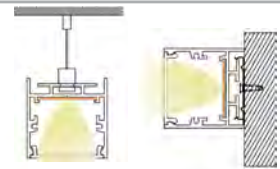


YD-3535 black diffuser cover

## YD-3535

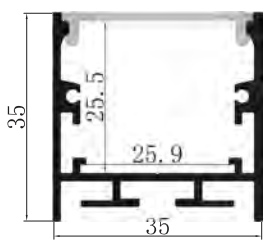

Material: AL6063-T5  
 Surface: black/white/silver  
 Pc cover option:  
 opal diffuser, transparent, frosted  
 Available length: 0.5-4m



YD-3535 metal end cap



YD-3535 metal clip




suspended wire





**YD-3535-R**




Material: AL6060-T5  
 Surface: black/white/silver  
 Pc cover option:  
 opal diffuser, transparent, frosted  
 Available length:  
 D600/D900/1200/D1800/D2500



YD-3535-R  
Silicone cover



suspended  
wire

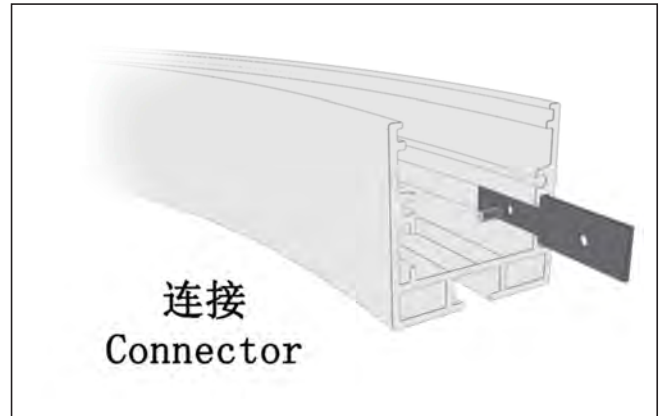

连接  
Connector




# Aluminum Profile


CE RoHS



**YD-3573**

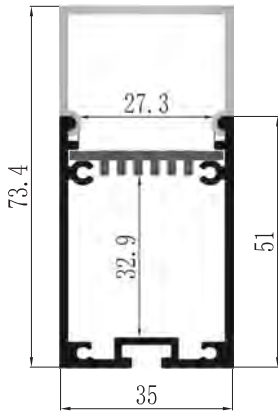

Material: AL6063-T5  
 Surface: black/white/silver  
 Pc cover option:  
 opal diffuser, transparent, frosted  
 Available length: 0.5-4m




YD-3573 metal end cap




YD-3573 metal clip



suspended wire

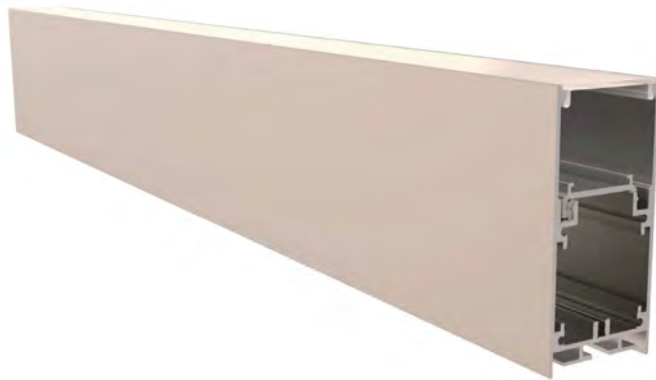


**YD-3575**

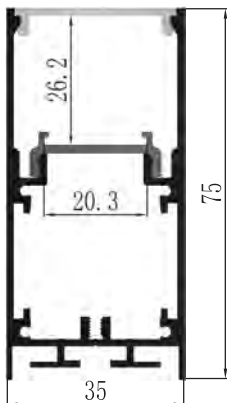

Material: AL6063-T5  
 Surface: black/white/silver  
 Pc cover option:  
 opal diffuser, transparent, frosted  
 Available length: 0.5-4m



YD-3575 black diffuser cover



YD-3575 metal end cap




YD-3575 metal clip



suspended wire


Embedded installation

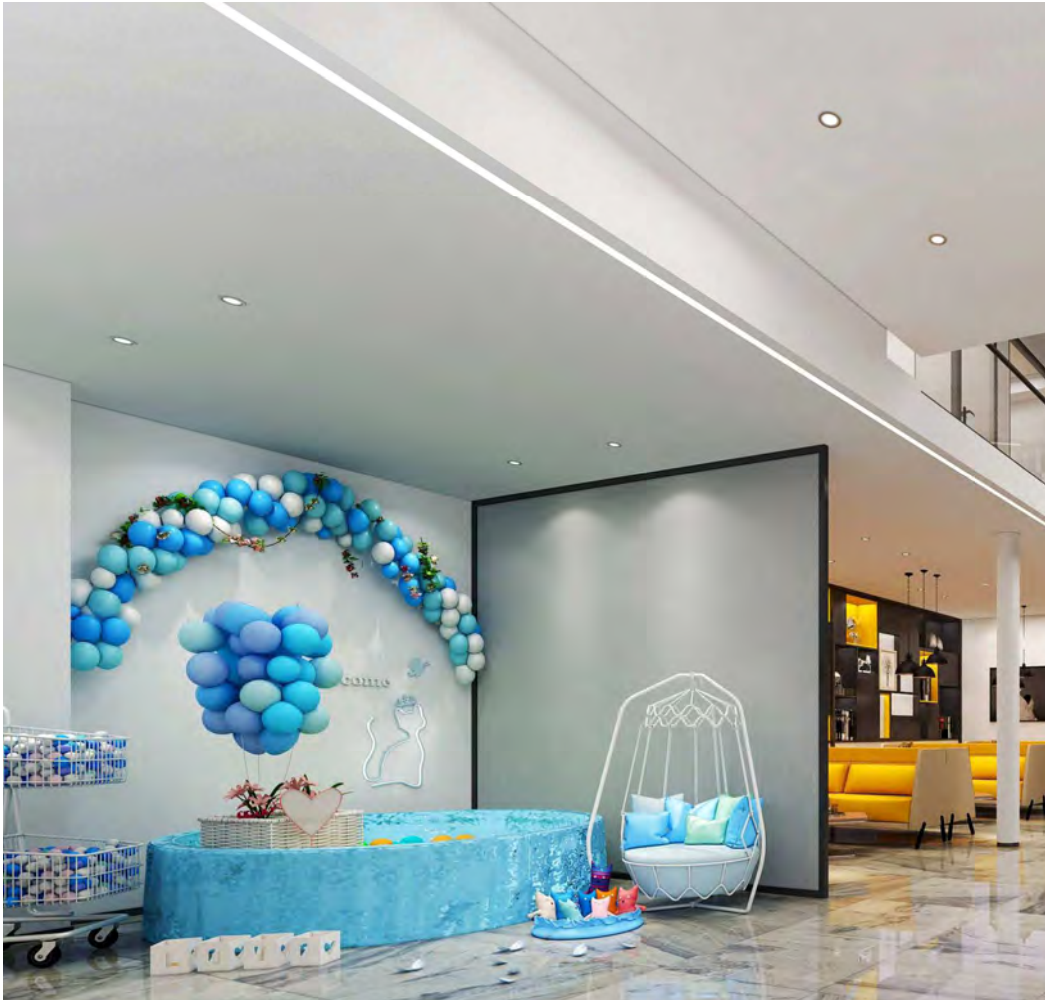


Surface clasp installation



# Aluminum Profile

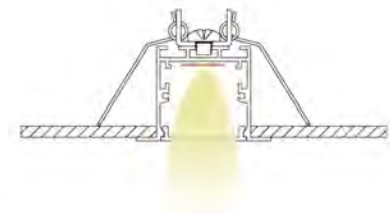

## YD-3830



YD-5035  
black diffuser cover





YD-3830/5035  
spring clip

## YD-5035



Material: AL6063-T5  
 Surface: black/white/silver  
 Pc cover option:  
 opal diffuser, transparent, frosted  
 Available length: 0.5-4m





YD-3830  
metal end cap



YD-5035  
metal end cap

## YD-4035

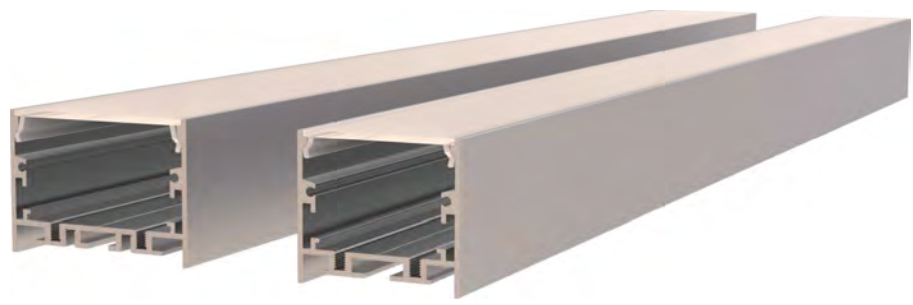


YD-5036  
black diffuser cover




YD-5036  
metal clip

## YD-5036



YD-4035  
metal end cap



YD-5036  
metal end cap



YD-4035  
metal clip




suspended  
wire





# Aluminum Profile

CE RoHS



## YD-5535

## YD-6535

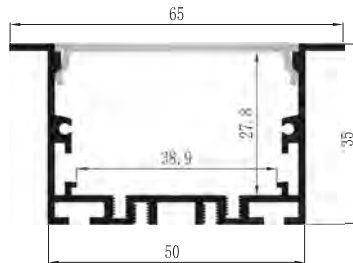

Material: AL6063-T5

Surface: black/white/silver

Pc cover option:

opal diffuser, transparent, frosted

Available length: 0.5-4m



YD-6535  
black diffuser cover


YD-5535  
metal end cap

YD-5535  
spring clip

YD-6535  
metal end cap


YD-6535  
spring clip

# Aluminum Profile

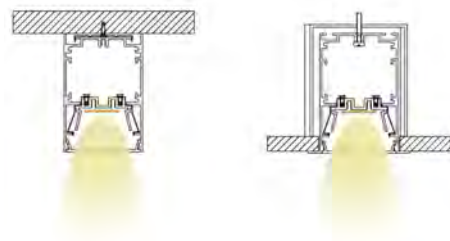




## YD-5075

## YD-6575



YD-5075  
black diffuser cover

YD-6575  
black diffuser cover

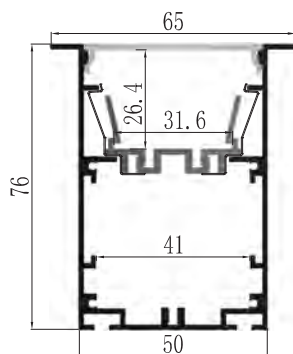

YD-5075  
metal end cap

YD-5075  
metal clip



Material: AL6063-T5

Surface: black/white/silver

Pc cover option:

opal diffuser, transparent, frosted


Available length: 0.5-4m




YD-6575  
metal end cap

YD-6575  
metal clip

## YD-5075

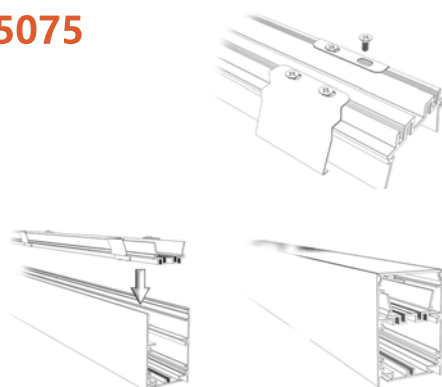


## YD-6575

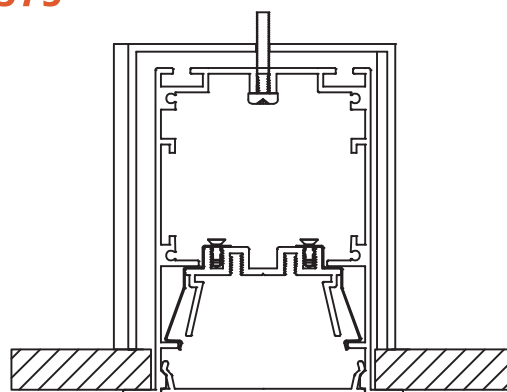





# Aluminum Profile

CE RoHS

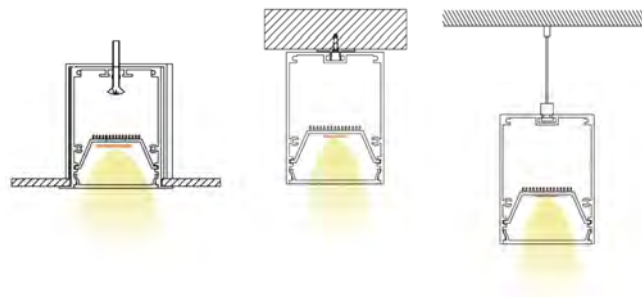

**YD-5575**

**YD-7075**

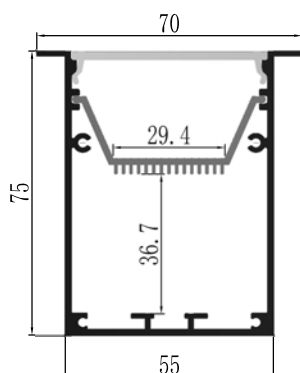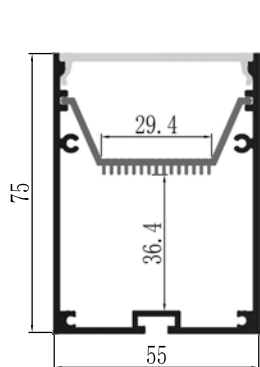


Material: AL6063-T5

Surface: black/white/silver

Pc cover option:

opal diffuser, transparent, frosted

Available length: 0.5-4m

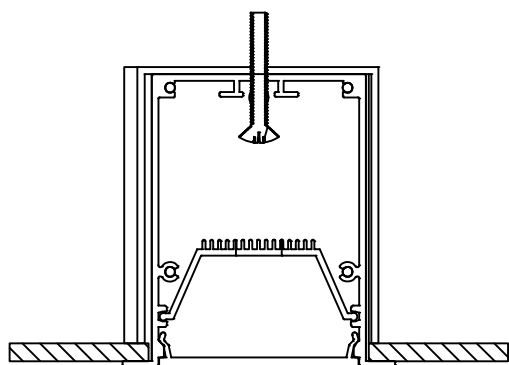


YD-5575 metal end cap



YD-5575 metal clip



suspended wire





YD-7075 metal end cap





YD-7075 metal clip

# Aluminum Profile

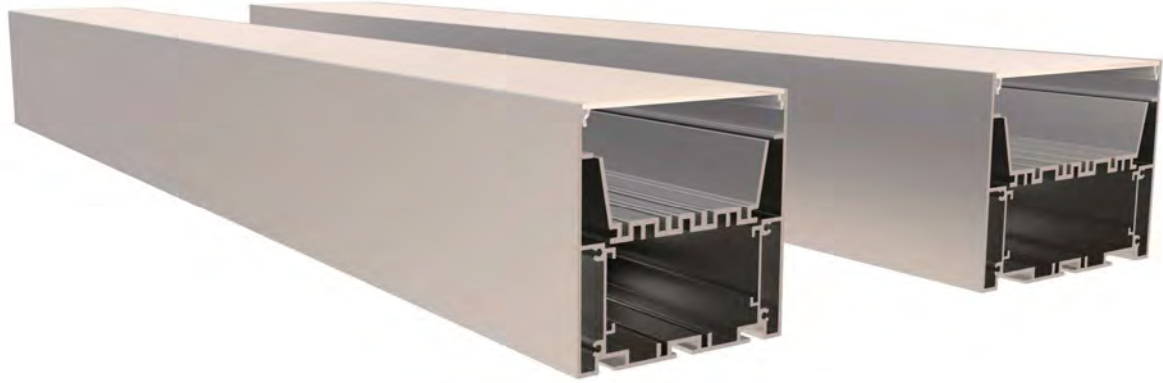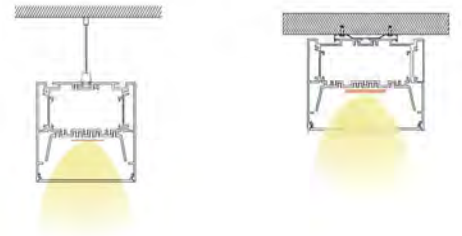

**YD-8080**

**YD-10280**

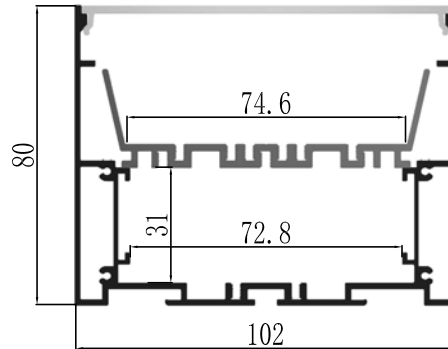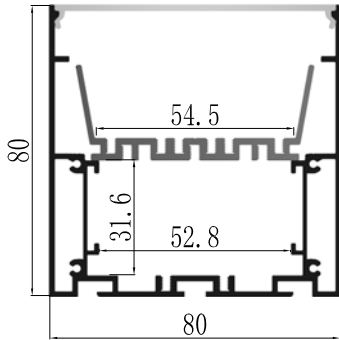


Material: AL6063-T5

Surface: black/white/silver

Pc cover option:

opal diffuser, transparent, frosted

Available length: 0.5-4m




YD-8080 metal end cap




YD-8080/10280 metal clip



suspended wire




YD-10280 metal end cap




YD-8080/10280 tray metal clip

# Aluminum Profile

CE RoHS

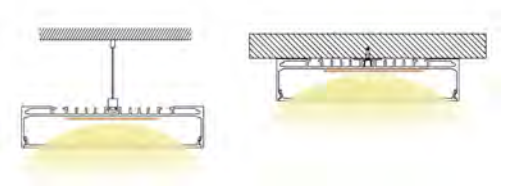

## YD-14232

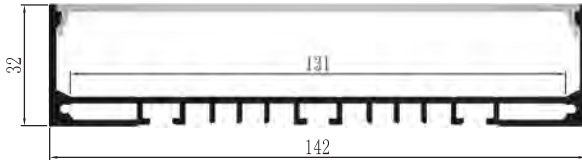

Material: AL6063-T5

Surface: black/white/silver

Pc cover option:

opal diffuser, transparent, frosted

Available length: 0.5-4m



YD-14232  
metal end cap



YD-14232  
metal clip





suspended  
wire





# Aluminum Profile

CE RoHS



## YD-5550

## YD-5532

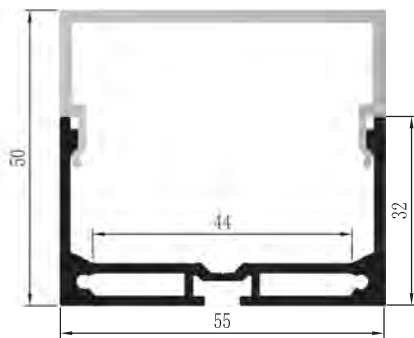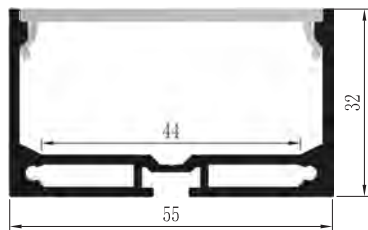

Material: AL6063-T5

Surface: black/white/silver

Pc cover option:

opal diffuser, transparent, frosted

Available length: 0.5-4m



YD-5532  
metal end cap




YD-5550  
metal end cap



YD-5532/5550  
metal clip





suspended  
wire

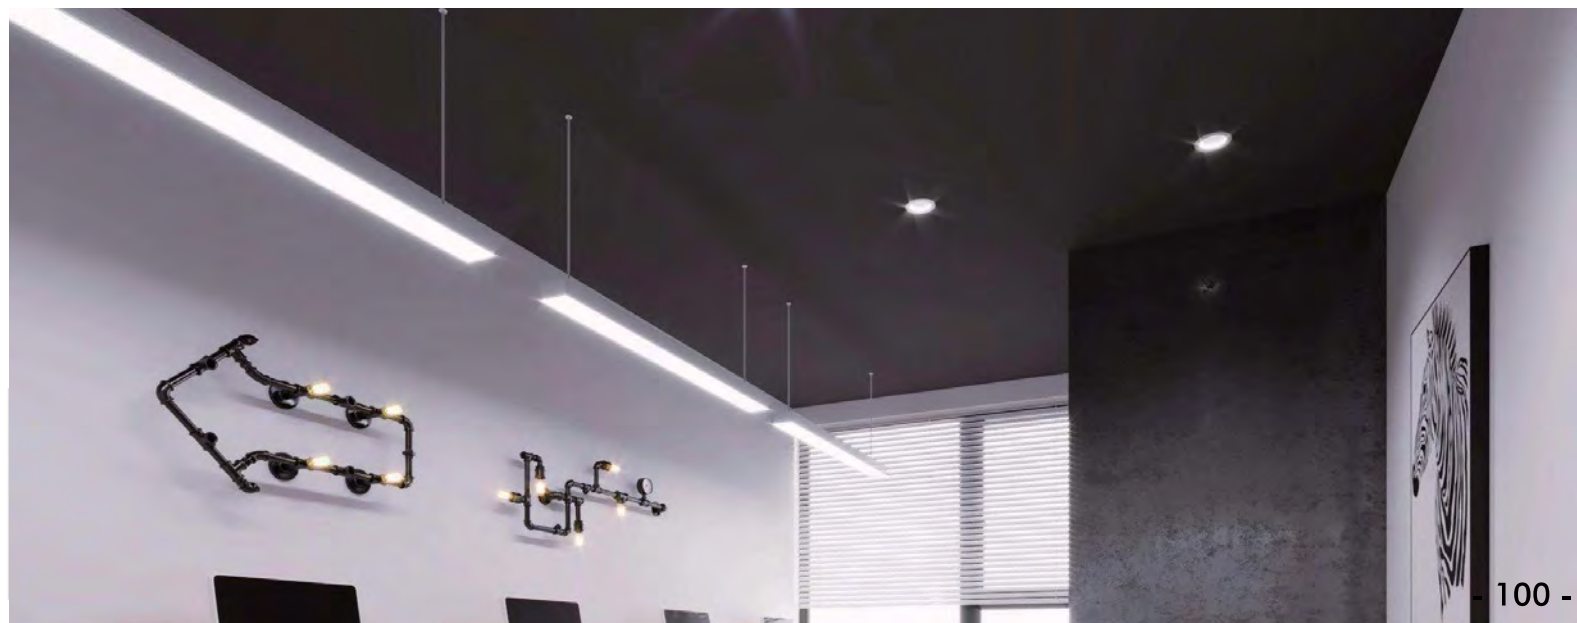





# Aluminum Profile

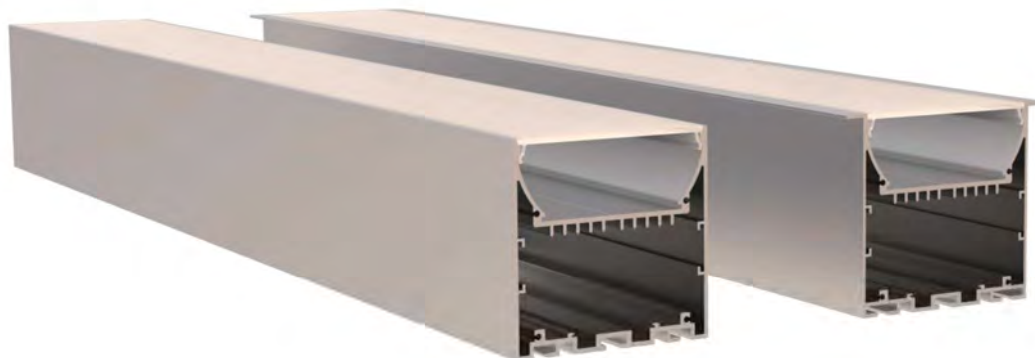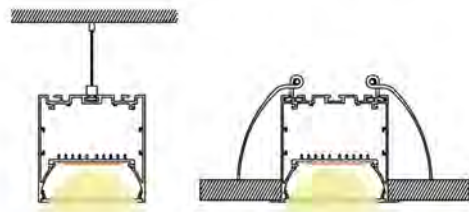

**YD-7676**

**YD-9176**

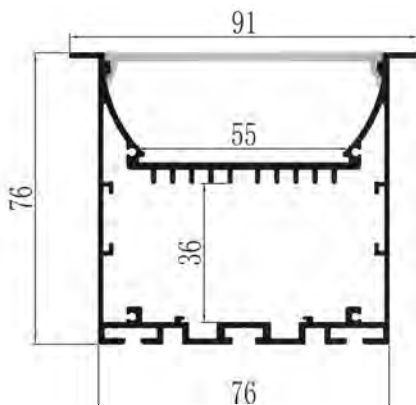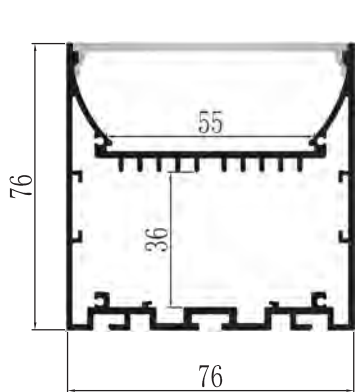

Material: AL6063-T5

Surface: black/white/silver

Pc cover option:

opal diffuser, transparent, frosted

Available length: 0.5-4m



YD-7676  
plastic end cap



YD-9176  
metal end cap



YD-7676  
metal clip





YD-9176  
metal clip




suspended  
wire



# Aluminum Profile

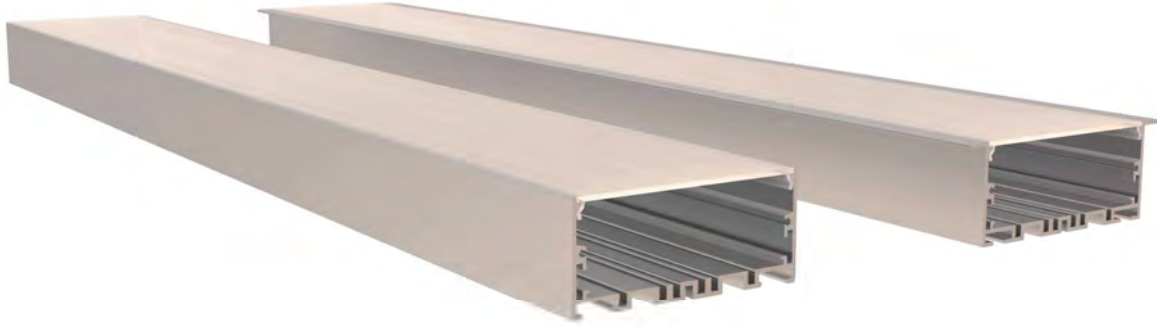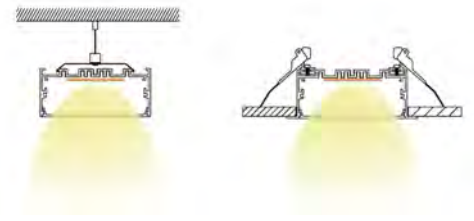

## YD-8035

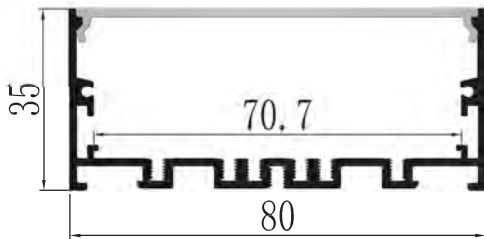

Material: AL6063-T5


Surface: black/white/silver

Pc cover option:

opal diffuser, transparent, frosted

Available length: 0.5-4m

## YD-9535

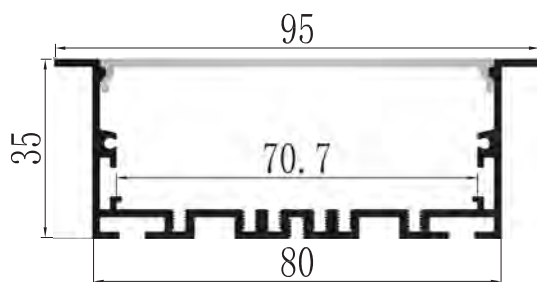

YD-8035  
metal end cap



YD-9535  
metal end cap



YD-8035  
metal clip




YD-9535  
metal clip




suspended  
wire

# Aluminum Profile

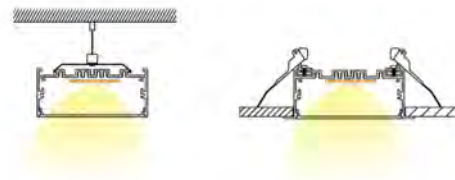

## YD-10236

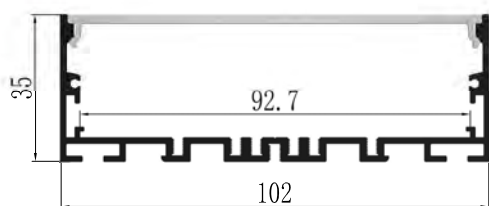

Material: AL6063-T5


Surface: black/white/silver

Pc cover option:


opal diffuser, transparent, frosted

Available length: 0.5-4m

## YD-11736

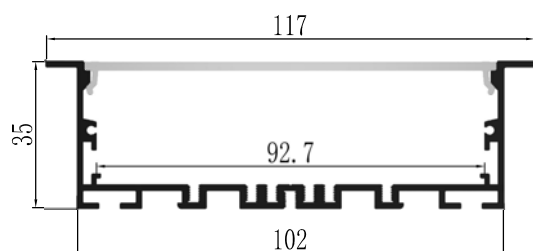

YD-10236  
metal end cap



YD-11736  
metal end cap



YD-10236  
metal clip




YD-11736  
metal clip




suspended  
wire


# Aluminum Profile

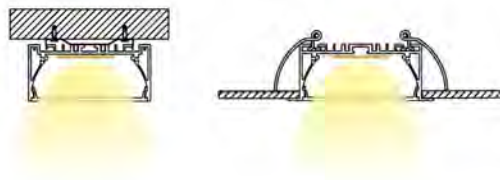

## YD-7635

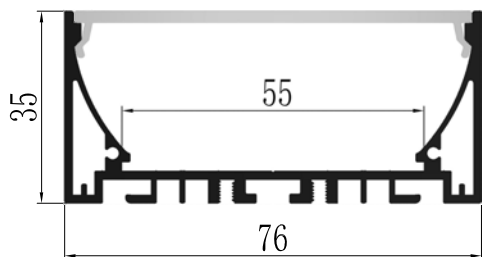

## YD-9135

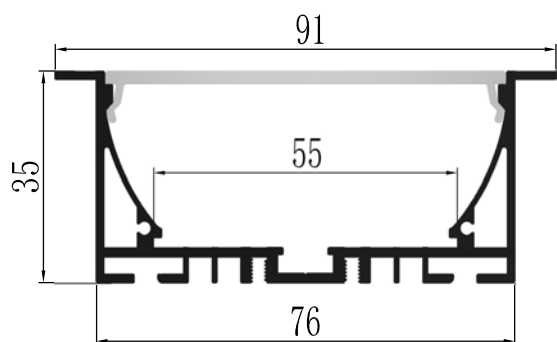

Material: AL6063-T5

Surface: black/white/silver


Pc cover option:

opal diffuser, transparent, frosted

Available length: 0.5-4m




YD-7635  
metal end cap



YD-9135  
metal end cap



YD-7635  
metal clip




YD-9135  
metal clip




suspended  
wire

# Aluminum Profile

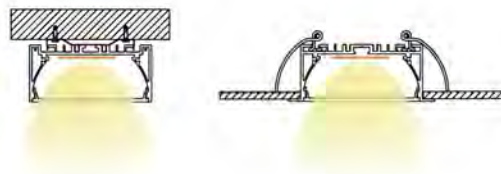

## YD-10235

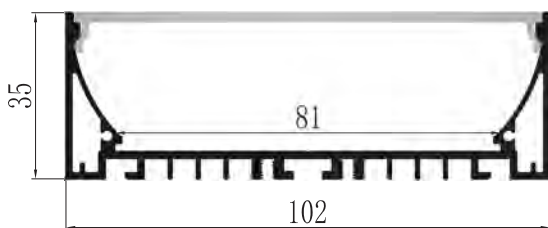

Material: AL6063-T5


Surface: black/white/silver

Pc cover option:

opal diffuser, transparent, frosted

Available length: 0.5-4m

## YD-11735

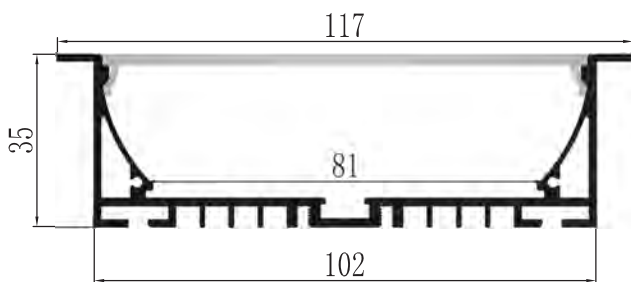

YD-10235  
plastic end cap



YD-11735  
metal end cap



YD-10235  
metal clip



YD-11735  
metal clip



suspended  
wire

# Aluminum Profile

CE RoHS




Material: AL6063-T5

Surface: black/white/silver



Pc cover option:

opal diffuser, transparent, frosted

Available length: 0.5-4m



**YD-1402**

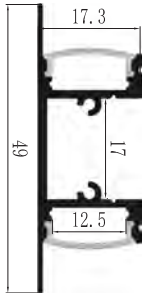

YD-1402 metal end cap



YD-1402 metal clip




Material: AL6063-T5

Surface: black/white/silver



Pc cover option:

opal diffuser, transparent, frosted

Available length: 0.5-4m



**YD-1403**

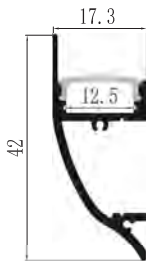

YD-1403 plastic end cap



YD-1403 metal clip




Material: AL6063-T5

Surface: black/white/silver


Pc cover option:

opal diffuser, transparent, frosted

Available length: 0.5-4m

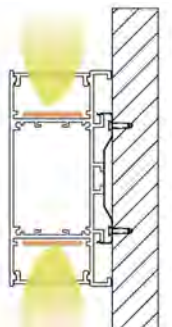


**YD-4290**

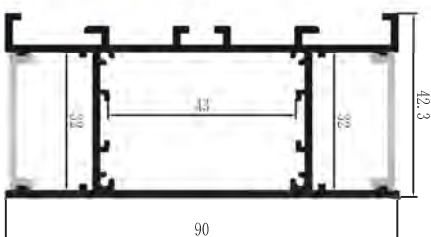

YD-4290 plastic end cap




YD-4290 metal clip




YD-4290 black diffuser cover



# Aluminum Profile



## YD-4615

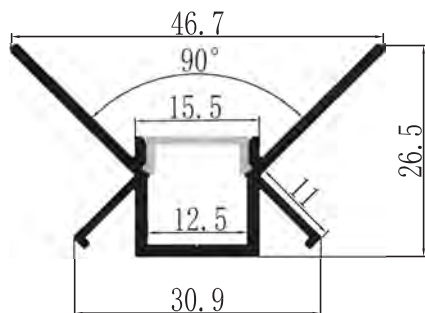

YD-4615  
plastic end cap




Material: AL6063-T5

Surface: black/white/silver

Pc cover option:

opal diffuser, transparent, frosted



Available length: 0.5-4m

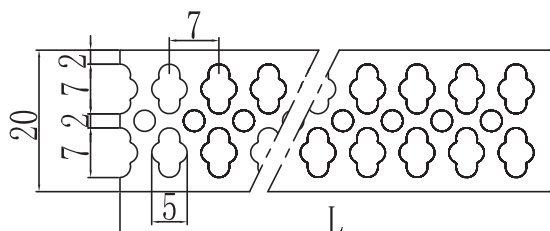


Double side working together with the plaster or dry wall can be fixed by screw.




# Aluminum Profile

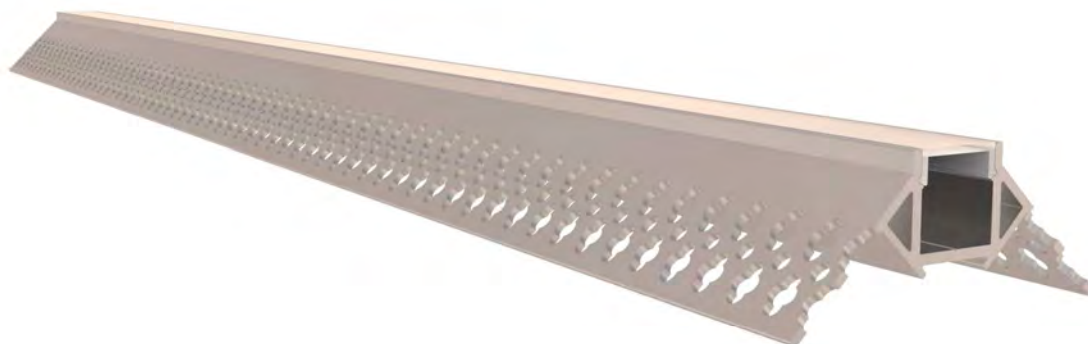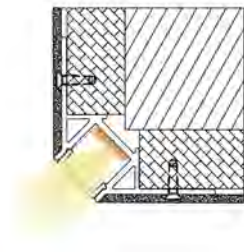

**YD-5315**

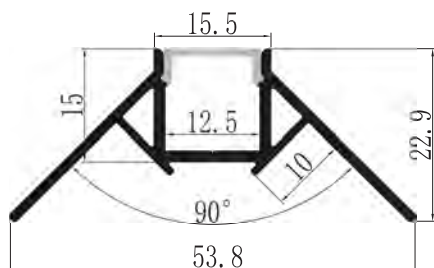

YD-5315  
plastic end cap

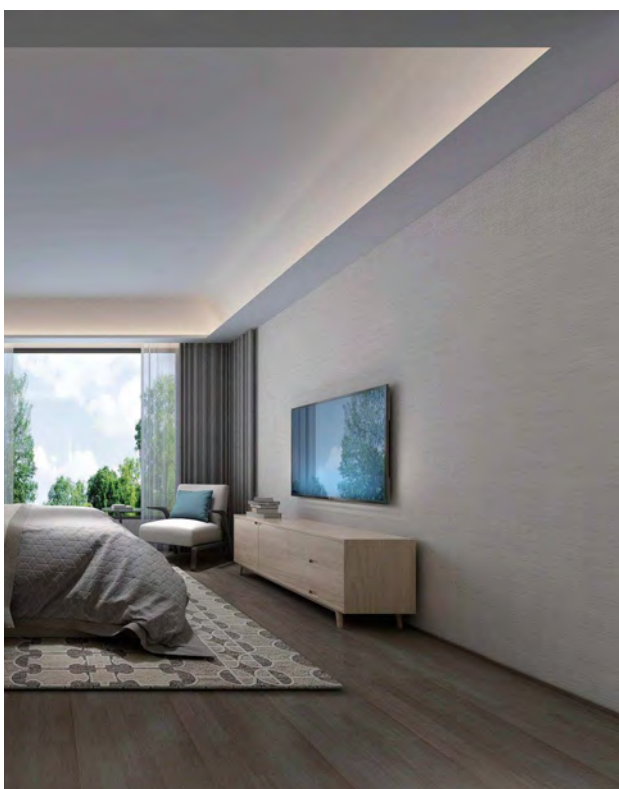


Material: AL6063-T5

Surface: black/white/silver

Pc cover option:

opal diffuser, transparent, frosted



Available length: 0.5-4m

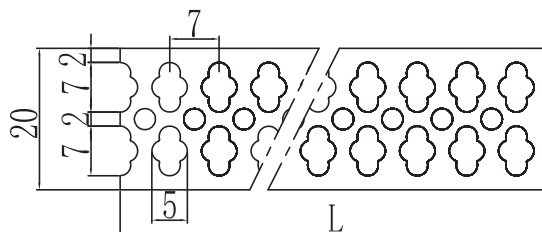


Double side working together with the plaster or dry wall can be fixed by screw.

# Aluminum Profile

CE RoHS

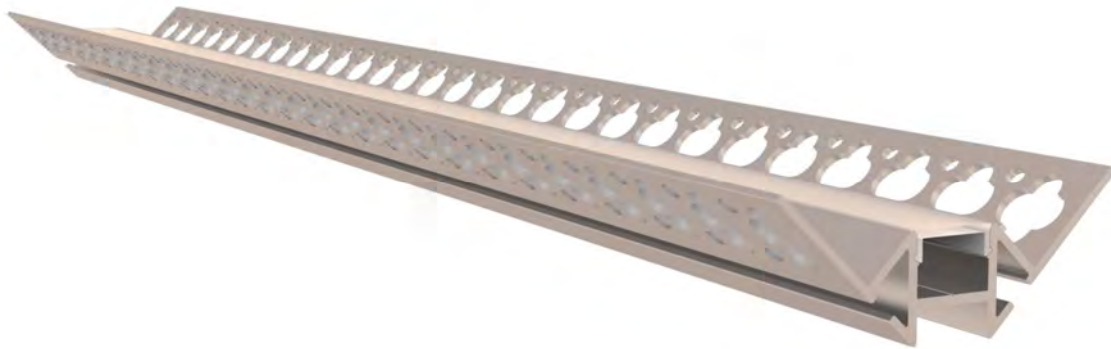

## YD-5917

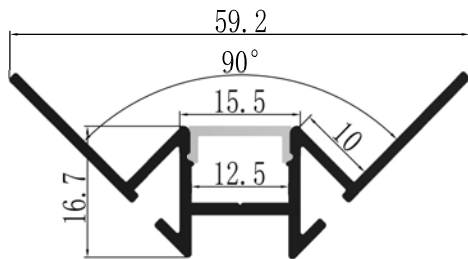

YD-5917  
plastic end cap




Material: AL6063-T5

Surface: black/white/silver

Pc cover option:

opal diffuser, transparent, frosted



Available length: 0.5-4m

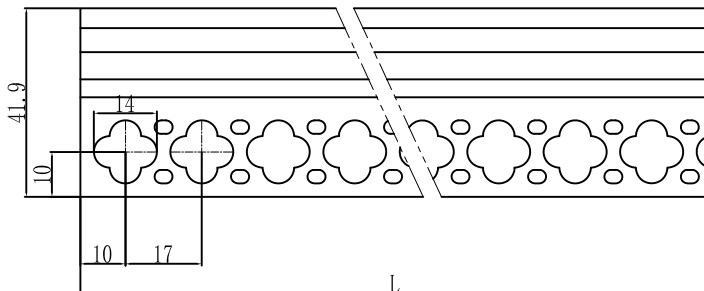


Single row punching, larger aperture,  
screw fixed, very firm



# Aluminum Profile

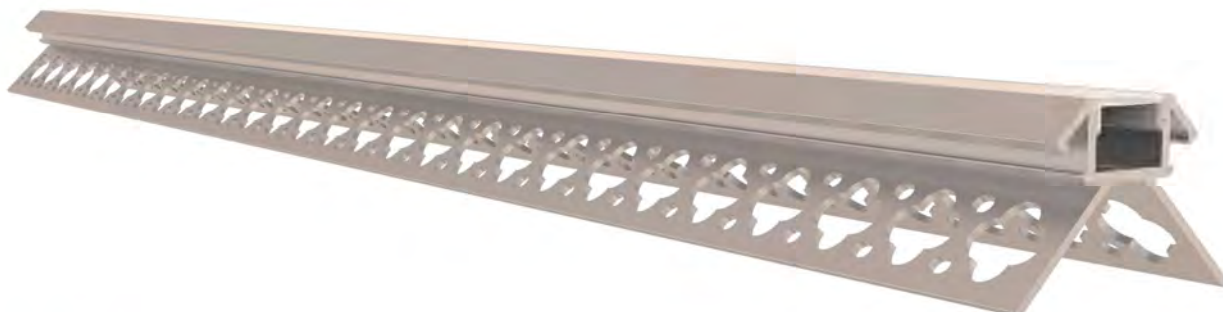

**YD-4128**

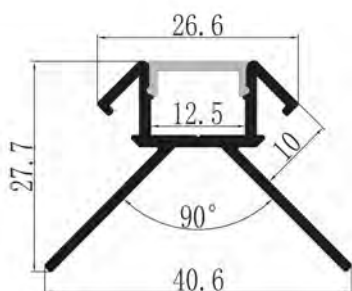

YD-4128 plastic end cap




Material: AL6063-T5

Surface: black/white/silver

Pc cover option:

opal diffuser, transparent, frosted

Available length: 0.5-4m

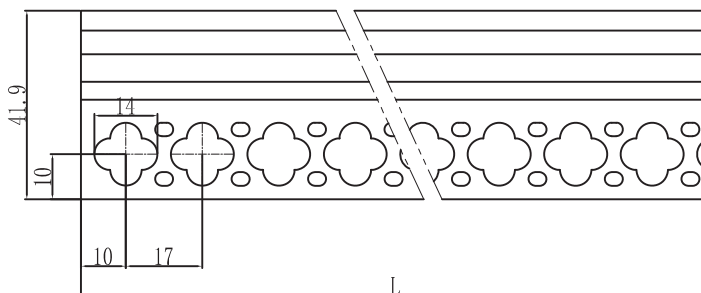


Double side working together with the plaster or dry wall can be fixed by screw.






Double side working together with the plaster or dry wall can be fixed by screw.

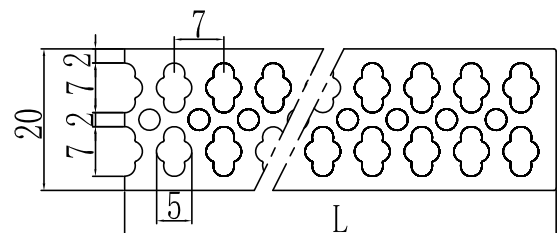




# Aluminum Profile

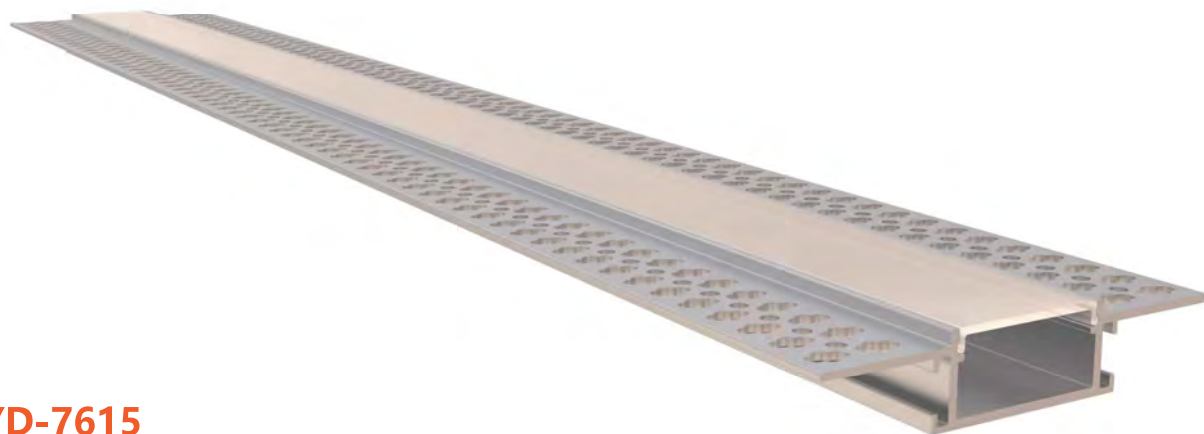

## YD-7615

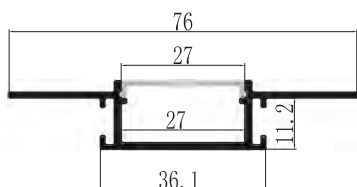

YD-7615  
plastic end cap



Material: AL6063-T5

Surface: black/white/silver


Pc cover option:

opal diffuser, transparent, frosted

Available length: 0.5-4m



## YD-5615

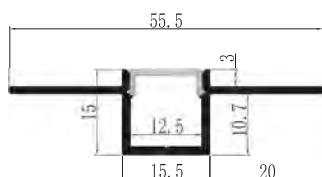

YD-5615  
plastic end cap



Material: AL6063-T5

Surface: black/white/silver

Pc cover option:


opal diffuser, transparent, frosted

Available length: 0.5-4m


# Aluminum Profile



## YD-2009

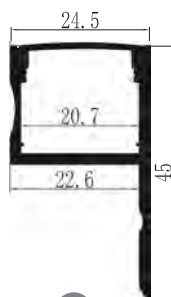


Material: AL6063-T5  
 Surface: black/white/silver  
 Pc cover option:  
 opal diffuser, transparent, frosted  
 Available length: 0.5-4m

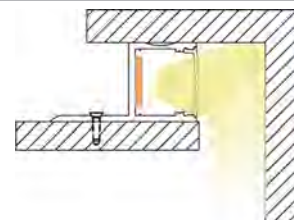



YD-2009 plastic end cap



## YD-2009-A




Material: AL6063-T5  
 Surface: black/white/silver  
 Pc cover option:  
 opal diffuser, transparent, frosted  
 Available length: 0.5-4m




YD-2009-A plastic end cap




## YD-3511



Material: AL6063-T5  
 Surface: black/white/silver  
 Pc cover option:  
 opal diffuser, transparent, frosted  
 Available length: 0.5-4m




YD-3511 plastic end cap

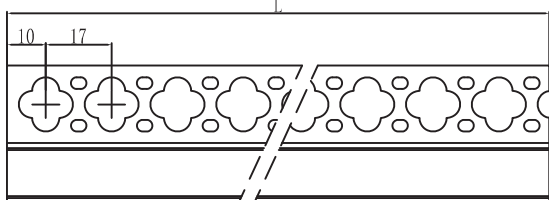

# Aluminum Profile RoHS



**YD-8833**

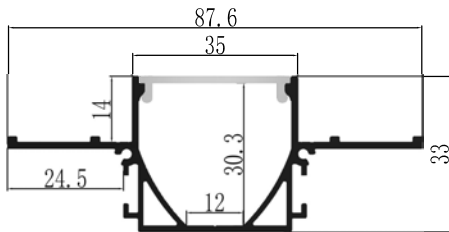

Material: AL6063-T5

Surface: black/white/silver

Pc cover option:

opal diffuser, transparent, frosted

Available length: 0.5-4m




YD-8833  
metal end cap








**YD-6728**

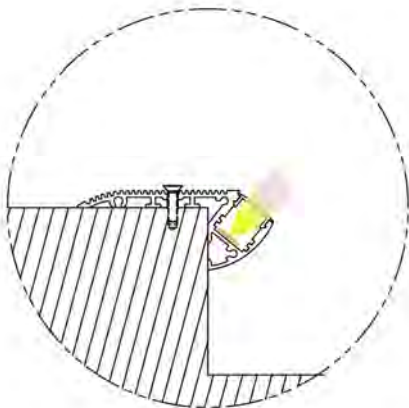


**YD-6826**

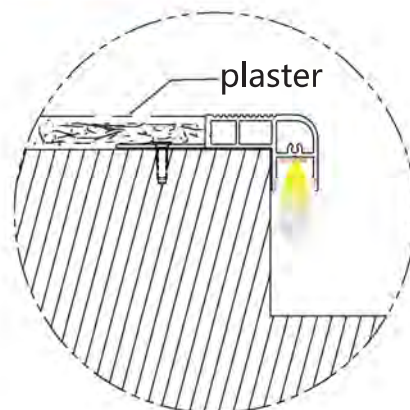

# Aluminum Profile



**YD-6728**

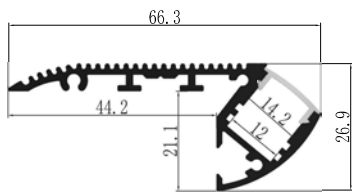


Material: AL6063-T5

Surface: black/white/silver

Pc cover option:

opal diffuser, transparent, frosted


Available length: 0.5-4m



YD-6728  
plastic end cap



**YD-6826**

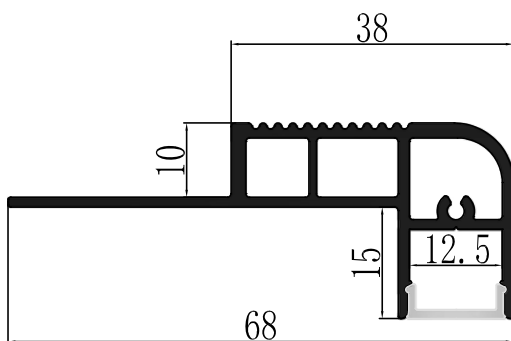


Material: AL6063-T5

Surface: black/white/silver

Pc cover option:

opal diffuser, transparent, frosted

Available length: 0.5-4m





YD-6826  
plastic end cap






**YD-9151**

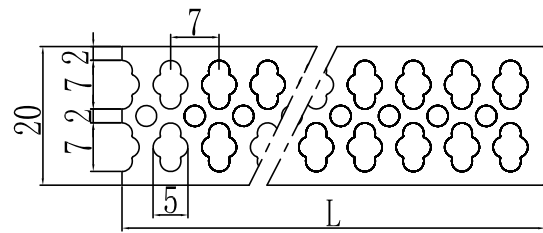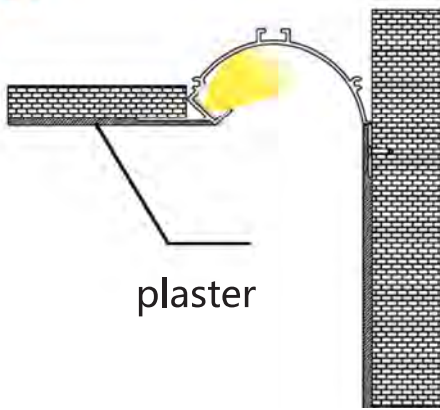

**YD-13350**

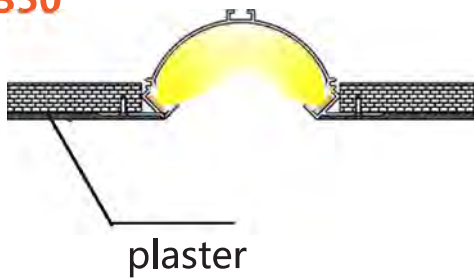


Double side working together with the plaster or dry wall can be fixed by screw.

# Aluminum Profile



## YD-9151

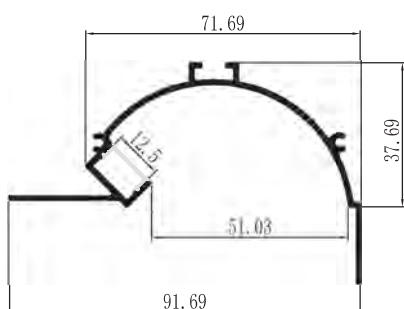


Material: AL6063-T5  
 Surface: black/white/silver  
 Pc cover: Available with opal  
 Available length: 0.5-4m



YD-9151  
metal end cap



## YD-13350

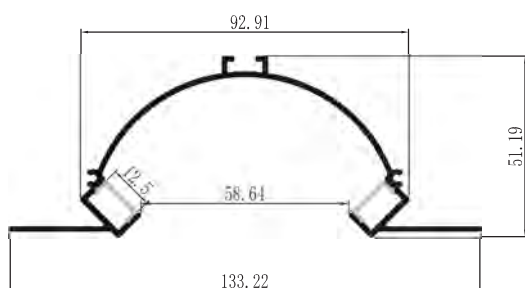


Material: AL6063-T5  
 Surface: black/white/silver  
 Pc cover option:  
 opal diffuser, transparent, frosted  
 Available length: 0.5-4m




YD-13350  
metal end cap



**YD-6916**

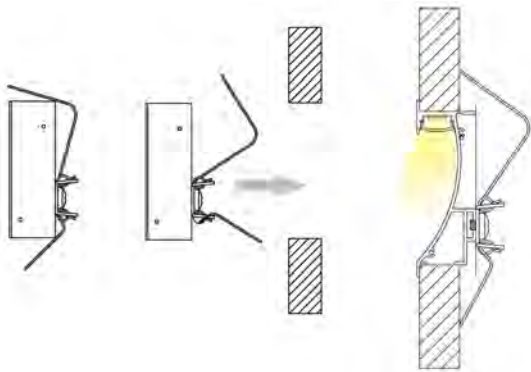



**YD-12017**

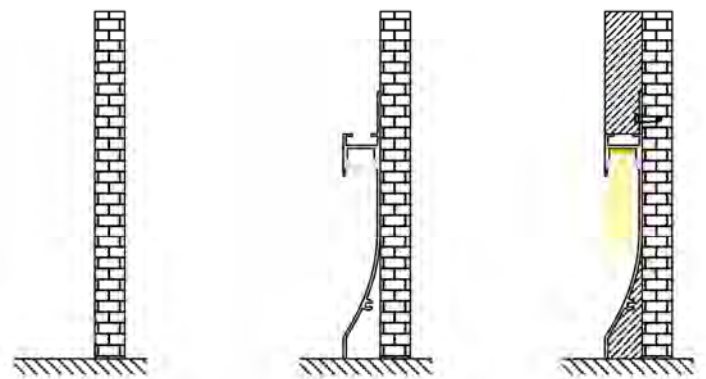



# Aluminum Profile

## YD-6916

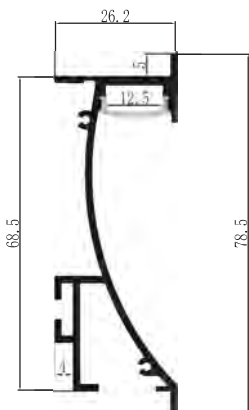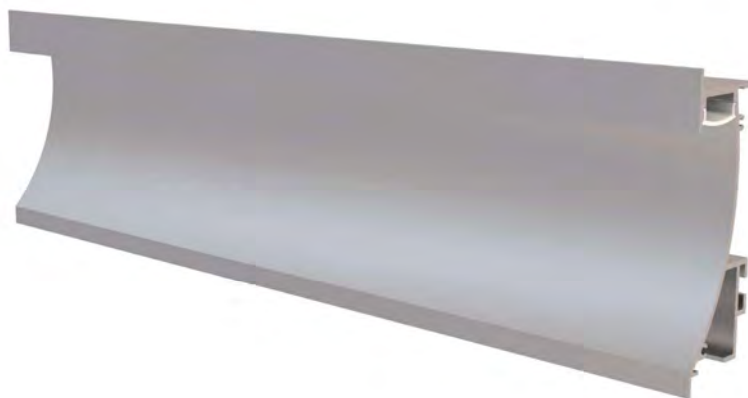

Material: AL6063-T5  
Surface: black/white/silver

Pc cover option:  
opal diffuser, transparent, frosted  
Available length: 0.5-4m




YD-6916  
spring clip



YD-6916  
metal end cap

## YD-12017

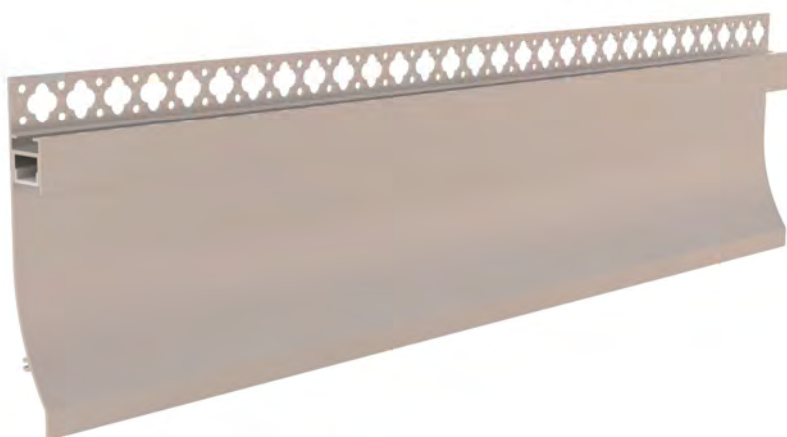


Material: AL6063-T5  
Surface: black/white/silver

Pc cover option:  
opal diffuser, transparent, frosted  
Available length: 0.5-4m




YD-12017  
plastic end cap

# Aluminum Profile

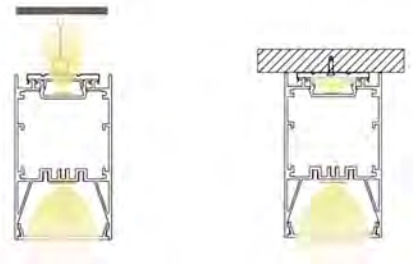

**YD-5085**

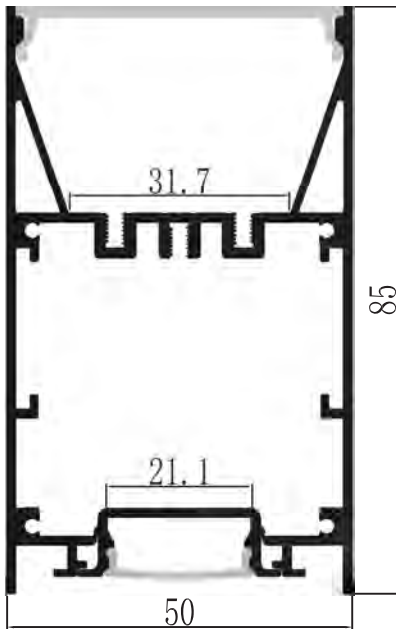

Material: AL6063-T5

Surface: black/white/silver

Pc cover option:

opal diffuser, transparent, frosted

Available length: 0.5-4m



YD-5085  
black diffuser cover




YD-5085  
metal end cap



YD-5085  
metal clip




suspended  
wire

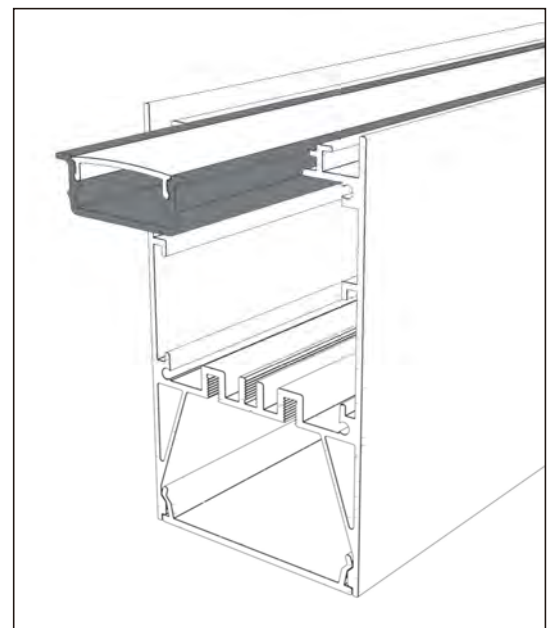




# Aluminum Profile

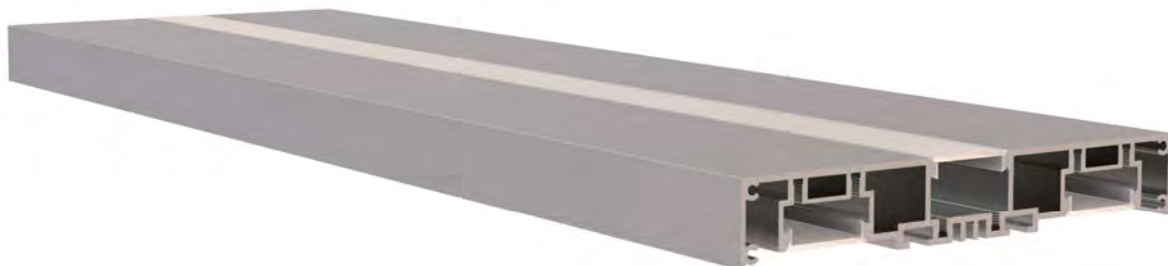

## YD-15023




Material: AL6063-T5

Surface: black/white/silver

Pc cover option:

opal diffuser, transparent, frosted

Available length: 0.5-4m

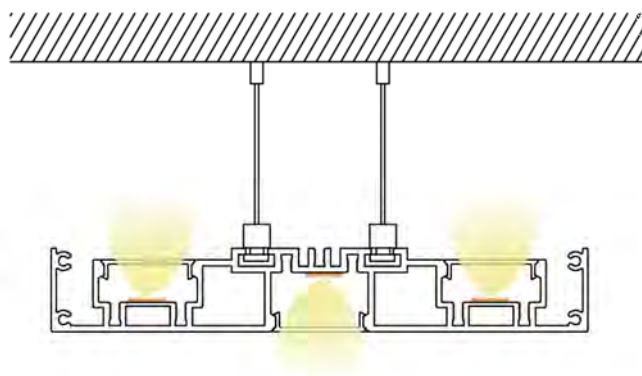

YD-15023  
metal end cap




suspended  
wire

# Aluminum Profile




## YD-V04

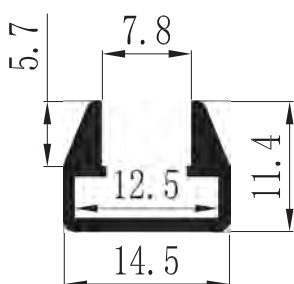

Material: AL6063-T5  
 Surface: black/white/silver  
 Pc cover option:  
 opal diffuser, transparent, frosted  
 Available length: 0.5-4m



## YD-1218

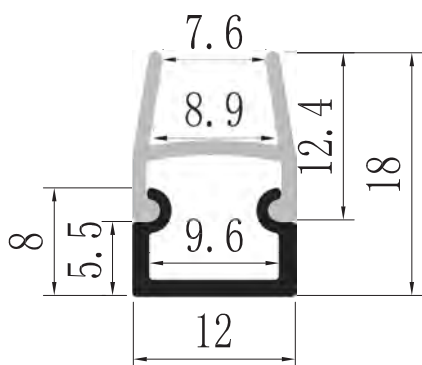


Material: AL6063-T5  
 Surface: black/white/silver  
 Pc cover option:  
 opal diffuser, transparent, frosted  
 Available length: 0.5-4m



# Aluminum Profile



## YD-3019

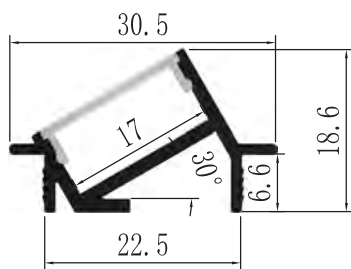

YD-3019  
plastic end cap



Material: AL6063-T5

Surface: black/white/silver


Pc cover option:

opal diffuser, transparent, frosted


Available length: 0.5-4m



# Aluminum Profile

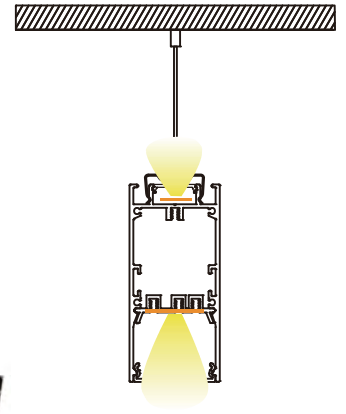

## YD-3373

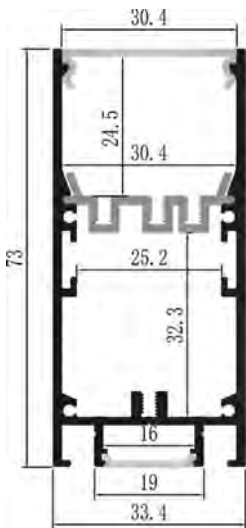



Material: AL6063-T5

Surface: black/white/silver

Pc cover option:

opal diffuser, transparent, frosted

Available length: 0.5-4m

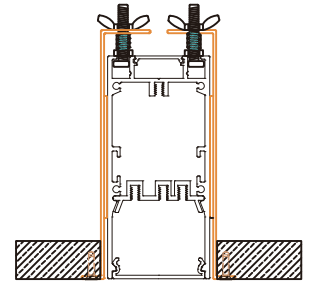

YD-3373 plastic end cap



YD-3373 metal clip



suspended wire





YD-3373 metal clip






# Aluminum Profile

## Length 规格长度

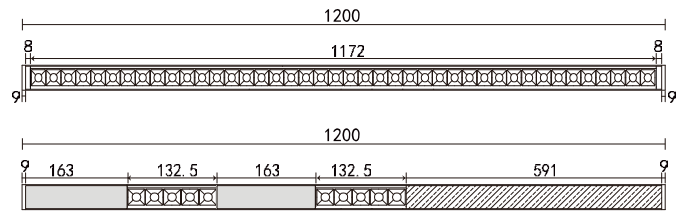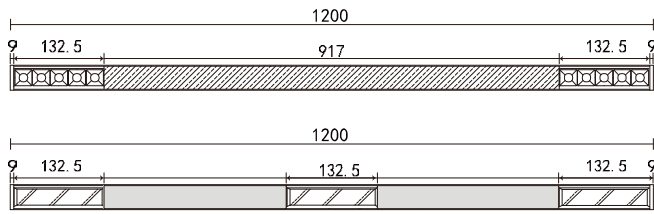



## Combination 组合

LENS 透镜	
Size尺寸	132,5*30*23,6mm
LED灯珠	XPE/3030/3535
Power功率	5*(1-3)W
Angle角度	15° 30° 45°

LENS 透镜	
Size尺寸	132,5*30*22,6mm
LED灯珠	XPE/3030/3535
Power功率	5*(1-3)W
Angle角度	Flood Light/泛光

LENS 透镜	
Size尺寸	132,5*30*27mm
LED灯珠	XPE/3030/3535
Power功率	5*(1-3)W
Angle角度	Polarized light/偏光

LENS 透镜	
Size尺寸	1176*30*20mm
LED灯珠	3030
Power功率	42*(1-3)W
Angle角度	50° 50X50° 35X70°



PC cover PC罩	
Size尺寸	30,8*7*xxmm
LED灯珠	2835/5050/5730
Power功率	20w/m 28,8w/m 36w/m
Angle角度	120°

Aluminium Plate 铝板	
Size尺寸	30,8*7*xxmm
LED灯珠	None
Power功率	None
Angle角度	None






**Aluminum profile** 

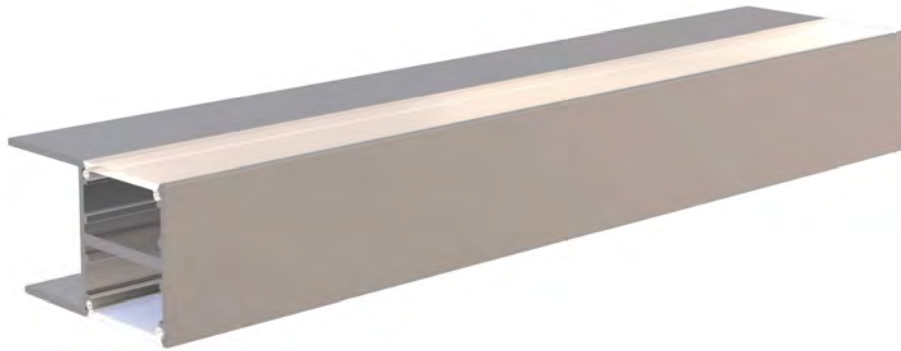

**YD-3420**

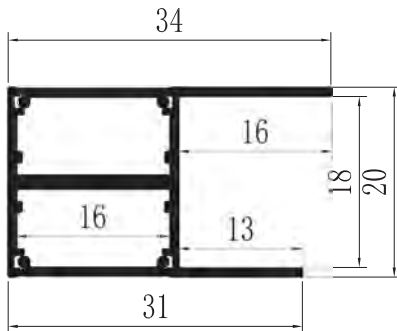



Material: AL6063-T5

Surface: black/white/silver


Pc cover option:

opal diffuser, transparent, frosted

Available length: 0.5-4m

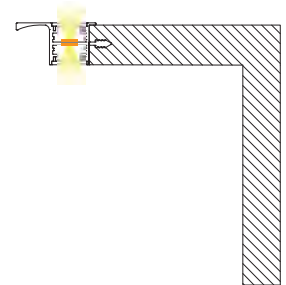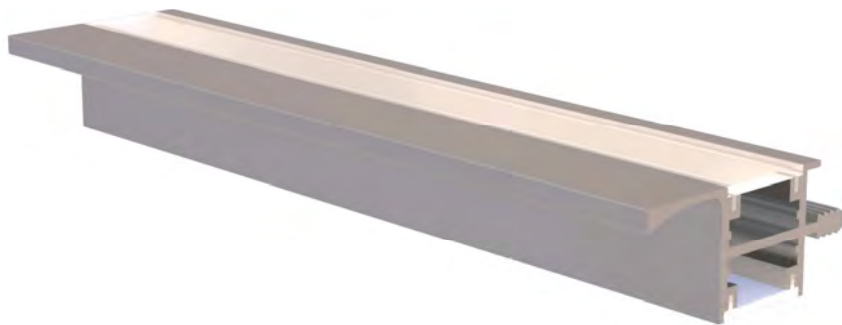

**YD-4319**

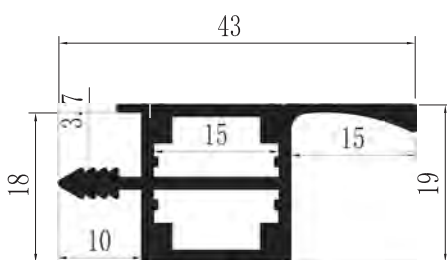


Material: AL6063-T5


Surface: black/white/silver

Pc cover option:

opal diffuser, transparent, frosted

Available length: 0.5-4m

**Aluminum profile** 

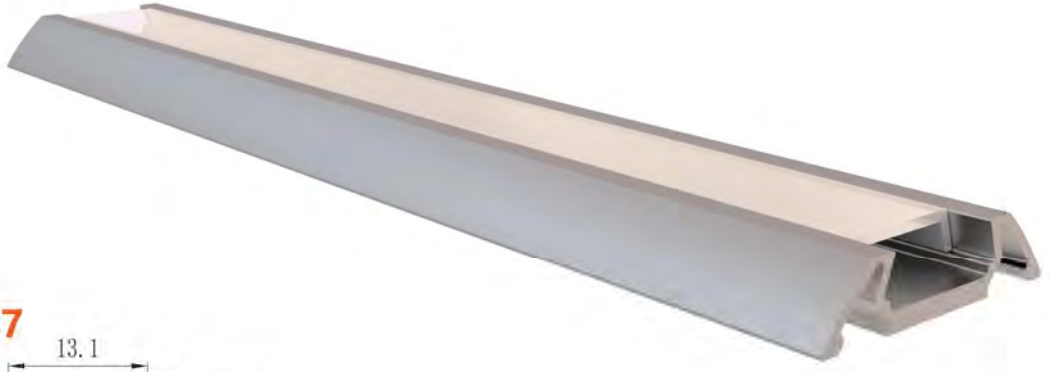

**YD-1107**



Material: AL6063-T5  
 Surface: black/white/silver  
 Pc cover option:  
 opal diffuser, transparent, frosted  
 Available length: 0.5-4m




YD-1107 plastic end cap



YD-1107 metal clip




**YD-2121**

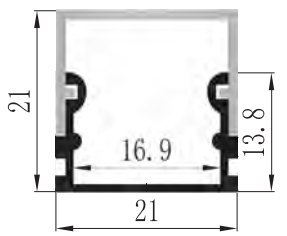

Material: AL6063-T5  
 Surface: black/white/silver  
 Pc cover option:  
 opal diffuser, transparent, frosted  
 Available length: 0.5-4m




YD-2121 plastic end cap




YD-2121 metal clip

# Aluminum profile

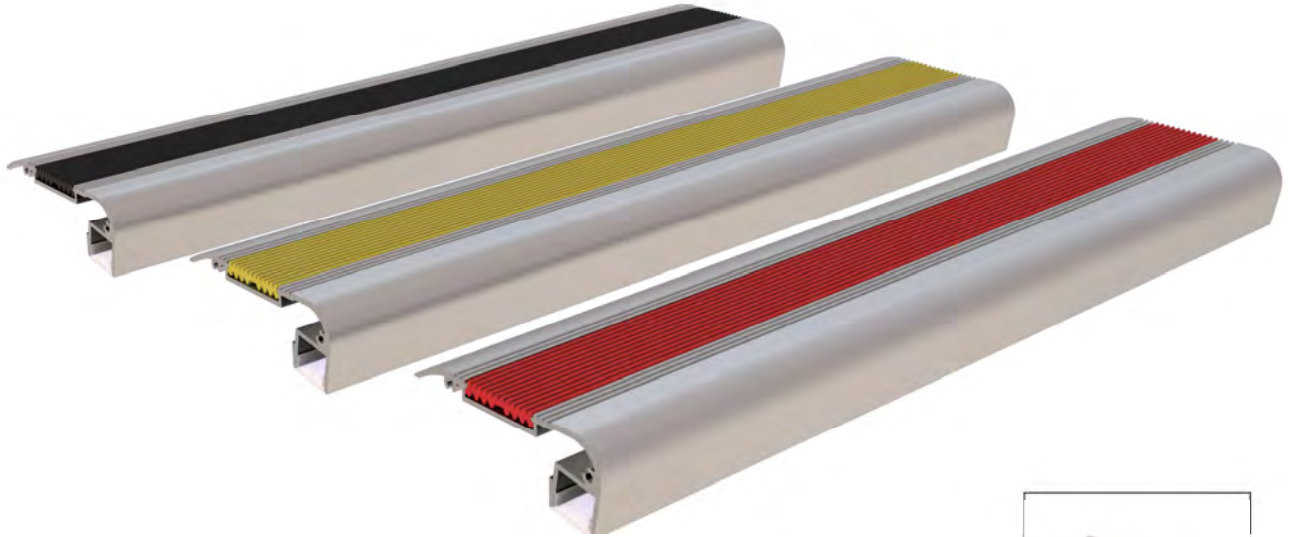

## YD-6725

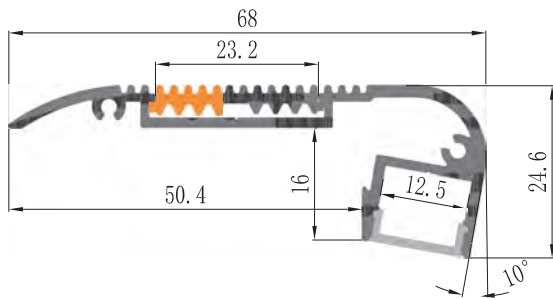

YD-6725 plastic end cap




Material: AL6063-T5

Surface: black/white/silver

Pc cover option:

opal diffuser, transparent, frosted


Available length: 0.5-4m

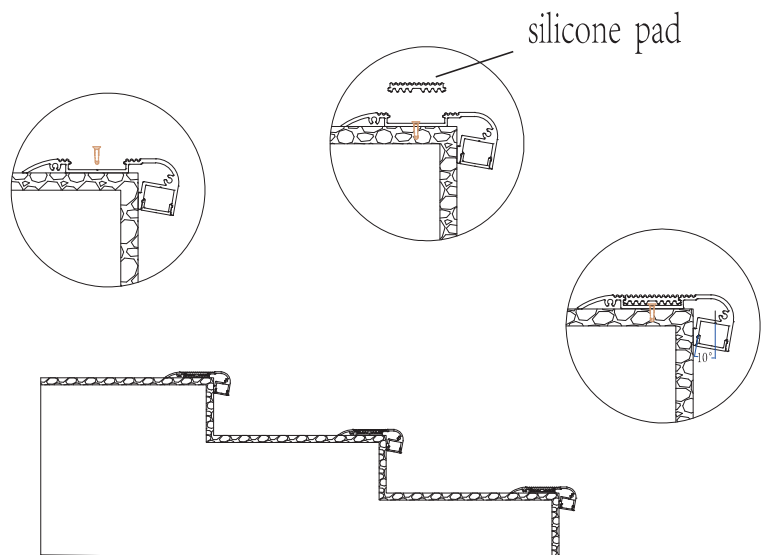

# Aluminum profile



**YD-9013**

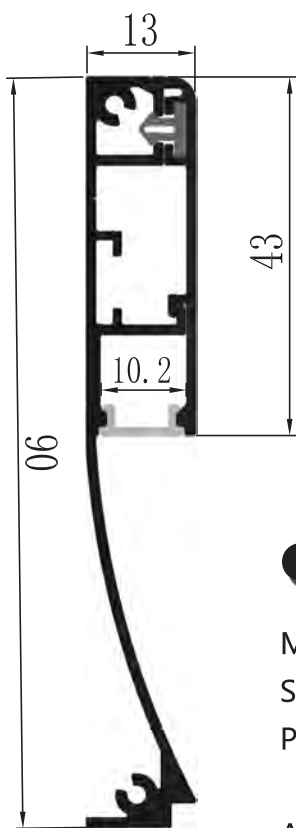

YD-9013 metal end cap



YD-9013 plastic clip





Material: AL6063-T5

Surface: black/white/silver

Pc cover option:



opal diffuser, transparent, frosted

Available length: 0.5-4m

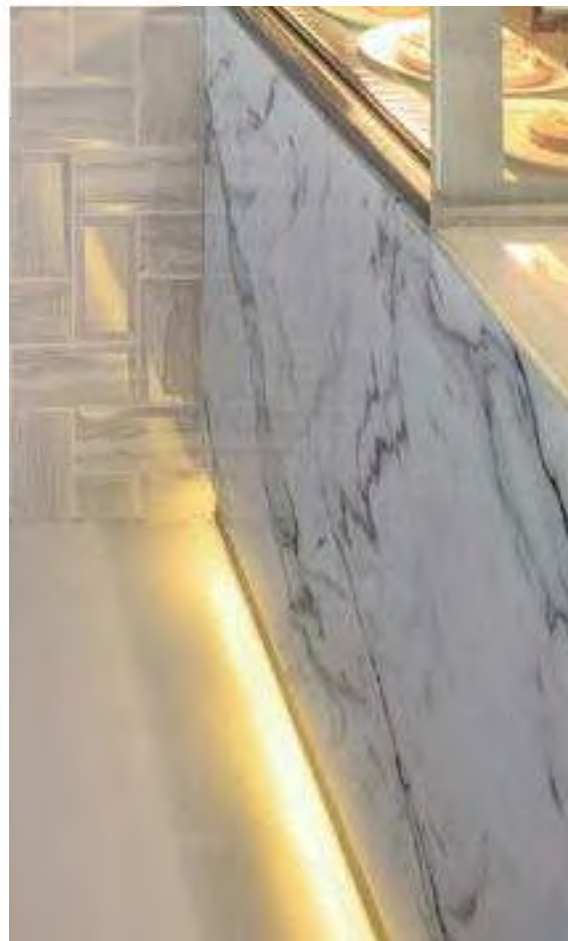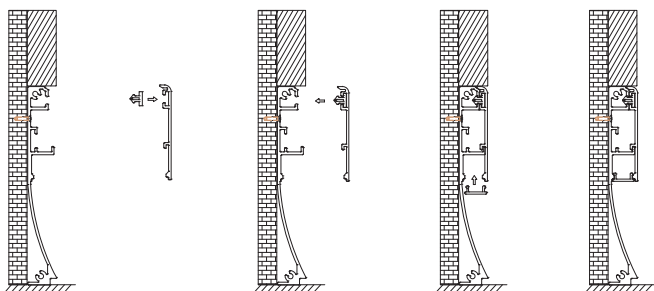



# Aluminum Profile

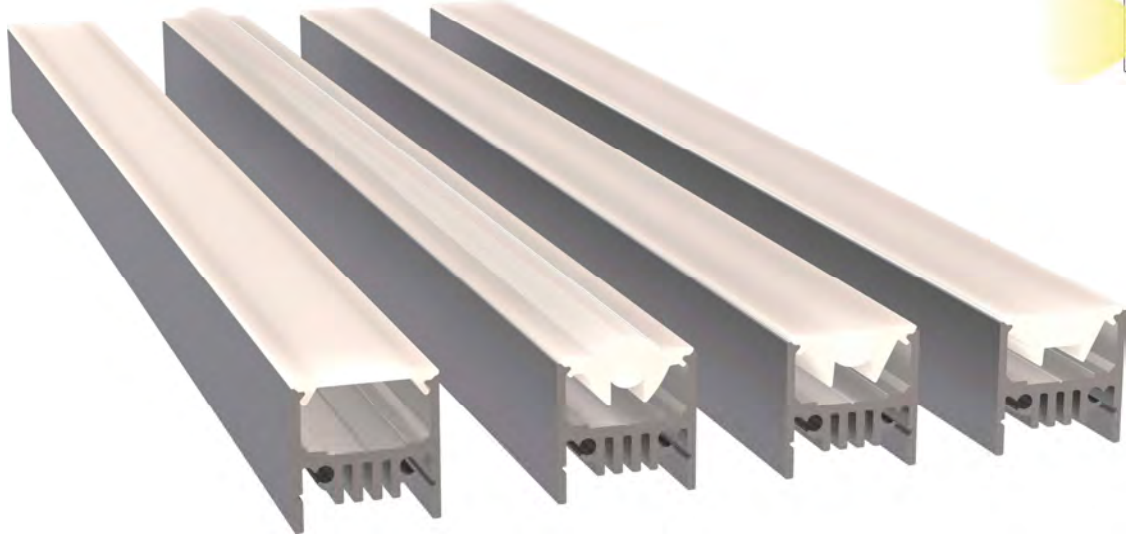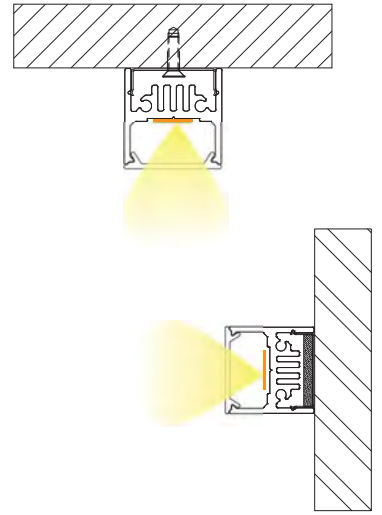

## YD-1919

Material: AL6063-T5

Surface: black/white/silver


Pc/PMMA Cover Option:

opal diffuser, transparent, frosted

Available length: 0.5-4m

YD-1919: Pc Cover Option

YD-1919-10°/30°/60°: PMMA Cover Option






YD-1919/10°/30°/60° plastic end cap

## YD-1919-10°

## YD-1919-30°

## YD-1919-60°




YD-1919/10°/30°/60° magnet





YD-1919/10°/30°/60° metal clip

It comes with regular lampshades and special ones at 10, 30 and 60 degrees. Equipped with magnetic clip.

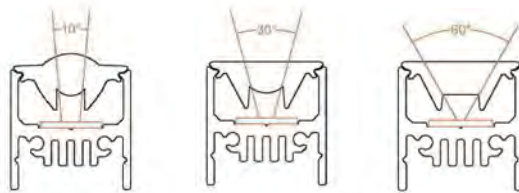




# Aluminum Profile **CE ROHS**




## YD-2411



Material: AL6063-T5  
 Surface: black/white/silver  
 Pc cover: Available with opal  
 Available length: 0.5-4m



## YD-2213



YD-2411 plastic end cap





YD-2213 plastic end cap



YD-2213 metal clip

**Aluminum Profile** **CE ROHS**

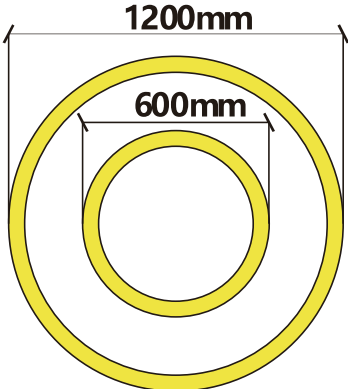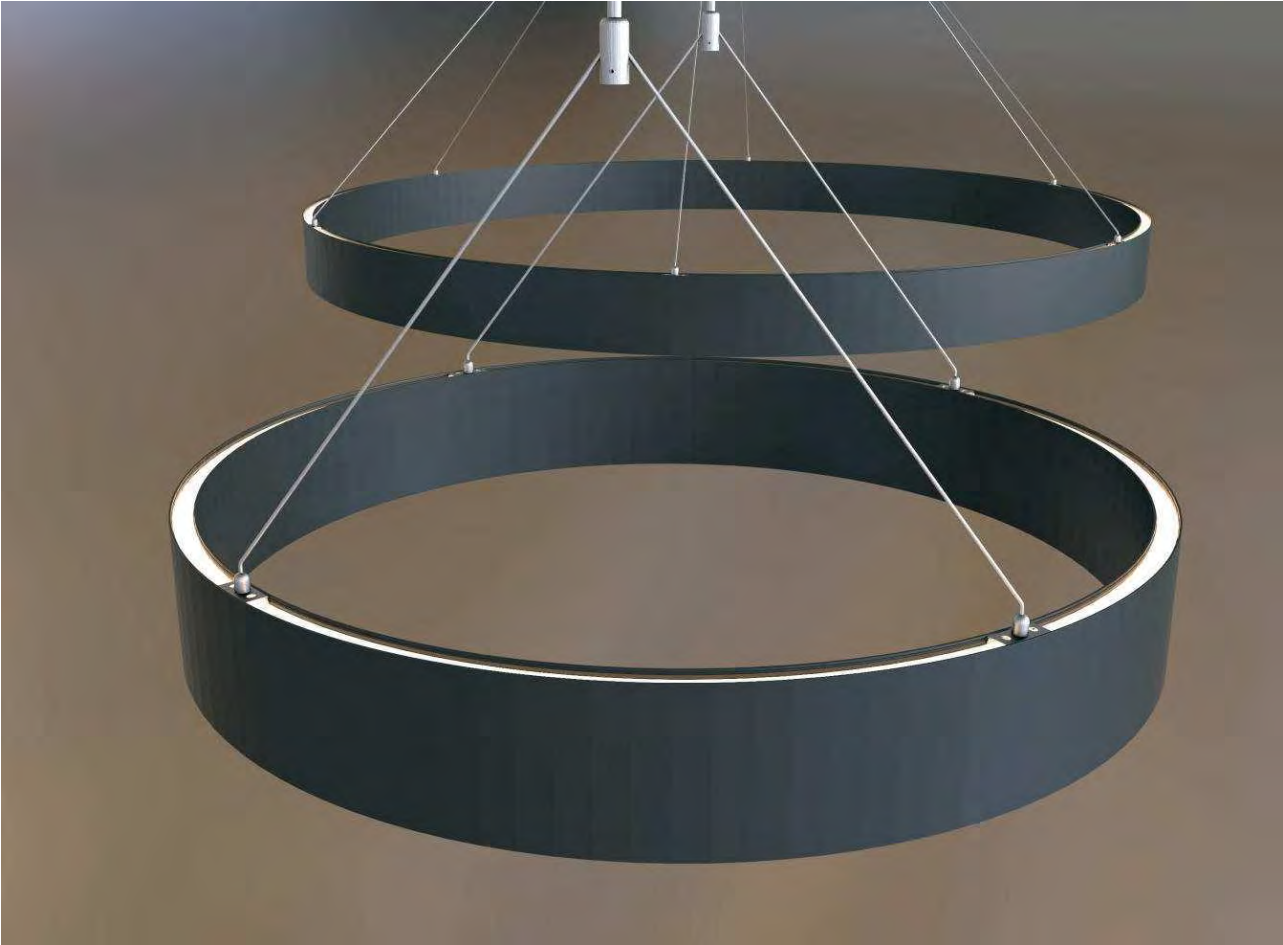

**YD 1590**



# Aluminum Profile



## Aluminum Profile

Material: 6063-T5

Weight: 0.82kg/m

Color: anodized silver available  
another color can be customized

## Cover

Material: imported pc plastics

Weight: 0.025kg/m


Color: frosted, opal diffuser, transparent

## End cap

Material: imported pc plastics

## Installation parts

Material: stainless steel/AL

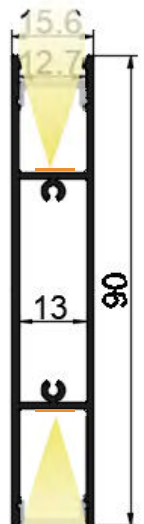

# Aluminum Profile

## Aluminum Profile

Material: 6063-T5

Color: anodized silver available  
another color can be customized

Weight: 0.056kg/m

## Cover

Material: imported silica gel

Color: white

Weight: 0.0076kg/m


## End cap

Material: imported pc plastics



## Installation parts

Material: stainless steel

Color: true colors




**YD 1005**

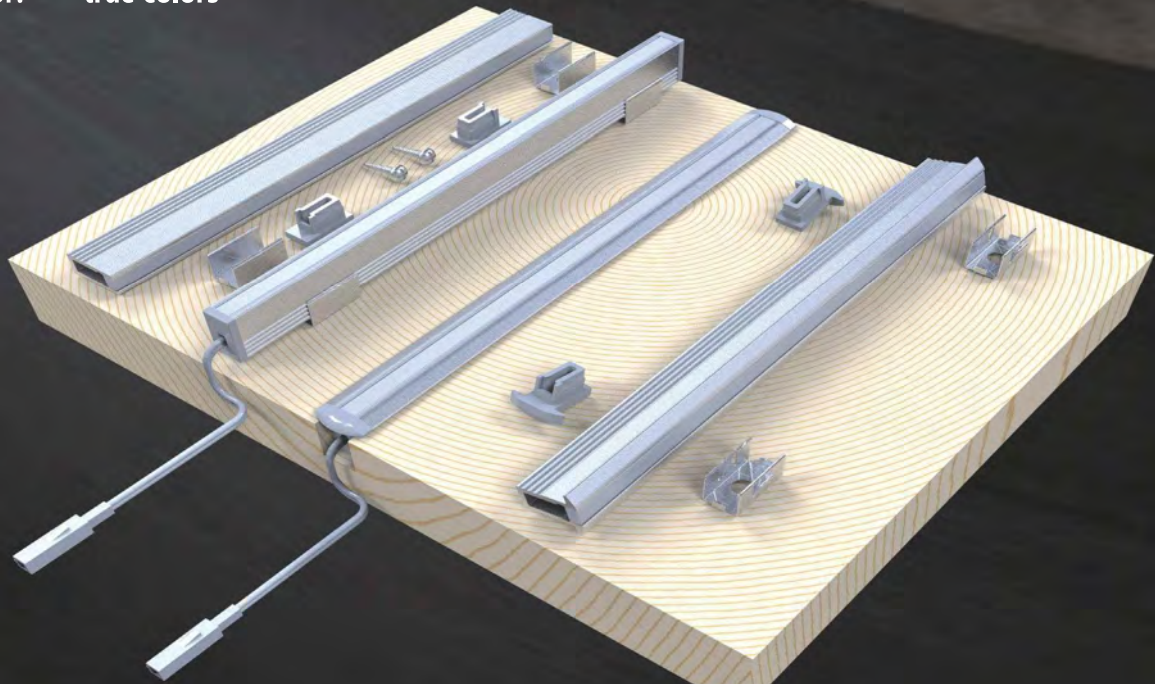

开孔尺寸6MM



**YD 1009**



## Aluminum Profile

Material: 6063-T5

Color: anodized silver available  
another color can be customized

Weight: 0.066kg/m

## Cover

Material: imported silica gel

Color: white

Weight: 0.0076kg/m

## End cap

Material: imported pc plastics

## Installation parts

Material: stainless steel

Color: true colors



# Aluminum Profile

## Aluminum Profile

Material: 6063-T5

Color: anodized silver available  
another color can be customized

Weight: 0.162kg/m

## Cover

Material: imported pc plastics

Color: frosted, opal diffuser, transparent

Weight: 0.026kg/m


## End cap

Material: imported pc plastics



## Installation parts

Material: stainless steel

Color: true colors

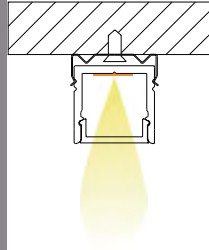

**YD** 1516

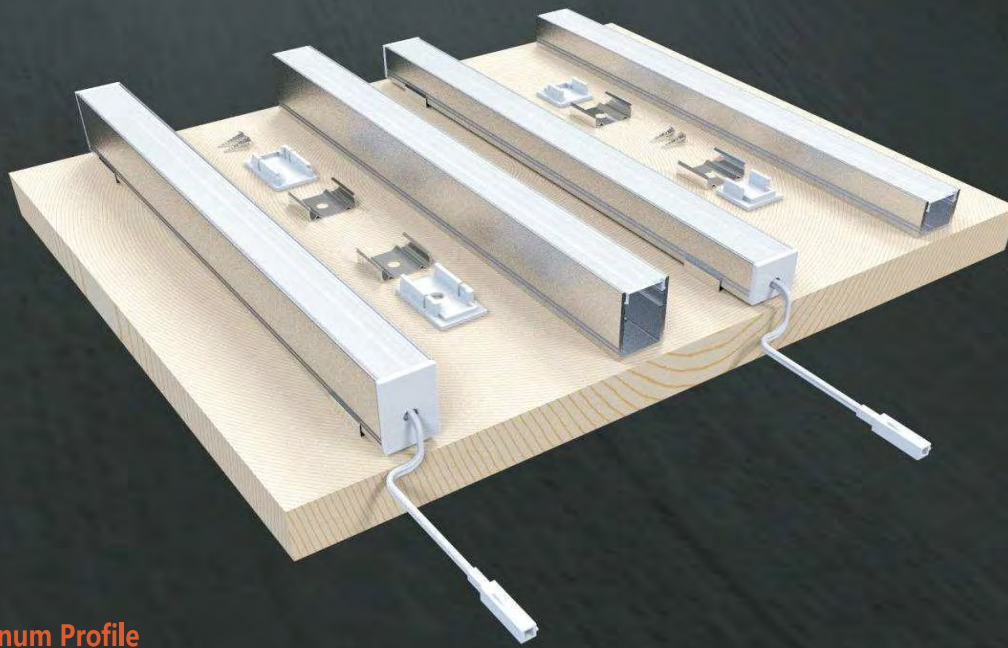

## Aluminum Profile

Material: 6063-T5

Color: anodized silver available  
another color can be customized

Weight: 0.23kg/m

## Cover

Material: imported pc plastics

Color: frosted, opal diffuser, transparent

Weight: 0.026kg/m


## End cap

Material: imported pc plastics


## Installation parts

Material: stainless steel

Color: true colors



**YD** 1525





# Aluminum Profile

## Aluminum Profile

Material: 6063-T5

Color: anodized silver available  
another color can be customized

Weight: 0.022kg/m

## Cover

Material: imported silica gel

Color: white

Weight: 0.03kg/m



## End cap

Material: imported pc plastics




## Installation parts

Material: stainless steel

Color: true colors



**YD 2020-S**

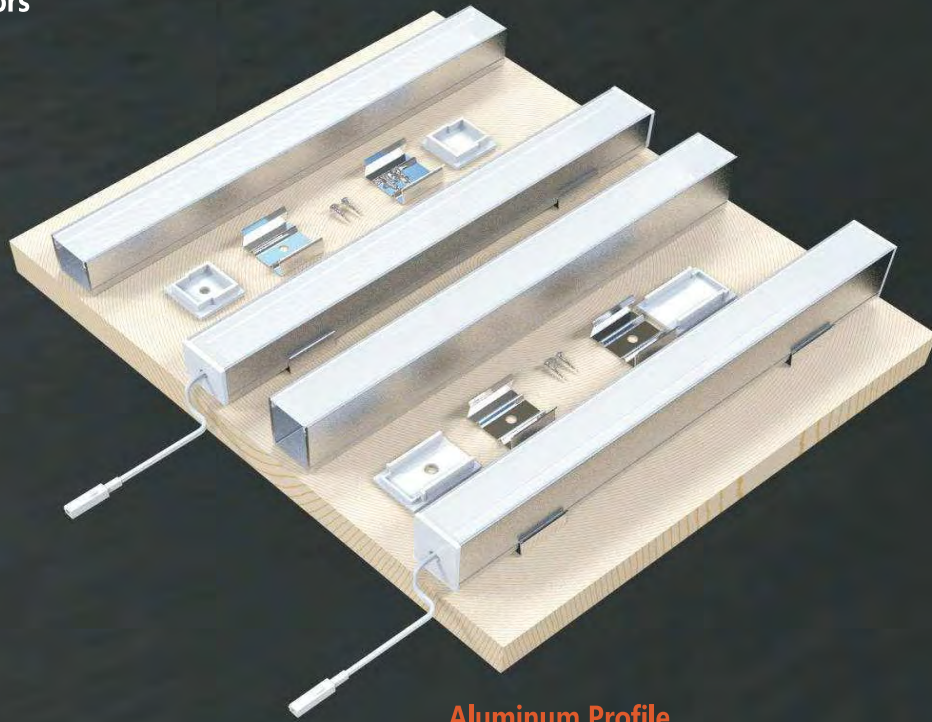

**YD 2030**

## Aluminum Profile

Material: 6063-T5

Color: anodized silver available  
another color can be customized

Weight: 0.3kg/m

## Cover

Material: imported silica gel

Color: white

Weight: 0.03kg/m

## End cap

Material: imported pc plastics

## Installation parts

Material: stainless steel

Color: true colors

# Aluminum Profile

## Aluminum Profile

Material: 6063-T5  
 Color: anodized silver available  
 another color can be customized  
 Weight: 0.3kg/m

## Cover


Material: imported pc plastics  
 Color: frosted, opal diffuser, transparent  
 Weight: 0.03kg/m

## End cap



Material: imported pc plastics

## Installation parts

Material: stainless steel  
 Color: true colors



**YD 2525**

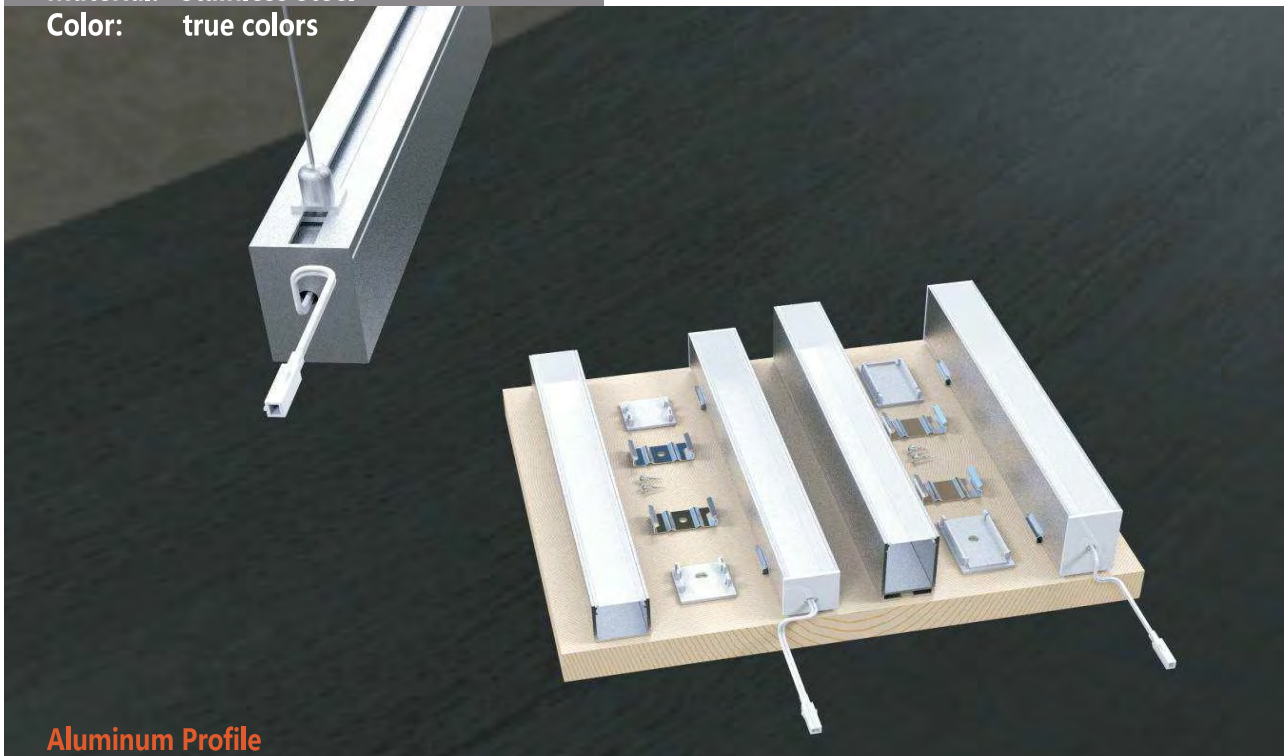

## Aluminum Profile

Material: 6063-T5  
 Color: anodized silver available  
 another color can be customized  
 Weight: 0.47kg/m

## Cover


Material: imported pc plastics  
 Color: frosted, opal diffuser, transparent  
 Weight: 0.03kg/m

## End cap


Material: imported pc plastics

## Installation parts

Material: stainless steel  
 Color: true colors




**YD 2540**

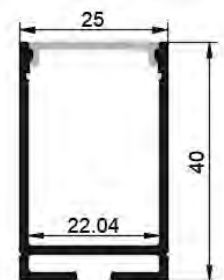



# Aluminum Profile

CE ROHS

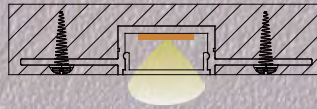

## Aluminum Profile

Material: 6063-T5

Color: anodized silver available  
another color can be customized

Weight: 0.254kg/m



## Cover

Material: imported pc plastics


Color: frosted, opal diffuser, transparent

Weight: 0.03kg/m




## End cap

Material: imported pc plastics

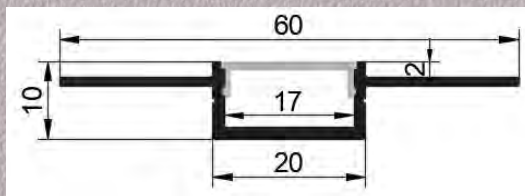

**YD** 6010






**Aluminum  
Profile**

**CE ROHS**

# Aluminum Profile

CE RoHS

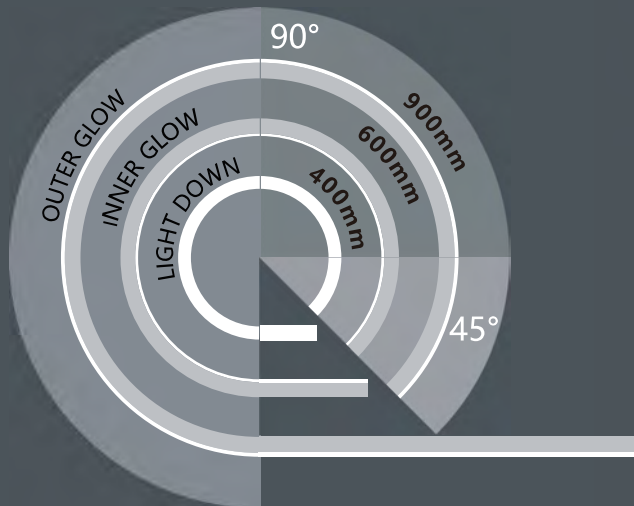

## Black module


Angle	Diameter	Arc length	Light out
180°	400mm	inside $\sim$ 550mm/outside $\sim$ 628.5mm	outer glow
180°	600mm	inside $\sim$ 864mm/outside $\sim$ 942.5mm	inner glow
180°	900mm	inside $\sim$ 1335mm/outside $\sim$ 1413.5mm	light down

## Grey module

Angle	Diameter	Arc length	Light out
45°	400mm	inside $\sim$ 137.5mm/outside $\sim$ 157mm	outer glow
45°	600mm	inside $\sim$ 216mm/outside $\sim$ 235.5mm	inner glow
45°	900mm	inside $\sim$ 334mm/outside $\sim$ 353.5mm	light down



## White module

Angle	Diameter	Arc length	Light out
90°	400mm	inside $\sim$ 275mm/outside $\sim$ 314mm	outer glow
90°	600mm	inside $\sim$ 432mm/outside $\sim$ 471mm	inner glow
90°	900mm	inside $\sim$ 667.5mm/outside $\sim$ 707mm	light down

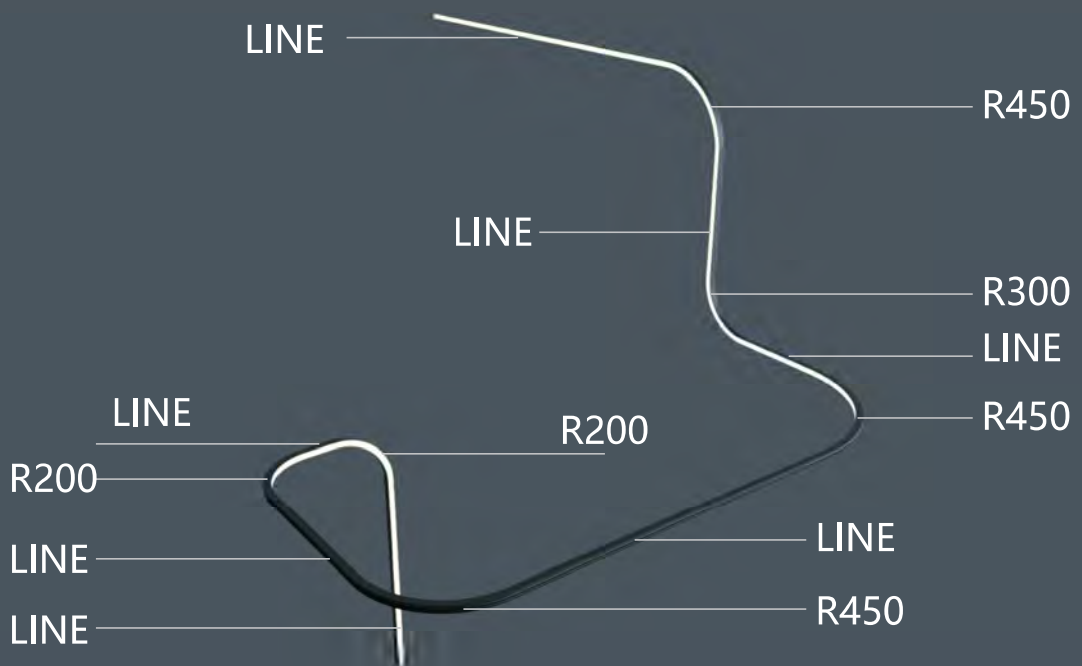





# Aluminum Profile CE RoHS

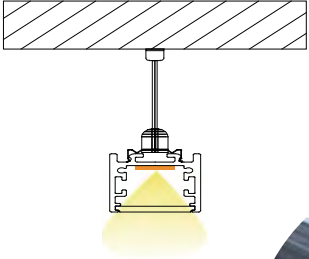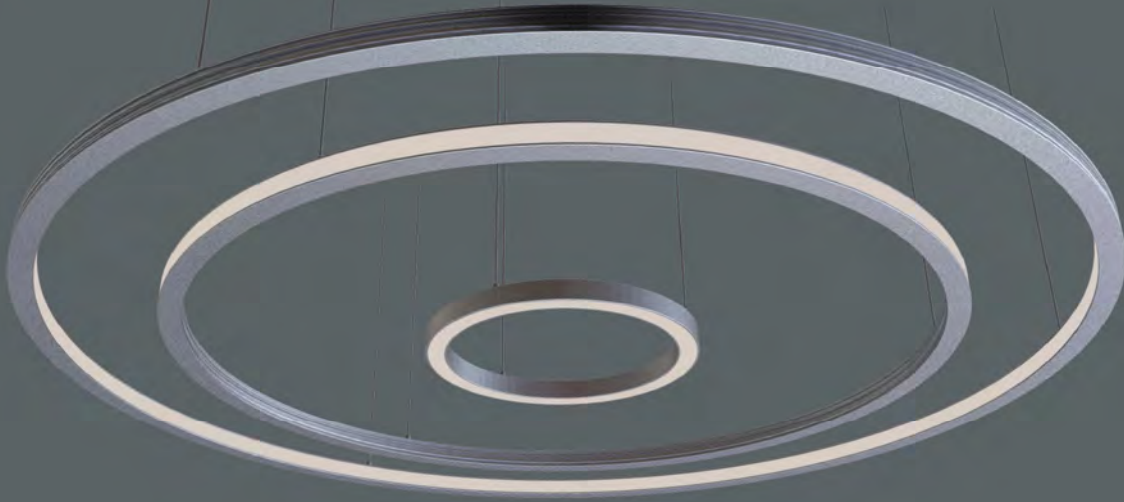

**New technology**



**Common processes**

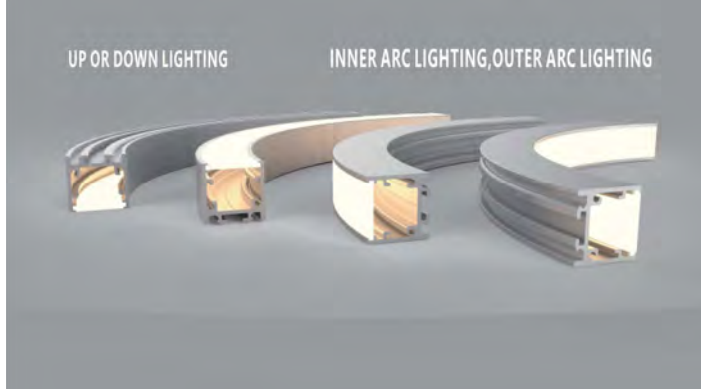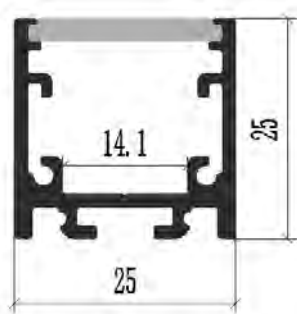

## Aluminum Profile

Material: 6063-T5

Color: anodized silver available  
another color can be customized

Weight: 0.456kg/m

## Cover

Material: imported silica gel

Color: white

Weight: 0.05kg/m

## End cap

Material: 6063-T5

Weight: 0.09Kg/m

## Installation parts


Material: metal clip







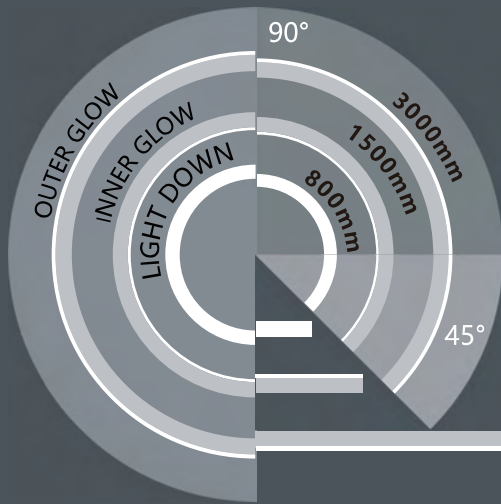

**YD 2525-R**

# Aluminum Profile







CE RoHS



## Width 35mm



	45°	Φ800mm	inside ∩ 286.5mm/outside ∩ 314mm	Innter glow
	90°	Φ800mm	inside ∩ 573.5mm/outside ∩ 628mm	Outer glow
	45°	Φ1500mm	inside ∩ 561mm/outside ∩ 589mm	Outer glow
	90°	Φ1500mm	inside ∩ 1123mm/outside ∩ 1178mm	Innter glow
	45°	Φ3000mm	inside ∩ 1150mm/outside ∩ 1178mm	Outer glow
	90°	Φ3000mm	inside ∩ 2300mm/outside ∩ 2356mm	Innter glow

## Width 50mm

	45°	Φ800mm	inside ∩ 275mm/outside ∩ 314mm	Light down
	90°	Φ800mm	inside ∩ 550mm/outside ∩ 628mm	Light down
	45°	Φ1500mm	inside ∩ 550mm/outside ∩ 589mm	Light down
	90°	Φ1500mm	inside ∩ 1099.5mm/outside ∩ 1178mm	Light down
	45°	Φ3000mm	inside ∩ 1139mm/outside ∩ 1178mm	Light down
	90°	Φ3000mm	inside ∩ 2277.5mm/outside ∩ 2356mm	Light down



# Aluminum Profile

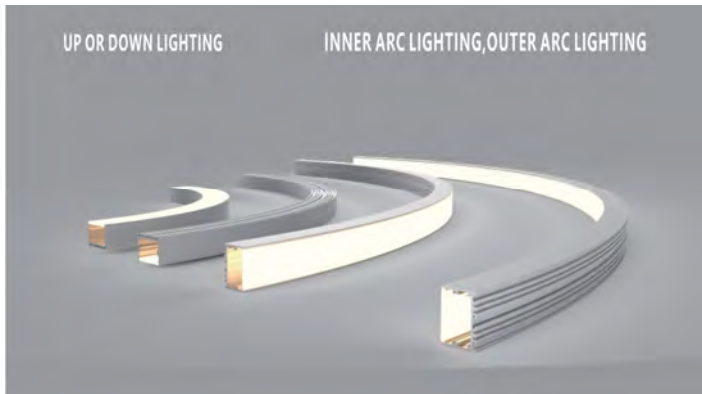

## Aluminum Profile

**Material:** 6063-T5

**Color:** anodized silver available  
another color can be customized

**Weight:** 0.9kg/m

## Cover

**Material:** imported silica gel

**Color:** white

**Weight:** 0.2kg/m


## End cap

**Material:** 6063-T5

**Weight:** 0.2Kg/m

## Installation parts


**Material:** metal clip

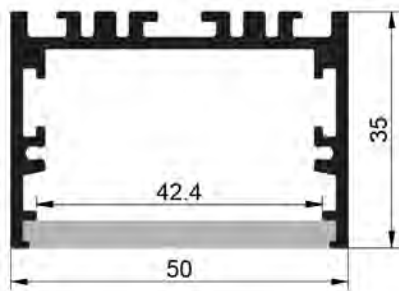





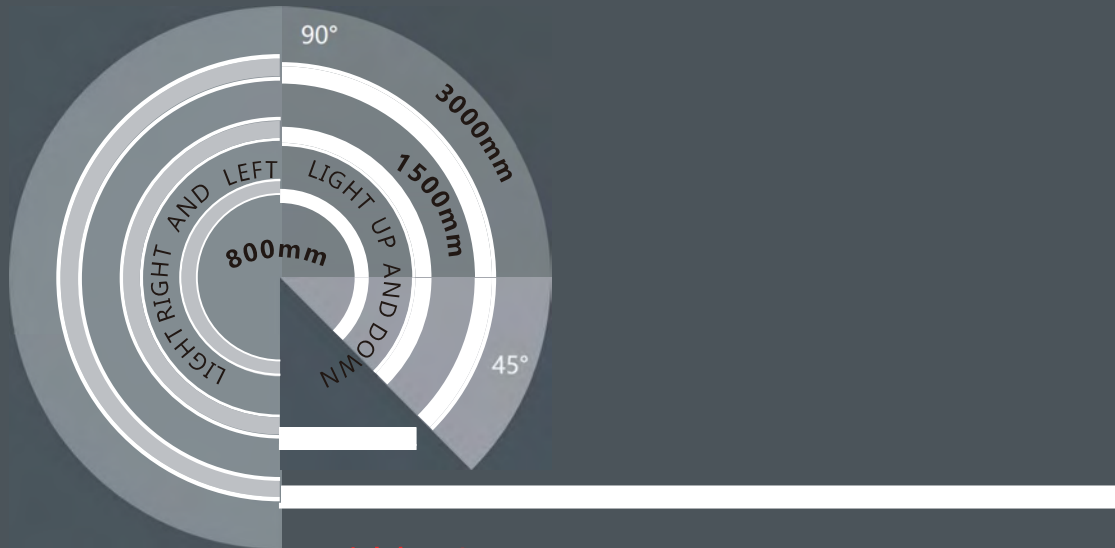

**YD 5035-R**

# Aluminum Profile







CE RoHS



## Width 50mm

	45°	Φ800mm	inside ∩ 275mm/outside ∩ 314mm	Light up and down
	90°	Φ800mm	inside ∩ 550mm/outside ∩ 628mm	Light up and down
	45°	Φ1500mm	inside ∩ 550mm/outside ∩ 589mm	Light up and down
	90°	Φ1500mm	inside ∩ 1099.5mm/outside ∩ 1178mm	Light up and down
	45°	Φ3000mm	inside ∩ 1139mm/outside ∩ 1178mm	Light up and down
	90°	Φ3000mm	inside ∩ 2277.5mm/outside ∩ 2356mm	Light up and down




## Width 60mm

	45°	Φ800mm	inside ∩ 267mm/outside ∩ 314mm	Light left and right
	90°	Φ800mm	inside ∩ 534mm/outside ∩ 628mm	Light left and right
	45°	Φ1500mm	inside ∩ 542mm/outside ∩ 589mm	Light left and right
	90°	Φ1500mm	inside ∩ 1084mm/outside ∩ 1178mm	Light left and right
	45°	Φ3000mm	inside ∩ 1131mm/outside ∩ 1178mm	Light left and right
	90°	Φ3000mm	inside ∩ 2262mm/outside ∩ 2356mm	Light left and right





# Aluminum Profile

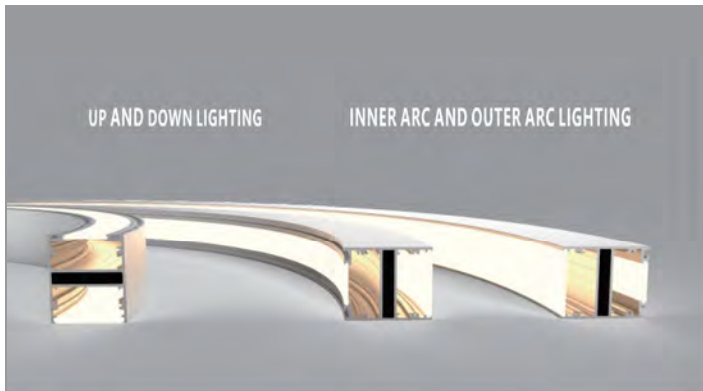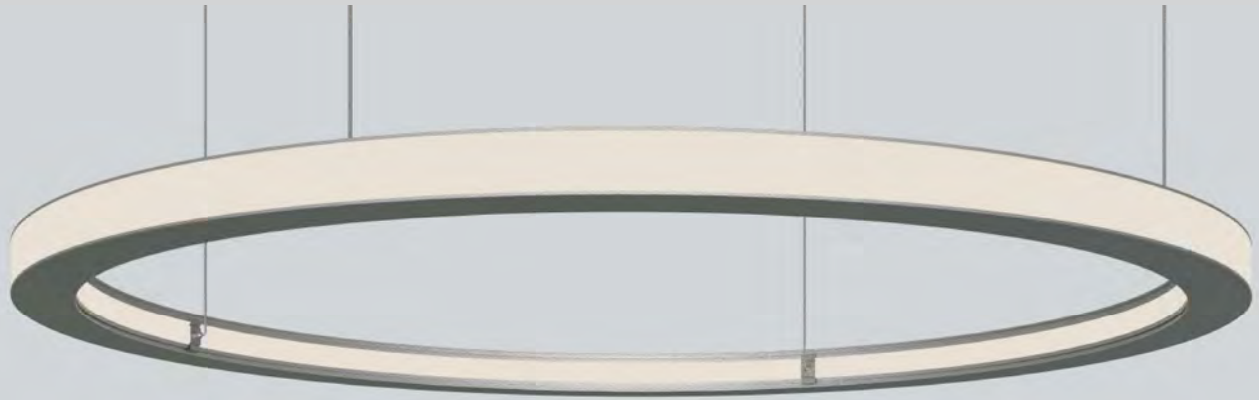

## Aluminum Profile

Material: 6063-T5

Color: anodized silver available  
another color can be customized

Weight: 1.4kg/m

## Cover

Material: imported silica gel

Color: white

Weight: 0.2kg/m


## End cap

Material: 6063-T5

Weight: 0.2Kg/m

## Installation parts

Material: metla clip

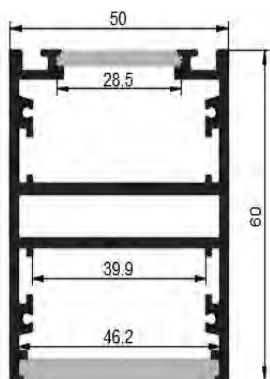

**YD 6050-R**

# Aluminum Profile **CE RoHS**



## **YD** 3535-R



### Aluminum Profile

Material: 6063-T5

Color: anodized silver available  
another color can be customized

Weight: 0.68kg/m



### Cover

Material: imported silica gel

Color: white

### End cap

Material: 6063-T5

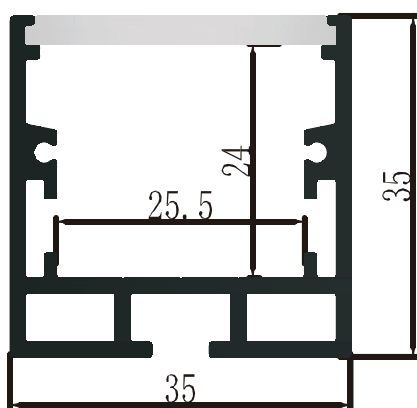


Common processes



New technology



# Aluminum Profile

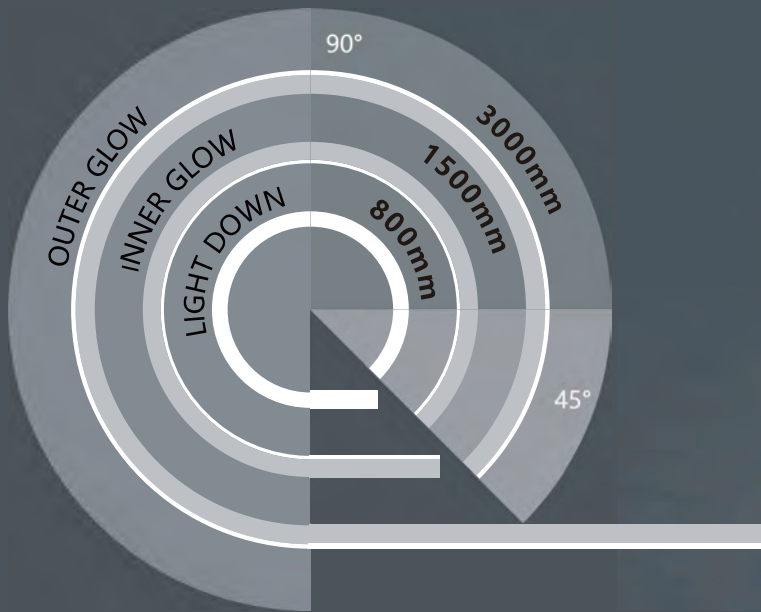

## Black module

Angle	Diameter	Arc length	Light out
180°	800mm	inside $\cap$ 1146.5mm/outside $\cap$ 1256.5mm	outer glow
180°	1500mm	inside $\cap$ 2246mm/outside $\cap$ 2356mm	inner glow
180°	3000mm	inside $\cap$ 4602.5mm/outside $\cap$ 4712.5mm	light down

## Grey module

Angle	Diameter	Arc length	Light out
45°	800mm	inside $\cap$ 286.5mm/outside $\cap$ 314mm	outer glow
45°	1500mm	inside $\cap$ 561.5mm/outside $\cap$ 589mm	inner glow
45°	3000mm	inside $\cap$ 1150.5mm/outside $\cap$ 1178mm	light down

## White module


Angle	Diameter	Arc length	Light out
90°	800mm	inside $\cap$ 573mm/outside $\cap$ 628mm	outer glow
90°	1500mm	inside $\cap$ 1123mm/outside $\cap$ 1178mm	inner glow
90°	3000mm	inside $\cap$ 2301mm/outside $\cap$ 2356mm	light down



# Aluminum Profile

CE RoHS

YD 4168

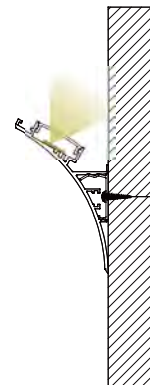

### Aluminum Profile

Material: 6063-T5

Color: anodized silver available  
another color can be customized

Weight: 0.5kg/m



### Cover

Material: imported pc plastics

Color: frosted, opal diffuser transparent

Weight: 0.035Kg/m



### End cap

Material: imported pc plastics

### Installation parts

Material: imported silica gel



Color: white



### Installation parts

Material: 6063-5

Weight: 0.09kg/m

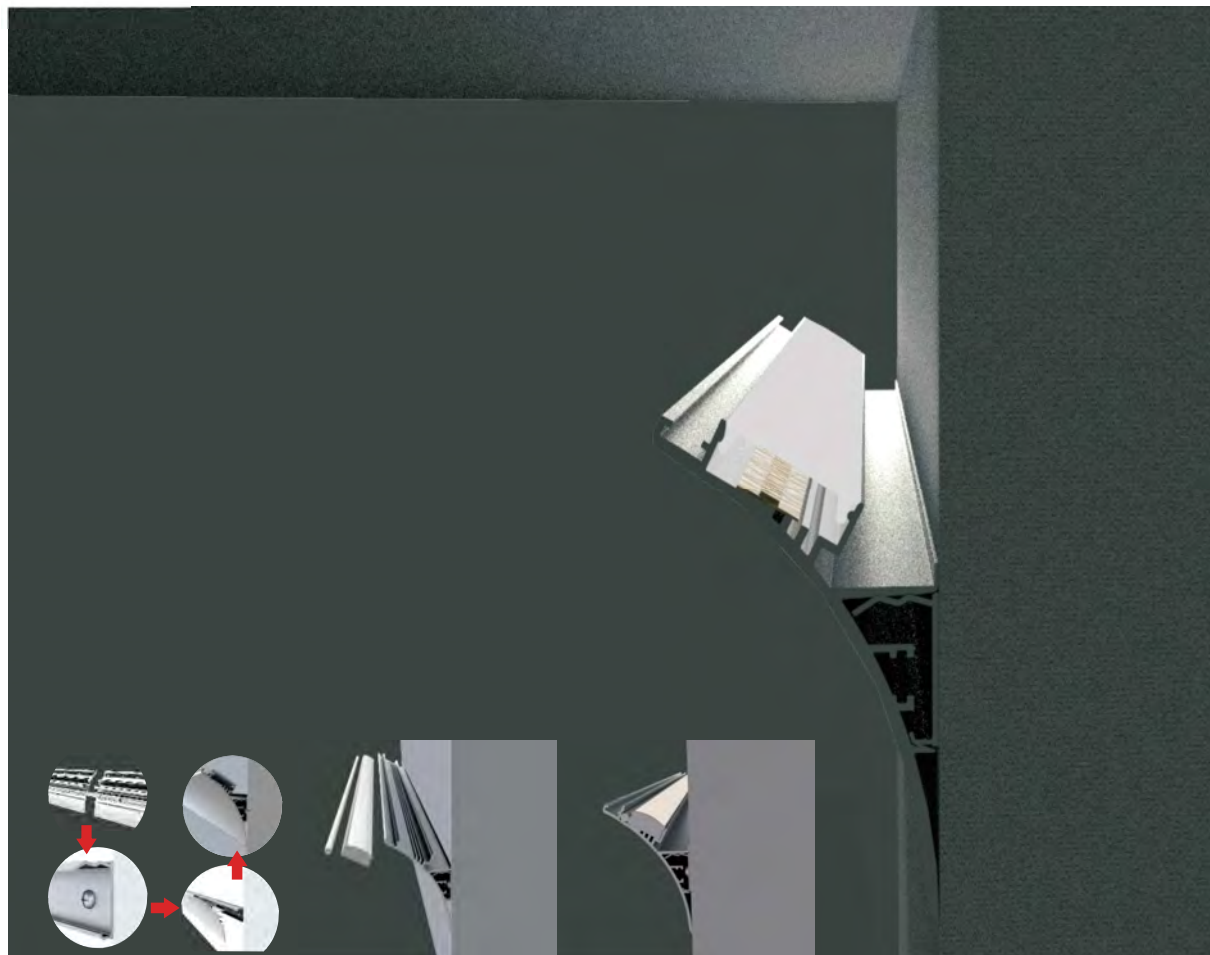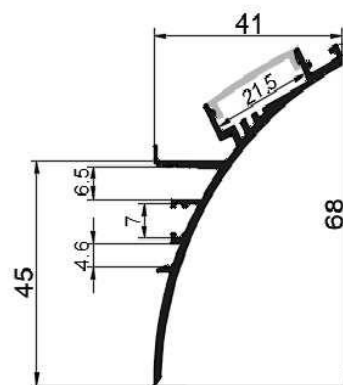



# Aluminum Profile

CE RoHS

YD 44108



### Aluminum Profile

Material: 6063-T5

Color: anodized silver available  
another color can be customized

Weight: 0.71kg/m



### Cover

Material: imported pc plastics

Color: frosted, opal diffuser transparent

Weight: 0.035Kg/m



### End cap



Material: imported pc plastics



### Installation parts

Material: imported silica gel

Color: white

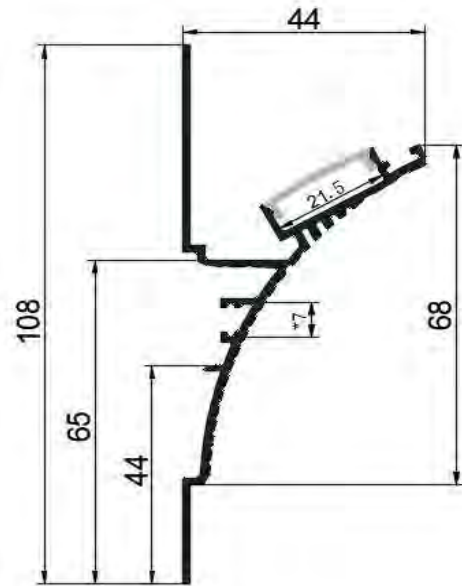




# Aluminum Profile

CE RoHS

**YD** 7535



### Aluminum Profile

Material: 6063-T5

Color: anodized silver available  
another color can be customized

Weight: 0.7kg/m



### Cover

Material: imported pc plastics



Color: frosted, opal diffuser transparent

Weight: 0.07Kg/m



### End cap


Material: 6063-5

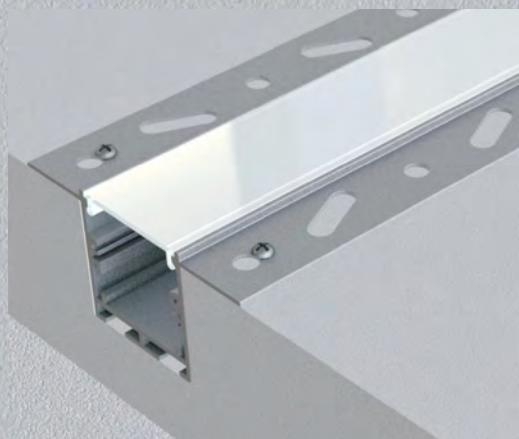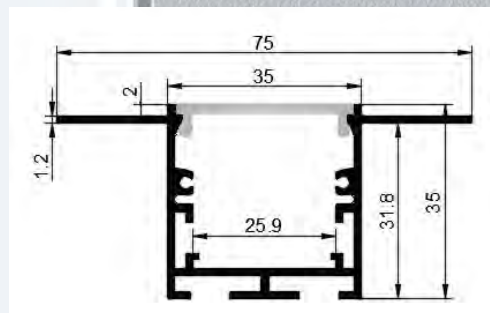



# Aluminum Profile

**YD** 9035-T

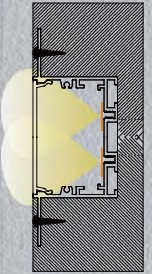

### Aluminum Profile

Material: 6063-T5

Color: anodized silver available  
another color can be customized

Weight: 0.8kg/m



### Cover

Material: imported pc plastics



Color: frosted, opal diffuser transparent

Weight: 0.1Kg/m



### End cap


Material: 6063-5

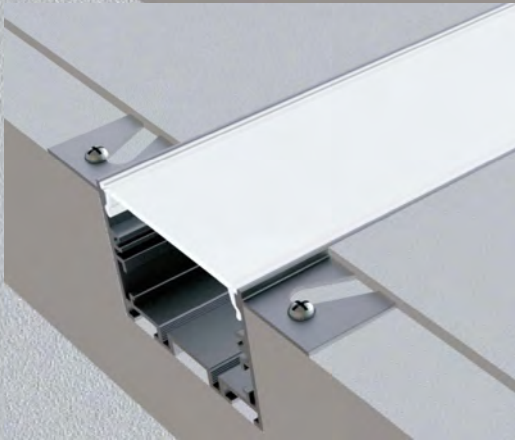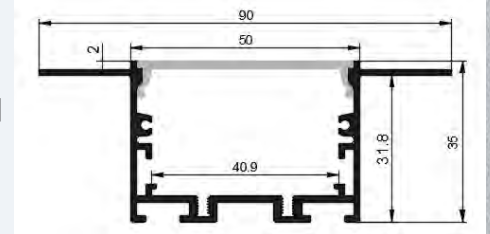

# Aluminum Profile

CE RoHS

YD 5055

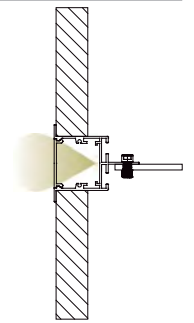

### Aluminum Profile

Material: 6063-T5

Color: anodized silver available  
another color can be customized

Weight: 0.67kg/m



### Cover

Material: imported pc plastics


Color: frosted, opal diffuser transparent

Weight: 0.07Kg/m



### End cap

Material: 6063-5

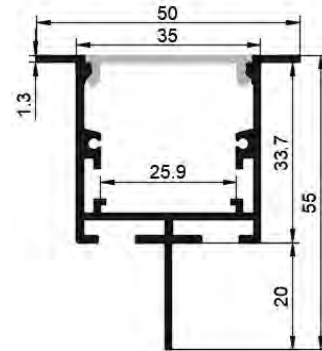




# Aluminum Profile

CE RoHS

YD 6535-T

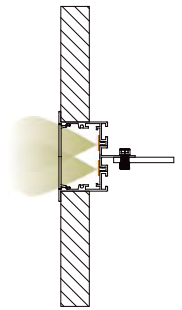

### Aluminum Profile

Material: 6063-T5

Color: anodized silver available  
another color can be customized

Weight: 0.77kg/m



### Cover

Material: imported pc plastics


Color: frosted, opal diffuser transparent

Weight: 0.1Kg/m



### End cap

Material: 6063-5

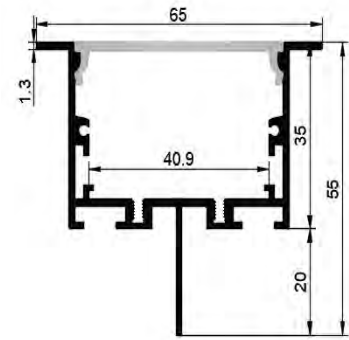

**YD** box-01



## Brief introduction

### Driver box


Material: AL6063-T5

end cap: PC plastic

### Characteristic

1、 Easy installation as the right pictures

2、 Customised length available

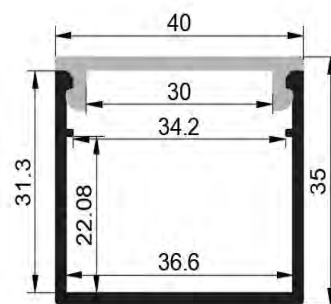


Driver box



Conducting wire rope

Suspended wire

Light up and down

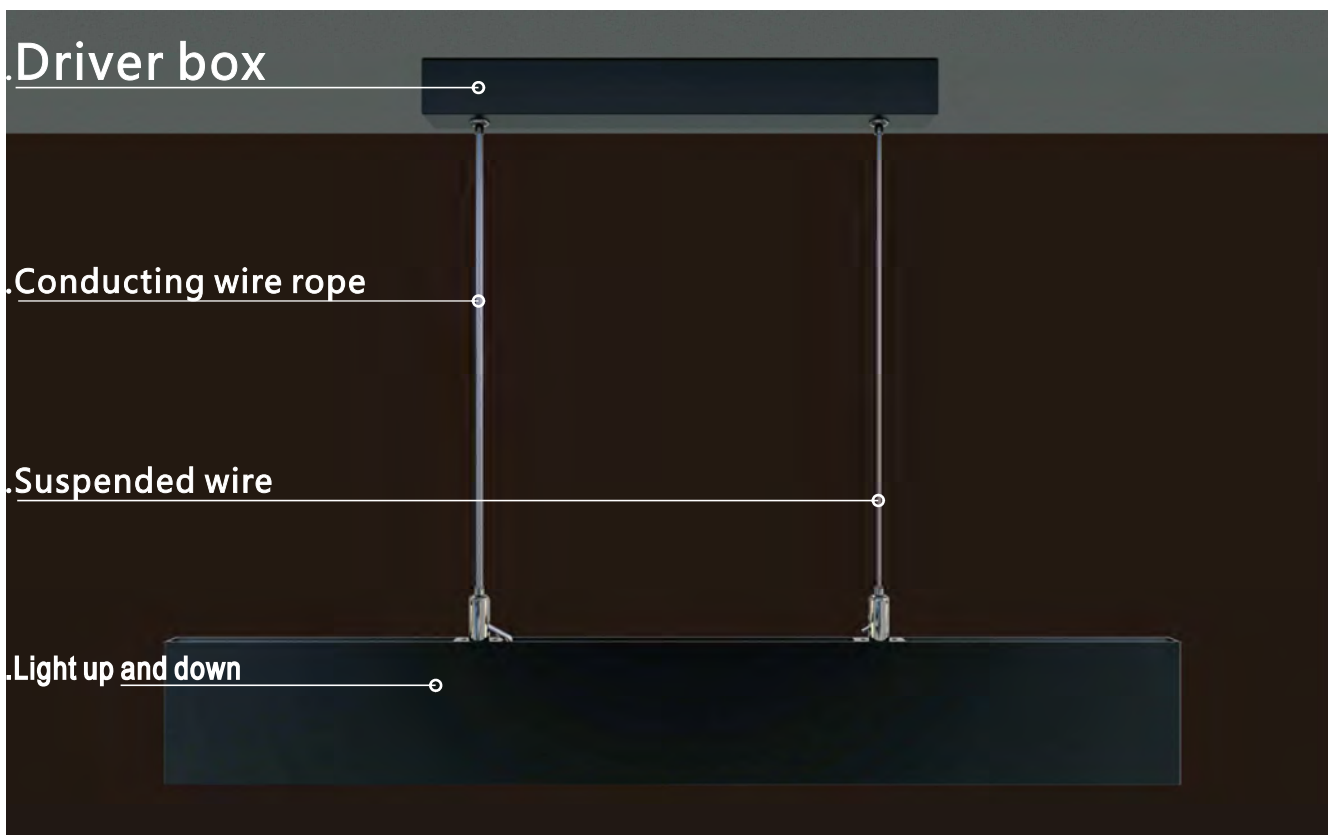

# Aluminum Profile

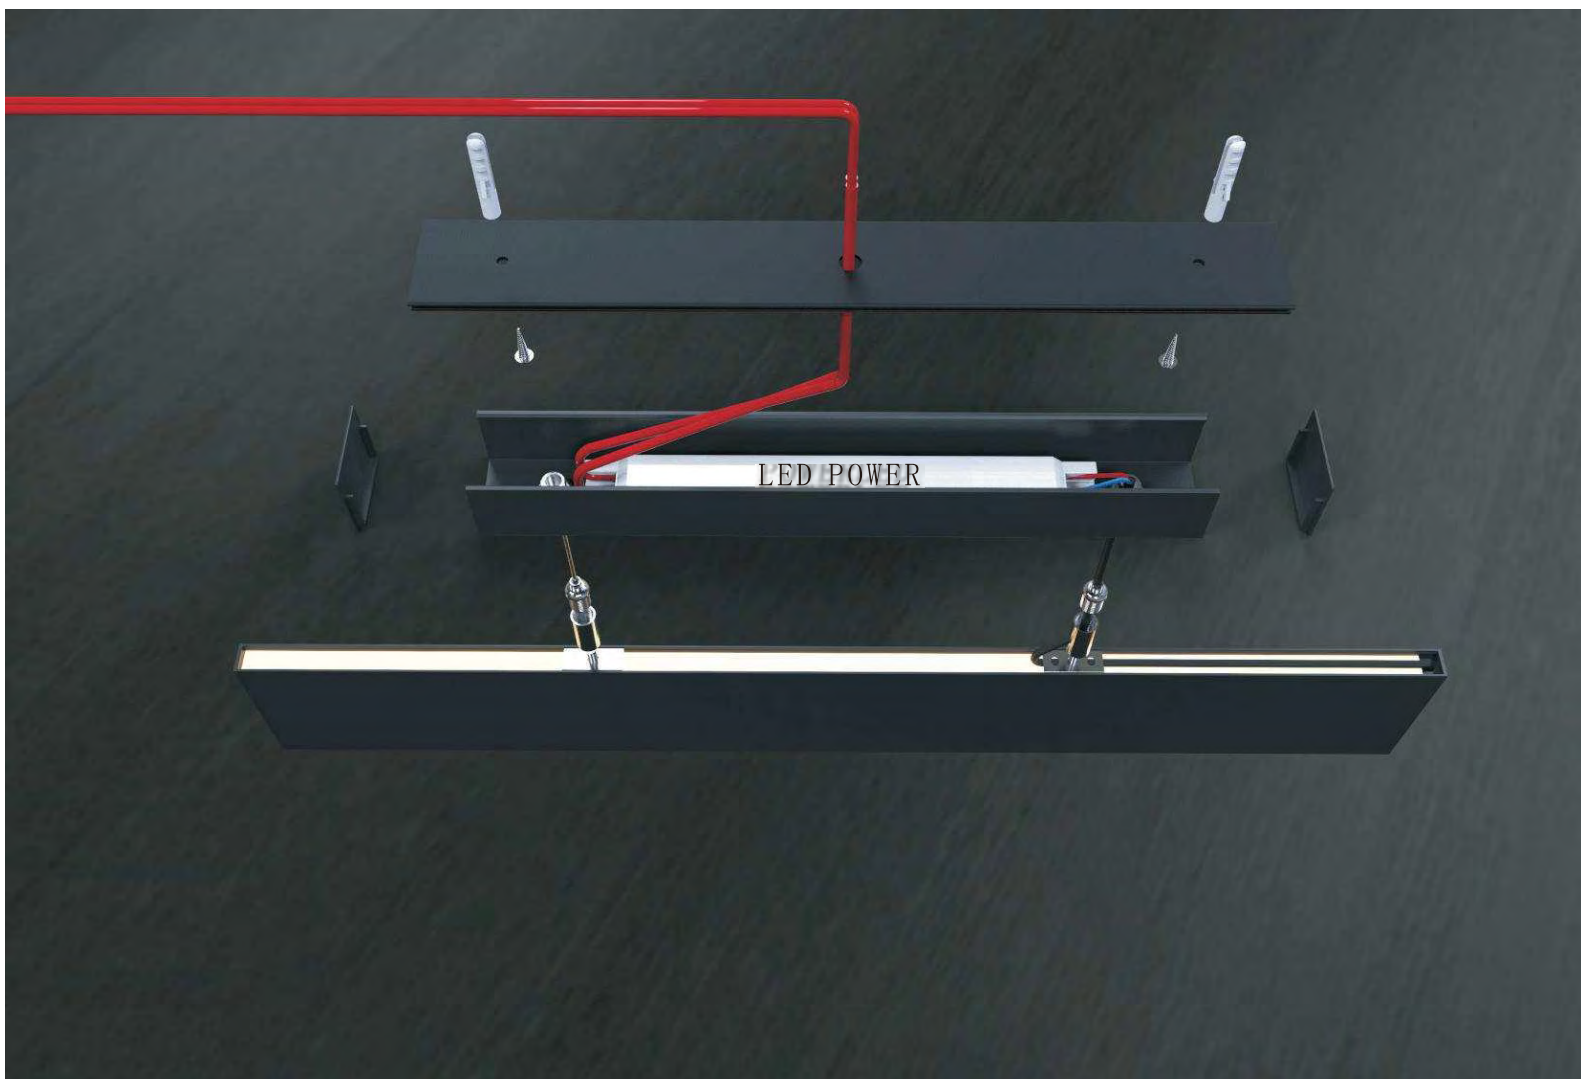

# Aluminum Profile

CE RoHS

YD

1414 (Magnetic attraction series)



### Aluminum Profile

Material: 6063-T5

Color: anodized silver available  
another color can be customized

Weight: 0.13kg/m



### Cover

Material: imported pc plastics

Color: frosted, opal diffuser transparent



### End cap

Material: imported pc plastics




Metal clip


### Installation parts

Material: metal clip


Magnet




YD-1414

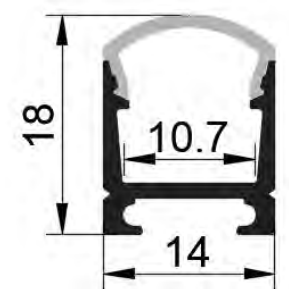

YD-1414-1

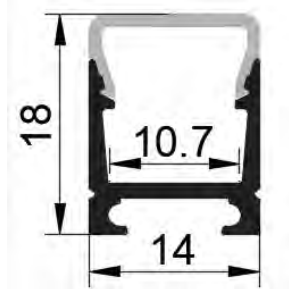



YD-1414-2

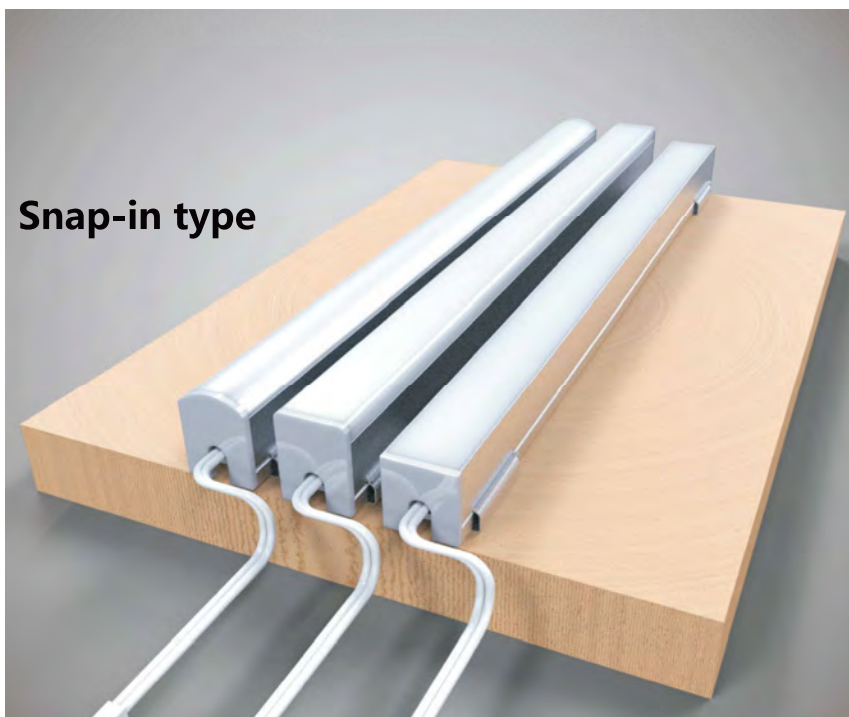

Snap-in type



# Aluminum Profile

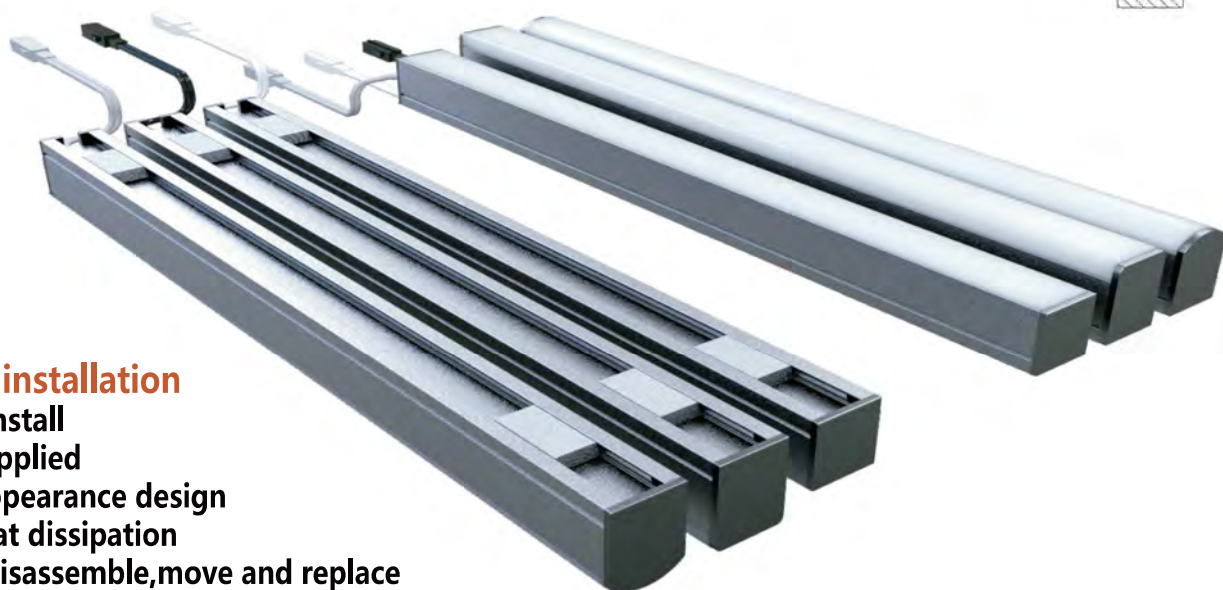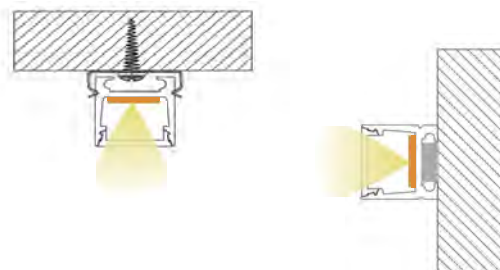


## Magnet installation

- .Easy to install
- .Widely applied
- .Linear appearance design
- .Good heat dissipation
- .Easy to disassemble,move and replace



# Aluminum Profile

**YD** A109



## Aluminum Profile

Material: 6063-T5

Color: anodized silver available  
another color can be customized

Weight: 0.09kg/m

## Cover

Material: imported pc plastics

Color: frosted,opal diffuser transparent




## End cap

Material: imported pc plastics

## Installation parts

Material: metal clip


Color: true colors

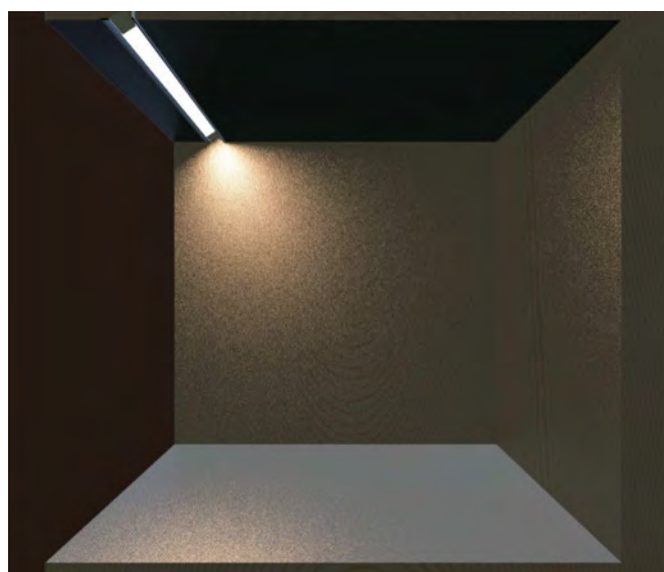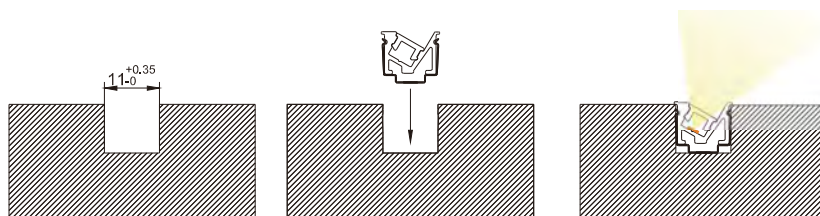

# Aluminum Profile

CE RoHS

YD 6868



### Aluminum Profile

Material: 6063-T5

Color: anodized silver available  
another color can be customized

Weight: 0.82kg/m



### Cover

Material: imported pc plastics

Color: frosted, opal diffuser transparent



### End cap


Material: imported pc plastics



### Installation parts

Material: 6063-5



Weight: 0.23kg/m

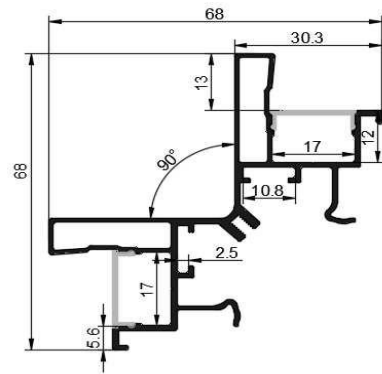

## Connector

---

---

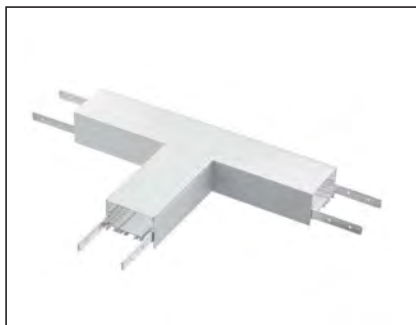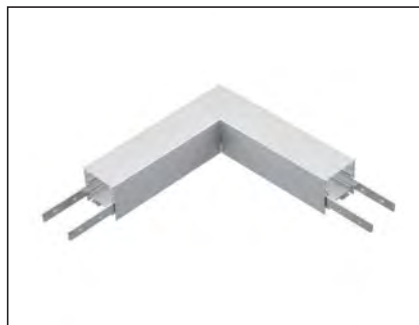



# Aluminum Profile RoHS



**P10-90**

90 degrees  
connecting



**P23-180**

90 degrees  
connecting



**P10-120**

120 degrees  
connecting



**P23-180**

180 degrees  
connecting



**P10-180**

180 degrees  
connecting



**T23-90**

90 degrees  
connecting



**T10-90**

90 degrees  
connecting



PAD Lighting Group Holdings Limited  
7th Floor, Xiu Ping Commercial Building, 104 Jervois Street, Sheung Wan, Hong Kong  
[www.pad-lighting.com](http://www.pad-lighting.com)

T: +852 28772868  
E: [project@pad-lighting.com](mailto:project@pad-lighting.com)