



Office Lighting



PAD Lighting Group Holdings Limited
7th Floor, Xiu Ping Commercial Building, 104 Jervois Street, Sheung Wan, Hong Kong
www.pad-lighting.com


T: +852 28772868
E: project@pad-lighting.com

WISDOM 智·落地灯



Floor lamp structure integrated with advanced side light transmittance technology, direct and indirect light illuminating, high transmitting optical light guide plate create shadow free and uniform light output without any glare. Advanced thermal management technology to ensure consistency of LED life span, color temperature and maximize output lumens.

智-系列落地灯, 采用优质铝合金型材灯体, 外观尺寸比例科学, 结构合理, 线条流畅美观。先进的侧发光导光技术结合上下出光的直接+间接照明模式, 再加上高透光率光学级导光板, 使其出光均匀无阴影、防眩光效果更好, 先进的热管理技术, 散热效果优异, 确保了灯具最大光输出的持续性及色温的一致性。

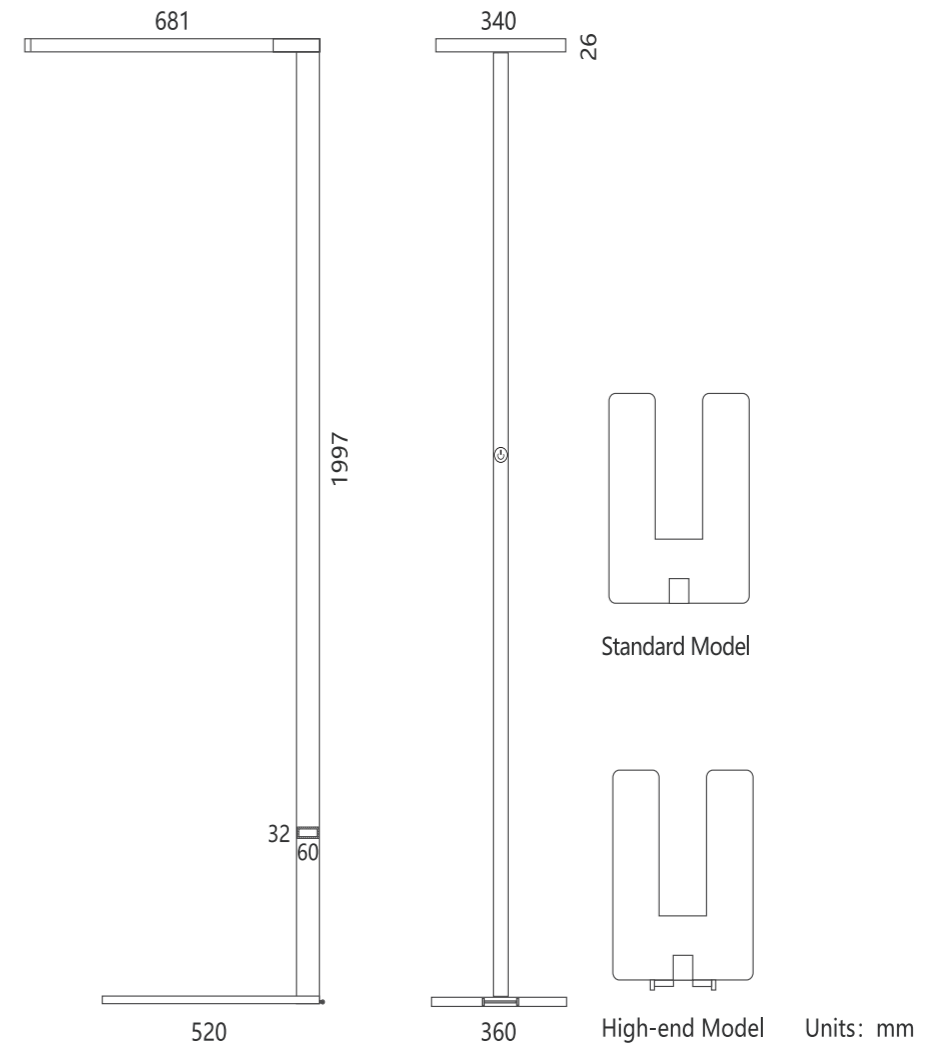


Black | White

80W | 6560 lm | 3000K/4000K/6000K | CRI > 90 | 82 lm/W | UGR < 16

E296 Floor lamp 智·落地灯	防眩光 Anti Glare	无屏闪 No Flickering	光控 Light Sensor	调光 Dimming	微波感应 Microwave Sensor	延时关灯 Delay	移动滑轮 Moving Pulley
E296.LT80.LED 基础版	✓	✓					
E296.SV.LT80.LED 标准版	✓	✓		✓			
E296.HE.LT80.LED 高配版	✓	✓	✓	✓	✓	✓	✓

WISDOM 智·桌面灯

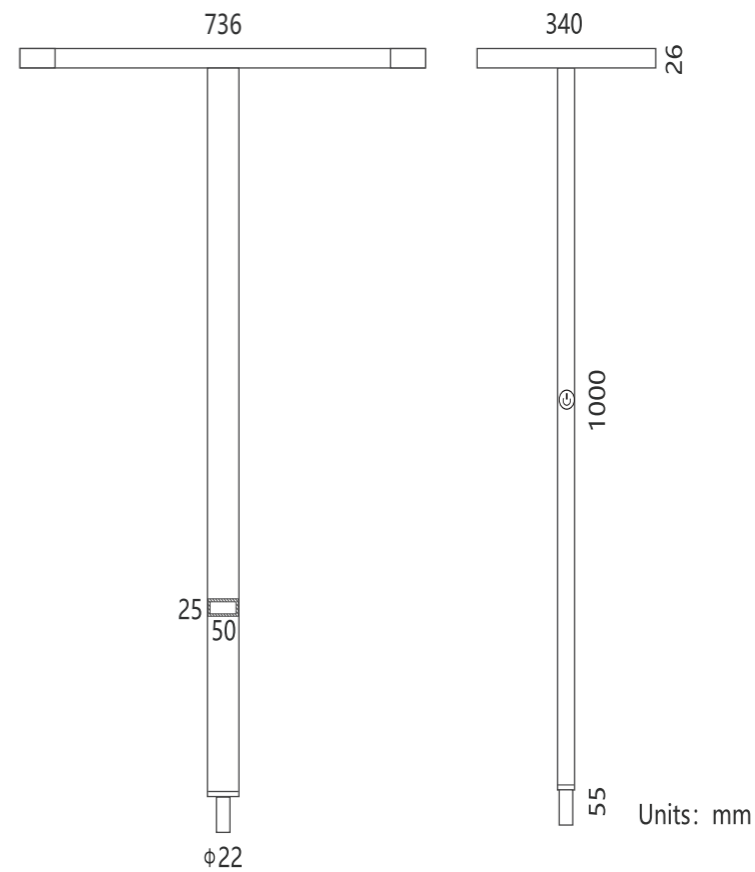


Desktop lamp structure integrated with advanced side light transmittance technology, direct and indirect light illuminating, high transmitting optical light guide plate create shadow free and uniform light output without any glare, Advanced thermal management technology to ensure consistency of LED life span, color temperature and maximize output lumens.

智-系列桌面灯，采用优质铝合金型材灯体，外观尺寸比例科学，结构合理，线条流畅美观。先进的侧发光导光技术结合上下出光的直接+间接照明模式，再加上高透光率光学级导光板，使其出光均匀无阴影、防眩光效果更好，先进的热管理技术，散热效果优异，确保了灯具最大光输出的持续性及色温的一致性。




Black	White	0-80W 0-6560 lm 3000K/4000K/6000K CRI > 90 82 lm/W UGR < 16				
E296 Desktop lamp 智·桌面灯	防眩光 Anti Glare	无屏闪 No Flickering	光控 Light Sensor	调光 Dimming	微波感应 Microwave Sensor	延时关灯 Delay
E298.HE.TT80.LED 高配版	✓	✓	✓	✓	✓	✓

WISDOM 智·桌面灯

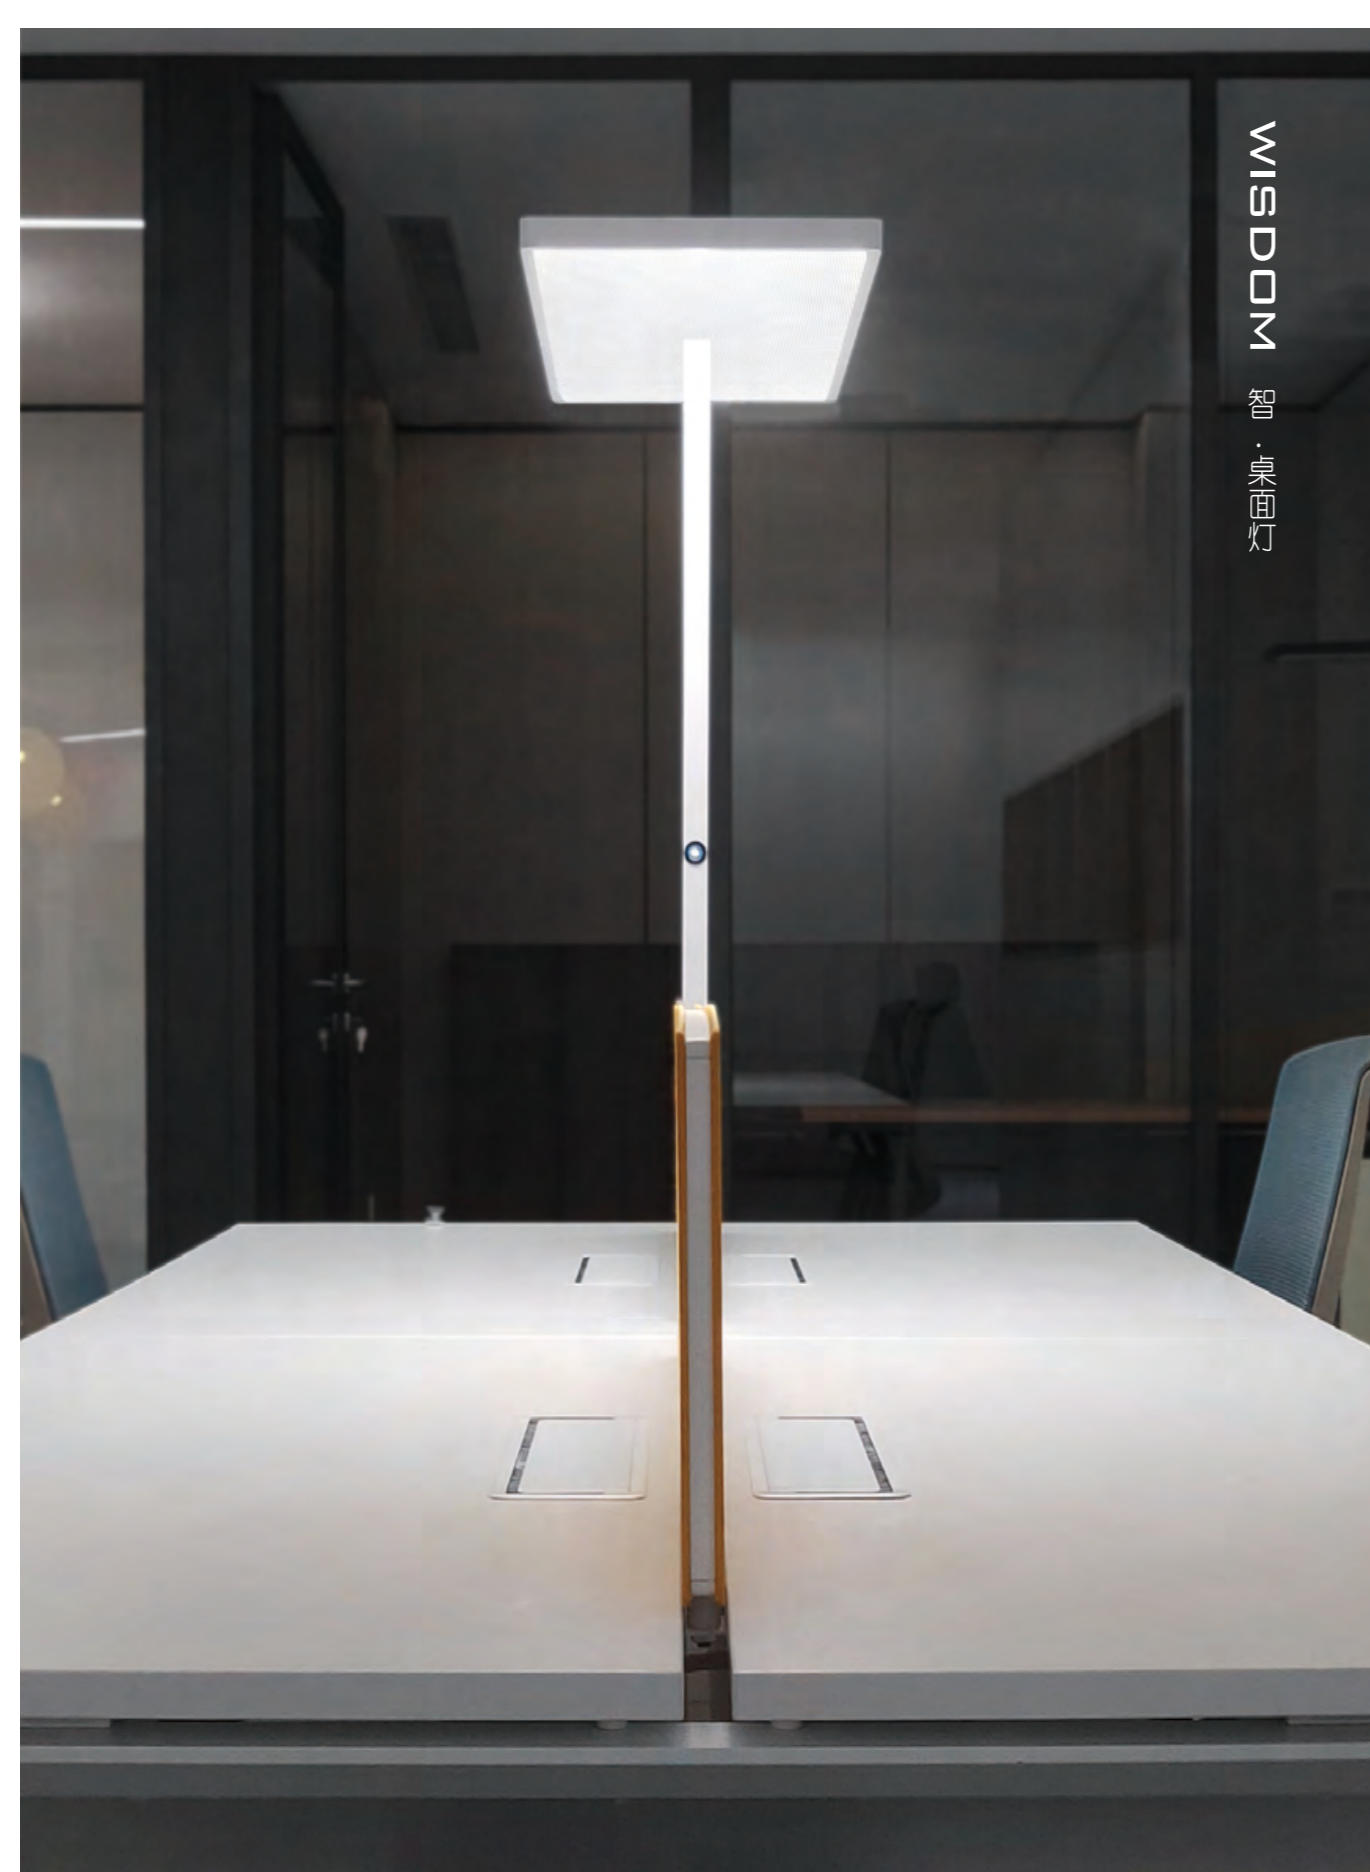

"Wisdom" desktop lamp, a dedicated intelligent product, using advanced side light guide technology, to achieve excellent anti-glare effect. The lamp pole with the frame of fruity and thin disc, fruity collocation square, concise and fashionable namely.

智-系列桌面灯，一款潜心打造的智慧产品，采用先进的侧发光导光技术，实现优良的防眩效果。纤薄的灯盘、圆润的边框搭配方形的灯杆，即简洁又时尚。

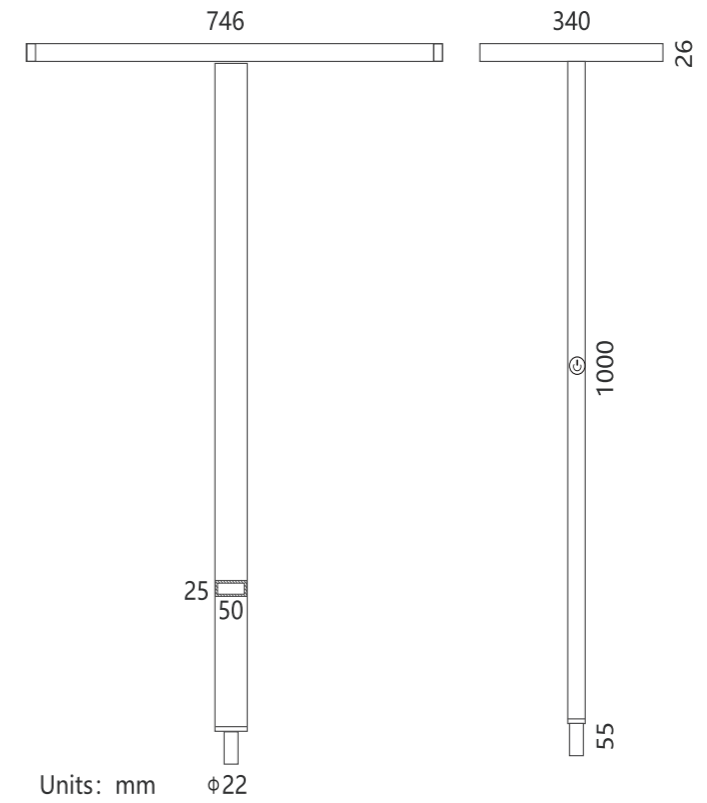

Units: mm




Black White

80W | 6560 lm | 3000K/4000K/6000K | CRI > 90 | 82 lm/W | UGR < 16


E296 Desktop lamp 智·桌面灯	防眩光 Anti Glare	无屏闪 No Flickering	光控 Light Sensor	调光 Dimming	微波感应 Microwave Sensor	色温调节 C-CT
E296.TT80.LED 基础版	✓	✓				
E296.SV.TT80.LED 标准版	✓	✓		✓		

WISDOM 智·桌面灯

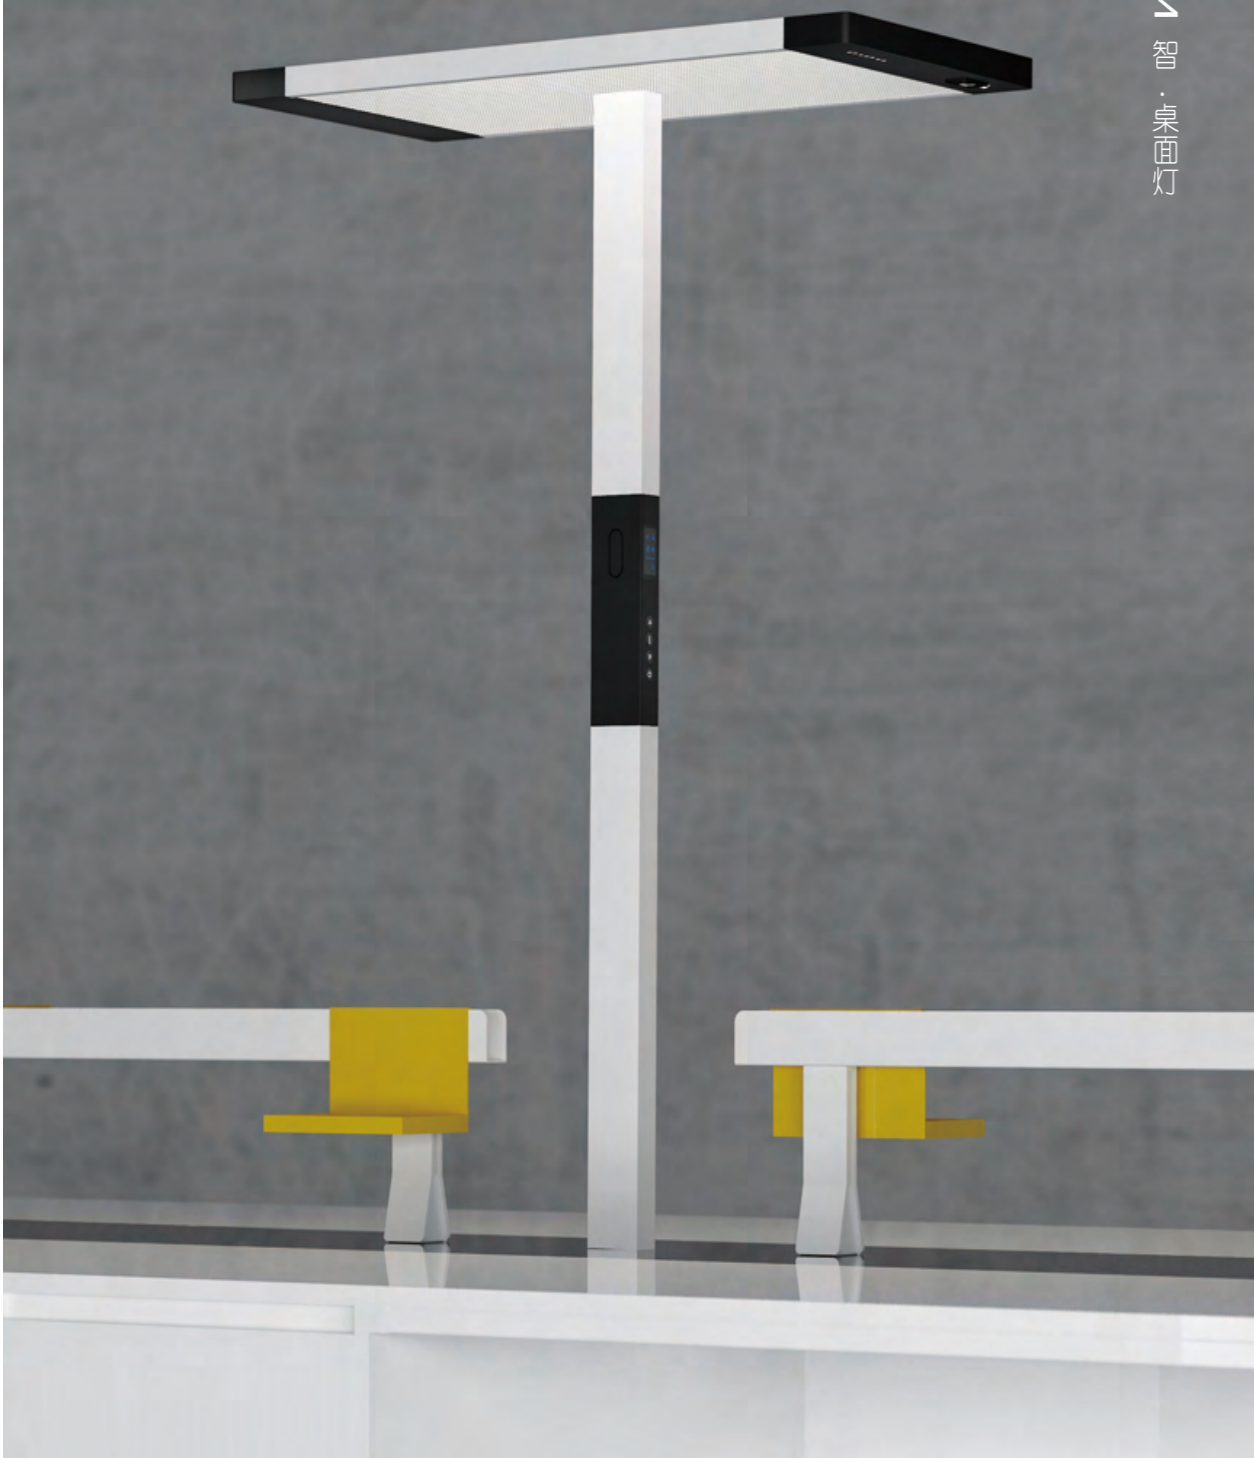

"WISDOM" desktop lamp is an elaborately designed intelligent product. Equipped with EIM intelligent dimming system, under the joint action of microwave sensor and light sensor, intelligent control of lights can be realized.

智-系列桌面灯，一款潜心打造的智慧产品。搭载EIM 智能调光系统，在微波、光线传感器的共同作用下，可实现对灯光的智能控制。

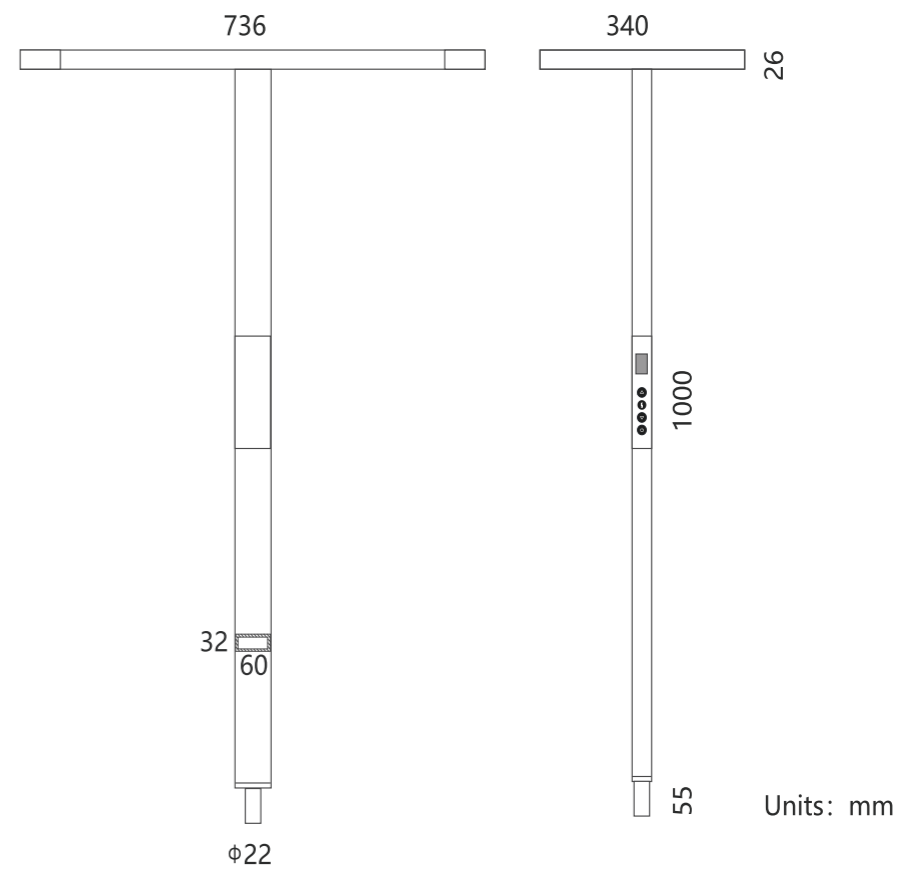

Black | White

0-60W | 0-4920LM | 3000K~6000K | CRI > 90 | 82 lm/W | UGR < 16


E296 Desktop lamp 智·桌面灯	防眩光 Anti Glare	无屏闪 No Flickering	光控 Light Sensor	调光 Dimming	微波感应 Microwave Sensor	色温调节 C-CT	延时关灯 Delay
E296.SE.TT60.LED 智能版	✓	✓	✓	✓	✓	✓	✓

SIMPLE
筒·落地灯



SIMPLE Floor Lamp is thin and steady, with minimalist lines for the most detailed outlines. The fine structure design is combined with Simple's side lighting technology, excellent light guiding and anti-dazzle materials, with Simple side lighting technology, excellent light guide anti-glare materials, you can enjoy this high quality light color effect. The layout of office space or living environment is smart and matched, and makes it natural.

SIMPLE纤薄不失稳重，极简的线条勾勒最细致的轮廓。精细的结构设计，配合Simple的侧发光技术、优秀的导光防眩材料，实时展示高品质的光色效果办公空间、生活环境的布局灵动搭配，浑然天成。

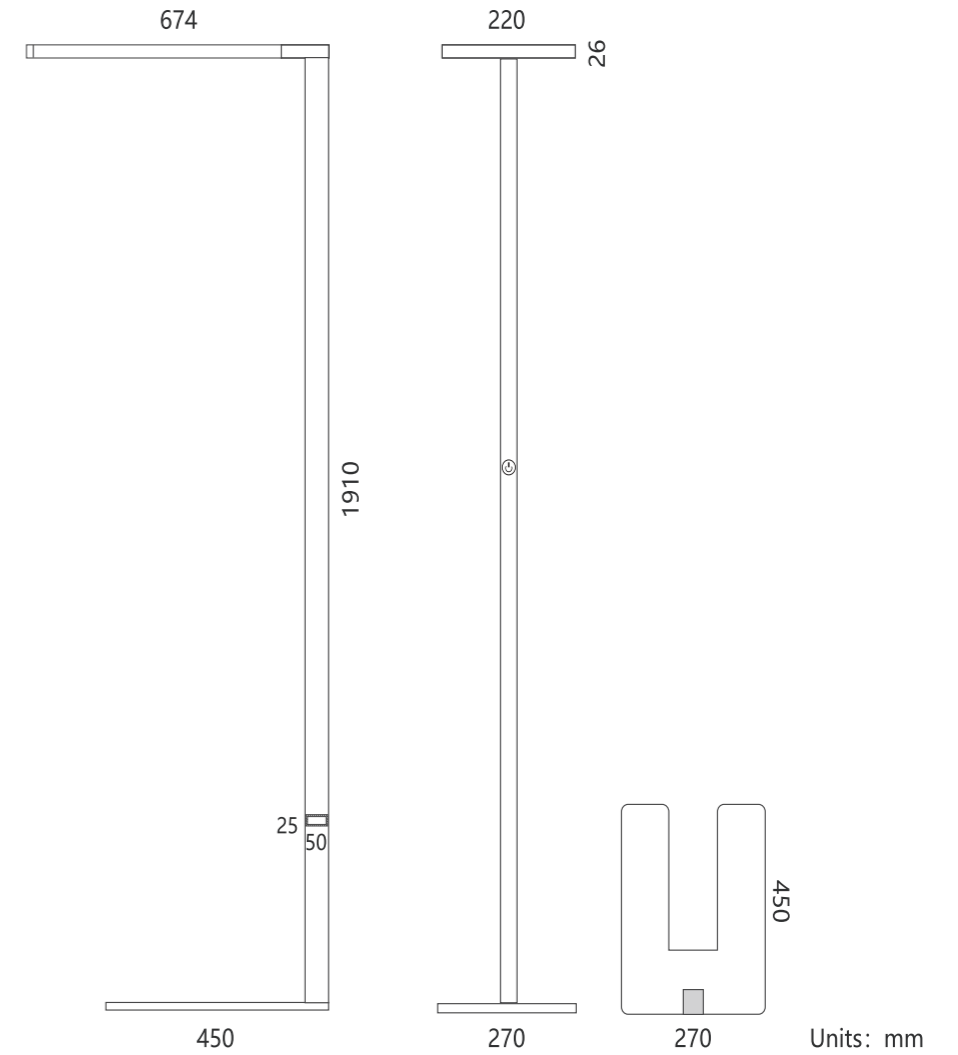


Black | White

80W | 4740 LM | 3000K/4000K/6000K | CRI > 90 | 82 lm/W | UGR < 16

E298 Floor lamp 筒·落地灯	防眩光 Anti Glare	无屏闪 No Flickering	光控 Light Sensor	调光 Dimming	微波感应 Microwave Sensor	延时关灯 Delay
E298.LT80.LED 基础版	✓	✓				
E298.SV.LT80.LED 标准版	✓	✓		✓		




SIMPLE 简·桌面灯

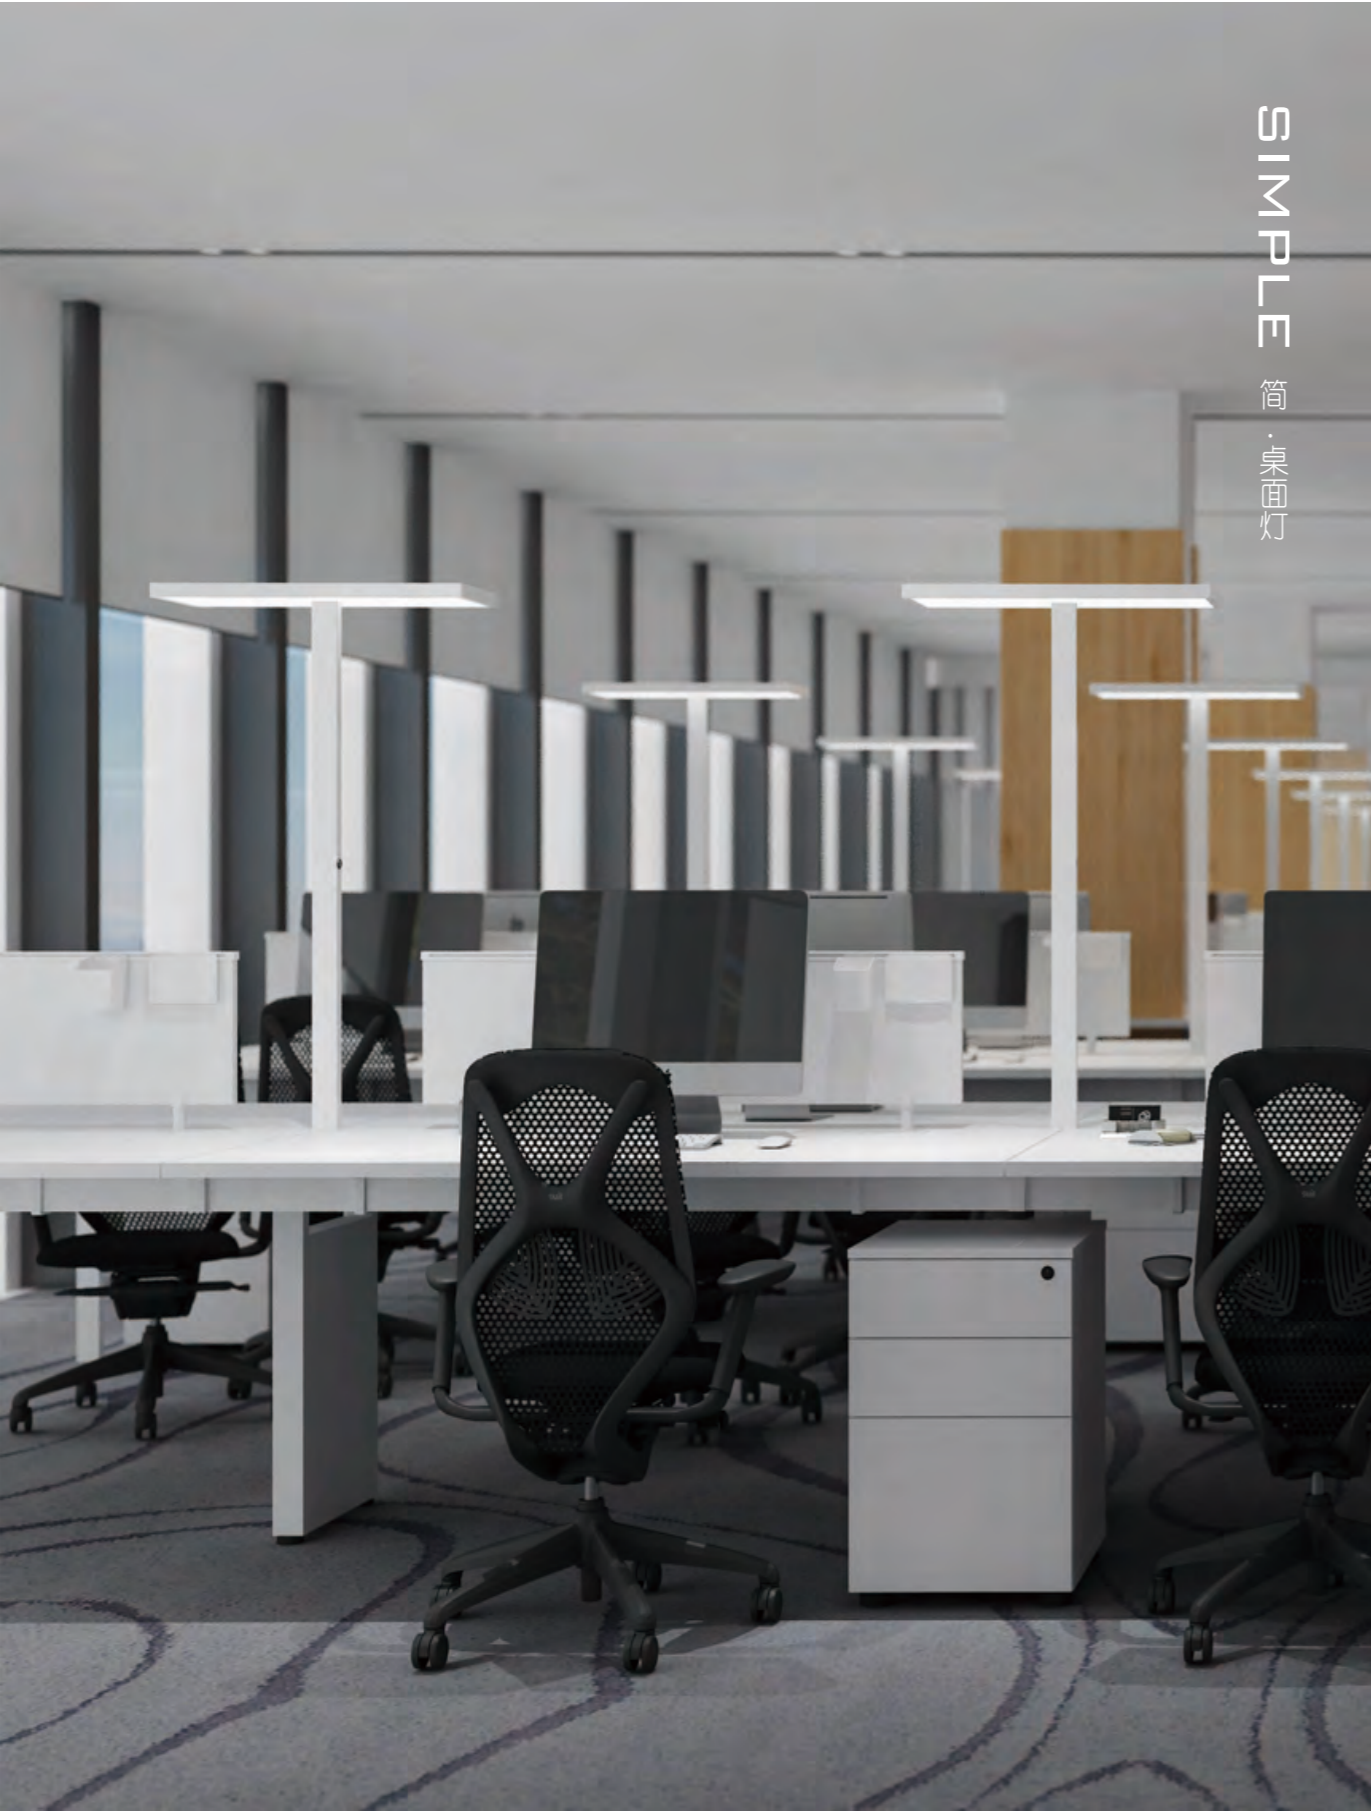

SIMPLE Floor Lamp is thin and steady, with minimalist lines for the most detailed outlines. The fine structure design is combined with Simple's side lighting technology, excellent light guiding and anti-dazzle materials, with Simple side lighting technology, excellent light guide anti-glare materials, you can enjoy this high quality light color effect. The layout of office space or living environment is smart and matched, and makes it natural.


SIMPLE纤薄不失稳重，极简的线条勾勒最细致的轮廓。精细的结构设计，配合Simple的侧发光技术、优秀的导光防眩材料，实时展示高品质的光色效果办公空间、生活环境的布局灵动搭配，浑然天成。

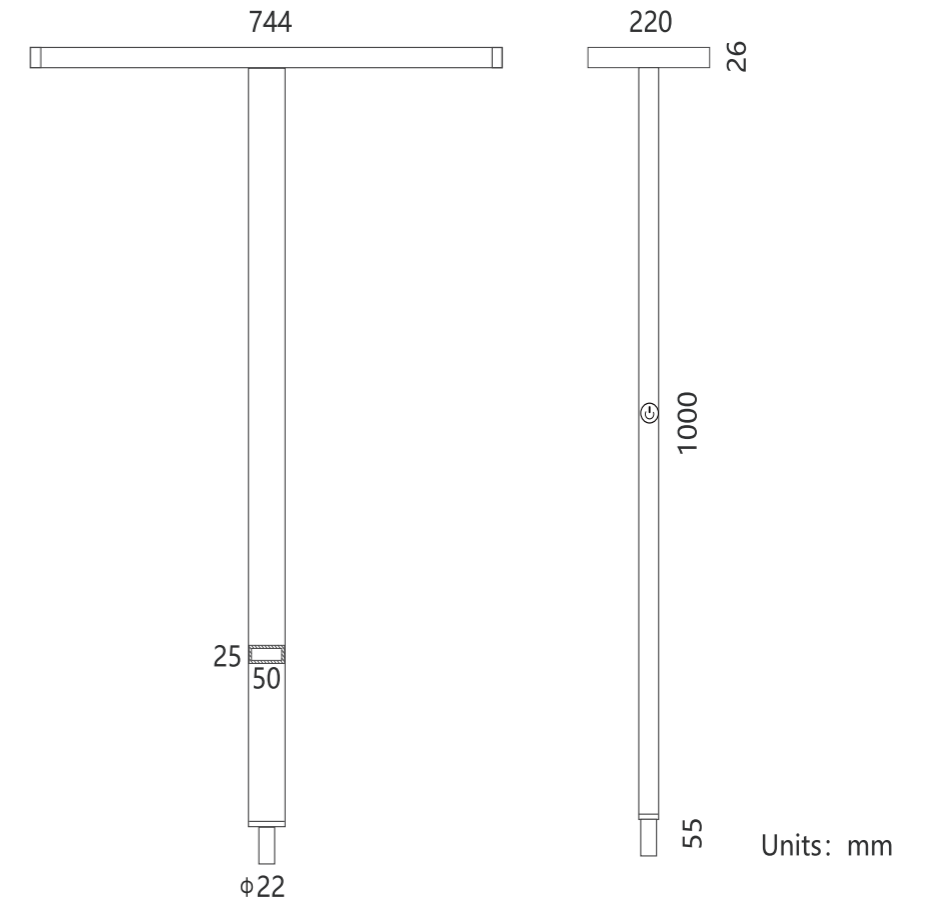

Black | White 60W | 4740 LM | 3000K/4000K/6000K | CRI > 90 | 82 lm/W | UGR < 16

E298 Desktop lamp 简·落地灯	防眩光 Anti Glare	无屏闪 No Flickering	光控 Light Sensor	调光 Dimming	微波感应 Microwave Sensor	色温调节 C-CT
E298.TT60.LED 基础版	✓	✓				
E298.SV.TT60.LED 标准版	✓	✓		✓		

SIMPLE 简·双头桌面灯

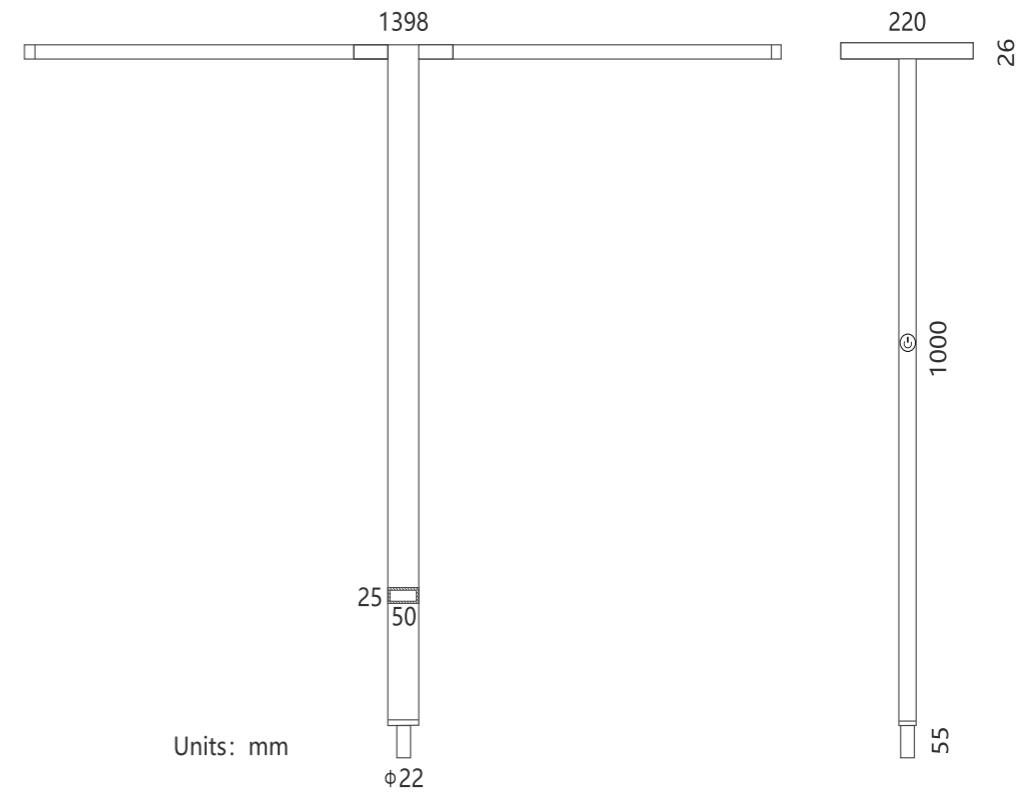

Simple desktop lamp, using high quality aluminum alloy profile light body, appearance size ratio science, reasonable structure, smooth and beautiful lines. Advanced side light guide technology combined with the direct and indirect lighting mode of the upper and lower light, coupled with high transmittance optical level light guide plate, make the light uniform without shadow, better anti-glare effect, advanced thermal management technology, excellent heat dissipation effect, ensure the maximum light output continuity and color temperature consistency.

简-系列双头桌面灯，采用优质铝合金型材灯体，外观尺寸比例科学，结构合理，线条流畅美观。先进的侧发光导光技术结合上下出光的直接加间接照明模式，再加上高透光率光学级导光板，使其出光均匀无阴影、防眩光效果更好，先进的热管理技术，散热效果优异，确保了灯具最大光输出的持续性及色温的一致性。

Black | White

100W | 8200 lm | 3000K/4000K/6000K | CRI > 90 | 82 lm/W | UGR < 16

E298 Desktop lamp
简·桌面灯

防眩光
Anti Glare

无屏闪
No Flickering

光控
Light Sensor

微波感应
Microwave Sensor

调光
Dimming

E298.TT100.LED
基础版



E298.SV.TT100.LED
标准版




SIMPLE
简·吊灯



The chandelier of "Simple" series adopts excellent structural design and Simple appearance, which is Simple and elegant. Direct plus indirect lighting way, even light, light but not dazzling, bring you a healthy lighting experience.

简-系列吊灯,采用优异的结构设计搭配简洁的外形,简约而不失风雅。直接加间接的照明方式,出光均匀,光而不炫,带给你健康的照明体验。

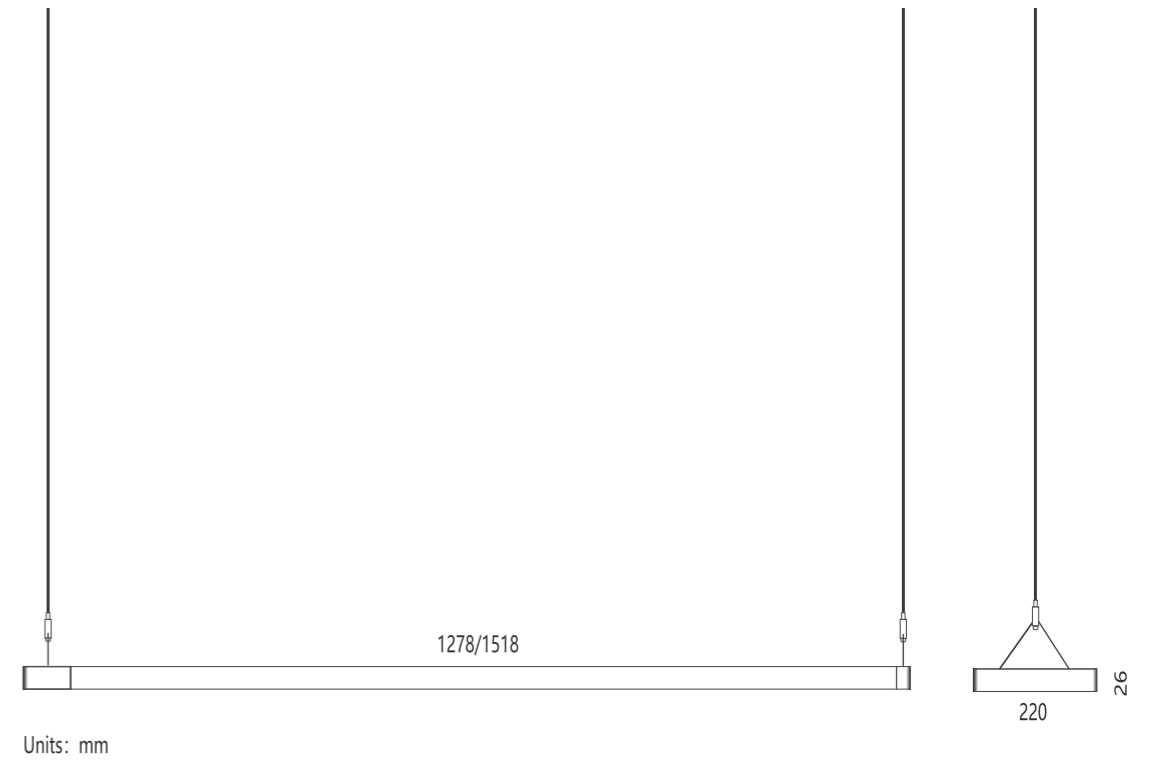


Black | White 50/60W | 4100lm/4920 lm | 3000K/4000k/6000K | CRI > 90 | 82 lm/W | UGR < 16

E256 Pendant lamp 简·吊灯	防眩光 Anti Glare	无屏闪 No Flickering	外置驱动 External Drive	光控 Light Sensor	调光 Dimming	色温调节 C-CT
E256.PT50.LED 基础版	✓	✓				
E256.HE.PT50.LED 高配版	✓	✓	✓		✓	✓
E256.PT60.LED 基础版	✓	✓				
E256.HE.PT60.LED 高配版	✓	✓	✓		✓	✓



WISDOM
智·吊灯

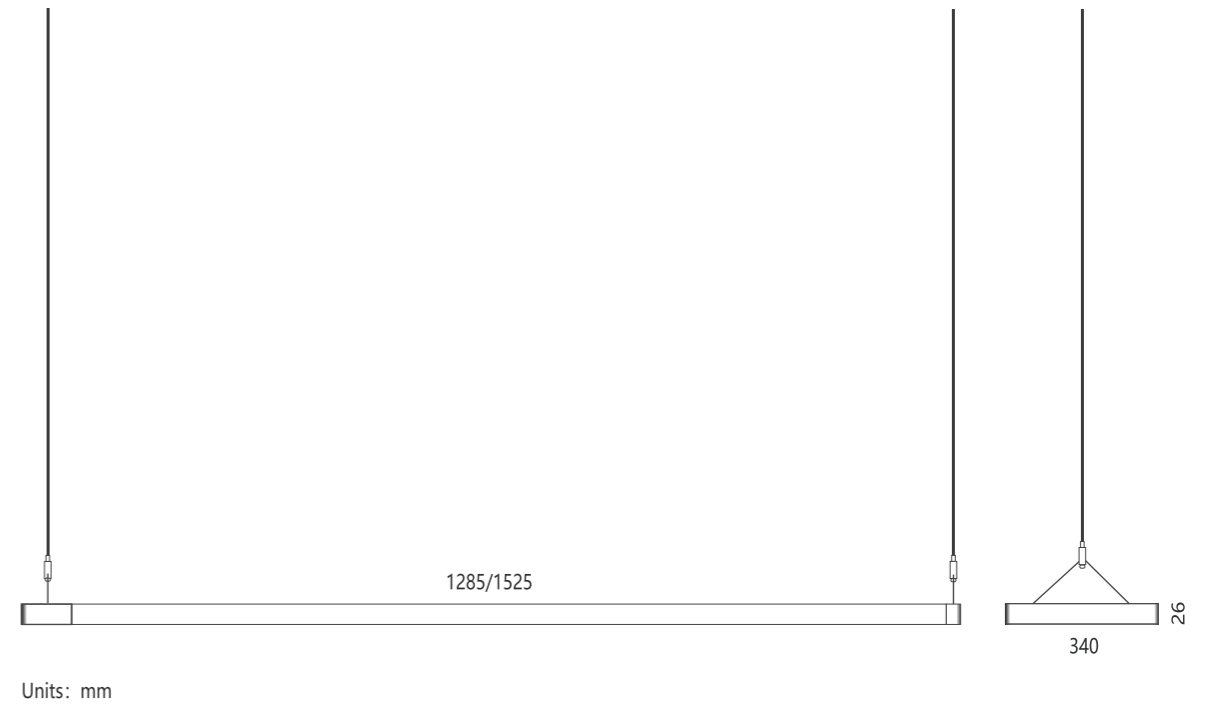

Wisdom series chandeliers take on the structural design advantages of the floor lamps, adding direct and indirect light, high light efficiency, high color rendering, combined with a simple ultra-thin shape and advanced power dimming and color blending technology, to highlight the space's hard atmosphere.

Wisdom系列吊灯承接了其落地灯的结构设计上的优点，防眩，直接加间接出光、高光效、高显色性等，再结合简洁超薄的外形、先进的电源调光调色技术，彰显空间硬朗大气。

■ Black | □ White 60/70W | 4920 lm/5740 lm | 3000K/4000k/6000K | CRI > 90 | 82 lm/W | UGR < 16


E256 Pendant lamp 智·吊灯	防眩光 Anti Glare	无屏闪 No Flickering	外置驱动 External Drive	光控 Light Sensor	调光 Dimming	色温调节 C-CT
E266.PT60.LED 基础版	✓	✓				
E266.HE.PT60.LED 高配版	✓	✓	✓		✓	✓
E266.PT70.LED 基础版	✓	✓				
E266.HE.PT70.LED 高配版	✓	✓	✓		✓	✓

明·落地灯
LUMINANCE



LUMINANCE series floor lamp, fruity fibre-thin lamp dish, extremely simple line draws the outline of the most meticulous outline. Fine structure design, with Luminance's side luminescence technology and excellent light-guided anti-glare materials, real-time display of high-quality light and color effect, smart collocation of office space and living environment layout, natural

明系列落地灯，圆润的纤薄的灯盘，极简的线条勾勒最细致的轮廓。精细的结构设计，配合Luminance的侧发光技术、优秀的导光防眩材料，实时展示高品质的光色效果办公空间、生活环境的布局灵动搭配，浑然天成。

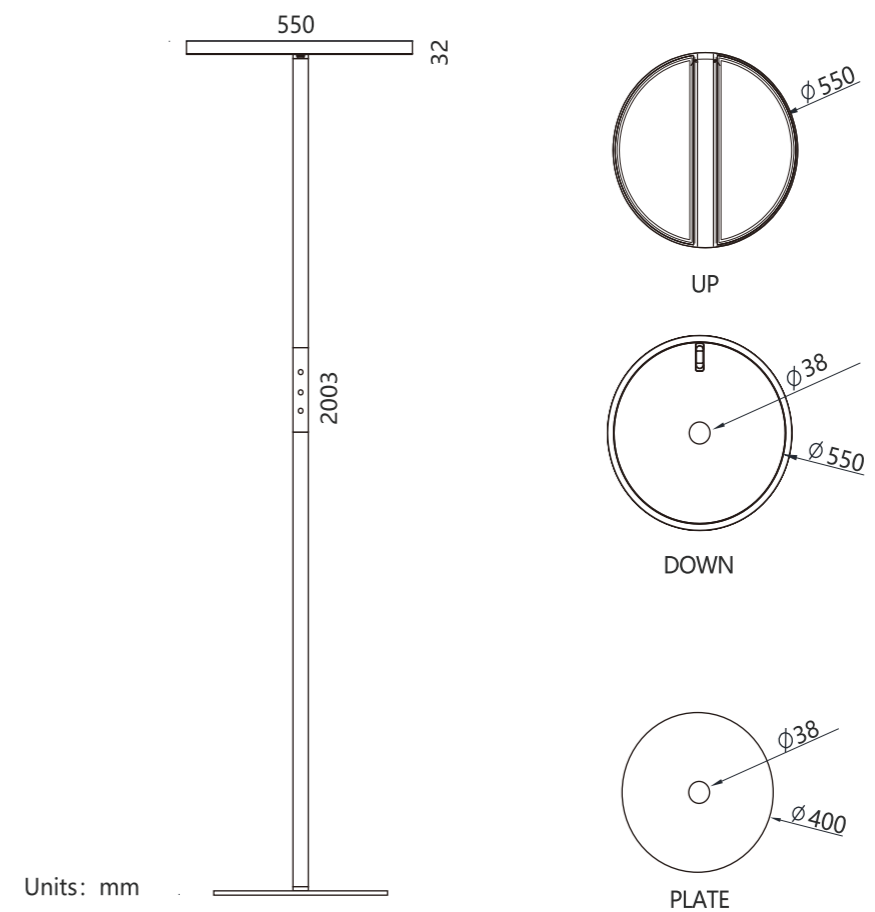

Units: mm



Black | White 0-60W | UP 0-3320/DOWN 0-4920lm | 3000K-6000K | CRI > 90 | 82 lm/W | UGR < 16


E802 Floor lamp 明·落地灯	防眩光 Anti Glare	无屏闪 No Flickering	光控 Light Sensor	调光 Dimming	微波感应 Microwave Sensor	色温调节 C-CT	延时关灯 Delay
E802.HE.LT60.LED 高配版	✓	✓	✓	✓	✓	✓	✓

明·落地灯
LUMINANCE



LUMINANCE series floor lamp, fruity fibre-thin lamp dish, extremely simple line draws the outline of the most meticulous outline. Fine structure design, with Luminance's side luminescence technology and excellent light-guided anti-glare materials, real-time display of high-quality light and color effect, smart collocation of office space and living environment layout, natural

明-系列落地灯，圆润的纤薄的灯盘，极简的线条勾勒最细致的轮廓。精细的结构设计，配合Luminance的侧发光技术、优秀的导光防眩材料，实时展示高品质的光色效果办公空间、生活环境的布局灵动搭配，浑然天成。

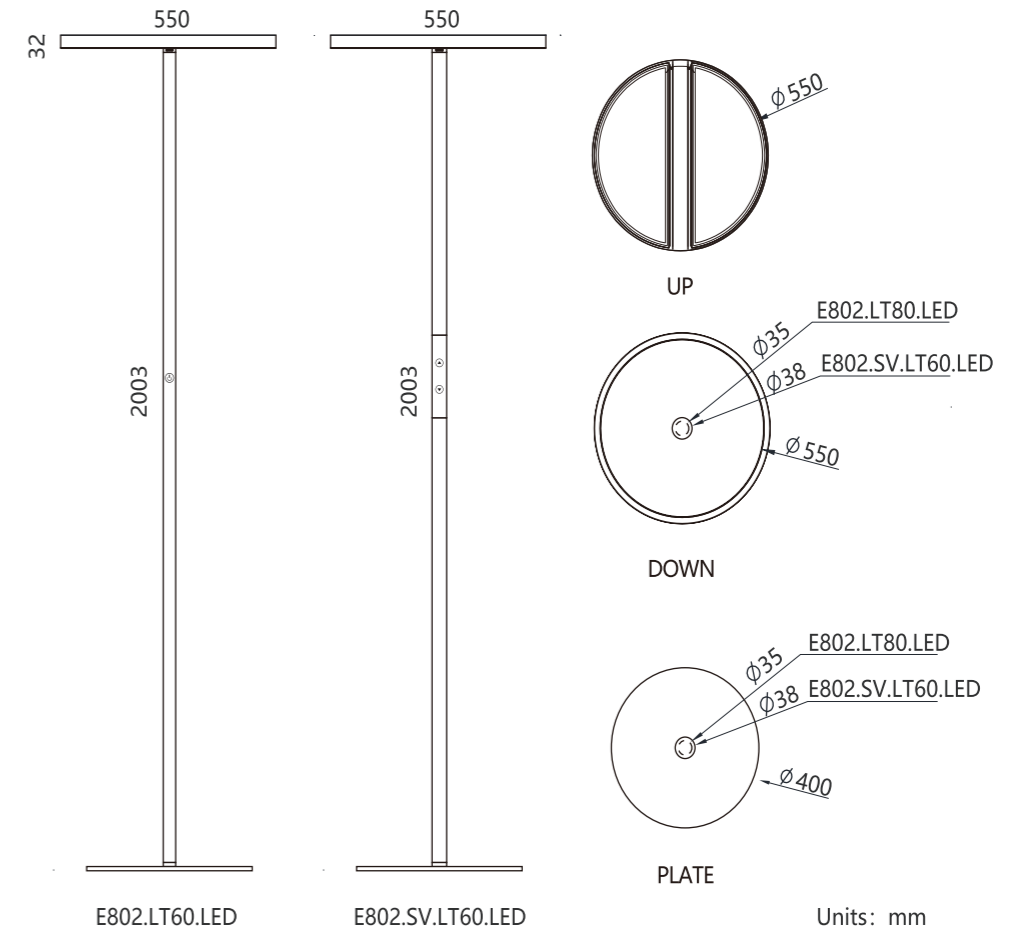

Black | White 80W/60W | UP 3320/DOWN 4920 lm | 3000K/4000K/6000K | CRI > 90 | 82 lm/W | UGR < 16

E802 Floor lamp 明·落地灯	防眩光 Anti Glare	无屏闪 No Flickering	光控 Light Sensor	调光 Dimming	微波感应 Microwave Sensor	色温调节 C-CT
E802.LT80.LED 基础版	✓	✓				
E802.SV.LT60.LED 标准版	✓	✓		✓		




明·桌面灯
LUMINANCE



LUMINANCE series desktop lamp, fruity fibre-thin lamp dish, extremely simple line draws the outline of the most meticulous outline. Fine structure design, with Luminance's side luminescence technology and excellent light-guided anti-glare materials, real-time display of high-quality light and color effect, smart collocation of office space and living environment layout, natural.

明-系列桌面灯，圆润的纤薄的灯盘，极简的线条勾勒最细致的轮廓。精细的结构设计，配合Luminance的侧发光技术优秀的导光防眩材料，实时展示高品质的光色效果办公空间、生活环境的布局灵动搭配，浑然天成。

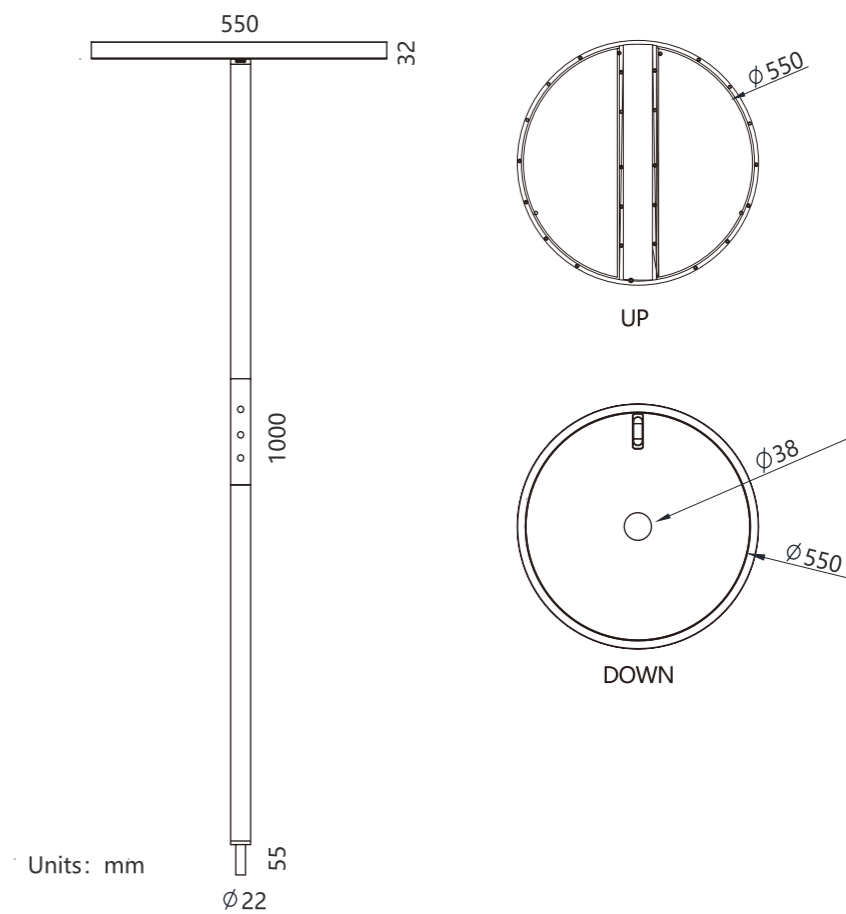


Units: mm


Black | White

0-60W | UP 0-3320/DOWN 0-4980lm | 3000K-6000K | CRI > 90 | 82 lm/W | UGR < 16

E802 Desktop lamp 明·桌面灯	防眩光 Anti Glare	无屏闪 No Flickering	光控 Light Sensor	调光 Dimming	微波感应 Microwave Sensor	色温调节 C-CT	延时关灯 Delay
E802.HE.TT60.LED 高配版	✓	✓	✓	✓	✓	✓	✓



明·吊灯
LUMINANCE

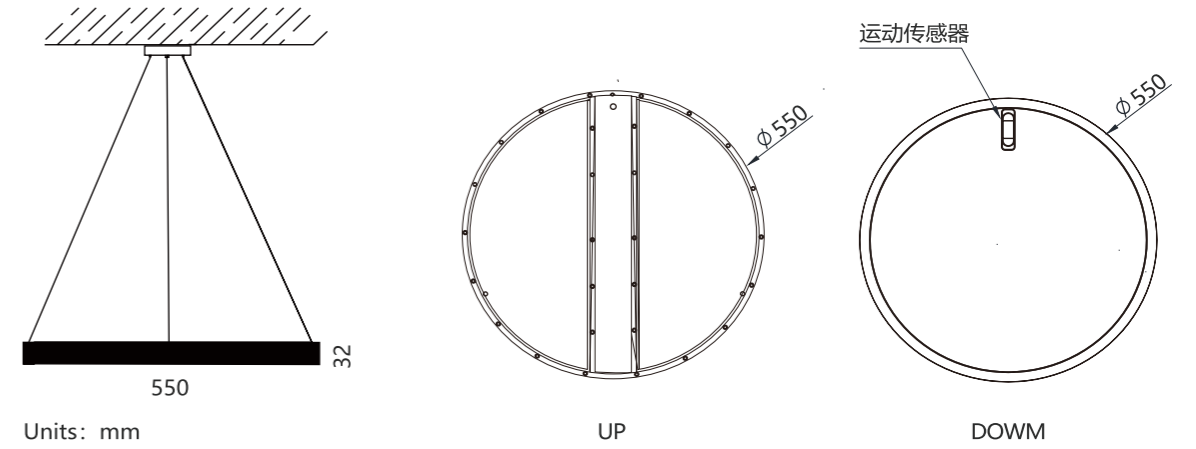

LUMINANCE series pendant lamp, fruity fibre-thin lamp dish, extremely simple line draws the outline of the most meticulous outline. Fine structure design, with Luminance's side luminescence technology and excellent light-guided anti-glare materials, real-time display of high-quality light and color effect, smart collocation of office space and living environment layout, natural.

明系列吊灯，圆润的纤薄的灯盘，极简的线条勾勒最细致的轮廓。精细的结构设计，配合Luminance的侧发光技术、优秀的导光防眩材料，实时展示高品质的光色效果办公空间、生活环境的布局灵动搭配，浑然天成。


Black | White

80W | 4740 lm | 3000K/4000K/6000K | CRI>90 | 82 lm/W | UGR<16

E802 Pendant lamp 明·吊灯	防眩光 Anti Glare	无屏闪 No Flickering	光控 Light Sensor	调光 Dimming	微波感应 Microwave Sensor	延时关灯 Delay
E802.HE.PT80.LED 高配版	✓	✓	✓	✓	✓	✓



明·桌面灯
LUMINANCE

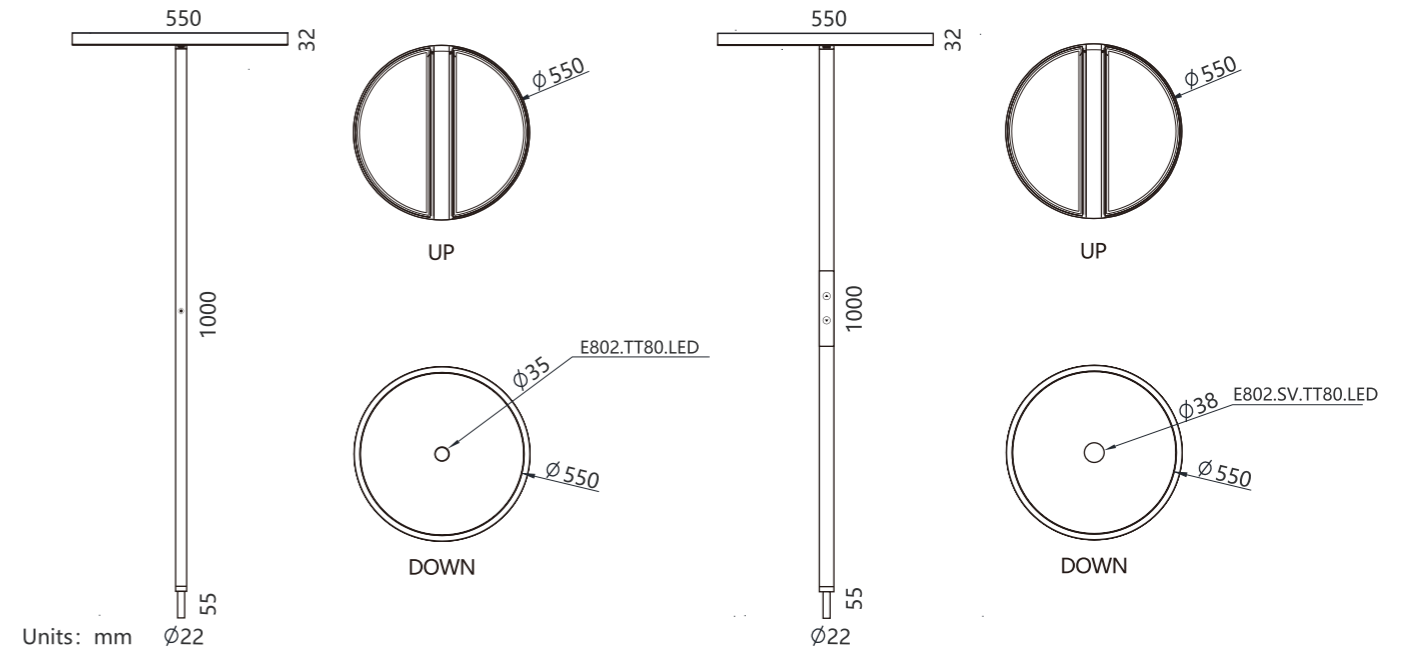

LUMINANCE series desktop lamp, fruity fibre-thin lamp dish, extremely simple line draws the outline of the most meticulous outline. Fine structure design, with Luminance's side luminescence technology and excellent light-guided anti-glare materials, real-time display of high-quality light and color effect, smart collocation of office space and living environment layout, natural

明-系列桌面灯，圆润的纤薄的灯盘，极简的线条勾勒最细致的轮廓。精细的结构设计，配合Luminance的侧发光技术、优秀的导光防眩材料，实时展示高品质的光色效果办公空间、生活环境的布局灵动搭配，浑然天成。





Black | White

80W | 4740LM | 3000K/4000K/6000K | CRI > 90 | 82 lm/W | UGR < 16

E802 Desktop lamp 明·桌面灯	防眩光 Anti Glare	无屏闪 No Flickering	光控 Light Sensor	调光 Dimming	微波感应 Microwave Sensor	色温调节 C-CT
E802.TT80.LED 基础版	✓	✓				
E802.SV.TT80.LED 标准版	✓	✓		✓		

明·吊灯
LUMINANCE

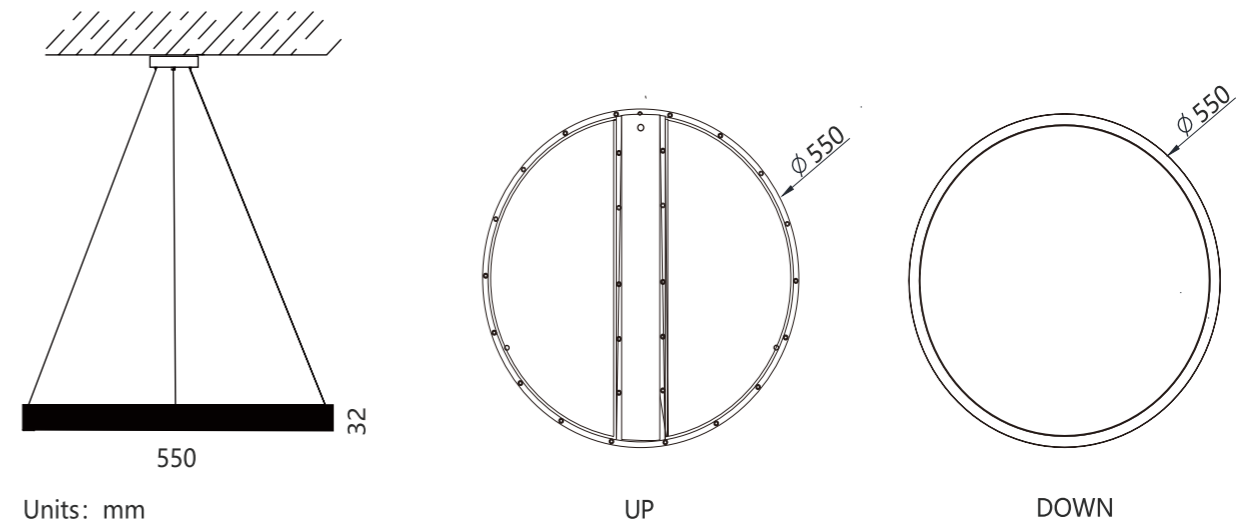

Black | White


80W | 4740 lm | 3000K/4000k/6000K | CRI > 90 | 82 lm/W | UGR < 16

E802 Pendant lamp 明·吊灯	防眩光 Anti Glare	无屏闪 No Flickering	光控 Light Sensor	调光 Dimming	微波感应 Microwave Sensor	色温调节 C-CT
E802.PT80.LED 基础版	✓	✓				
E802.SV.PT80.LED 标准版	✓	✓		✓		

LUMINANCE series pendant lamp, fruity fibre-thin lamp dish, extremely simple line draws the outline of the most meticulous outline. Fine structure design, with Luminance's side luminescence technology and excellent light-guided anti-glare materials, real-time display of high-quality light and color effect, smart collocation of office space and living environment layout, natural

明-系列吊灯，圆润的纤薄的灯盘，极简的线条勾勒最细致的轮廓。精细的结构设计，配合Luminance的侧发光技术、优秀的导光防眩材料，实时展示高品质的光色效果办公空间、生活环境的布局灵动搭配，浑然天成。

明·吸顶灯
LUMINANCE

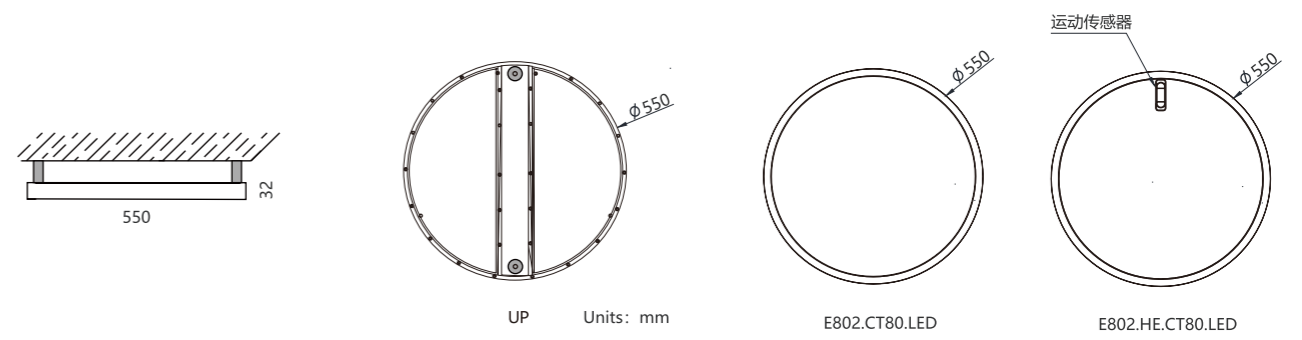

LUMINANCE series ceiling lamp, fruit fibre-thin lamp dish, extremely simple line draws the outline of the most meticulous outline. Fine structure design, with Luminance's side luminescence technology and excellent light-guided anti-glare materials, real-time display of high-quality light and color effect, smart collocation of office space and living environment layout, natural.

明-系列吸顶灯，圆润的纤薄的灯盘，极简的线条勾勒最细致的轮廓。精细的结构设计，配合Luminance的侧发光技术、优秀的导光防眩材料，实时展示高品质的光色效果办公空间、生活环境的布局灵动搭配，浑然天成。




Black | White

40W | 3280 lm | 3000K/4000K/6000K | CRI > 90 | 82 lm/W | UGR < 16

E802 Ceiling lamp 明·吸顶灯	防眩光 Anti Glare	无屏闪 No Flickering	光控 Light Sensor	调光 Dimming	微波感应 Microwave Sensor	延时关灯 Delay
E802.CT40.LED 基础版	✓	✓				
E802.HE.CT40.LED 高配版	✓	✓	✓	✓	✓	✓

NIMBLY
灵·吊

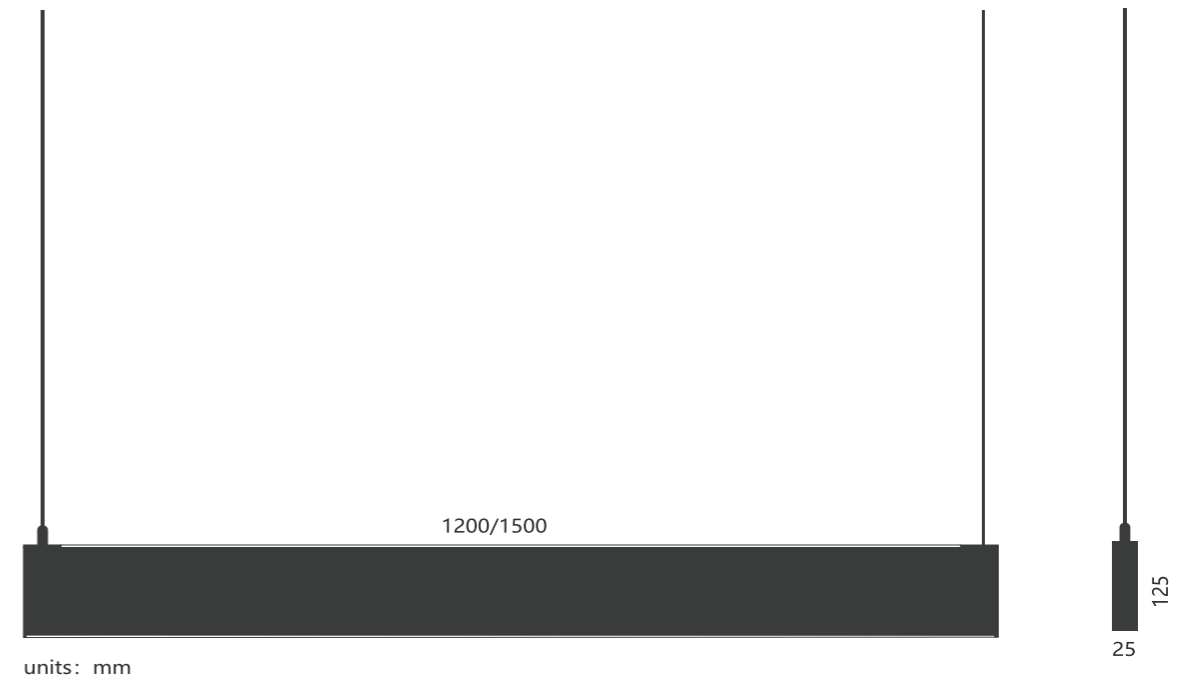

NIMBLY Pendant Lamp, with their flexible appearance with vertical hanging mode, this lamp has a strong decorative effect. It is a lighting product as well as a work of art. Its existence not only can bring local lighting to the space, but also can add artistic aesthetic feeling to the space.

“NIMBLY”吊灯灵动的外观搭配竖型的吊装模式，让产品具有很强的装饰效果。它是一款照明产品，同时也是一款艺术品。它的存在不仅能带给空间局部的照明，也能为空间增添艺术的美感。


■ Black | □ White

型号 (ArtNo)	功率 (P)	流明 (Flux)	色温(CCT)	显指(CRI)	
E308U.PT40.LED	40W	2840 lm	3000/4000/6000K	CRI > 90	 No flickering 无屏闪
E308U.PT60.LED	60W	3550 lm	3000/4000/6000K	CRI > 90	 No flickering 无屏闪

50


50

朴 ELEGANT E211 Pendant lamp

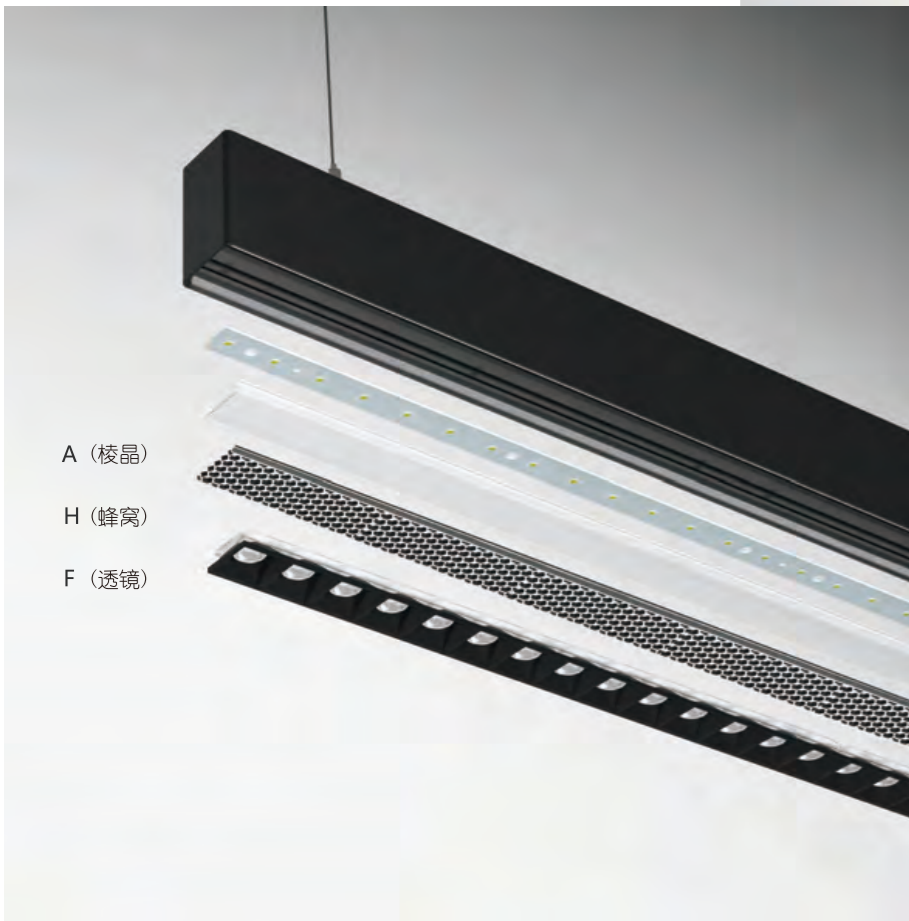

继承了ELEGANT落地灯优秀外观结构设计，同样在吊灯中获得出众的防眩能力，简洁时尚的外观搭配现代办公设计的装饰风格，产品与环境能够完美地融合，让你不会觉得有任何违和感。


Inherited from the ELEGANT floor lamp excellent appearance structure design, the ELEGANT chandelier also has outstanding polarized light and anti-glare ability. The simple and fashionable appearance is combined with the decoration style of modern office design, and the product and environment can perfectly blend, so that you won't feel any incompatibility.

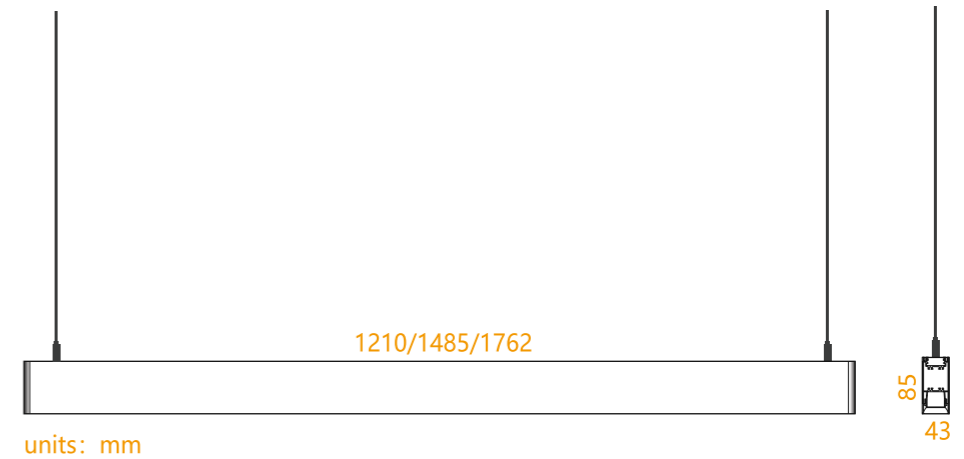


可选灯罩



A 防眩组合灯罩 (Anti-glare lamp shade)



H 蜂窝组合灯罩 (Honeycomb shade)



F 格栅透镜 (Grid lens lampshade)


Black | White

E211 Pendant lamp 朴吊灯	功率 (P)	尺寸 (Size)	光通量 (lm)	色温(CCT)	显指(CRI)	出光方式
E211.PA48.LED	U 20W/D 28W	1210*43*85mm	U:1700 lm D:2240 lm	3000K/4000K/6000K	>80	40° 60°
E211.PH48.LED	U 20W/D 28W	1210*43*85mm	U:1700 lm D:1680 lm	3000K/4000K/6000K	>80	40° 60°
E211.PF48.LED	U 20W/D 28W	1210*43*85mm	U:1700 lm D:2520 lm	3000K/4000K/6000K	>90	40° 60°
E211.PA56.LED	U 24W/D 32W	1486*43*85mm	U:2040 lm D:2560 lm	3000K/4000K/6000K	>80	40° 60°
E211.PH56.LED	U 24W/D 32W	1486*43*85mm	U:2040 lm D:2240 lm	3000K/4000K/6000K	>80	40° 60°
E211.PF56.LED	U 24W/D 32W	1486*43*85mm	U:2040 lm D:2560 lm	3000K/4000K/6000K	>90	40° 60°
E211.PA64.LED	U 28W/D 36W	1762*43*85mm	U:2380 lm D:2730 lm	3000K/4000K/6000K	>80	40° 60°
E211.PH64.LED	U 28W/D 36W	1762*43*85mm	U:2380 lm D:2730 lm	3000K/4000K/6000K	>80	40° 60°
E211.PF64.LED	U 28W/D 36W	1762*43*85mm	U:2380 lm D:3060 lm	3000K/4000K/6000K	>90	40° 60°

朴 ELEGANT E801 Pendant lamp





- 1、全铝合金框架结构；
- 2、可搭配不同场景需求的灯罩：
 - a. 进口光学级格栅透镜（光学角度系列）组合罩，采用纳米溅射镀膜工艺；
 - b. 进口光学级偏光透镜组合罩，采用纳米溅射镀膜工艺
- 3、进口高亮、高效、高显LED光源
- 4、整灯应用高转换率电源，具有短路、过载、过压保护；
- 5、灯具可按环境尺寸要求实现无缝拼接铝合金框架结构，可搭配：格栅透镜组合罩/蜂窝组合灯罩等。

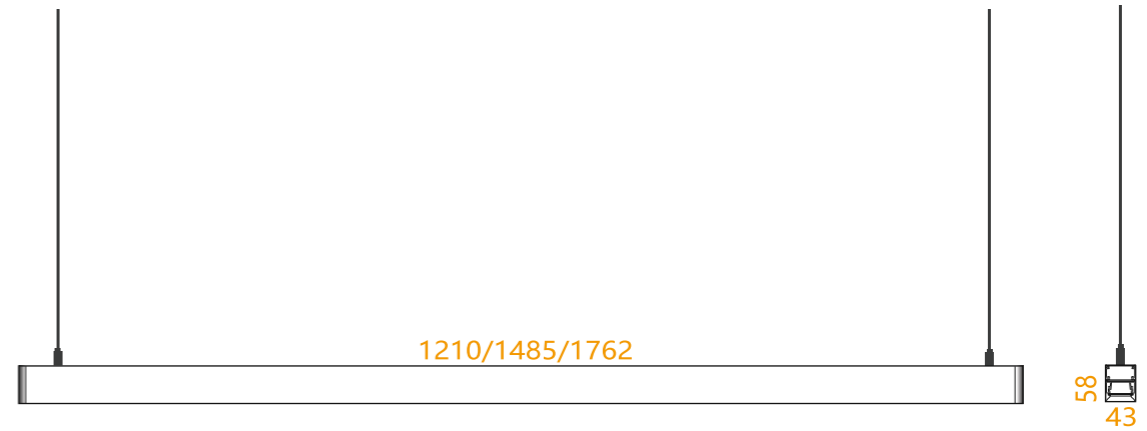

units: mm

可选灯罩

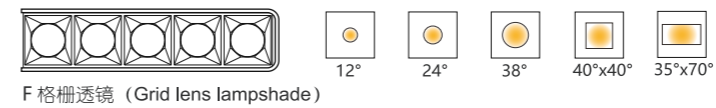

Black | White

E801 Pendant lamp 朴.801吊灯	功率 (P)	尺寸 (Size)	光通量 (lm)	色温(CCT)	显指(CRI)	出光方式
E801.PA30.LED	30W	1210*43*58mm	2400 lm	3000K/4000K/6000K	>80	100
E801.PH30.LED	30W	1210*43*58mm	1800 lm	3000K/4000K/6000K	>80	100
E801.PF30.LED	30W	1210*43*58mm	2400 lm	3000K/4000K/6000K	>90	100
E801.PA36.LED	36W	1486*43*58mm	2880 lm	3000K/4000K/6000K	>80	100
E801.PH36.LED	36W	1486*43*58mm	2160 lm	3000K/4000K/6000K	>80	100
E801.PF36.LED	36W	1486*43*58mm	2880 lm	3000K/4000K/6000K	>90	100
E801.PA45.LED	45W	1762*43*58mm	3600 lm	3000K/4000K/6000K	>80	100
E801.PH45.LED	45W	1762*43*58mm	2700 lm	3000K/4000K/6000K	>80	100
E801.PF45.LED	45W	1762*43*58mm	3600 lm	3000K/4000K/6000K	>90	100

1. All aluminum alloy frame structure
- 2, can match different scene requirements of the lamp shade:
 - A. Imported optical grating lens (optical Angle series) composite cover, using nano sputtering coating process;
 - B. imported optical polarized lens combination, using nanometer sputtering coating process
- 3, import the highlighted, high efficiency, LED light source
- 4, The whole lamp uses high conversion power supply, with short circuit, overload, overvoltage protection
5. The lamp can achieve seamless splicing aluminum alloy frame structure according to environmental size requirements, and can be matched with: grating lens combination cover/grating polarizing lens combination cover, etc

BUTTERFLY一个时尚、简洁，且富有趣味性的灯具。造型通过圆润修饰的外观显得低调且优雅，结合色彩多样的吸音毛毡板，组合出蝴蝶翩翩起舞般灵动造型。整个系列可满足最佳的照明需求，调合场景视觉美感，同时还能起到吸音降噪的作用，使规划者能够根据需要拓展出更多的使用场景，以此适应多种多样的工作风格。

BUTTERFLY, is a fashion, concise, and interesting lighting equipment. Slender aluminum, matte powder painted, with smooth rounded edges, is modest and elegant. Combined with a variety of styles and colors of felt board, the combination of a butterfly elegant clever shape. The whole series can meet the best lighting needs, provide excellent viewing comfort, but also play the role of sound absorption and noise reduction, allowing planners to expand the use of more scenarios according to the need to adapt to a variety of work


蝶

BUTTERFLY



蝶 BUTTERFLY

FLOOR LAMP 落地灯

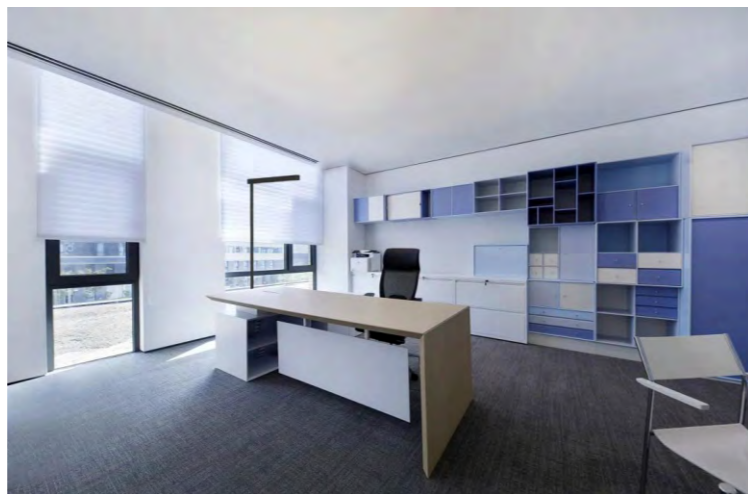



基础版

22W | 1760lm | 3000K/4000K/6000K | CRI>90 | SDCM<3 | DOWN LIGHT




智能版

22W | 0-1760lm | 3000K/4000K/6000K | CRI>90 | SDCM<3 | DOWN LIGHT

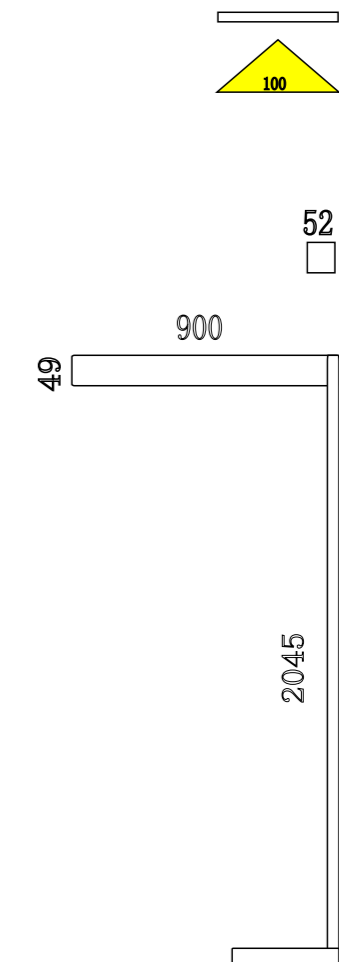

□ W T

■ BK





格栅透镜 (Grid lens lampshade)



BUTTERFLY
DESK LAMP 桌面灯

蝶

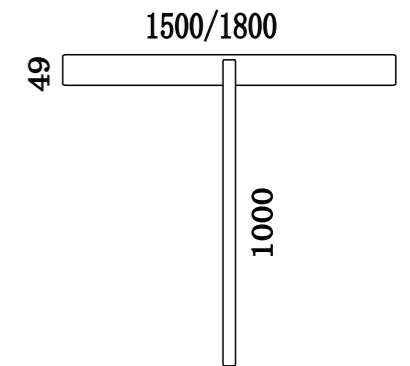

□ W T


■ BK

H 蜂窝组合灯罩 (Honeycomb shade)

36W /42W | 21601m /25201m | 3000K/4000K/6000K | CRI>90 | SDCM <3 | DOWN LIGHT

BUTTERFLY
READING LAMP 阅读灯

蝶

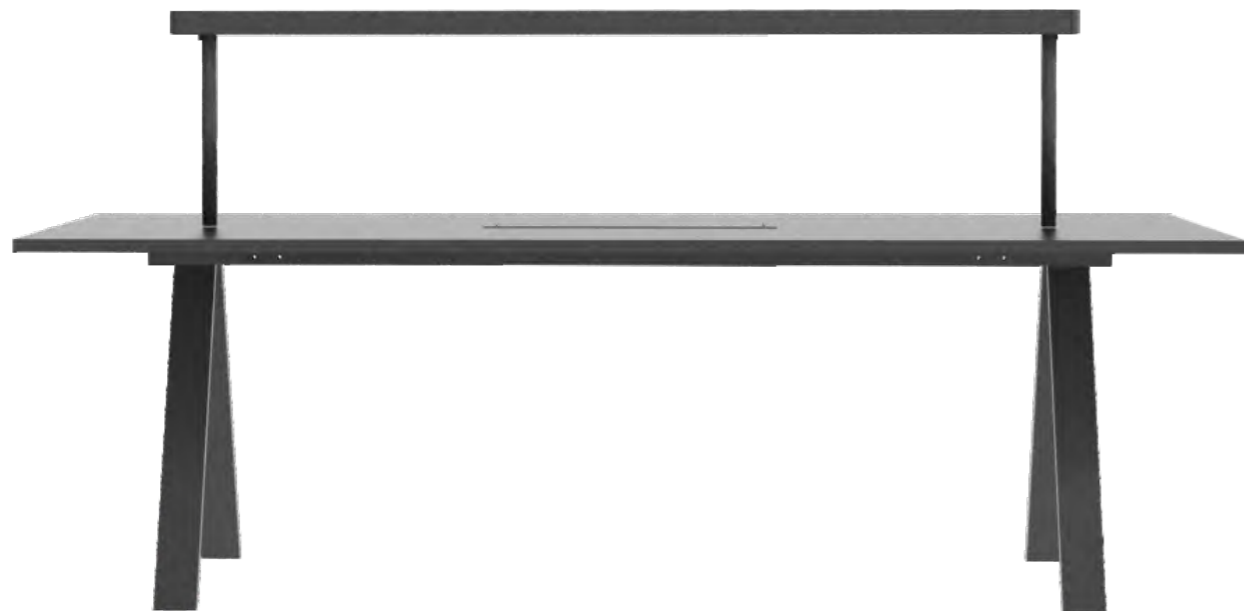

防眩光
Anti Glare




无屏闪
No Flickering




USB充电口接口
USB charge port



1200/1500/1800/2200

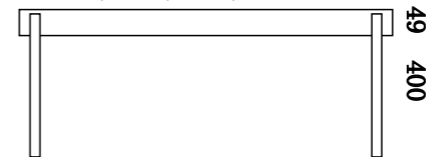

可定制长度 (Customizable length)



□ W T ■ BK

BV T蝴蝶翼组合灯罩 (BVT lamp shade)

30W -80W | 2400lm -6400lm | 3000K/4000K/6000K | CRI>90 | SDCM<3 | DOWN LIGHT

蝶 BUTTERFLY PLUS

FLOOR LAMP 落地灯






UP 14W /7001m /DOWN 22W /17601m | 4000K | CRI>90 | SDCM<3 | DIM /SIDE +DOWN LIGHT



智能版

UP 14W /0-7001m /DOWN 22W /0-17601m | 4000K | CRI>90 | SDCM<3 | DIM /SIDE +DOWN LIGHT



□ W T


■ BK

F 格栅透镜 (Grid lens lampshade)



BUTTERFLY PLUS

FLOOR LAMP 落地灯




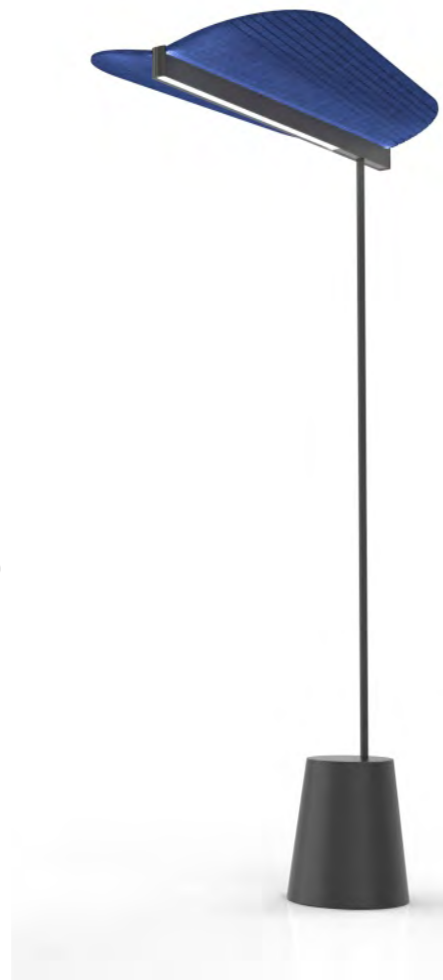


UP 14W /700lm /DOWN 22W /1760lm | 4000K | CRI>90 | SDCM<3 | DIM /SIDE +DOWN LIGHT



智能版

UP 14W /0-700lm /DOWN 22W /0-1760lm | 4000K | CRI>90 | SDCM<3 | DIM /SIDE +DOWN LIGHT

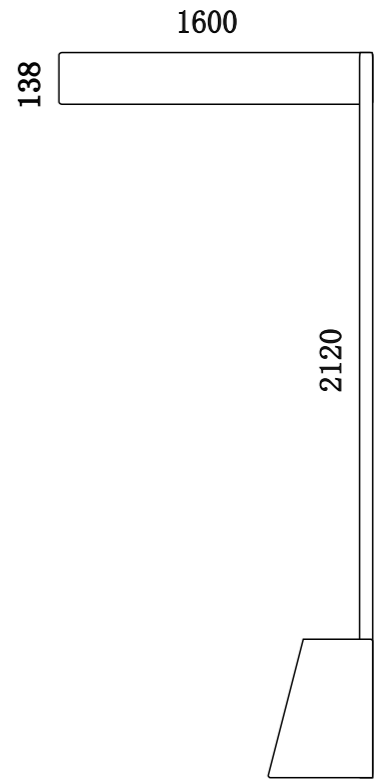




□ W T ■ BK


F格栅透镜 (Grid lens lampshade)

蝶 BUTTERFLY PLUS

DESK LAMP 桌面灯

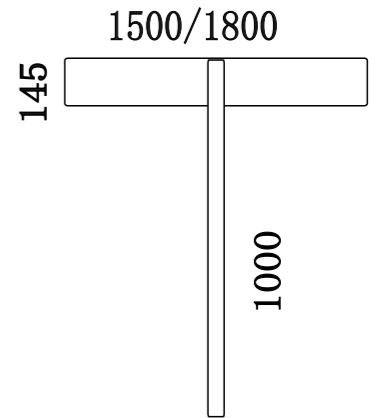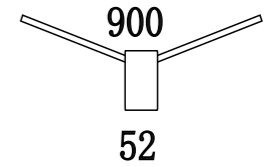

□ W T ■ BK






H蜂窝组合灯罩 (Honeycomb shade)

60W /80W | 3350mm /5125mm | 4000K | CRI>90 | SDCM<3 | DIM /SIDE+DOWN LIGHT


蝶 BUTTERFLY PLUS

READING LAMP 阅读灯

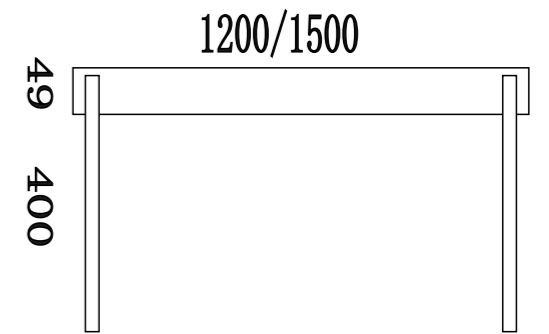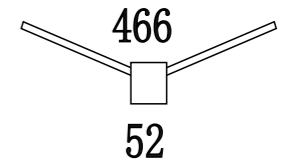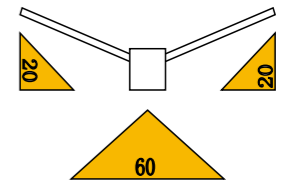

可定制长度 (Custom izable length)

□ W T ■ BK





BVT蝴蝶翼组合灯罩 (BVT lamp shade)

45W /60W | 2250lm /4000lm | 3000K/4000K/6000K | CRI>90 | SDCM<3 | DIM /SIDE+DOWN LIGHT

蝶 BUTTERFLY PLUS

DROP LIGHT 吊灯

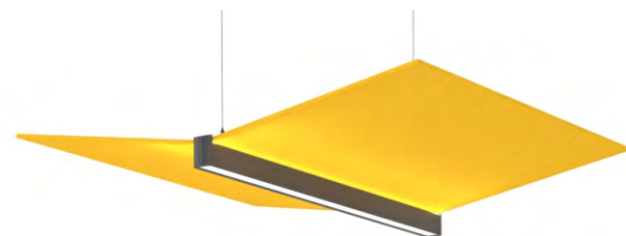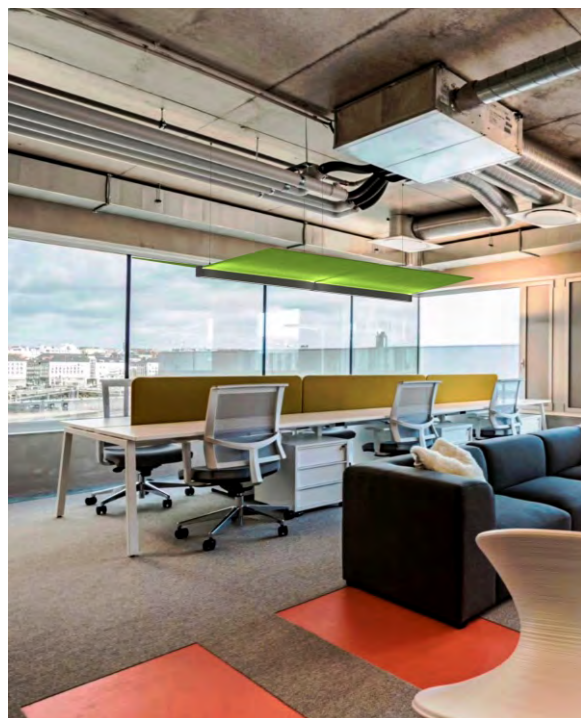

防眩光
Anti Glare



无屏闪
No Flickering




吸音
Suction sound



多彩
Colorful


BUTTERFLY PLUS DROP LIGHT 蝶Plus·吸音吊灯	功率 (P)	尺寸 (Size)	光效 (lm/W)	色温 (CCT)	显指 (CRI)	出光方式
BU-UPPA-01A	U 15W/D 30W	1234*52*173mm	80lm/W	4000K/4000K	>90	
BU-UPPA-01H	U 15W/D 30W	1234*52*173mm	75lm/W	4000K/4000K	>90	
BU-UPPA-01F	U 15W/D 30W	1234*52*173mm	80lm/W	4000K/4000K	>90	
BU-UPPA-02A	U 20W/D 36W	1510*52*173mm	80lm/W	4000K/4000K	>90	
BU-UPPA-02H	U 20W/D 36W	1510*52*173mm	75lm/W	4000K/4000K	>90	
BU-UPPA-02F	U 20W/D 36W	1510*52*173mm	80lm/W	4000K/4000K	>90	
BU-UPPA-03A	U 25W/D 45W	1786*52*173mm	80lm/W	4000K/4000K	>90	
BU-UPPA-03H	U 25W/D 45W	1786*52*173mm	75lm/W	4000K/4000K	>90	
BU-UPPA-03F	U 25W/D 45W	1786*52*173mm	80lm/W	4000K/4000K	>90	




1234/1510/1786




□ W T ■ BK



A防眩组合灯罩 (Anti-glare lamp shade)



H蜂窝组合灯罩 (Honeycomb shade)



F格栅透镜 (Grid lens lampshade)

明 MOON

FLOOR LAMP 落地灯




标准版

80W | UP 32801m /W /DOWN 32801m /W | 3000K/4000K/6000K | CRI>90 | 821m /W | UGR<16 | DIM /UP+DOWN LIGHT



智能版




0-80W | UP 0-32801m /W /DOWN 0-32801m /W | 3000K-6000K | CRI>90 | 821m /W | UGR<16 | DIM /UP+DOWN LIGHT

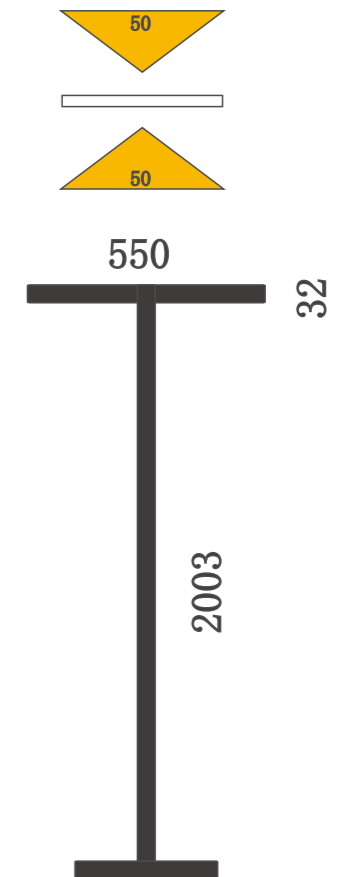

□ W T ■ BK

* 明·智能版细节 (MOON·Sm art version details)

明 MOON
DESK LAMP 桌面灯

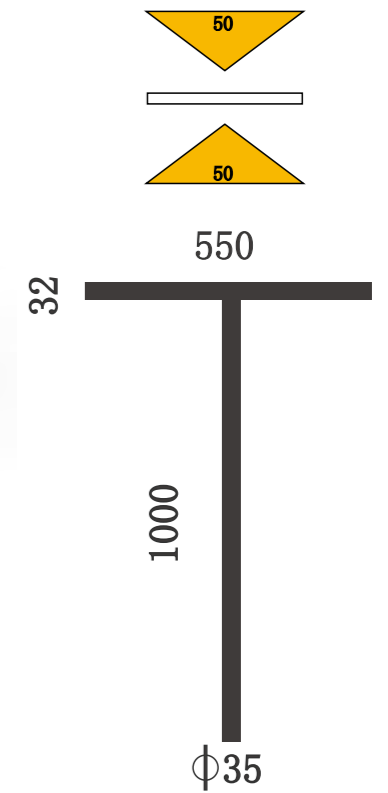



□ W T ■ BK

80W | 6560lm | 3000K/4000K/6000K | CRI>90 | 82lm/W | UGR<16 | DIM/UP+DOWN LIGHT



明月 MOON

DROP LIGHT 吊灯

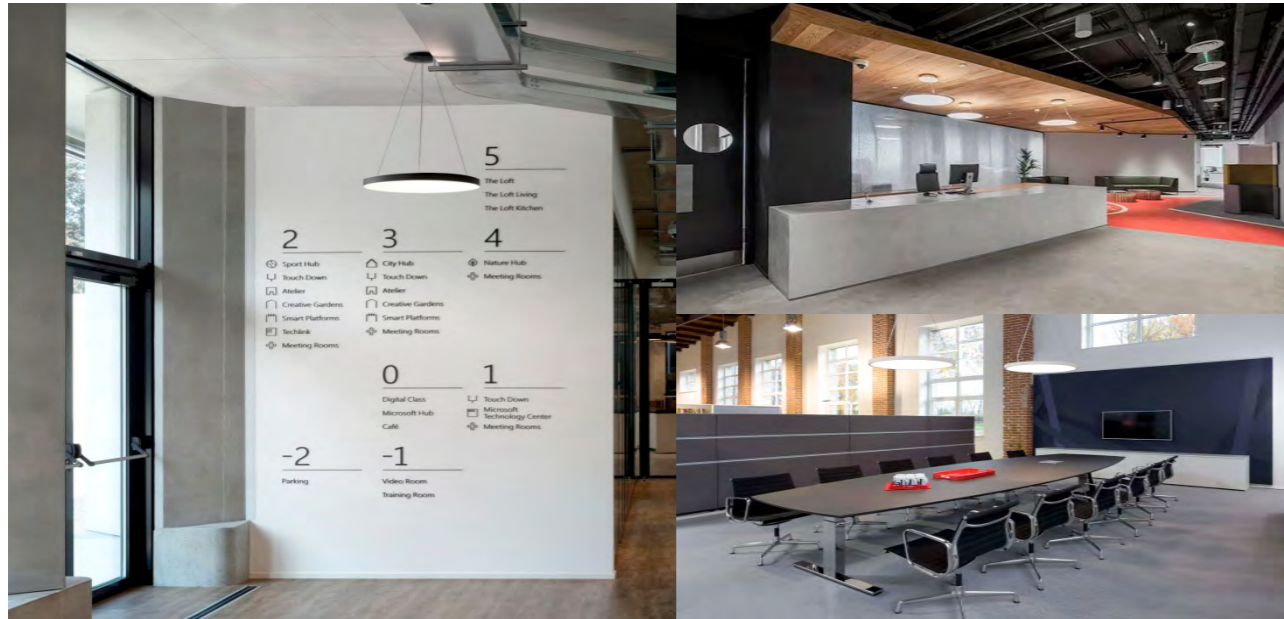


550



80W | 6560lm | 3000K/4000K/6000K | CRI>90 | 82lm/W | UGR<16 | DIM/UP+DOWN LIGHT

明MOON

FLOOR LAMP落地灯

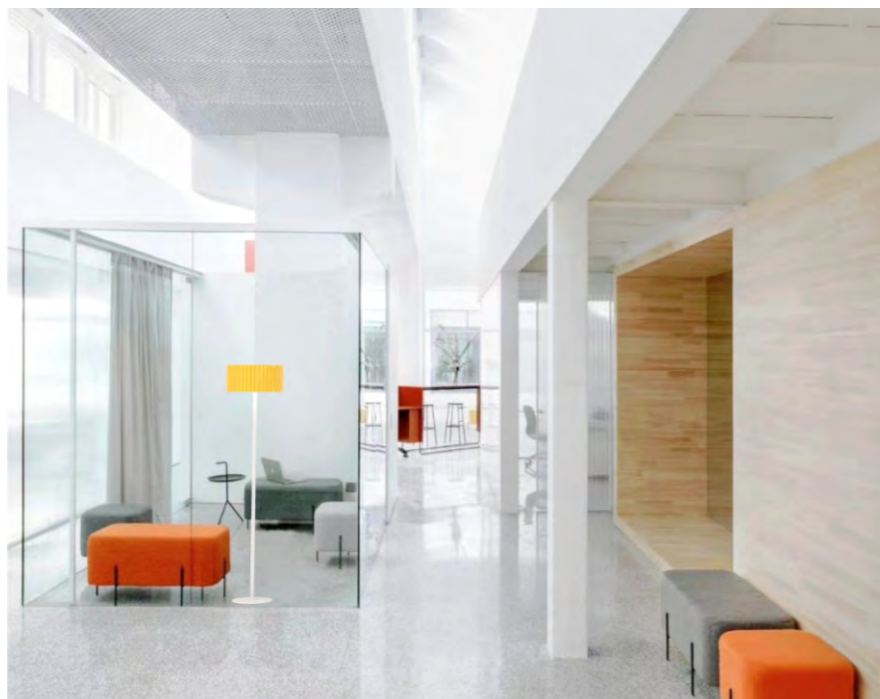

标准版

80W | UP 32801m /DOW N 32801m | 3000K/4000K/6000K | CRI>90 | 821m/W | UGR<16 | DIM/UP+DOWN LIGHT



智能版



0-80W | UP 0-32801m /DOW N 0-32801m | 3000K-6000K | CRI>90 | 821m/W | UGR<16 | DIM/UP+DOWN LIGHT



* 明·智能版细节 (MOON·Smart version details)

明 MOON

DESK LAMP 桌面灯

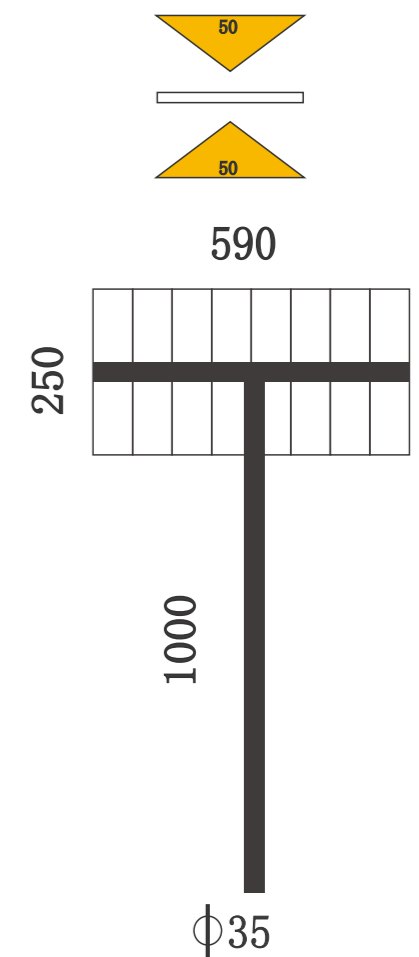


□ W T ■ BK

80W | 6560lm | 3000K/4000K/6000K | CRI>90 | 821m/W | UGR<16 | DIM/UP+DOWN LIGHT

明MOON

DROP LIGHT 吊灯

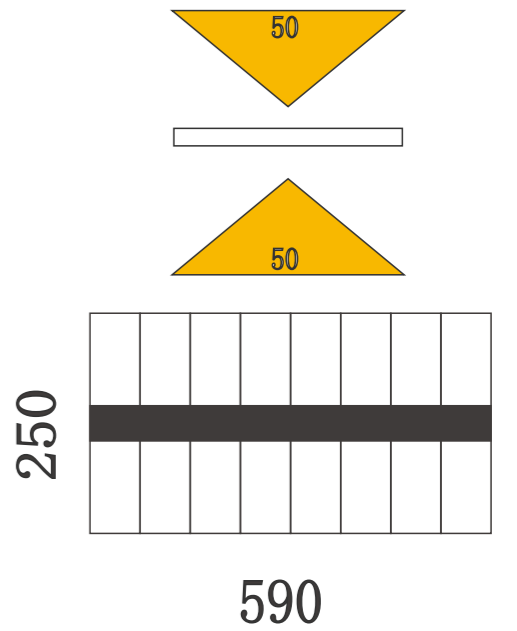

□ WT ■ BK

80W | 6560lm | 3000K/4000K/6000K | CRI>90 | 82lm/W | UGR<16 | DIM/UP+DOWN LIGHT



E213 吊灯


Lighting your life



Parameters 产品参数

Type:	Pendant
Color:	Silver/Matte White /Matte black
Light Source:	SMD LED
Diffuser:	PC
Reflector:	/
Color Temperature(K):	3000K/4000K/6000K
CIE:	Direct
Beam angle:	120°
CRI(Ra):	80-85
IP:	20
Fitting Efficiency:	75%
Application:	indoor

Details 产品细节

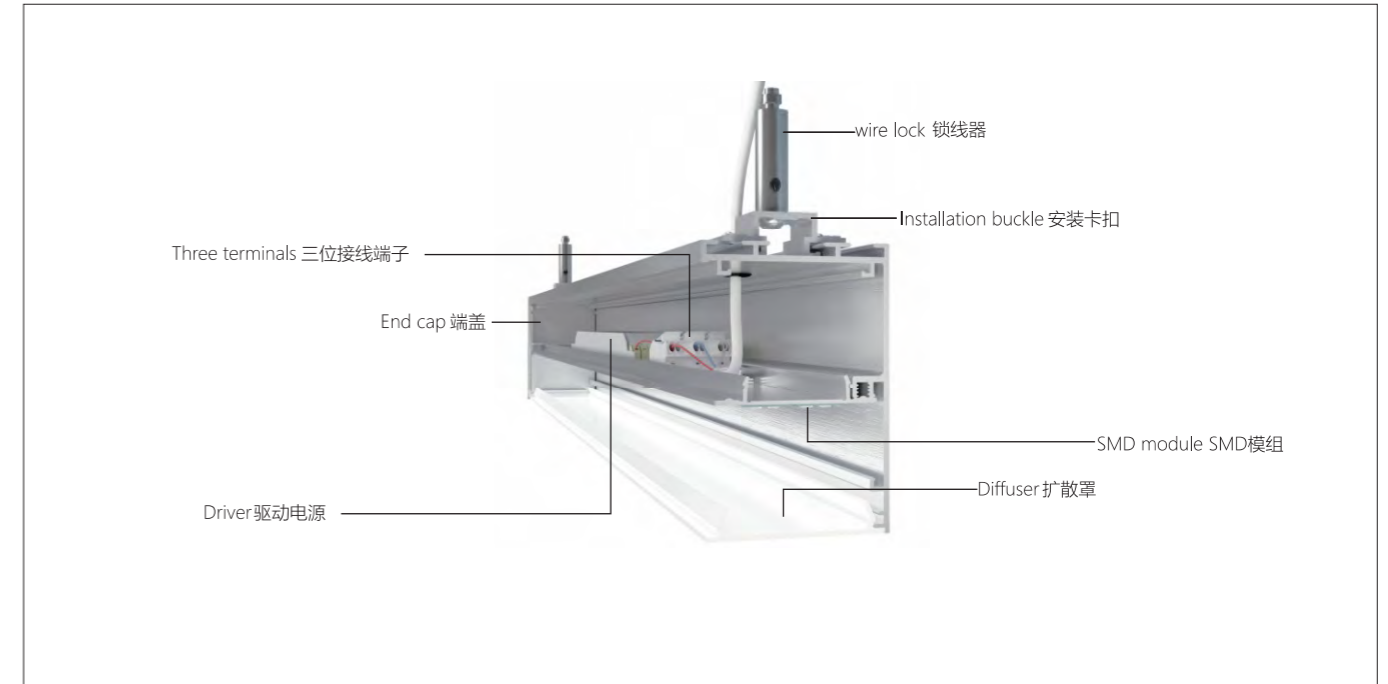

Material/Technic 材质/工艺

- The lamp body adopts high quality aluminum alloy (6063-T5), the end cover adopts ABS engineering plastic, the surface electrostatic spraying treatment, weathering, corrosion resistance and strong adhesion, easy to change color, color optional;
- Transparent cover for the high transmittance, diffusion type PMMA extrusion molding shade; good weather resistance, high temperature and cold, light are Uniform, anti-glare effect is good.
- Built-in high-brightness SMD light source, light efficiency up to 120lm / W, color rendering index ≥ 80 , color temperature 3000K, 4000K, 6000K Optional.
- Light source life of up to 50,000 hours, light fades small, energy saving, greatly reducing maintenance costs.
- Product configuration high-performance, high conversion rate of the drive power; with short circuit, overload, overvoltage and other protective measures, To ensure that the entire lamp performance and stability, and the other optional dimming power (1-10V, DALI dimming);

- 灯体采用优质铝合金 (6063-T5), 端盖采用ABS工程塑料, 表面静电喷涂处理, 耐候、耐蚀及附着力强、不易变色, 颜色可选;
- 透光罩为高透光率、扩散型PMMA挤压成型灯罩; 耐候性好、耐高温及耐寒, 出光均匀, 防眩效果佳;
- 内置高亮度SMD光源, 光效可达120lm/W, 显色指数 ≥ 80 , 色温3000K、4000K、6000K可选;
- 光源寿命长达5万小时, 光衰小, 节能降耗, 极大降低维护成本;
- 产品配置高性能, 高转换率的驱动电源; 具有短路、过载、过压等保护措施, 确保整灯性能稳定, 另可选配调光电源 (1-10V、DALI调光);

Features 产品特点

Simple line type LED lamps, so that the office environment is simple and taste; all-aluminum structure lighthouse, fully guarantee the thermal stability of lamps to ensure that the life of the whole lamp and color temperature consistency; direct-type SMD light source through high transmittance Diffuse PC lampshade, so that the light is more uniform, soft and comfortable; to maximize the lamp light output efficiency, efficiency up to 68%.

Product installation is divided into: lifting, ceiling installation, embedded installation; installation simple, convenient.



Product scope: high-grade office buildings, schools, hospitals, libraries, supermarkets and public buildings, etc.

简约线条型LED灯具, 让办公环境简洁而有品位; 全铝合金结构灯架, 充分保证灯具的热稳定性, 确保整灯寿命及色温的一致性; 直照式的SMD光源通过高透光率扩散型PC灯罩, 让出光更均匀、柔和舒适; 最大限度满足灯具光输出效率, 效率可达68%。

产品安装方式分为: 吊装、吸顶式安装、嵌入式安装等; 安装简捷、方便。

产品适用范围: 高档写字楼、学校、医院、图书馆、超市及公共建筑空间等。

Specifications 产品规格

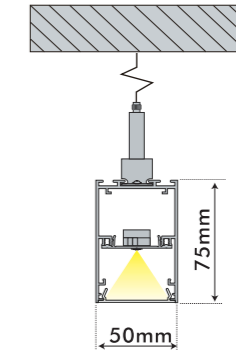
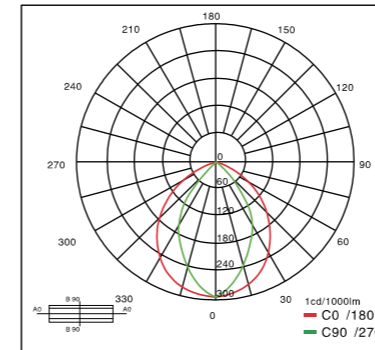


ArtNo.	Power	Flux	Size(mm)	Lampshade material	Color
E213.PT18.LED	18W	1556 lm	1200*50*75	PC	Silver/Matte White /Matte black
E213.PT25.LED	25W	2192 lm	1500*50*75	PC	Silver/Matte White /Matte black
E213.PT38.LED	38W	3289 lm	1780*50*75	PC	Silver/Matte White /Matte black
E213.PT50.LED	50W	4385 lm	2360*50*75	PC	Silver/Matte White /Matte black



E213 嵌灯

Lighting your life

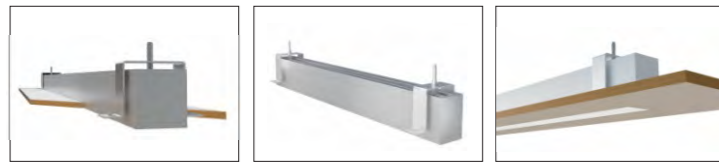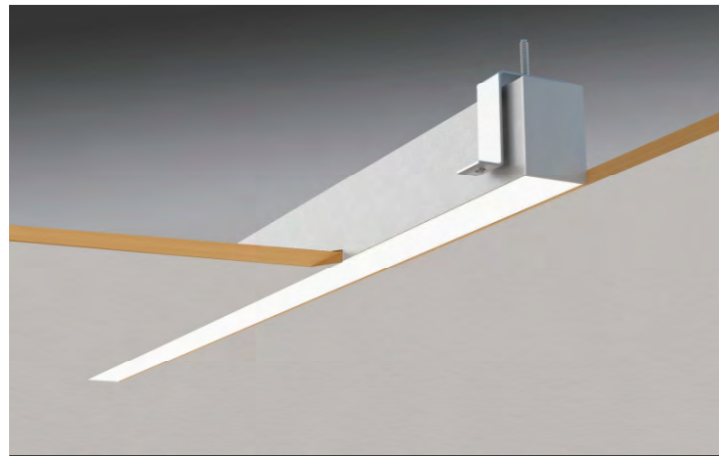

Parameters 产品参数

Type:	RECESSED LAMP
Color:	Silver/Matte White /Matte black
Light Source:	SMD LED
Diffuser:	PC
Reflector:	/
Color Temperature(K):	3000K/4000K/6000K
CIE:	Direct
Beam angle:	120°
CRI(Ra):	80-85
IP:	20
Fitting Efficiency:	75%
Application:	indoor

Details 产品细节



Material/Technic 材质/工艺

- The lamp body and the end cap are made of high quality aluminum alloy (6063-T5), the surface electrostatic spraying treatment, weathering, corrosion resistance and strong adhesion, easy to change color, color optional.
 - Transparent cover for the high transmittance, diffusion type PMMA extrusion molding shade; good weather resistance, high temperature and cold, light are Uniform, anti-glare effect is good.
 - Built-in high-brightness SMD light source, light efficiency up to 120lm/W, color rendering index ≥ 80 , color temperature 3000K, 4000K, 6000K Optional.
 - Light source life of up to 50,000 hours, light fades small, energy saving, greatly reducing maintenance costs.
- Product configuration high-performance, high conversion rate of the drive power; with short circuit, overload, overvoltage and other protective measures to ensure that the entire lamp performance and stability.

- 灯体及端盖采用优质铝合金 (6063-T5), 表面静电喷涂处理, 耐候、耐蚀及附着力强、不易变色, 颜色可选;
- 透光罩为高透光率、扩散型PMMA挤压成型灯罩; 耐候性好、耐高温及耐寒, 出光均匀, 防眩效果佳;
- 内置高亮度SMD光源, 光效可达120lm/W, 显色指数 ≥ 80 , 色温3000K、4000K、6000K可选;
- 光源寿命长达5万小时, 光衰小, 节能降耗, 极大降低维护成本;
- 产品配置高性能, 高转换率的驱动电源; 具有短路、过载、过压等保护措施, 确保整灯性能稳定;

Features 产品特点

Simple line type LED lamps, so that the office environment is simple and taste; all-aluminum structure lighthouse, fully guarantee the thermal stability of lamps to ensure that the life of the whole lamp and color temperature consistency; direct-type SMD light source through high transmittance Diffuse PC lampshade, so that the light is more uniform, soft and comfortable; to maximize the lamp light output efficiency, efficiency up to 68%.

Product installation is divided into: lifting, ceiling installation, embedded installation; installation simple, convenient.




Product scope: high-grade office buildings, schools, hospitals, libraries, supermarkets and public buildings, etc.

简约线条型LED灯具, 让办公环境简洁而有品位; 全铝合金结构灯架, 充分保证灯具的热稳定性, 确保整灯寿命及色温的一致性; 直照式的SMD光源通过高透光率扩散型PC灯罩, 让出光更均匀、柔和舒适; 最大限度满足灯具光输出效率, 效率可达68%。

产品安装方式分为: 吊装、吸顶式安装、嵌入式安装等; 安装简捷、方便。

产品适用范围: 高档写字楼、学校、医院、图书馆、超市及公共建筑空间等。

Specifications 产品规格

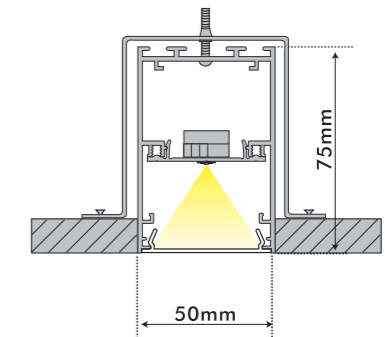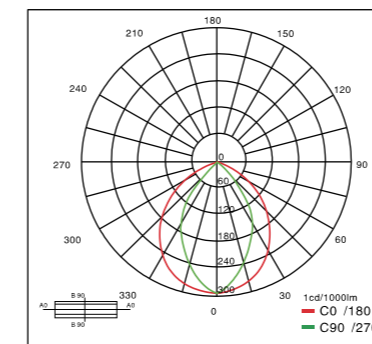


ArtNo.	Power	Flux	Size(mm)	Lampshade material	Color
E213.RT18.LED	18W	1556 lm	1200*50*75	PC	Silver/Matte White /Matte black
E213.RT25.LED	25W	2192 lm	1500*50*75	PC	Silver/Matte White /Matte black
E213.RT38.LED	38W	3289 lm	1780*50*75	PC	Silver/Matte White /Matte black
E213.RT50.LED	50W	4385 lm	2360*50*75	PC	Silver/Matte White /Matte black



E213 吸顶灯


Lighting your life

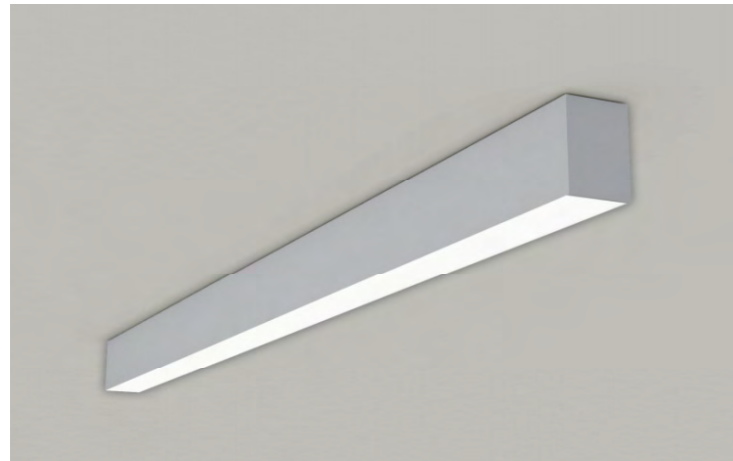

Parameters 产品参数

Type:	CEILING LAMP
Color:	Silver/Matte White /Matte black
Light Source:	SMD LED
Diffuser:	PC
Reflector:	/
Color Temperature(K):	3000K/4000K/6000K
CIE:	Direct
Beam angle:	120°
CRI(Ra):	80-85
IP:	20
Fitting Efficiency:	75%
Application:	indoor

Details 产品细节

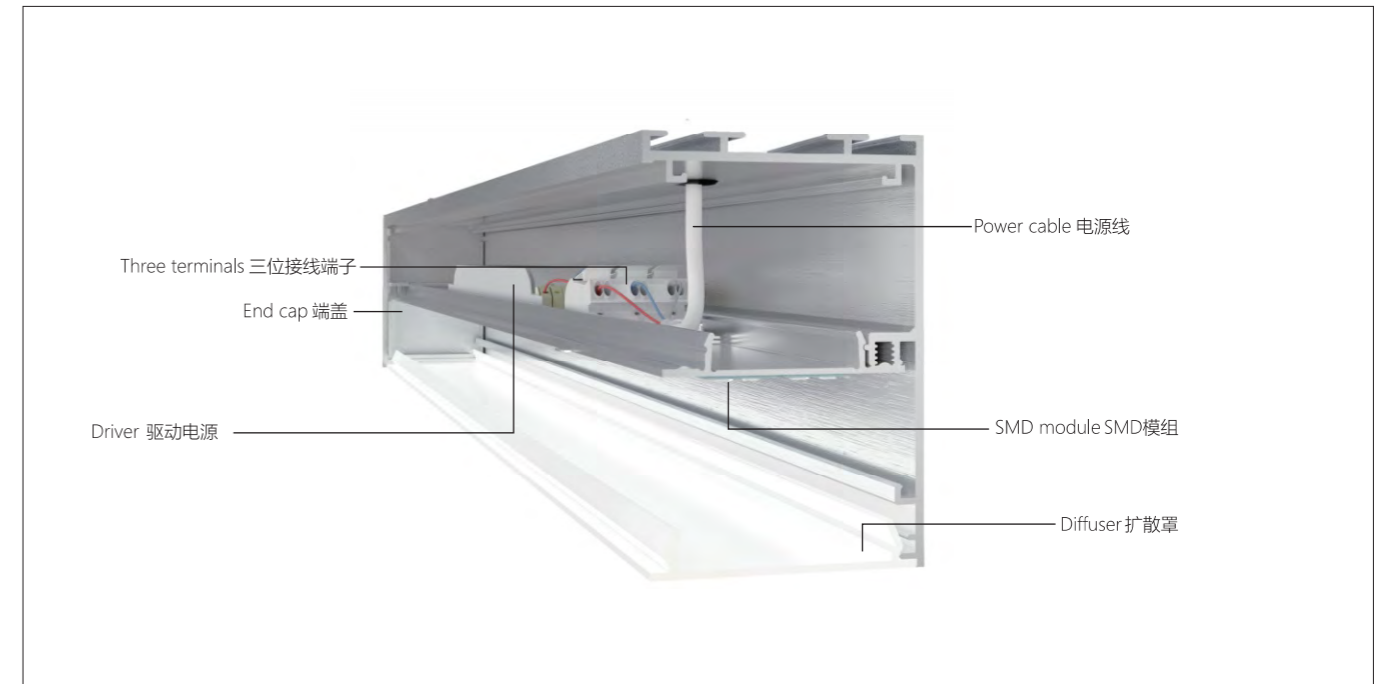

Material/Technic 材质/工艺

- The lamp body and the end cap are made of high quality aluminum alloy (6063-T5), the surface electrostatic spraying treatment, weathering, corrosion resistance and strong adhesion, easy to change color, color optional.
- Transparent cover for the high transmittance, diffusion type PMMA extrusion molding shade; good weather resistance, high temperature and cold, light are Uniform, anti-glare effect is good.
- Built-in high-brightness SMD light source, light efficiency up to 120lm / W, color rendering index ≥ 80 , color temperature 3000K, 4000K, 6000K Optional.
- Light source life of up to 50,000 hours, light fades small, energy saving, greatly reducing maintenance costs.

Product configuration high-performance, high conversion rate of the drive power; with short circuit, overload, overvoltage and other protective measures to ensure that the entire lamp performance and stability.

- 灯体及端盖采用优质铝合金 (6063-T5), 表面静电喷涂处理, 耐候、耐蚀及附着力强、不易变色, 颜色可选;
- 透光罩为高透光率、扩散型PMMA挤压成型灯罩; 耐候性好、耐高温及耐寒, 出光均匀, 防眩效果佳;
- 内置高亮度SMD光源, 光效可达120lm/W, 显色指数 ≥ 80 , 色温3000K、4000K、6000K可选;
- 光源寿命长达5万小时, 光衰小, 节能降耗, 极大降低维护成本;
- 产品配置高性能, 高转换率的驱动电源; 具有短路、过载、过压等保护措施, 确保整灯性能稳定;

Features 产品特点

Simple line type LED lamps, so that the office environment is simple and taste; all-aluminum structure lighthouse, fully guarantee the thermal stability of lamps to ensure that the life of the whole lamp and color temperature consistency; direct-type SMD light source through high transmittance Diffuse PC lampshade, so that the light is more uniform, soft and comfortable; to maximize the lamp light output efficiency, efficiency up to 68%.

Product installation is divided into: lifting, ceiling installation, embedded installation; installation simple, convenient.




Product scope: high-grade office buildings, schools, hospitals, libraries, supermarkets and public buildings, etc.

简约线条型LED灯具, 让办公环境简洁而有品位; 全铝合金结构灯架, 充分保证灯具的热稳定性, 确保整灯寿命及色温的一致性; 直照式的SMD光源通过高透光率扩散型PC灯罩, 让出光更均匀、柔和舒适; 最大限度满足灯具光输出效率, 效率可达68%。

产品安装方式分为: 吊装、吸顶式安装、嵌入式安装等; 安装简捷、方便。

产品适用范围: 高档写字楼、学校、医院、图书馆、超市及公共建筑空间等。

Specifications 产品规格

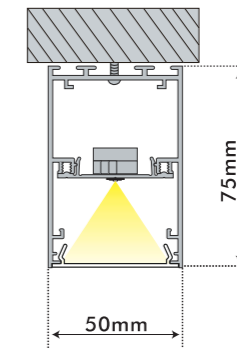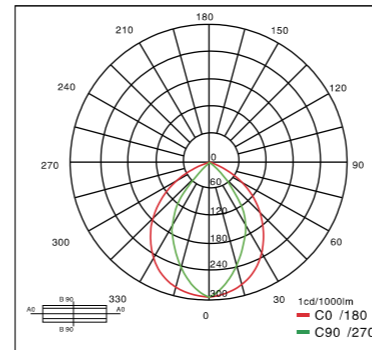

ArtNo.	Power	Flux	Size(mm)	Lampshade material	Color
E213.CT18.LED	18W	1556 lm	1200*50*75	PC	Silver/Matte White /Matte black
E213.CT25.LED	25W	2192 lm	1500*50*75	PC	Silver/Matte White /Matte black
E213.CT38.LED	38W	3289 lm	1780*50*75	PC	Silver/Matte White /Matte black
E213.CT50.LED	50W	4385 lm	2360*50*75	PC	Silver/Matte White /Matte black



E224 吊灯


Lighting your life



Parameters 产品参数

Type:	Pendant
Color:	Matte Black/Matt white/Silver
Light Source:	SMD LED
Diffuser:	PMMA
Reflector:	/
Color Temperature(K):	3000K/4000K/6000K
CIE:	Direct
Beam angle:	120°
CRI(Ra):	80-85
IP:	20
Fitting Efficiency:	80%
Application:	indoor

Details 产品细节

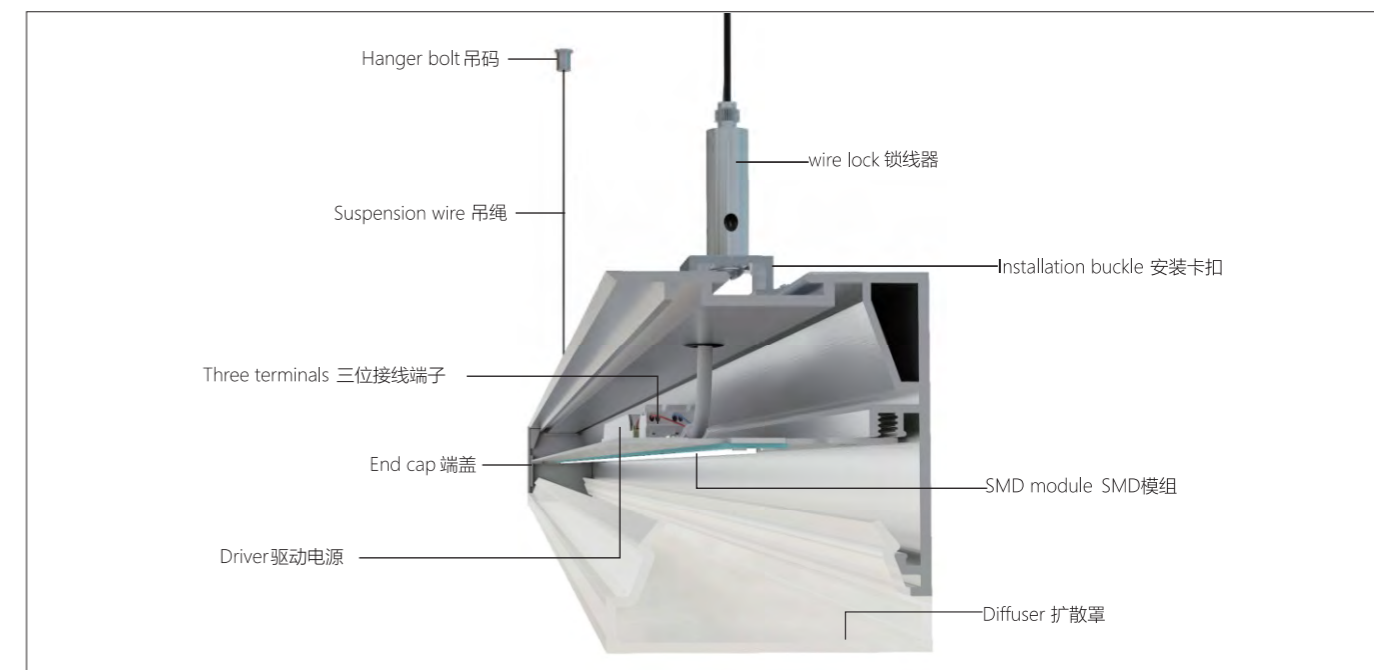

Material/Technic 材质/工艺

- The lamp body adopts high quality aluminum alloy (6063-T5), the end cap adopts imported die-casting aluminum ingot (ADC12), the surface electrostatic spraying treatment, weathering, corrosion resistance and strong adhesion, easy to change color, color optional;
 - Transparent cover for the optical grade high transmittance, diffusion type PMMA extrusion molding shade; high strength, high temperature, light uniform, anti-glare effect is good;
 - Built-in high brightness SMD light source, light efficiency up to 120lm/W, color rendering index ≥ 80 , color temperature 3000K, 4000K, 6000K optional.
 - Light source life of up to 50,000 hours, light fades small, energy saving, greatly reducing maintenance costs.
 - Product configuration high-performance, high conversion rate of the drive power; with short circuit, overload, overvoltage and other protective measures to ensure that the entire lamp performance and stability; another optional dimming power (1-10V, DALI dimming).
- 灯体采用优质铝合金 (6063-T5), 端盖采用进口压铸铝锭 (ADC12), 表面静电喷涂处理, 耐候、耐蚀及附着力强、不易变色, 颜色可选;
 - 透光罩为光学级高透光率、扩散型PMMA挤压成型灯罩; 强度高、耐高温, 出光均匀, 防眩效果佳;
 - 内置高亮度SMD光源, 光效可达120lm/W, 显色指数 ≥ 80 , 色温3000K、4000K、6000K可选;
 - 光源寿命长达5万小时, 光衰小, 节能降耗, 极大降低维护成本;
 - 产品配置高性能, 高转换率的驱动电源; 具有短路、过载、过压等保护措施, 确保整灯性能稳定; 另可选配调光电源 (1-10V、DALI调光);

Features 产品特点

Modern simple LED linear lamps, with its simple lines, fine craftsmanship and can change with the shape of the environment, so that the office environment bright, comfortable, artistic expression strong; all-aluminum structure lighthouse, fully guarantee the thermal stability of lamps Nature, to ensure the consistency of the life of the whole lamp and color temperature; direct-style SMD light source through the high transmittance diffusion PMMA lampshade, so that the light more uniform, soft and comfortable; to maximize the lamp light output efficiency, efficiency up to 68%.

In addition to the standard lighting products, according to the site environment and design requirements, can be customized special shaped light band seamless, no shadow splicing, optimize the office environment, to achieve the perfect combination of people.

Product installation is divided into: lifting, ceiling installation, embedded installation; installation simple and convenient.

Product scope: subway, high - grade office buildings, schools, hospitals, libraries, supermarkets and public buildings, such as space.



现代简约LED线性灯具, 以其简洁的线条、精细的工艺以及可随环境而变的造型, 让办公环境明亮、舒适、艺术表现力强; 全铝合金结构灯架, 充分保证灯具的热稳定性, 确保整灯寿命及色温的一致性; 直照式的SMD光源通过高透光率扩散型PMMA灯罩, 让出光更均匀、柔和舒适; 最大限度满足灯具光输出效率, 效率可达68%。

除标准灯具产品外, 根据现场环境及设计要求, 可特殊订制异形光带的无缝、无影拼接, 优化办公环境, 实现人、境、光的完美结合;

产品安装方式分为: 吊装、吸顶式安装、嵌入式安装等; 安装简捷、方便;

产品适用范围: 地铁、高档写字楼、学校、医院、图书馆、超市及公共建筑空间等;



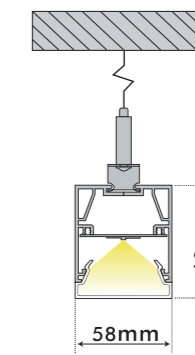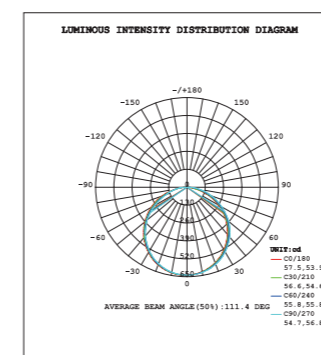






Specifications 产品规格



ArtNo.	Power	Flux	Size(mm)	Lampshade material	Color
E224.PT18.LED	18W	1556 lm	1200*58*68	Opal PMMA	Silver/Matte White /Matte black
E224.PT25.LED	25W	2192 lm	1500*58*68	Opal PMMA	Silver/Matte White /· black
E224.PT38.LED	38W	3289 lm	1780*58*68	Opal PMMA	Silver/Matte White /Matte black
E224.PT50.LED	50W	4385 lm	2360*58*68	Opal PMMA	Silver/Matte White /Matte black








Monomer accessories 单体配件

Name	Number	Name	Number
 Hanger bolt 吊码	2	 wire lock 锁线器	2
 Waterproof connectors 防水接头	1	 Wire Rope 钢丝绳	2
 Hanging cup fixed sheet metal parts 吊杯固定板金件	1	 Three terminals 3位接线端子	1
 Metal fixed suction a top piece 吸顶金属固定片	1	 Installation buckle 安装卡扣	2
 Screw 吸顶固定螺丝/螺帽	4		

Connection system 连接系统图





Expand accessories 拓展配件

L-module	Item No	Power	Flux(lm)	Size(mm)	Name
	E224-RL	6W	522	215*235*58*68	 Band connection piece (top) 光带连接片 (侧)
T-module	Item No	Power	Flux(lm)	Size(mm)	Name
	E224-RT	9W	783	392*235*58*68	 Band connection piece (top) 光带连接片 (顶)
X-module	Item No	Power	Flux(lm)	Size(mm)	Name
	E224-RX	12W	1044	392*412*58*68	

Custom module



(1) One word band matching, cross stitching, T type joining together. (1)一字型光带拼接、十字型拼接、T字型拼接；

(2) According to the requirements of customers customized different stitching. (2)根据客户的要求进行定制异型拼接；

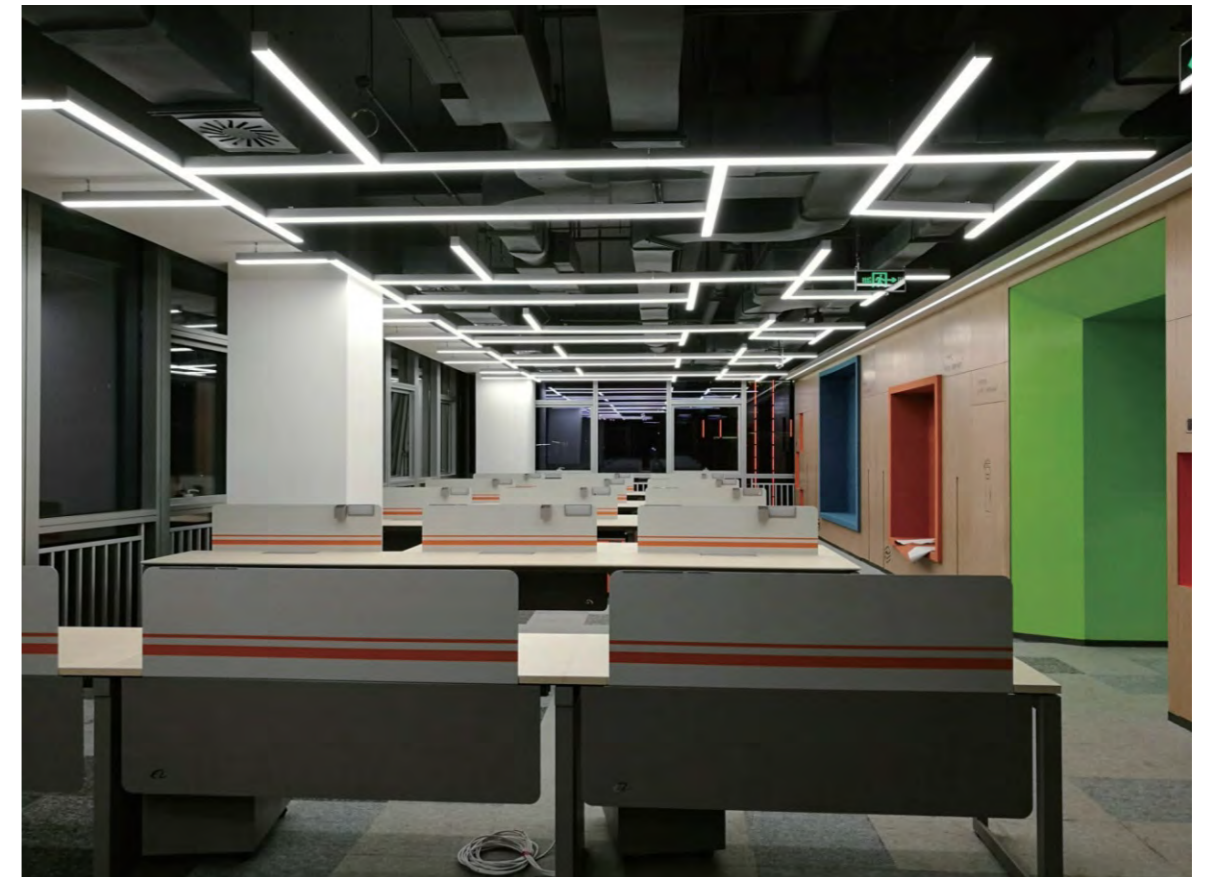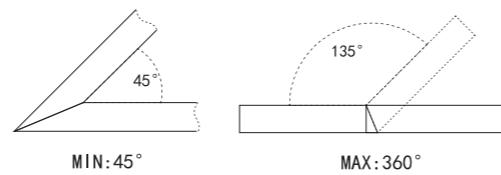

E224 嵌灯

Lighting your life

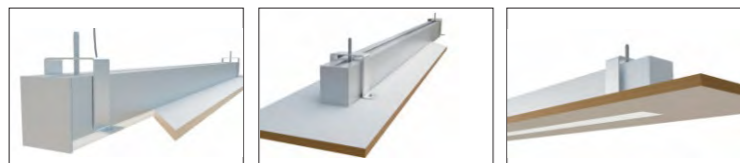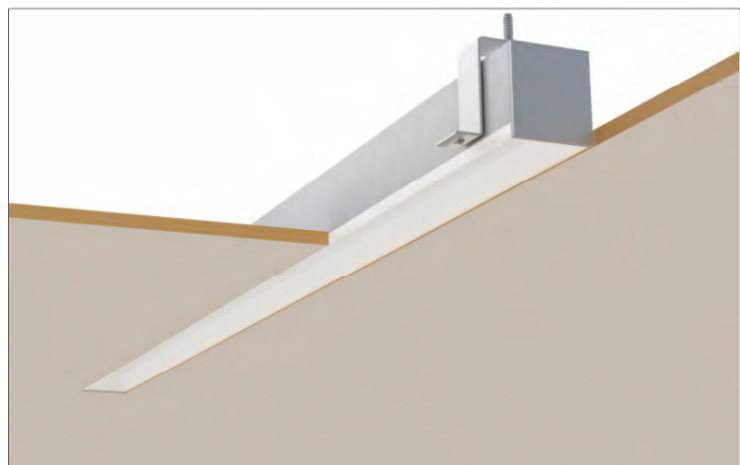

Parameters 产品参数

Type:	RECESSED LAMP
Color:	Matte Black/Matt white/Silver
Light Source:	SMD LED
Diffuser:	PMMA
Reflector:	/
Color Temperature(K):	3000K/4000K/6000K
CIE:	Direct
Beam angle:	120°
CRI(Ra):	80-85
IP:	20
Fitting Efficiency:	80%
Application:	indoor

Material/Technic 材质/工艺

- The lamp body adopts high quality aluminum alloy (6063-T5), the end cap adopts imported die-casting aluminum ingot (ADC12), the surface electrostatic spraying treatment, weathering, corrosion resistance and strong adhesion, easy to change color, color optional;
- Transparent cover for the optical grade high transmittance, diffusion type PMMA extrusion molding shade; high strength, high temperature, light uniform, anti-glare effect is good;
- Built-in high brightness SMD light source, light efficiency up to 120lm / W, color rendering index ≥ 80 , color temperature 3000K, 4000K, 6000K optional.
- Light source life of up to 50,000 hours, light fades small, energy saving, greatly reducing maintenance costs.
- Product configuration high-performance, high conversion rate of the drive power; with short circuit, overload, overvoltage and other protective measures to ensure that the entire lamp performance and stability; another optional dimming power (1-10V, DALI dimming).

- 灯体采用优质铝合金 (6063-T5), 端盖采用进口压铸铝锭 (ADC12), 表面静电喷涂处理, 耐候、耐蚀及附着力强、不易变色, 颜色可选;
- 透光罩为光学级高透光率、扩散型PMMA挤压成型灯罩; 强度高、耐高温, 出光均匀, 防眩效果佳;
- 内置高亮度SMD光源, 光效可达120lm/W, 显色指数 ≥ 80 , 色温3000K、4000K、6000K可选;
- 光源寿命长达5万小时, 光衰小, 节能降耗, 极大降低维护成本;
- 产品配置高性能, 高转换率的驱动电源; 具有短路、过载、过压等保护措施, 确保整灯性能稳定; 另可选配调光电源 (1-10V、DALI调光);

Features 产品特点

Modern simple LED linear lamps, with its simple lines, fine craftsmanship and can change with the shape of the environment, so that the office environment bright, comfortable, artistic expression strong; all-aluminum structure lighthouse, fully guarantee the thermal stability of lamps Nature, to ensure the consistency of the life of the whole lamp and color temperature; direct-style SMD light source through the high transmittance diffusion PMMA lampshade, so that the light more uniform, soft and comfortable; to maximize the lamp light output efficiency, efficiency up to 68%.

In addition to the standard lighting products, according to the site environment and design requirements, can be customized special shaped light band seamless, no shadow splicing, optimize the office environment, to achieve the perfect combination of people.

Product installation is divided into: lifting, ceiling installation, embedded installation; installation simple and convenient.

Product scope: subway, high-grade office buildings, schools, hospitals, libraries, supermarkets and public buildings, such as space.


现代简约型LED线性灯具, 以其简洁的线条、精细的工艺以及可随环境而变的造型, 让办公环境明亮、舒适、艺术表现力强; 全铝合金结构灯架, 充分保证灯具的热稳定性, 确保整灯寿命及色温的一致性; 直照式的SMD光源通过高透光率扩散型PMMA灯罩, 让出光更均匀、柔和舒适; 最大限度满足灯具光输出效率, 效率可达68%。

除标准灯具产品外, 根据现场环境及设计要求, 可特殊订制异形光带的无缝、无影拼接, 优化办公环境, 实现人、境、光的完美结合;




产品安装方式分为: 吊装、吸顶式安装、嵌入式安装等; 安装简捷、方便;

产品适用范围: 地铁、高档写字楼、学校、医院、图书馆、超市及公共建筑空间等;

Details 产品细节

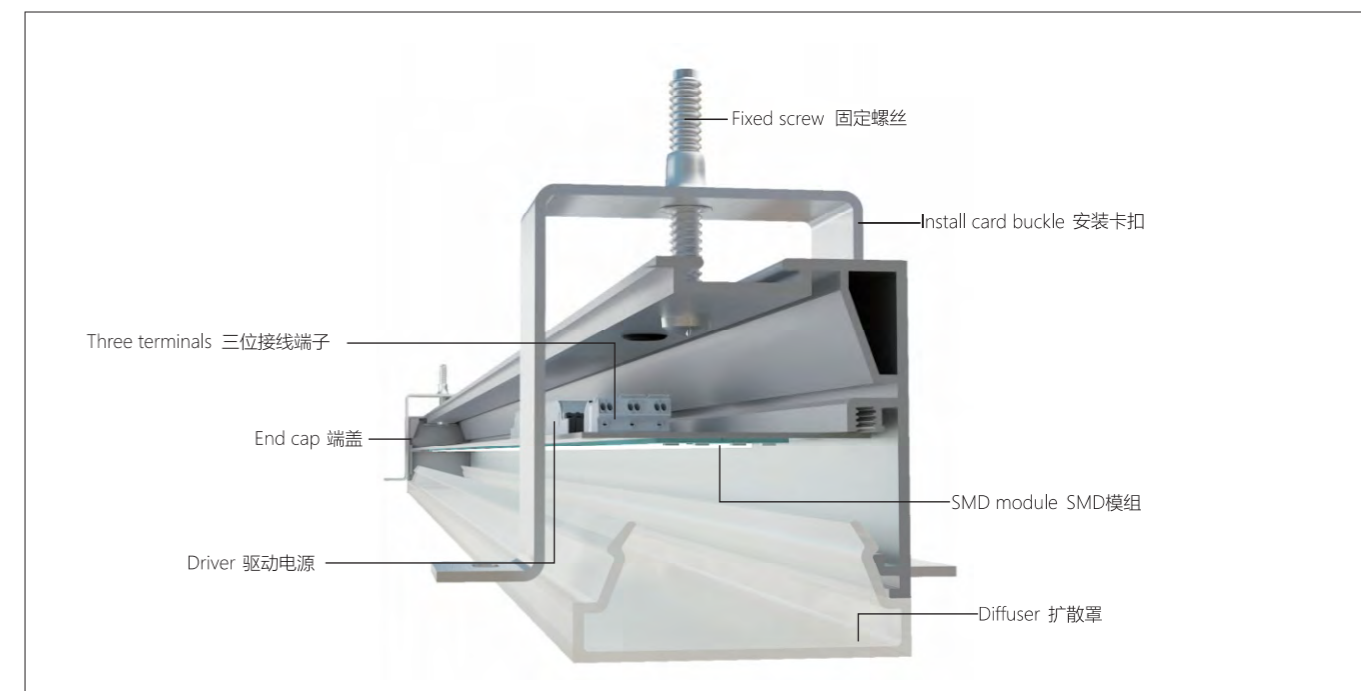

Specifications 产品规格

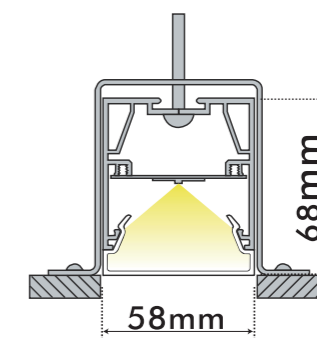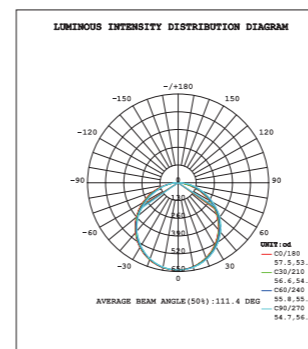

ArtNo.	Power	Flux	Size(mm)	Lampshade material	Color
E224.RT18.LED	18W	1556 lm	1200*58*68	Opal PMMA	Silver/Matte White /Matte black
E224.RT25.LED	25W	2192 lm	1500*58*68	Opal PMMA	Silver/Matte White /Matte black
E224.RT38.LED	38W	3289 lm	1780*58*68	Opal PMMA	Silver/Matte White /Matte black
E224.RT50.LED	50W	4385 lm	2360*58*68	Opal PMMA	Silver/Matte White /Matte black



E224 吸顶灯

Lighting your life



Parameters 产品参数

Type:	CEILING LAMP
Color:	Matte Black/Matt white/Silver
Light Source:	SMD LED
Diffuser:	PMMA
Reflector:	/
Color Temperature(K):	3000K/4000K/6000K
CIE:	Direct
Beam angle:	120°
CRI(Ra):	80-85
IP:	20
Fitting Efficiency:	80%
Application:	indoor

Material/Technic 材质/工艺

- The lamp body adopts high quality aluminum alloy (6063-T5), the end cap adopts imported die-casting aluminum ingot (ADC12), the surface electrostatic spraying treatment, weathering, corrosion resistance and strong adhesion, easy to change color, color optional;
- Transparent cover for the optical grade high transmittance, diffusion type PMMA extrusion molding shade; high strength, high temperature, light uniform, anti-glare effect is good;
- Built-in high brightness SMD light source, light efficiency up to 120lm/W, color rendering index ≥ 80 , color temperature 3000K, 4000K, 6000K optional.
- Light source life of up to 50,000 hours, light fades small, energy saving, greatly reducing maintenance costs.
- Product configuration high-performance, high conversion rate of the drive power; with short circuit, overload, overvoltage and other protective measures to ensure that the entire lamp performance and stability; another optional dimming power (1-10V, DALI dimming).
- 灯体采用优质铝合金 (6063-T5),端盖采用进口压铸铝锭 (ADC12),表面静电喷涂处理,耐候、耐蚀及附着力强、不易变色,颜色可选;
- 透光罩为光学级高透光率、扩散型PMMA挤压成型灯罩;强度高、耐高温,出光均匀,防眩效果佳;
- 内置高亮度SMD光源,光效可达120lm/W,显色指数 ≥ 80 ,色温3000K、4000K、6000K可选;
- 光源寿命长达5万小时,光衰小,节能降耗,极大降低维护成本;
- 产品配置高性能,高转换率的驱动电源;具有短路、过载、过压等保护措施,确保整灯性能稳定;另可选配调光电源(1-10V、DALI调光);

Features 产品特点

Modern simple LED linear lamps, with its simple lines, fine craftsmanship and can change with the shape of the environment, so that the office environment bright, comfortable, artistic expression strong; all-aluminum structure lighthouse, fully guarantee the thermal stability of lamps Nature, to ensure the consistency of the life of the whole lamp and color temperature; direct-style SMD light source through the high transmittance diffusion PMMA lampshade, so that the light more uniform, soft and comfortable; to maximize the lamp light output efficiency, efficiency up to 68%.

In addition to the standard lighting products, according to the site environment and design requirements, can be customized special shaped light band seamless, no shadow splicing, optimize the office environment, to achieve the perfect combination of people.

Product installation is divided into: lifting, ceiling installation, embedded installation; installation simple and convenient.

Product scope: subway, high - grade office buildings, schools, hospitals, libraries, supermarkets and public buildings, such as space.


现代简约型LED线性灯具,以其简洁的线条、精细的工艺以及可随环境而变的造型,让办公环境明亮、舒适、艺术表现力强;全铝合金结构灯架,充分保证灯具的热稳定性,确保整灯寿命及色温的一致性;直照式的SMD光源通过高透光率扩散型PMMA灯罩,让出光更均匀、柔和舒适;最大限度满足灯具光输出效率,效率可达68%。

除标准灯具产品外,根据现场环境及设计要求,可特殊订制异形光带的无缝、无影拼接,优化办公环境,实现人、境、光的完美结合;




产品安装方式分为:吊装、吸顶式安装、嵌入式安装等;安装简捷、方便;

产品适用范围:地铁、高档写字楼、学校、医院、图书馆、超市及公共建筑空间等;

Details 产品细节

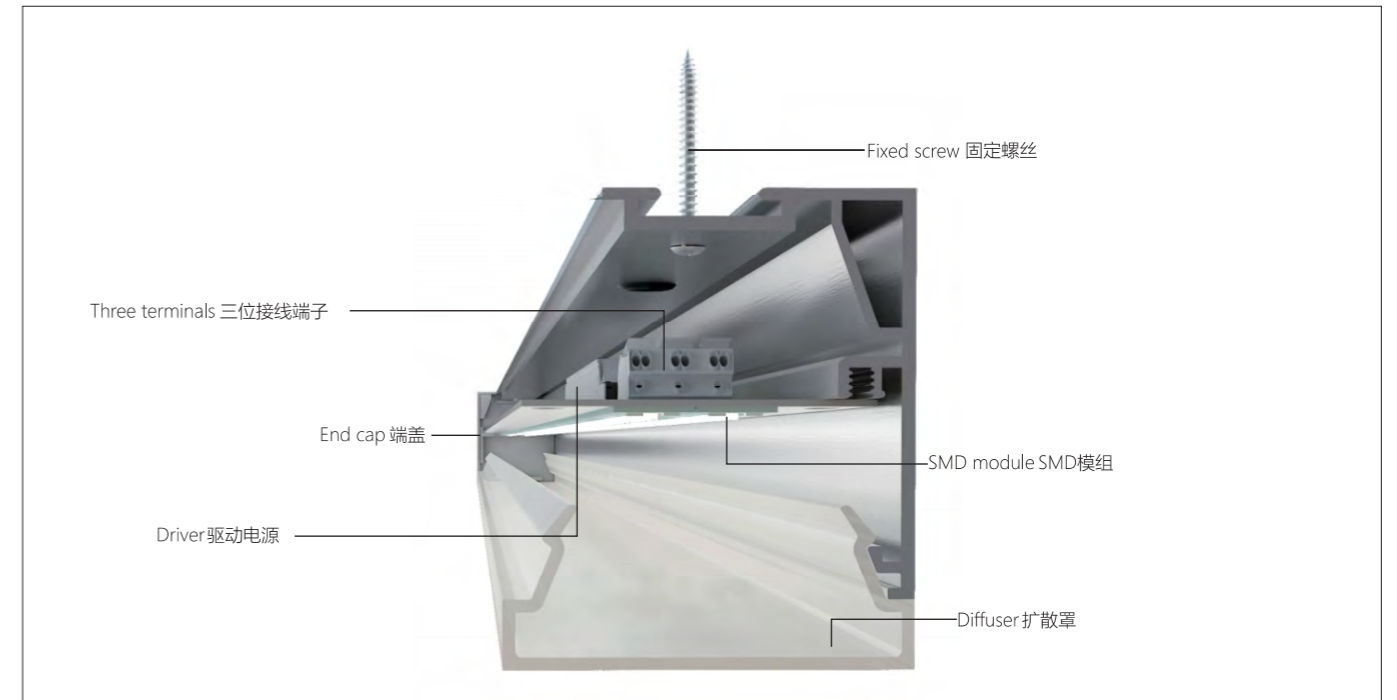

Specifications 产品规格

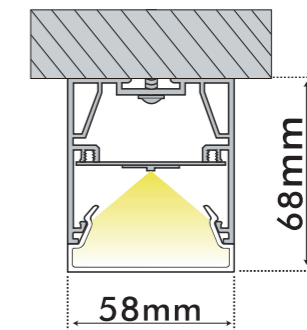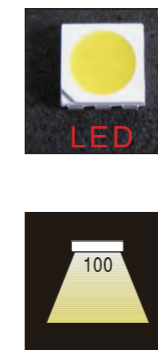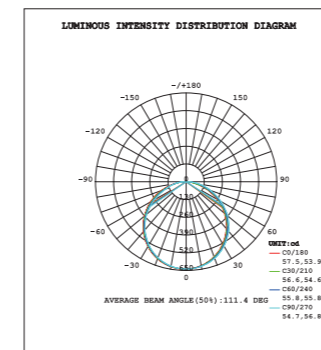

ArtNo.	Power	Flux	Size(mm)	Lampshade material	Color
E224.CT18.LED	18W	1556 lm	1200*58*68	Opal PMMA	Silver/Matte White /Matte black
E224.CT25.LED	25W	2192 lm	1500*58*68	Opal PMMA	Silver/Matte White /Matte black
E224.CT38.LED	38W	3289 lm	1780*58*68	Opal PMMA	Silver/Matte White /Matte black
E224.CT50.LED	50W	4385 lm	2360*58*68	Opal PMMA	Silver/Matte White /Matte black





E227 吊灯

Lighting your life



Parameters 产品参数

Type:	Pendant
Color:	Matt Black/Matt white/Silver
Light Source:	SMD LED
Diffuser:	PC
Reflector:	/
Color Temperature(K):	3000K/4000K/6000K
CIE:	Direct
Beam angle:	120°
CRI(Ra):	80-85
IP:	20
Fitting Efficiency:	80%
Application:	indoor

Material/Technic 材质/工艺

- The lamp body and the end cap are made of high quality aluminum alloy (6063-T5), the surface electrostatic spraying treatment, weathering, corrosion resistance and strong adhesion, easy to change color, color optional.
 - Transparent cover for high transmittance, diffusion PC extrusion molding shade; high strength, high temperature and cold, light uniform, anti-glare effect is good.
 - Built-in high-brightness SMD light source, light efficiency up to 120lm/W, color rendering index ≥ 80 , color temperature 3000K, 4000K, 6000K Optional.
 - Light source life of up to 50,000 hours, light fades small, energy saving, greatly reducing maintenance costs.
 - Product configuration high-performance, high conversion rate of the drive power; with short circuit, overload, overvoltage and other protective measures to ensure that the entire lamp performance and stability another optional dimming power (1-10V, DALI dimming).
- 灯体及端盖采用优质铝合金 (6063-T5), 表面静电喷涂处理, 耐候、耐蚀及附着力强、不易变色, 颜色可选;
 - 透光罩为高透光率、扩散型PC挤压成型灯罩; 强度高、耐高温及耐寒, 出光均匀, 防眩效果佳;
 - 内置高亮度SMD光源, 光效可达120lm/W, 显色指数 ≥ 80 , 色温3000K、4000K、6000K可选;
 - 光源寿命长达5万小时, 光衰小, 节能降耗, 极大降低维护成本;
 - 产品配置高性能, 高转换率的驱动电源; 具有短路、过载、过压等保护措施, 确保整灯性能稳定, 另可选配调光电源 (1-10V、DALI调光);

Features 产品特点

Modern simple LED linear lamps, with its simple lines, fine craftsmanship and can change with the shape of the environment, so that the office environment bright, comfortable, artistic expression strong; all-aluminum structure lighthouse, fully guarantee the thermal stability of lamps Nature, to ensure the consistency of the life of the whole lamp and color temperature; direct-style SMD light source through the high transmittance diffusion PMMA lampshade, so that the light more uniform, soft and comfortable; to maximize the lamp light output efficiency, efficiency up to 68%.

In addition to the standard lighting products, according to the site environment and design requirements, can be customized special shaped light band seamless, no shadow splicing, optimize the office environment, to achieve the perfect combination of people.

Product installation is divided into: lifting, installation simple, convenient.

Product scope: subway, high - grade office buildings, schools, hospitals, libraries, supermarkets and public buildings, such as space.

现代简约型LED线性灯具, 以其简洁的线条、精细的工艺以及可随环境而变的造型, 让办公环境明亮、舒适、艺术表现力强; 全铝合金结构灯架, 充分保证灯具的热稳定性, 确保整灯寿命及色温


的一致性; 直照式的SMD光源通过高透光率扩散型PMMA灯罩, 让出光更均匀、柔和舒适; 最大限度满足灯具光输出效率, 效率可达68%。

除标准灯具产品外, 根据现场环境及设计要求, 可特殊定制异形光带的无缝、无影拼接, 优化办公环境, 实现人、境、光的完美结合;




产品安装方式分为: 吊装, 安装简捷、方便;

产品适用范围: 地铁、高档写字楼、学校、医院、图书馆、超市及公共建筑空间等;

Details 产品细节

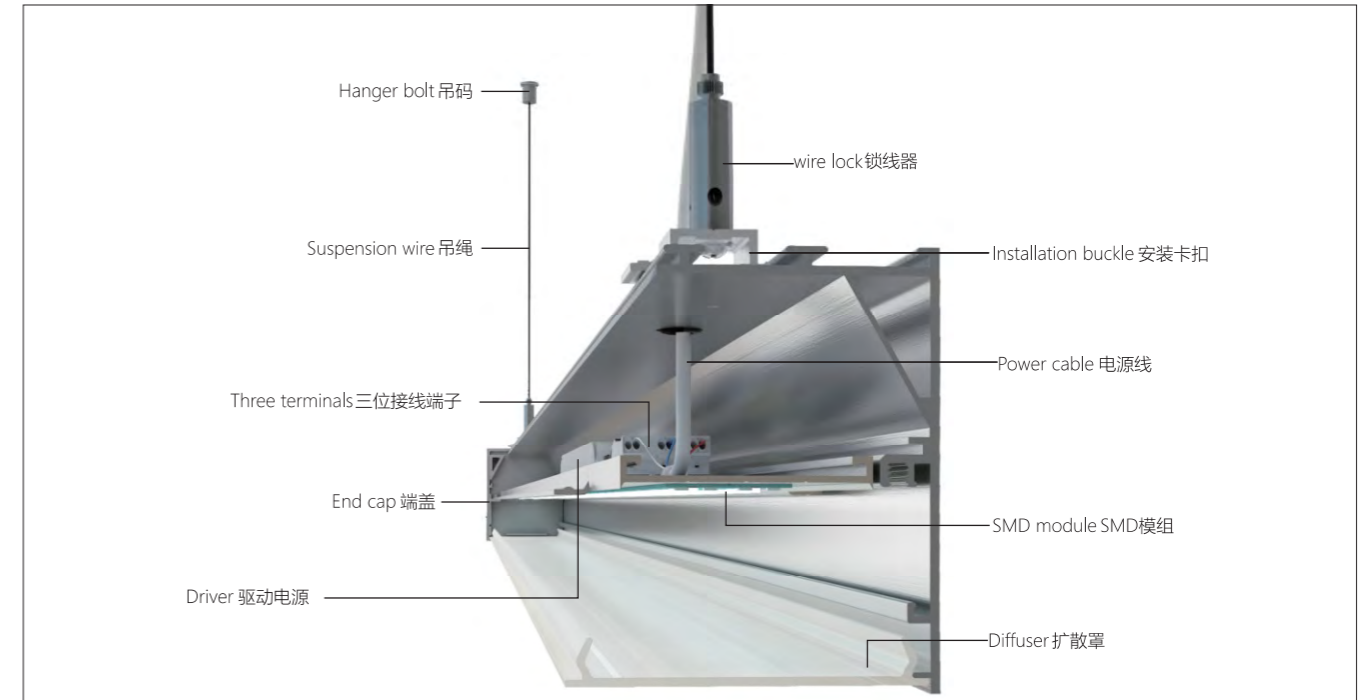



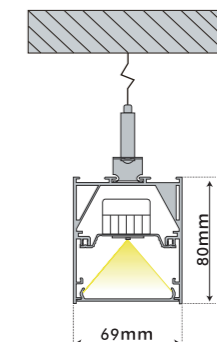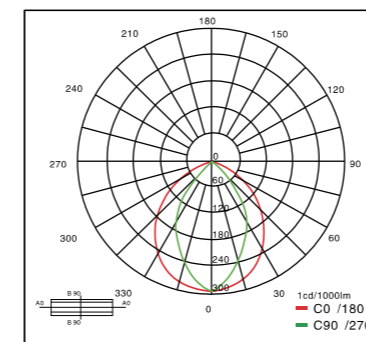






Specifications 产品规格




ArtNo.	Power	Flux	Size(mm)	Lampshade material	Color
E227.PT18.LED	18W	1556 lm	1200*69*80	Opal PC	Silver/Matt white/Matt Black
E227.PT25.LED	25W	2192 lm	1500*69*80	Opal PC	Silver/Matt white/Matt Black
E227.PT38.LED	38W	3289 lm	1780*69*80	Opal PC	Silver/Matt white/Matt Black
E227.PT50.LED	50W	4385 lm	2360*69*80	Opal PC	Silver/Matt white/Matt Black






Monomer accessories 单体配件

Name	Number	Name	Number
 Hanger bolt 吊码	2	 wire lock 锁线器	2
 Waterproof connectors 防水接头	1	 Wire Rope 钢丝绳	2
 Hanging cup fixed sheet metal parts 吊杯固定板金件	1	 Three terminals 3位接线端子	1
 Metal fixed suction a top piece 吸顶金属固定片	1	 Installation buckle 安装卡扣	2
 Screw 吸顶固定螺丝/螺帽	4		

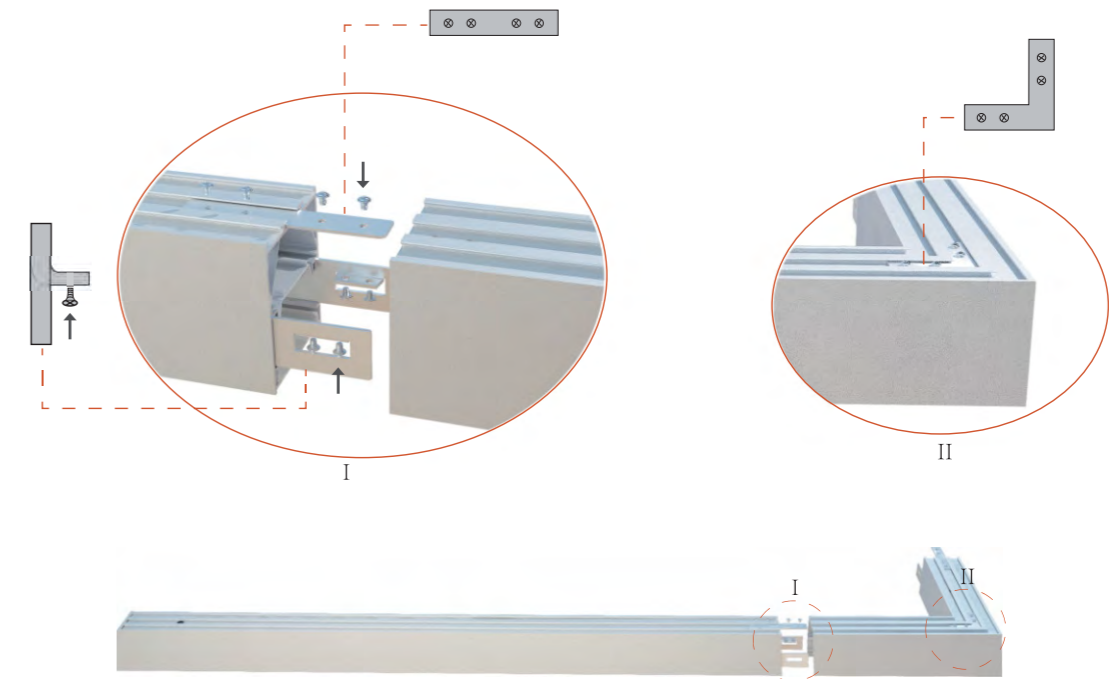Connection system 连接系统图





Expand accessories 拓展配件

L-module	Item No	Power	Flux(lm)	L*W*H(mm)	Name
	E227-RL	6W	522	240*220*69*80	Band connection piece (top) 光带连接片 (侧)
	E227-RT	9W	783	390*240*69*80	Band connection piece (top) 光带连接片 (顶)
	E227-RX	12W	1044	410*390*69*80	


Custom module

- (1) One word band matching, cross stitching, T type joining together. (1)一字型光带拼接、十字型拼接、T字型拼接；
- (2) According to the requirements of customers customized different stitching. (2)根据客户的要求进行定制异型拼接；

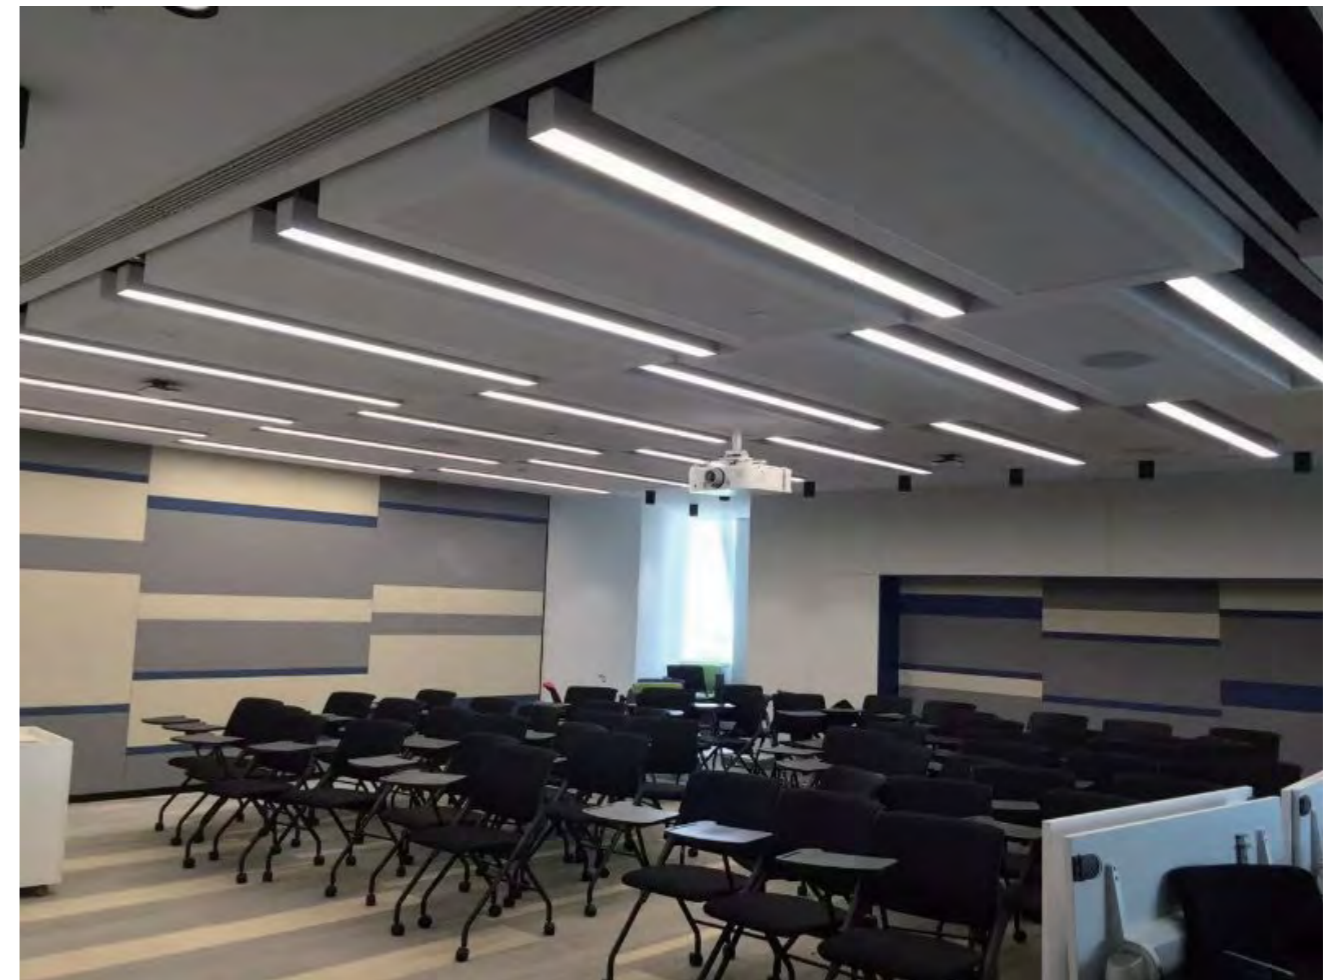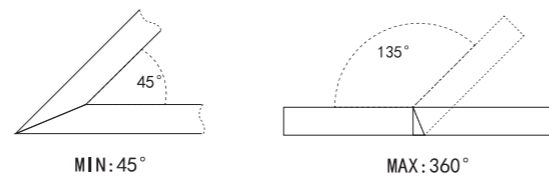

E227 嵌灯

Lighting your life

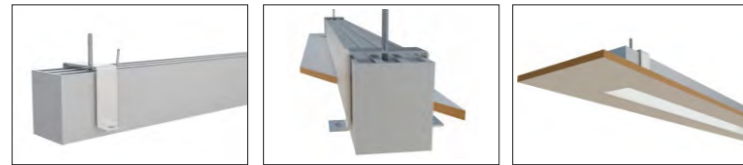

Parameters 产品参数

Type:	RECESSED LAMP
Color:	Matt Black/Matt white/Silver
Light Source:	SMD LED
Diffuser:	PC
Reflector:	/
Color Temperature(K):	3000K/4000K/6000K
CIE:	Direct
Beam angle:	120°
CRI(Ra):	80-85
IP:	20
Fitting Efficiency:	80%
Application:	indoor

Material/Technic 材质/工艺

- The lamp body and the end cap are made of high quality aluminum alloy (6063-T5), the surface electrostatic spraying treatment, weathering, corrosion resistance and strong adhesion, easy to change color, color optional.
 - Transparent cover for high transmittance, diffusion PC extrusion molding shade; high strength, high temperature and cold, light uniform, anti-glare effect is good.
 - Built-in high-brightness SMD light source, light efficiency up to 120lm/W, color rendering index ≥ 80 , color temperature 3000K, 4000K, 6000K Optional.
 - Light source life of up to 50,000 hours, light fades small, energy saving, greatly reducing maintenance costs.
 - Product configuration high-performance, high conversion rate of the drive power; with short circuit, overload, overvoltage and other protective measures to ensure that the entire lamp performance and stability another optional dimming power (1-10V, DALI dimming).
- 灯体及端盖采用优质铝合金 (6063-T5), 表面静电喷涂处理, 耐候、耐蚀及附着力强、不易变色, 颜色可选;
 - 透光罩为高透光率、扩散型PC挤压成型灯罩; 强度高、耐高温及耐寒, 出光均匀, 防眩效果佳;
 - 内置高亮度SMD光源, 光效可达120lm/W, 显色指数 ≥ 80 , 色温3000K、4000K、6000K可选;
 - 光源寿命长达5万小时, 光衰小, 节能降耗, 极大降低维护成本;
 - 产品配置高性能, 高转换率的驱动电源; 具有短路、过载、过压等保护措施, 确保整灯性能稳定, 另可选配调光电源 (1-10V、DALI调光);

Features 产品特点

Modern simple LED linear lamps, with its simple lines, fine craftsmanship and can change with the shape of the environment, so that the office environment bright, comfortable, artistic expression strong; all-aluminum structure lighthouse, fully guarantee the thermal stability of lamps Nature, to ensure the consistency of the life of the whole lamp and color temperature; direct-style SMD light source through the high transmittance diffusion PMMA lampshade, so that the light more uniform, soft and comfortable; to maximize the lamp light output efficiency, efficiency up to 68%.

In addition to the standard lighting products, according to the site environment and design requirements, can be customized special shaped light band seamless, no shadow splicing, optimize the office environment, to achieve the perfect combination of people.

Product installation is divided into: lifting, installation simple, convenient.

Product scope: subway, high - grade office buildings, schools, hospitals, libraries, supermarkets and public buildings, such as space.


现代简约型LED线性灯具, 以其简洁的线条、精细的工艺以及可随环境而变的造型, 让办公环境明亮、舒适、艺术表现力强; 全铝合金结构灯架, 充分保证灯具的热稳定性, 确保整灯寿命及色温的一致性; 直照式的SMD光源通过高透光率扩散型PMMA灯罩, 让出光更均匀、柔和舒适; 最大限度满足灯具光输出效率, 效率可达68%。

除标准灯具产品外, 根据现场环境及设计要求, 可特殊订制异形光带的无缝、无影拼接, 优化办公环境, 实现人、境、光的完美结合;



产品安装方式分为: 吊装, 安装便捷、方便;

产品适用范围: 地铁、高档写字楼、学校、医院、图书馆、超市及公共建筑空间等;

Details 产品细节

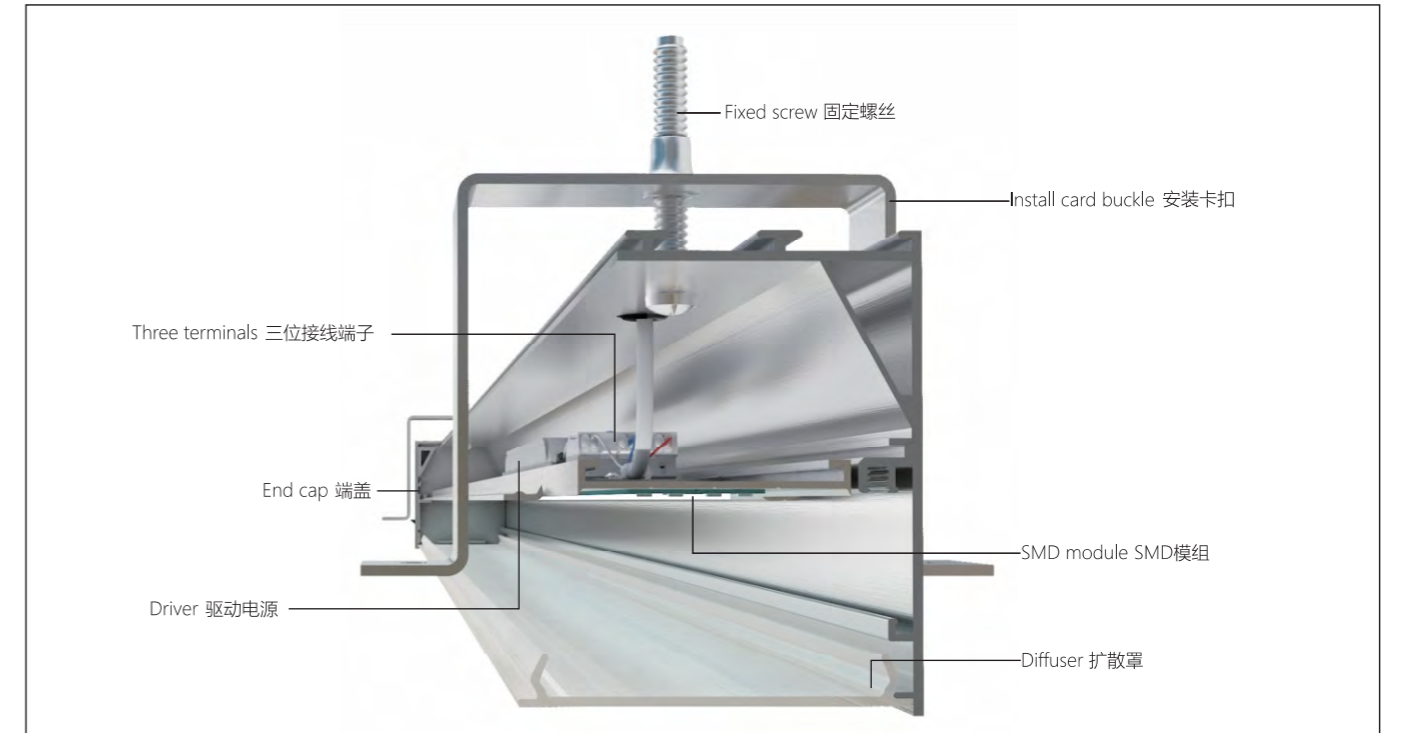

Specifications 产品规格

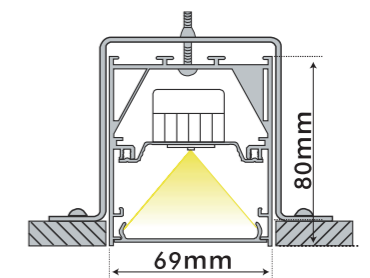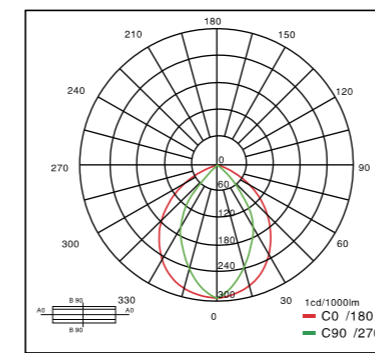

ArtNo.	Power	Flux	Size(mm)	Lampshade material	Color
E227.RT18.LED	18W	1556 lm	1200*69*80	Opal PC	Silver/Matt white/Matt Black
E227.RT25.LED	25W	2192 lm	1500*69*80	Opal PC	Silver/Matt white/Matt Black
E227.RT38.LED	38W	3289 lm	1780*69*80	Opal PC	Silver/Matt white/Matt Black
E227.RT50.LED	50W	4385 lm	2360*69*80	Opal PC	Silver/Matt white/Matt Black



E227 吸顶灯

Lighting your life



Parameters 产品参数

Type:	CEILING LAMP
Color:	Matt Black/Matt white/Silver
Light Source:	SMD LED
Diffuser:	PC
Reflector:	/
Color Temperature(K):	3000K/4000K/6000K
CIE:	Direct
Beam angle:	120°
CRI(Ra):	80-85
IP:	20
Fitting Efficiency:	80%
Application:	indoor

Material/Technic 材质/工艺

- The lamp body and the end cap are made of high quality aluminum alloy (6063-T5), the surface electrostatic spraying treatment, weathering, corrosion resistance and strong adhesion, easy to change color, color optional.
 - Transparent cover for high transmittance, diffusion PC extrusion molding shade; high strength, high temperature and cold, light uniform, anti-glare effect is good.
 - Built-in high-brightness SMD light source, light efficiency up to 120lm/W, color rendering index ≥ 80 , color temperature 3000K, 4000K, 6000K Optional.
 - Light source life of up to 50,000 hours, light fades small, energy saving, greatly reducing maintenance costs.
 - Product configuration high-performance, high conversion rate of the drive power; with short circuit, overload, overvoltage and other protective measures to ensure that the entire lamp performance and stability another optional dimming power (1-10V, DALI dimming).
- 灯体及端盖采用优质铝合金 (6063-T5), 表面静电喷涂处理, 耐候、耐蚀及附着力强、不易变色, 颜色可选;
 - 透光罩为高透光率、扩散型PC挤压成型灯罩; 强度高、耐高温及耐寒, 出光均匀, 防眩效果佳;
 - 内置高亮度SMD光源, 光效可达120lm/W, 显色指数 ≥ 80 , 色温3000K、4000K、6000K可选;
 - 光源寿命长达5万小时, 光衰小, 节能降耗, 极大降低维护成本;
 - 产品配置高性能, 高转换率的驱动电源; 具有短路、过载、过压等保护措施, 确保整灯性能稳定, 另可选配调光电源 (1-10V、DALI调光);

Features 产品特点

Modern simple LED linear lamps, with its simple lines, fine craftsmanship and can change with the shape of the environment, so that the office environment bright, comfortable, artistic expression strong; all-aluminum structure lighthouse, fully guarantee the thermal stability of lamps Nature, to ensure the consistency of the life of the whole lamp and color temperature; direct-style SMD light source through the high transmittance diffusion PMMA lampshade, so that the light more uniform, soft and comfortable; to maximize the lamp light output efficiency, efficiency up to 68%.

In addition to the standard lighting products, according to the site environment and design requirements, can be customized special shaped light band seamless, no shadow splicing, optimize the office environment, to achieve the perfect combination of people.

Product installation is divided into: lifting, installation simple, convenient.

Product scope: subway, high - grade office buildings, schools, hospitals, libraries, supermarkets and public buildings, such as space.


现代简约型LED线性灯具, 以其简洁的线条、精细的工艺以及可随环境而变的造型, 让办公环境明亮、舒适、艺术表现力强; 全铝合金结构灯架, 充分保证灯具的热稳定性, 确保整灯寿命及色温的一致性; 直照式的SMD光源通过高透光率扩散型PMMA灯罩, 让出光更均匀、柔和舒适; 最大限度满足灯具光输出效率, 效率可达68%。

除标准灯具产品外, 根据现场环境及设计要求, 可特殊订制异形光带的无缝、无影拼接, 优化办公环境, 实现人、境、光的完美结合;




产品安装方式分为: 吊装, 安装简捷、方便;

产品适用范围: 地铁、高档写字楼、学校、医院、图书馆、超市及公共建筑空间等;

Details 产品细节

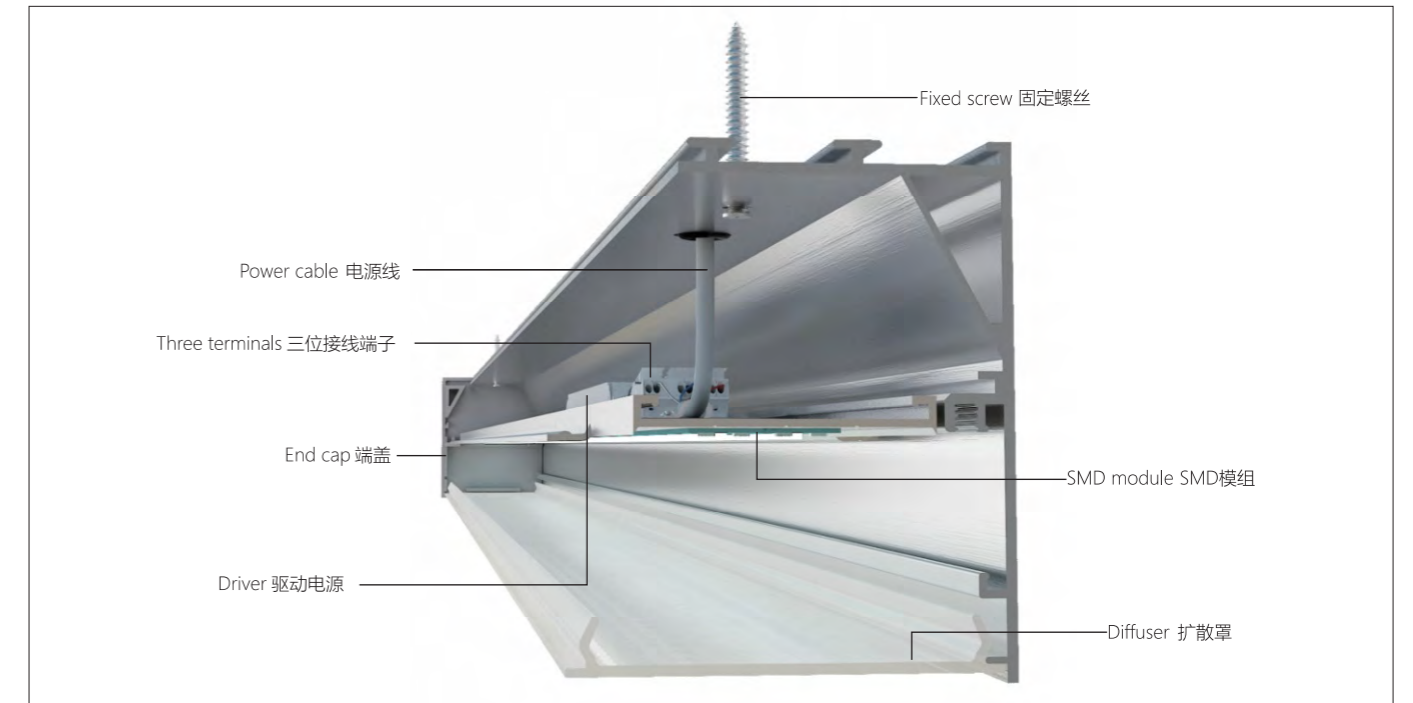

Specifications 产品规格

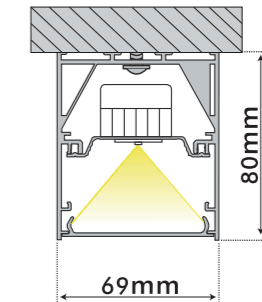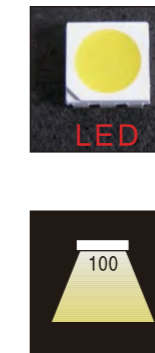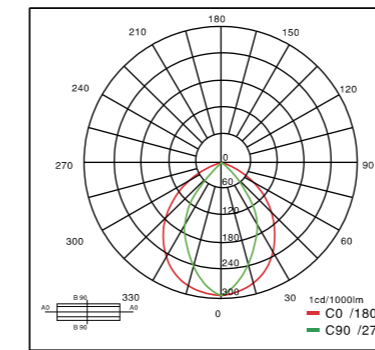

ArtNo.	Power	Flux	Size(mm)	Lampshade material	Color
E227.CT18.LED	18W	1556 lm	1200*69*80	Opal PC	Silver/Matt white/Black
E227.CT25.LED	25W	2192 lm	1500*69*80	Opal PC	Silver/Matt white/Black
E227.CT38.LED	38W	3289 lm	1780*69*80	Opal PC	Silver/Matt white/Black
E227.CT50.LED	50W	4385 lm	2360*69*80	Opal PC	Silver/Matt white/Black



E229 吊灯


Lighting your life



Parameters 产品参数

Type:	Pendant
Color:	Matt Black/Matt white/Silver
Light Source:	SMD LED
Diffuser:	PC
Reflector:	/
Color Temperature(K):	3000K/4000K/6000K
CIE:	Direct
Beam angle:	120°
CRI(Ra):	80-85
IP:	20
Fitting Efficiency:	80%
Application:	indoor

Details 产品细节

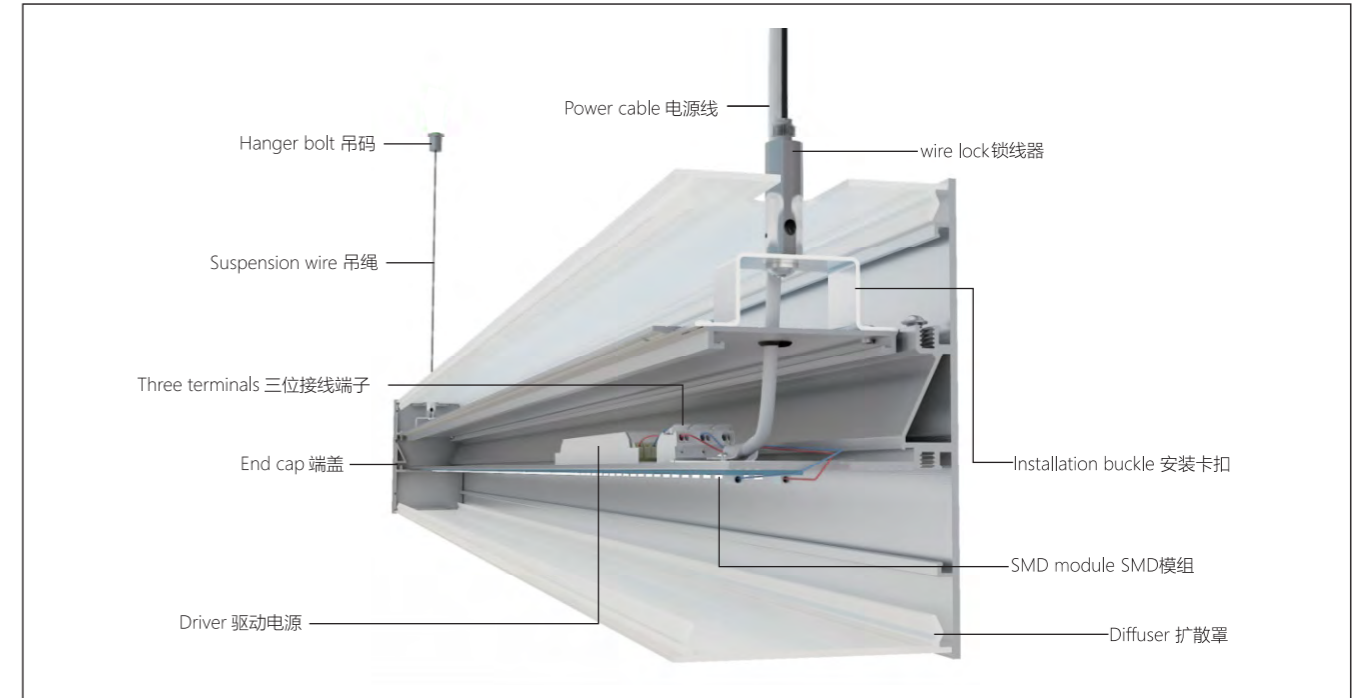

Material/Technic 材质/工艺

- The lamp body and the end cap are made of high quality aluminum alloy (6063-T5), the surface electrostatic spraying treatment, weathering, corrosion resistance and strong adhesion, easy to change color, color optional.
 - Transparent cover for high transmittance, diffusion PC extrusion molding shade; high strength, high temperature and cold, light uniform, anti-glare effect is good.
 - Built-in high-brightness SMD light source, light efficiency up to 120lm/W, color rendering index ≥ 80 , color temperature 3000K, 4000K, 6000K Optional.
 - Light source life of up to 50,000 hours, light fades small, energy saving, greatly reducing maintenance costs.
 - Product configuration high-performance, high conversion rate of the drive power; with short circuit, overload, overvoltage and other protective measures to ensure that the entire lamp performance and stability another optional dimming power (1-10V, DALI dimming).
- 灯体及端盖采用优质铝合金(6063-T5),表面静电喷涂处理,耐候、耐蚀及附着力强、不易变色,颜色可选;
 - 透光罩为高透光率、扩散型PC挤压成型灯罩;强度高、耐高温及耐寒,出光均匀,防眩效果佳;
 - 内置高亮度SMD光源,光效可达120lm/W,显色指数 ≥ 80 ,色温3000K、4000K、6000K可选;
 - 光源寿命长达5万小时,光衰小,节能降耗,极大降低维护成本;
 - 产品配置高性能,高转换率的驱动电源;具有短路、过载、过压等保护措施,确保整灯性能稳定,另可选配调光电源(1-10V、DALI调光);

Features 产品特点

Simple line type LED lamps, so that the office environment is simple and taste; all-aluminum structure lighthouse, fully guarantee the thermal stability of lamps to ensure that the life of the whole lamp and color temperature consistency; direct-type SMD light source through high transmittance Diffuse PC lampshade, so that the light is more uniform, soft and comfortable; to maximize the lamp light output efficiency, efficiency up to 68%.

Product installation is divided into: lifting, ceiling installation, installation simple and convenient.





Product scope: airport, subway, high-grade office buildings, schools, hospitals, libraries, supermarkets and public buildings, such as space.

简约线条型LED灯具,让办公环境简洁而有品位;全铝合金结构灯架,充分保证灯具的热稳定性,确保整灯寿命及色温的一致性;直照式的SMD光源通过高透光率扩散型PC灯罩,让出光更均匀、柔和舒适;最大限度满足灯具光输出效率,效率可达68%。

产品安装方式分为:吊装、吸顶式安装,安装简捷、方便;




产品适用范围:机场、地铁、高档写字楼、学校、医院、图书馆、超市及公共建筑空间等;

Specifications 产品规格

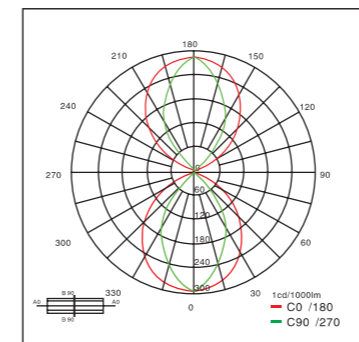


ArtNo.	Power	Flux	Size(mm)	Lampshade material	Color
E229.PT36.LED(上下照)	36W	2*1556 lm	1200*69*110	Opal PC	 Silver/Matt white/Black
E229.PT50.LED(上下照)	50W	2*2192 lm	1500*69*110	Opal PC	 Silver/Matt white/Black
E229.PT76.LED(上下照)	76W	2*3289 lm	1780*69*110	Opal PC	 Silver/Matt white/Black
E229.PT100.LED(上下照)	100W	2*4385 lm	2360*69*110	Opal PC	 Silver/Matt white/Black



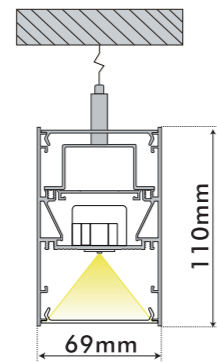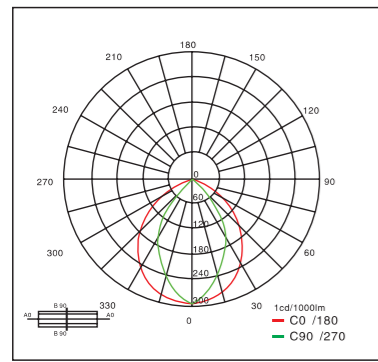

ArtNo.	Power	Flux	Size(mm)	Lampshade material	Color
E229.PT36.LED(下照)	18W	1556 lm	1200*69*110	Opal PC	Silver/Matt white/Black
E229.PT50.LED(下照)	25W	2192 lm	1500*69*110	Opal PC	Silver/Matt white/Black
E229.PT76.LED(下照)	38W	3289 lm	1780*69*110	Opal PC	Silver/Matt white/Black
E229.PT100.LED(下照)	50W	4385 lm	2360*69*110	Opal PC	Silver/Matt white/Black

Expand together 拓展拼接

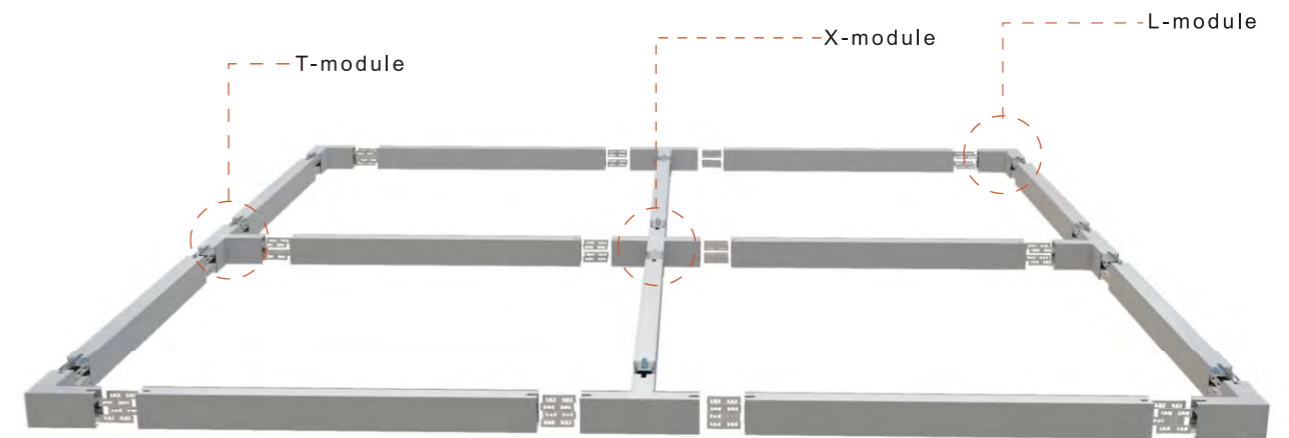


Expand accessories 拓展配件

L-module(上下照)	Item No	Power	Flux	Size(mm)
	E229-RL	12W	2*522 lm	240*220*69*110
T-module(上下照)	Item No	Power	Flux	Size(mm)
	E229-RT	18W	2*783 lm	390*240*69*110
X-module(上下照)	Item No	Power	Flux	Size(mm)
	E229-RX	24W	2*1044 lm	410*390*69*110
L-module(下照)	Item No	Power	Flux(lm)	Size(mm)
	E229-RL	6W	522 lm	240*220*69*110
T-module(下照)	Item No	Power	Flux(lm)	Size(mm)
	E229-RT	9W	783 lm	390*240*69*110
X-module(下照)	Item No	Power	Flux(lm)	Size(mm)
	E229-RX	12W	1044 lm	410*390*69*110



Custom module

- (1) One word band matching, cross stitching, T type joining together.
 - (2) According to the requirements of customers customized different stitching.
- (1)一字型光带拼接、十字型拼接、T字型拼接；
(2)根据客户的要求进行定制异型拼接；

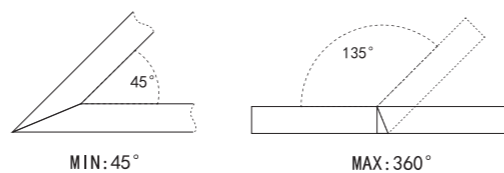

E229 壁灯

Lighting your life



Parameters 产品参数

Type:	WALL LAMP
Color:	Matt Black/Matt white/Silver
Light Source:	SMD LED
Diffuser:	PC
Reflector:	/
Color Temperature(K):	3000K/4000K/6000K
CIE:	Direct
Beam angle:	120°
CRI(Ra):	80-85
IP:	20
Fitting Efficiency:	80%
Application:	indoor

Material/Technic 材质/工艺

- The lamp body and the end cap are made of high quality aluminum alloy (6063-T5), the surface electrostatic spraying treatment, weathering, corrosion resistance and strong adhesion, easy to change color, color optional.
 - Transparent cover for high transmittance, diffusion PC extrusion molding shade; high strength, high temperature and cold, light uniform, anti-glare effect is good.
 - Built-in high-brightness SMD light source, light efficiency up to 120lm/W, color rendering index ≥ 80 , color temperature 3000K, 4000K, 6000K Optional.
 - Light source life of up to 50,000 hours, light fades small, energy saving, greatly reducing maintenance costs.
 - Product configuration high-performance, high conversion rate of the drive power; with short circuit, overload, overvoltage and other protective measures to ensure that the entire lamp performance and stability another optional dimming power (1-10V, DALI dimming).
- 灯体及端盖采用优质铝合金 (6063-T5), 表面静电喷涂处理, 耐候、耐蚀及附着力强、不易变色, 颜色可选;
 - 透光罩为高透光率、扩散型PC挤压成型灯罩; 强度高、耐高温及耐寒, 出光均匀, 防眩效果佳;
 - 内置高亮度SMD光源, 光效可达120lm/W, 显色指数 ≥ 80 , 色温3000K、4000K、6000K可选;
 - 光源寿命长达5万小时, 光衰小, 节能降耗, 极大降低维护成本;
 - 产品配置高性能, 高转换率的驱动电源; 具有短路、过载、过压等保护措施, 确保整灯性能稳定, 另可选配调光电源 (1-10V、DALI调光);

Features 产品特点

Simple line type LED lamps, so that the office environment is simple and taste; all-aluminum structure lighthouse, fully guarantee the thermal stability of lamps to ensure that the life of the whole lamp and color temperature consistency; direct-type SMD light source through high transmittance Diffuse PC lampshade, so that the light is more uniform, soft and comfortable; to maximize the lamp light output efficiency, efficiency up to 68%.

Product installation is divided into: lifting, ceiling installation, installation simple and convenient.





Product scope: airport, subway, high-grade office buildings, schools, hospitals, libraries, supermarkets and public buildings, such as space.

简约线条型LED灯具, 让办公环境简洁而有品位; 全铝合金结构灯架, 充分保证灯具的热稳定性, 确保整灯寿命及色温的一致性; 直照式的SMD光源通过高透光率扩散型PC灯罩, 让出光更均匀、柔和舒适; 最大限度满足灯具光输出效率, 效率可达68%。

产品安装方式分为: 吊装、吸顶式安装, 安装简捷、方便;




产品适用范围: 机场、地铁、高档写字楼、学校、医院、图书馆、超市及公共建筑空间等;

Specifications 产品规格

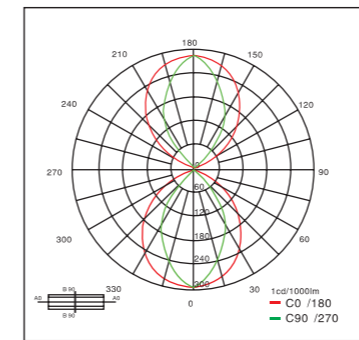

LED

ArtNo.	Power	Flux	Size(mm)	Lampshade material	Color
E229.PT36.LED(上下照)	36W	2*1556 lm	1200*69*110	Opal PC	Silver/Matt white/Black
E229.PT50.LED(上下照)	50W	2*2192 lm	1500*69*110	Opal PC	Silver/Matt white/Black
E229.PT76.LED(上下照)	76W	2*3289 lm	1780*69*110	Opal PC	Silver/Matt white/Black
E229.PT100.LED(上下照)	100W	2*4385 lm	2360*69*110	Opal PC	Silver/Matt white/Black

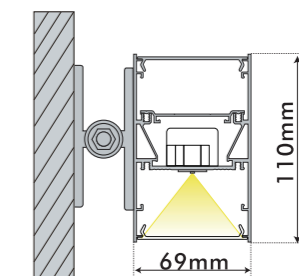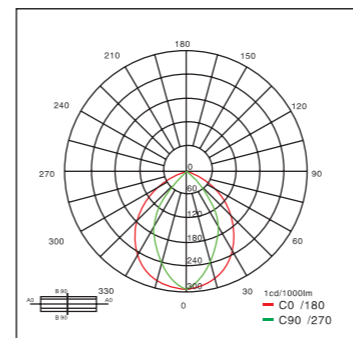

ArtNo.	Power	Flux	Size(mm)	Lampshade material	Color
E229.PT36.LED(下照)	18W	1556 lm	1200*69*110	Opal PC	Silver/Matt white/Black
E229.PT50.LED(下照)	25W	2192 lm	1500*69*110	Opal PC	Silver/Matt white/Black
E229.PT76.LED(下照)	38W	3289 lm	1780*69*110	Opal PC	Silver/Matt white/Black
E229.PT100.LED(下照)	50W	4385 lm	2360*69*110	Opal PC	Silver/Matt white/Black



E233 吊灯


Lighting your life



Parameters 产品参数

Type:	Pendant
Color:	Black/Matt white/Silver
Light Source:	SMD LED
Diffuser:	PC
Reflector:	/
Color Temperature(K):	3000K/4000K/6000K
CIE:	Direct
Beam angle:	120°
CRI(Ra):	80-85
IP:	20
Fitting Efficiency:	80%
Application:	indoor

Details 产品细节

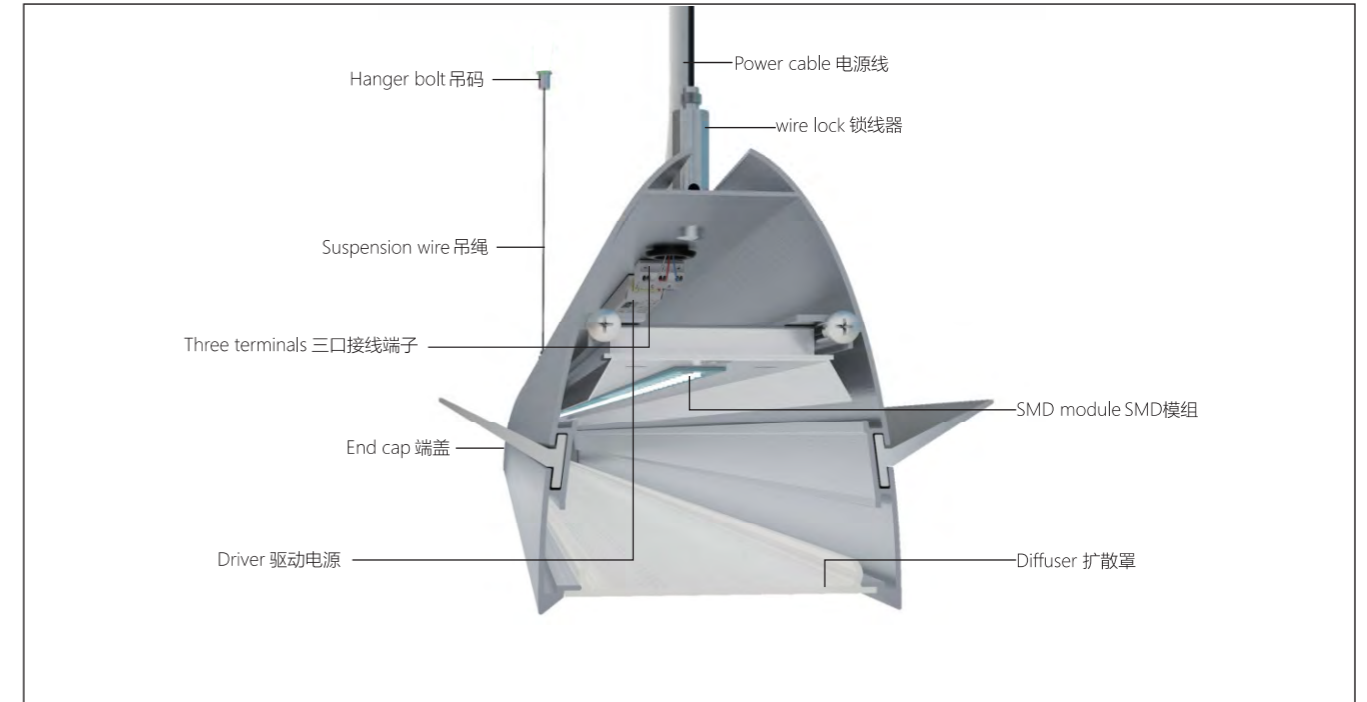

Material/Technic 材质/工艺

- The lamp body and the end cap are made of high quality aluminum alloy (6063-T5), the surface electrostatic spraying treatment, weathering, corrosion resistance and strong adhesion, easy to change color, color optional.
 - Transparent cover for high transmittance, diffusion PC extrusion molding shade; high strength, high temperature and cold, light uniform, anti-glare effect is good.
 - Built-in high-brightness SMD light source, light efficiency up to 120lm/W, color rendering index ≥ 80 , color temperature 3000K, 4000K, 6000K Optional.
 - Light source life of up to 50,000 hours, light fades small, energy saving, greatly reducing maintenance costs.
 - Product configuration high-performance, high conversion rate of the drive power; with short circuit, overload, overvoltage and other protective measures to ensure that the entire lamp performance and stability another optional dimming power (1-10V, DALI dimming, SCR dimming).
- 灯体及端盖采用优质铝合金(6063-T5),表面静电喷涂处理,耐候、耐蚀及附着力强、不易变色,颜色可选;
 - 透光罩为高透光率、扩散型PC挤压成型灯罩;强度高、耐高温及耐寒,出光均匀,防眩效果佳;
 - 内置高亮度SMD光源,光效可达120lm/W,显色指数 ≥ 80 ,色温3000K、4000K、6000K可选;
 - 光源寿命长达5万小时,光衰小,节能降耗,极大降低维护成本;
 - 产品配置高性能,高转换率的驱动电源;具有短路、过载、过压等保护措施,确保整灯性能稳定,另可选配调光电源(1-10V、DALI调光、可控硅调光);

Features 产品特点

Simple line type LED lamps, so that the office environment is simple and taste; all-aluminum structure lighthouse, fully guarantee the thermal stability of lamps to ensure that the life of the whole lamp and color temperature consistency; direct-type SMD light source through high transmittance Diffuse PC lampshade, so that the light is more uniform, soft and comfortable; to maximize the lamp light output efficiency, efficiency up to 68%.

Product installation is divided into: lifting, ceiling, etc.; installation simple and convenient.




Product scope: airport, subway, high-grade office buildings, schools, hospitals, libraries, supermarkets and public buildings, such as space.

简约线条型LED灯具,让办公环境简洁而有品位;全铝合金结构灯架,充分保证灯具的热稳定性,确保整灯寿命及色温的一致性;直照式的SMD光源通过高透光率扩散型PC灯罩,让出光更均匀、柔和舒适;最大限度满足灯具光输出效率,效率可达68%。

产品安装方式分为:吊装、吸顶式等;安装简捷、方便;

产品适用范围:机场、地铁、高档写字楼、学校、医院、图书馆、超市及公共建筑空间等;

Specifications 产品规格

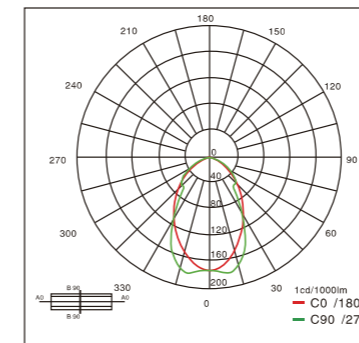

ArtNo.	Power	Flux	Size(mm)	Lampshade material	Color
E233.PT18.LED	18W	1556 lm	1200*76*100	Opal PC	Silver/Matt white/Black
E233.PT25.LED	25W	2192 lm	1500*76*100	Opal PC	Silver/Matt white/Black
E233.PT38.LED	38W	3289 lm	1780*76*100	Opal PC	Silver/Matt white/Black
E233.PT50.LED	50W	4385 lm	2360*76*100	Opal PC	Silver/Matt white/Black



E233 吸顶灯


Lighting your life



Parameters 产品参数

Type:	CEILING LAMP
Color:	Black/Matt white/Silver
Light Source:	SMD LED
Diffuser:	PC
Reflector:	/
Color Temperature(K):	3000K/4000K/6000K
CIE:	Direct
Beam angle:	120°
CRI(Ra):	80-85
IP:	20
Fitting Efficiency:	80%
Application:	indoor

Details 产品细节

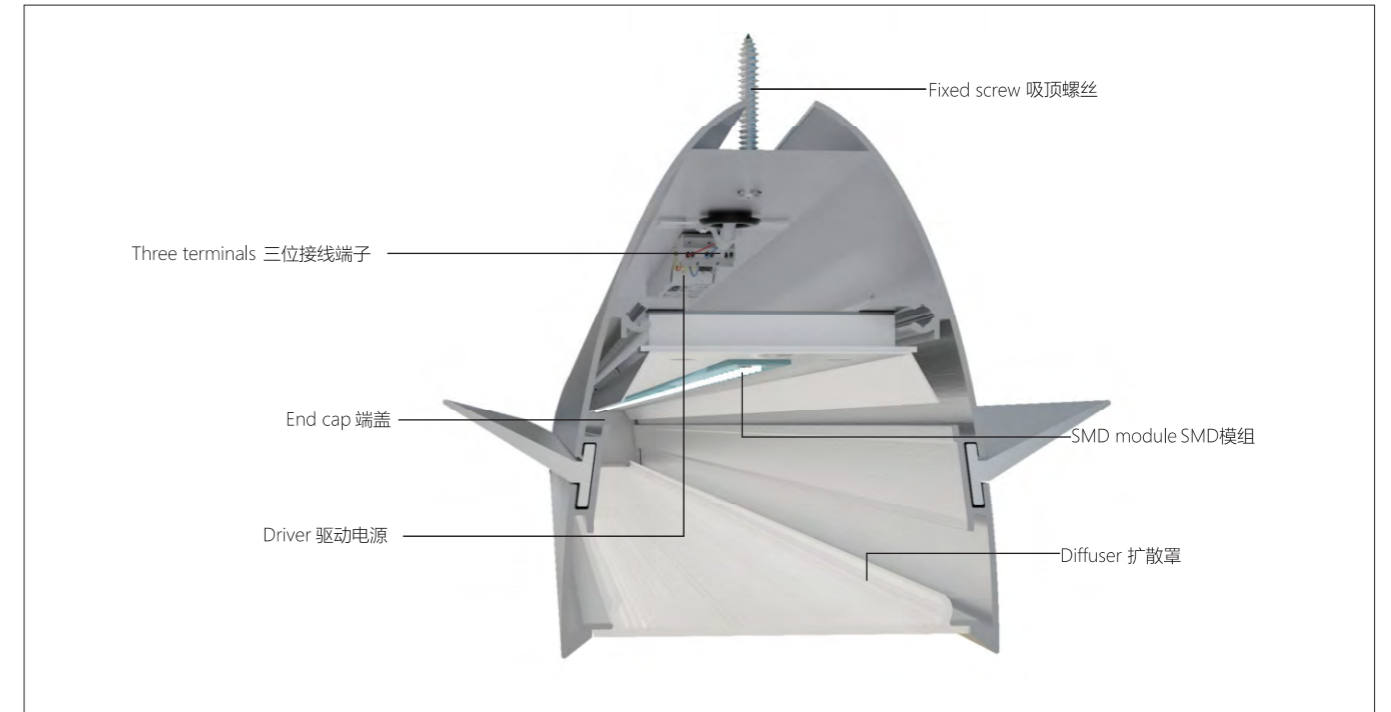

Material/Technic 材质/工艺

- The lamp body and the end cap are made of high quality aluminum alloy (6063-T5), the surface electrostatic spraying treatment, weathering, corrosion resistance and strong adhesion, easy to change color, color optional.
 - Transparent cover for high transmittance, diffusion PC extrusion molding shade; high strength, high temperature and cold, light uniform, anti-glare effect is good.
 - Built-in high-brightness SMD light source, light efficiency up to 120lm / W, color rendering index ≥ 80 , color temperature 3000K, 4000K, 6000K Optional.
 - Light source life of up to 50,000 hours, light fades small, energy saving, greatly reducing maintenance costs.
 - Product configuration high-performance, high conversion rate of the drive power; with short circuit, overload, overvoltage and other protective measures to ensure that the entire lamp performance and stability another optional dimming power (1-10V, DALI dimming, SCR dimming).
- 灯体及端盖采用优质铝合金 (6063-T5), 表面静电喷涂处理, 耐候、耐蚀及附着力强、不易变色, 颜色可选;
 - 透光罩为高透光率、扩散型PC挤压成型灯罩; 强度高、耐高温及耐寒, 出光均匀, 防眩效果佳;
 - 内置高亮度SMD光源, 光效可达120lm/W, 显色指数 ≥ 80 , 色温3000K、4000K、6000K可选;
 - 光源寿命长达5万小时, 光衰小, 节能降耗, 极大降低维护成本;
 - 产品配置高性能, 高转换率的驱动电源; 具有短路、过载、过压等保护措施, 确保整灯性能稳定, 另可选配调光电源 (1-10V、DALI调光、可控硅调光);

Features 产品特点

Simple line type LED lamps, so that the office environment is simple and taste; all-aluminum structure lighthouse, fully guarantee the thermal stability of lamps to ensure that the life of the whole lamp and color temperature consistency; direct-type SMD light source through high transmittance Diffuse PC lampshade, so that the light is more uniform, soft and comfortable; to maximize the lamp light output efficiency, efficiency up to 68%.

Product installation is divided into: lifting, ceiling, etc.; installation simple and convenient.




Product scope: airport, subway, high-grade office buildings, schools, hospitals, libraries, supermarkets and public buildings, such as space.

简约线条型LED灯具, 让办公环境简洁而有品位; 全铝合金结构灯架, 充分保证灯具的热稳定性, 确保整灯寿命及色温的一致性; 直照式的SMD光源通过高透光率扩散型PC灯罩, 让出光更均匀、柔和舒适; 最大限度满足灯具光输出效率, 效率可达68%。

产品安装方式分为: 吊装、吸顶式等; 安装简捷、方便;

产品适用范围: 机场、地铁、高档写字楼、学校、医院、图书馆、超市及公共建筑空间等;

Specifications 产品规格


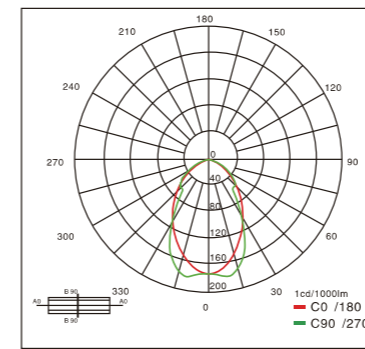


ArtNo.	Power	Flux	Size(mm)	Lampshade material	Color
E233.CT18.LED	18W	1556 lm	1200*76*100	Opal PC	Silver/Matt white/Black
E233.CT25.LED	25W	2192 lm	1500*76*100	Opal PC	Silver/Matt white/Black
E233.CT38.LED	38W	3289 lm	1780*76*100	Opal PC	Silver/Matt white/Black
E233.CT50.LED	50W	4385 lm	2360*76*100	Opal PC	Silver/Matt white/Black



E235 嵌灯

Lighting your life

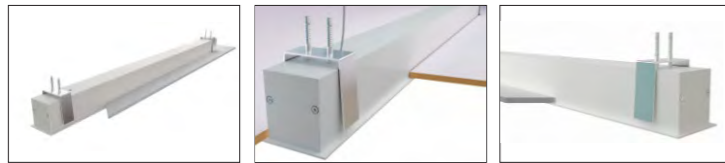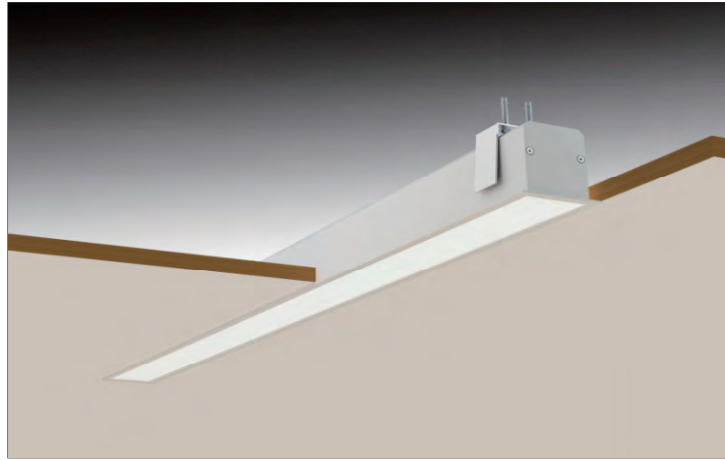

Parameters 产品参数

Type:	RECESSED LAMP
Color:	Matt white/Silver
Light Source:	SMD LED
Diffuser:	PC
Reflector:	/
Color Temperature(K):	3000K/4000K/6000K
CIE:	Direct
Beam angle:	120°
CRI(Ra):	80-85
IP:	20
Fitting Efficiency:	80%
Application:	indoor

Material/Technic 材质/工艺

- The lamp body adopts high quality aluminum alloy (6063-T5), the end cap adopts imported die-casting aluminum ingot (ADC12), the surface electrostatic spraying treatment, weathering, corrosion resistance and strong adhesion, easy to change color, color optional.
- Transparent cover for high transmittance, diffusion PC extrusion molding shade; high strength, high temperature and cold, light uniform, anti-glare effect is good.
- Built-in high brightness SMD light source, light efficiency up to 120lm / W, color rendering index ≥ 80, color temperature 3000K, 4000K, 6000K optional.
- Light source life of up to 50,000 hours, light fades small, energy saving, greatly reducing maintenance costs.
- Product configuration high-performance, high conversion rate of the drive power; with short circuit, overload, overvoltage and other protective measures to ensure that the entire lamp performance and stability; another optional dimming power (1-10V, DALI dimming, SCR dimming).

- 灯体采用优质铝合金 (6063-T5), 端盖采用进口压铸铝锭 (ADC12), 表面静电喷涂处理, 耐候、耐腐蚀及附着力强、不易变色, 颜色可选;
- 透光罩为高透光率、扩散型PC挤压成型灯罩; 强度高、耐高温及耐寒, 出光均匀, 防眩效果佳; 内置高亮度SMD光源, 光效可达120lm/W, 显色指数≥80, 色温3000K、4000K、6000K可选;
- 光源寿命长达5万小时, 光衰小, 节能降耗, 极大降低维护成本;
- 产品配置高性能, 高转换率的驱动电源; 具有短路、过载、过压等保护措施,
- 确保整灯性能稳定; 另可选配调光电源 (1-10V、DALI调光、可控硅调光);

Features 产品特点

Modern simple LED linear lamps, with its simple lines, fine craftsmanship and can change with the shape of the environment, so that the office environment bright, comfortable, artistic expression strong; all-aluminum structure lighthouse, fully guarantee the thermal stability of lamps Nature, to ensure the consistency of the life of the whole lamp and color temperature; direct-style SMD light source through the high transmittance diffusion PMMA lampshade, so that the light more uniform, soft and comfortable; to maximize the lamp light output efficiency, efficiency up to 68%.

In addition to the standard lighting products, according to the site environment and design requirements, can be customized special shaped light band seamless, no shadow splicing, optimize the office environment, to achieve the perfect combination of people.

Product installation is divided into: embedded installation; installation simple and convenient.

Product scope: subway, high - grade office buildings, schools, hospitals, libraries, supermarkets and public buildings, such as space.

现代简约型LED线性灯具, 以其简洁的线条、精细的工艺以及可随环境而变的造型, 让办公环境明亮、舒适、艺术表现力强; 全铝合金结构灯架, 充分保证灯具的热稳定性, 确保整灯寿命及色温的一致性;


直照式的SMD光源通过高透光率扩散型PMMA灯罩, 让出光更均匀、柔和舒适; 最大限度满足灯具光输出效率, 效率可达68%。

除标准灯具产品外, 根据现场环境及设计要求, 可特殊订制异形光带的无缝、无影拼接, 优化办公环境, 实现人、境、光的完美结合;




产品安装方式分为: 嵌入式安装; 安装简捷、方便;

产品适用范围: 地铁、高档写字楼、学校、医院、图书馆、超市及公共建筑空间等;

Details 产品细节

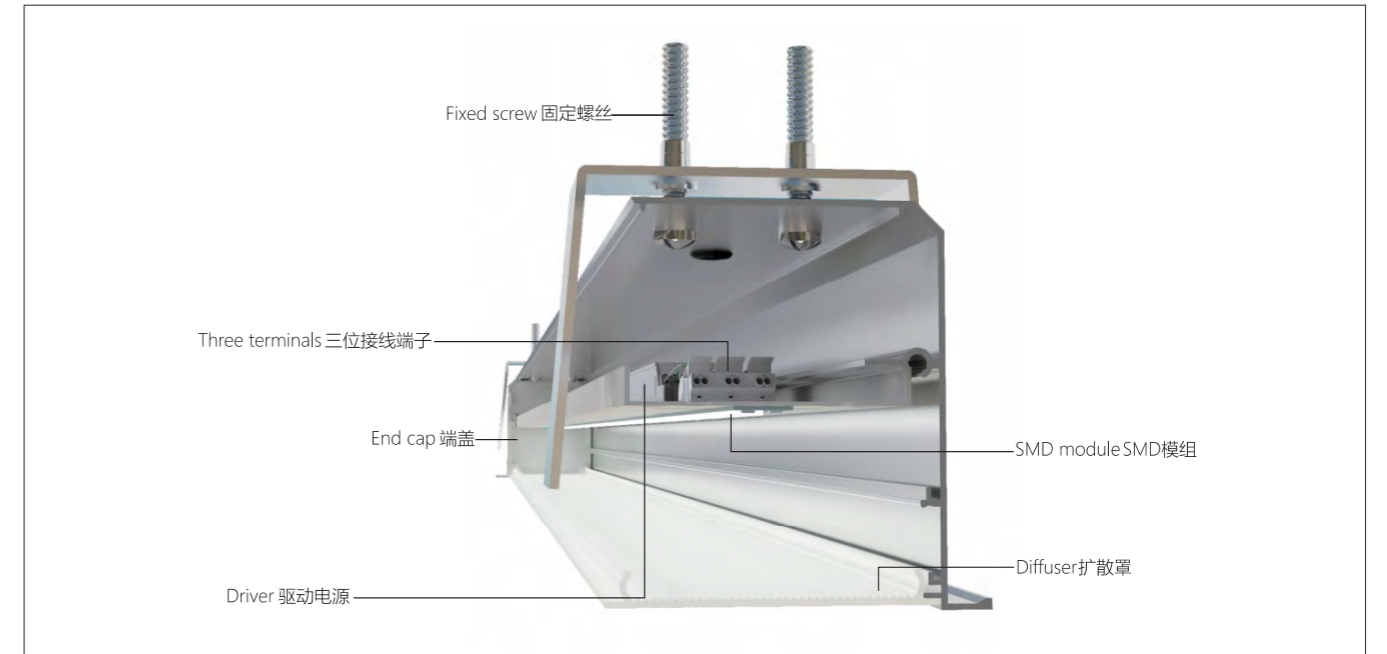

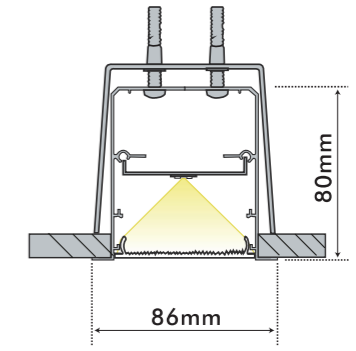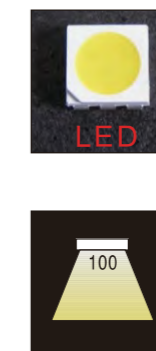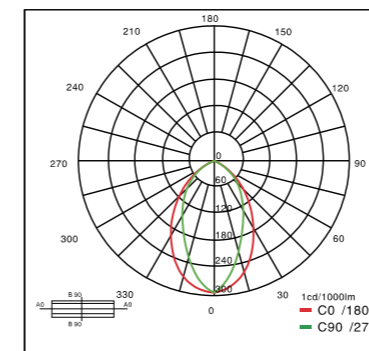


Specifications 产品规格



ArtNo.	Power	Flux	Size(mm)	Lampshade material	Color
E235.RT18.LED	18W	1556 lm	1200*86*80	PC	Silver/Matte White
E235.RT25.LED	25W	2192 lm	1500*86*80	PC	Silver/Matte White
E235.RT38.LED	38W	3289 lm	1780*86*80	PC	Silver/Matte White
E235.RT50.LED	50W	4385 lm	2360*86*80	PC	Silver/Matte White



Expand accessories 拓展配件

L-module	Item No	Power	Flux	Size(mm)	Name
	E235-RL	6W	522 lm	249*228*86*80	Band connection piece (top) 光带连接片 (侧)
T-module	Item No	Power	Flux	Size(mm)	Name
	E235-RT	9W	783 lm	390*412*86*80	
X-module	Item No	Power	Flux	Size(mm)	Name
	E235-RX	12W	1044 lm	390*249*86*80	



Connection system 连接系统图

(1) One font stitching, cross-shaped stitching, T-shaped stitching.

(2) According to the requirements of customers customized shaped splicing.

(1) 一字型光带拼接;

(2) 根据客户的要求进行定制异型拼接;

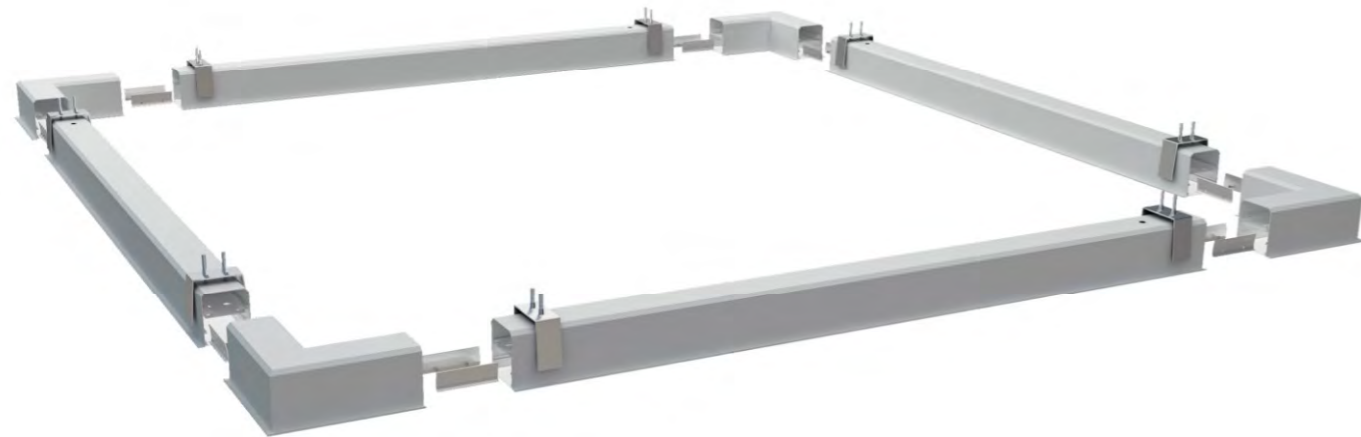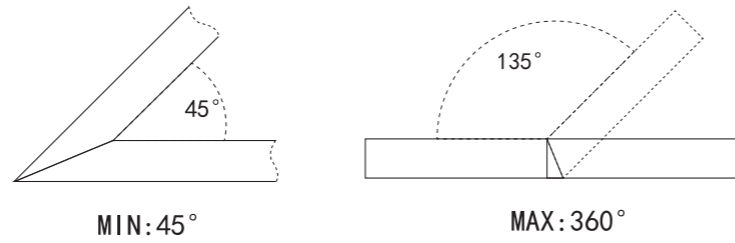

E237 吊灯


Lighting your life



Parameters 产品参数

Type:	Pendant
Color:	Matt Black/Matt white/Silver
Light Source:	SMD LED
Diffuser:	PMMA
Reflector:	/
Color Temperature(K):	3000K/4000K/6000K
CIE:	Direct
Beam angle:	120°
CRI(Ra):	80-85
IP:	20
Fitting Efficiency:	80%
Application:	indoor

Details 产品细节

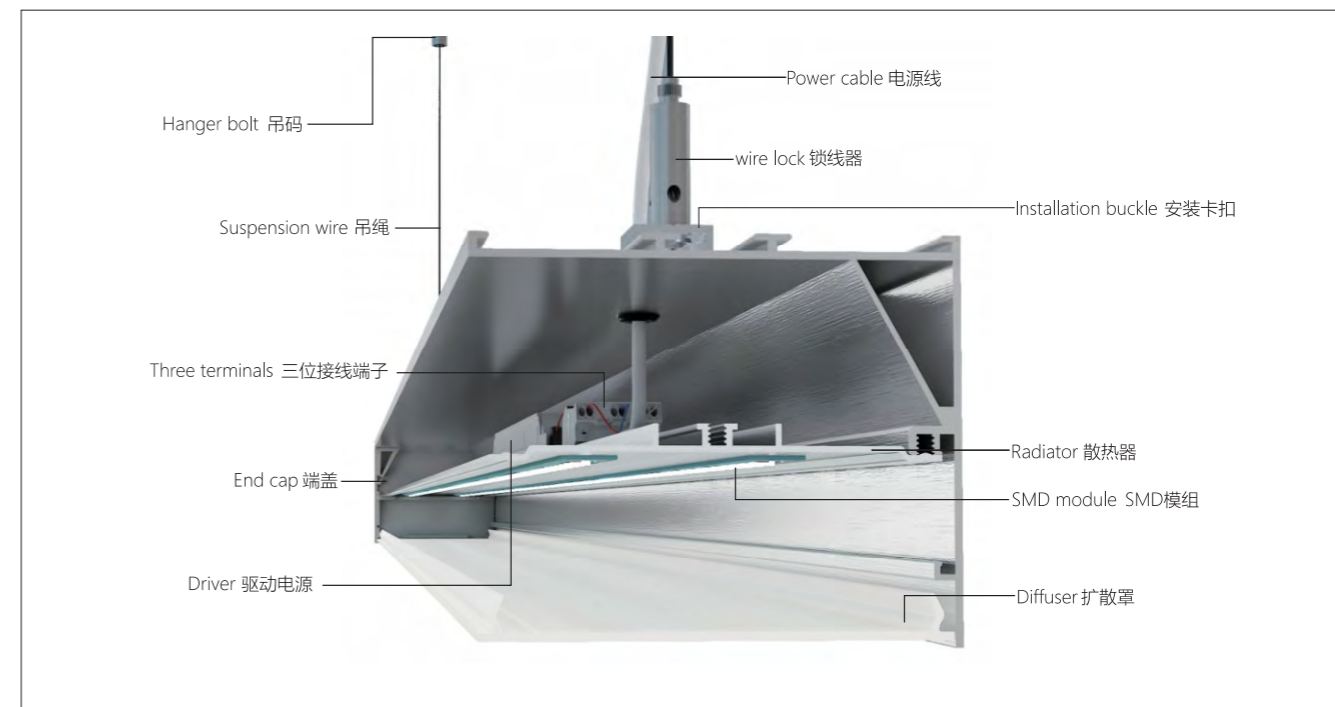

Material/Technic 材质/工艺

- The lamp body and the end cap are made of high quality aluminum alloy (6063-T5), the surface electrostatic spraying treatment, weathering, corrosion resistance and strong adhesion, easy to change color, color optional.
- Transparent cover for high transmittance, diffusion type PMMA extrusion molding shade; high strength, high temperature and cold, light uniform, anti-glare effect is good.
- Built-in high-brightness SMD light source, light efficiency up to 120lm/W, color rendering index ≥ 80 , color temperature 3000K, 4000K, 6000K Optional.
- Light source life of up to 50,000 hours, light fades small, energy saving, greatly reducing maintenance costs.
- Product configuration high-performance, high conversion rate of the drive power; with short circuit, overload, overvoltage and other protective measures to ensure that the entire lamp performance and stability another optional dimming power (1-10V, DALI dimming).
- 灯体及端盖采用优质铝合金 (6063-T5), 表面静电喷涂处理, 耐候、耐蚀及附着力强、不易变色, 颜色可选;
- 透光罩为高透光率、扩散型PMMA挤压成型灯罩; 强度高、耐高温及耐寒, 出光均匀, 防眩效果佳;
- 内置高亮度SMD光源, 光效可达120lm/W, 显色指数 ≥ 80 , 色温3000K、4000K、6000K可选;
- 光源寿命长达5万小时, 光衰小, 节能降耗, 极大降低维护成本;
- 产品配置高性能, 高转换率的驱动电源; 具有短路、过载、过压等保护措施, 确保整灯性能稳定, 另可选配调光电源 (1-10V、DALI调光);

Features 产品特点

Modern simple LED linear lamps, with its simple lines, fine craft and can change with the environment and shape, so that the office environment bright, comfortable, artistic expression strong; all-aluminum structure lighthouse, full To ensure the stability of the lamp to ensure the consistency of the life of the whole lamp and color temperature; direct-type SMD light source through the high transmittance diffusion PMMA lampshade, so that the light more uniform, soft and comfortable; Efficiency, efficiency up to 68%.

In addition to the standard lighting products, according to the site environment and design requirements, can be customized special shaped light band seamless, no shadow splicing, optimize the office environment, to achieve the perfect combination of people.

Product installation is divided into: lifting, ceiling installation, embedded installation; installation simple and convenient.

Product scope: airport, subway, high - grade office buildings, schools, hospitals, libraries, supermarkets and public buildings, such as space.




现代简约型LED线性灯具, 以其简洁的线条、精细的工艺以及可随环境而变的造型, 让办公环境明亮、舒适、艺术表现力强; 全铝合金结构灯架, 充分保证灯具的热稳定性, 确保整灯寿命及色温的一致性; 直照式的SMD光源通过高透光率扩散型PMMA灯罩, 让出光更均匀、柔和舒适; 最大限度满足灯具光输出效率, 效率可达68%。

除标准灯具产品外, 根据现场环境及设计要求, 可特殊订制异形光带的无缝、无影拼接, 优化办公环境, 实现人、境、光的完美结合;

产品安装方式分为: 吊装、吸顶式安装、嵌入式安装等; 安装简捷、方便;

产品适用范围: 机场、地铁、高档写字楼、学校、医院、图书馆、超市及公共建筑空间等;



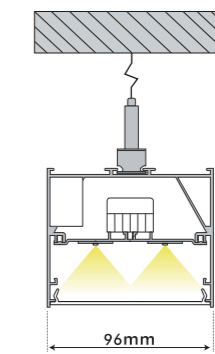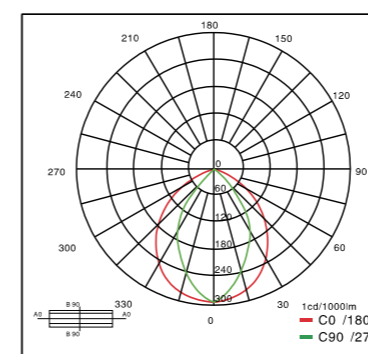






Specifications 产品规格





ArtNo.	Power	Flux	Size(mm)	Lampshade material	Color
E237.PT36.LED	36W	3132 lm	1200*96*80	PMMA	Silver/Matte White /Matte black
E237.PT50.LED	50W	4384 lm	1500*96*80	PMMA	Silver/Matte White /Matte black
E237.PT76.LED	76W	6578 lm	1780*96*80	PMMA	Silver/Matte White /Matte black
E237.PT100.LED	100W	8770 lm	2360*96*80	PMMA	Silver/Matte White /Matte black






Monomer accessories 单体配件

Name	Number	Name	Number
 Hanger bolt 吊码	2	 wire lock 锁线器	2
 Waterproof connectors 防水接头	1	 Wire Rope 钢丝绳	2
 Hanging cup fixed sheet metal parts 吊杯固定板金件	1	 Three terminals 3位接线端子	1
 Metal fixed suction a top piece 吸顶金属固定片	1	 Installation buckle 安装卡扣	2
 Screw 吸顶固定螺丝/螺帽	4		

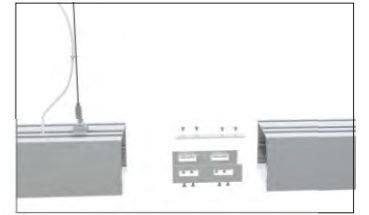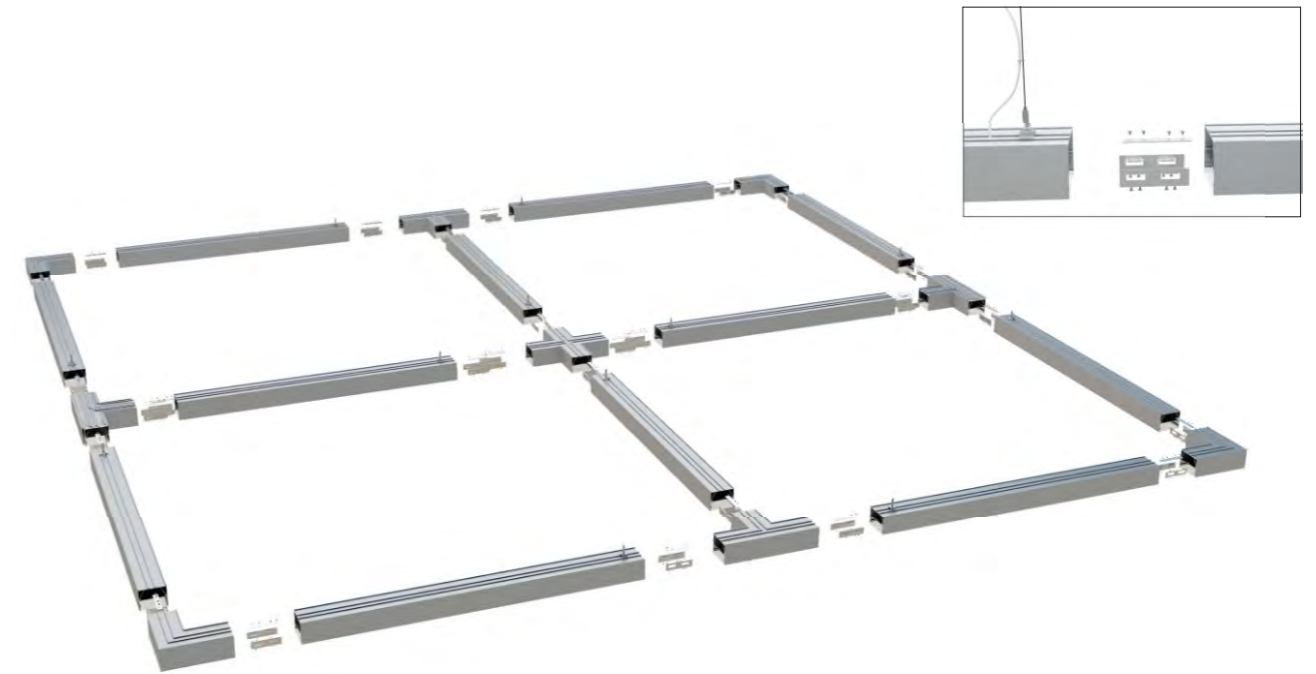Expand together 连接系统图



Expand accessories 拓展配件

L-module	Item No	Power	Flux(lm)	Size(mm)	Name
	E237-RL	12W	1044	232*273*96*80	Band connection piece (top) 光带连接片 (侧)
T-module	Item No	Power	Flux(lm)	Size(mm)	Name
	E237-RT	18W	1566	389*273*96*80	Band connection piece (top) 光带连接片 (顶)
X-module	Item No	Power	Flux(lm)	Size(mm)	Name
	E237-RX	24W	2088	389*451*96*80	



Custom module

(1) One word band matching, cross stitching, T type joining together.

(1)一字型光带拼接、十字型拼接、T字型拼接；

(2) According to the requirements of customer customized different stitching.

(2)根据客户的要求进行定制异型拼接；

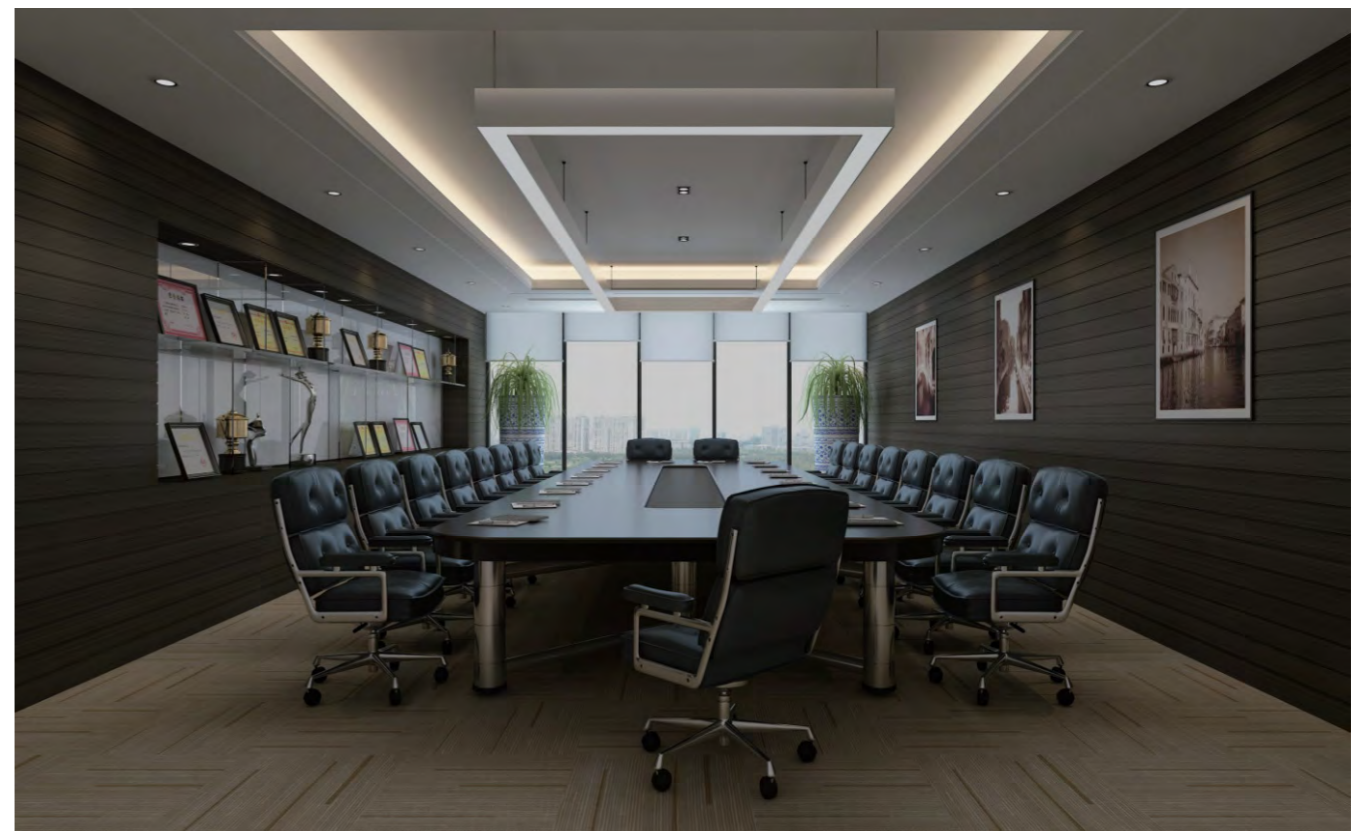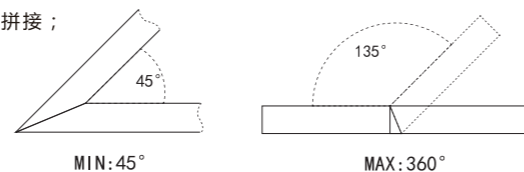

E237 嵌灯

Lighting your life



Parameters 产品参数

Type:	RECESSED LAMP
Color:	Matt Black/Matt white/Silver
Light Source:	SMD LED
Diffuser:	PMMA
Reflector:	/
Color Temperature(K):	3000K/4000K/6000K
CIE:	Direct
Beam angle:	120°
CRI(Ra):	80-85
IP:	20
Fitting Efficiency:	80%
Application:	indoor

Material/Technic 材质/工艺

- The lamp body and the end cap are made of high quality aluminum alloy (6063-T5), the surface electrostatic spraying treatment, weathering, corrosion resistance and strong adhesion, easy to change color, color optional.
- Transparent cover for high transmittance, diffusion type PMMA extrusion molding shade; high strength, high temperature and cold, light uniform, anti-glare effect is good.
- Built-in high-brightness SMD light source, light efficiency up to 120lm/W, color rendering index ≥ 80 , color temperature 3000K, 4000K, 6000K Optional.
- Light source life of up to 50,000 hours, light fades small, energy saving, greatly reducing maintenance costs.
- Product configuration high-performance, high conversion rate of the drive power; with short circuit, overload, overvoltage and other protective measures to ensure that the entire lamp performance and stability another optional dimming power (1-10V, DALI dimming).

- 灯体及端盖采用优质铝合金 (6063-T5), 表面静电喷涂处理, 耐候、耐蚀及附着力强、不易变色, 颜色可选;
- 透光罩为高透光率、扩散型PMMA挤压成型灯罩; 强度高、耐高温及耐寒, 出光均匀, 防眩效果佳;
- 内置高亮度SMD光源, 光效可达120lm/W, 显色指数 ≥ 80 , 色温3000K、4000K、6000K可选;
- 光源寿命长达5万小时, 光衰小, 节能降耗, 极大降低维护成本;
- 产品配置高性能, 高转换率的驱动电源; 具有短路、过载、过压等保护措施, 确保整灯性能稳定, 另可选配调光电源 (1-10V、DALI调光);

Features 产品特点

Modern simple LED linear lamps, with its simple lines, fine craft and can change with the environment and shape, so that the office environment bright, comfortable, artistic expression strong; all-aluminum structure lighthouse, full To ensure the stability of the lamp to ensure the consistency of the life of the whole lamp and color temperature; direct-type SMD light source through the high transmittance diffusion PMMA lampshade, so that the light more uniform, soft and comfortable; Efficiency, efficiency up to 68%.

In addition to the standard lighting products, according to the site environment and design requirements, can be customized special shaped light band seamless, no shadow splicing, optimize the office environment, to achieve the perfect combination of people.

Product installation is divided into: lifting, ceiling installation, embedded installation; installation simple and convenient.

Product scope: airport, subway, high - grade office buildings, schools, hospitals, libraries, supermarkets and public buildings, such as space.


现代简约型LED线性灯具, 以其简洁的线条、精细的工艺以及可随环境而变的造型, 让办公环境明亮、舒适、艺术表现力强; 全铝合金结构灯架, 充分保证灯具的热稳定性, 确保整灯寿命及色温的一致性; 直照式的SMD光源通过高透光率扩散型PMMA灯罩, 让出光更均匀、柔和舒适; 最大限度满足灯具光输出效率, 效率可达68%。

除标准灯具产品外, 根据现场环境及设计要求, 可特定制异形光带的无缝、无影拼接, 优化办公环境, 实现人、境、光的完美结合;




产品安装方式分为: 吊装、吸顶式安装、嵌入式安装等; 安装简捷、方便;

产品适用范围: 机场、地铁、高档写字楼、学校、医院、图书馆、超市及公共建筑空间等;

Details 产品细节

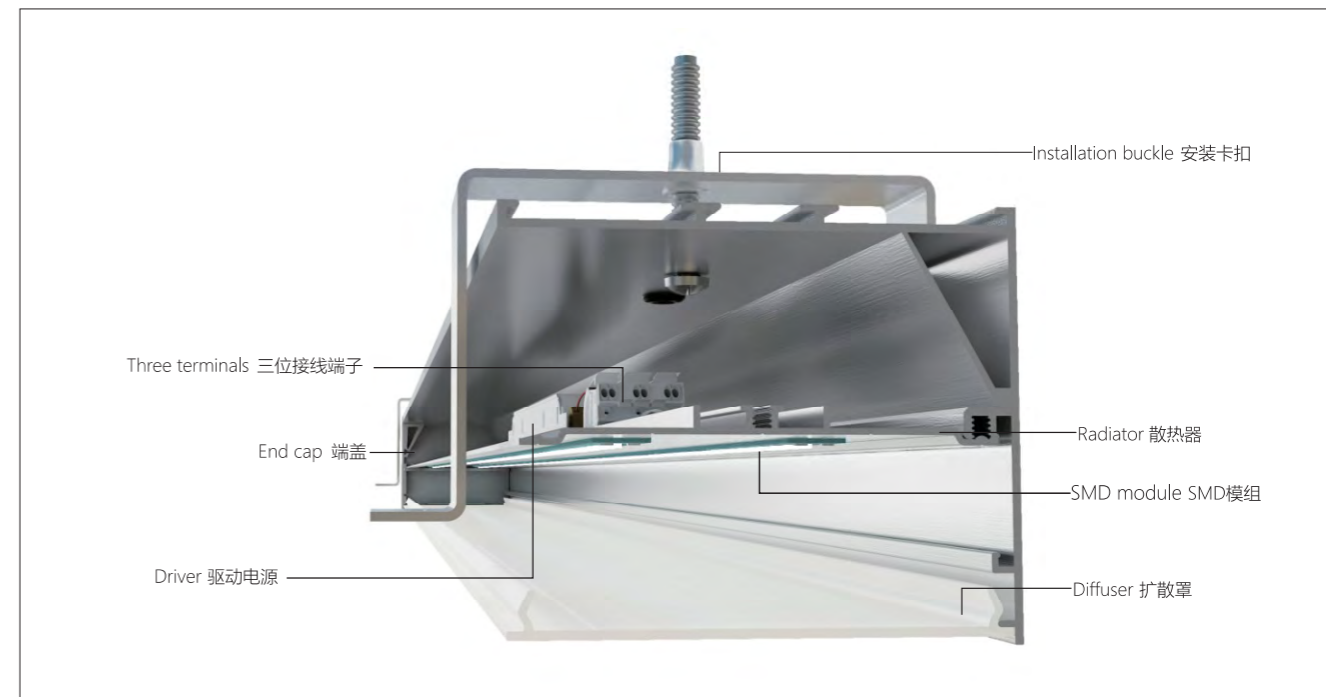

Specifications 产品规格

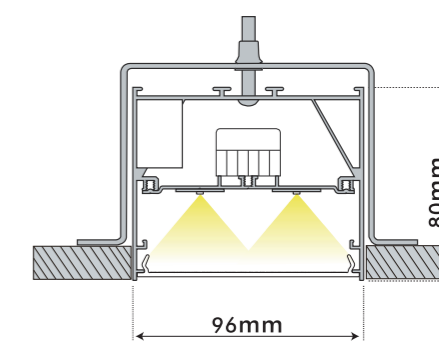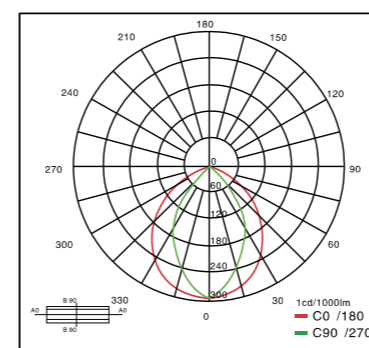

ArtNo.	Power	Flux	Size(mm)	Lampshade material	Color
E237.RT36.LED	36W	3132 lm	1200*96*80	PMMA	Silver/Matte White /Matte black
E237.RT50.LED	50W	4384 lm	1500*96*80	PMMA	Silver/Matte White /Matte black
E237.RT76.LED	76W	6578 lm	1780*96*80	PMMA	Silver/Matte White /Matte black
E237.RT100.LED	100W	8770 lm	2360*96*80	PMMA	Silver/Matte White /Matte black



E237 吸顶灯

Lighting your life



Parameters 产品参数

Type:	CEILING LAMP
Color:	Matt Black/Matt white/Silver
Light Source:	SMD LED
Diffuser:	PMMA
Reflector:	/
Color Temperature(K):	3000K/4000K/6000K
CIE:	Direct
Beam angle:	120°
CRI(Ra):	80-85
IP:	20
Fitting Efficiency:	80%
Application:	indoor

Material/Technic 材质/工艺

- The lamp body and the end cap are made of high quality aluminum alloy (6063-T5), the surface electrostatic spraying treatment, weathering, corrosion resistance and strong adhesion, easy to change color, color optional.
- Transparent cover for high transmittance, diffusion type PMMA extrusion molding shade; high strength, high temperature and cold, light uniform, anti-glare effect is good.
- Built-in high-brightness SMD light source, light efficiency up to 120lm/W, color rendering index ≥ 80 , color temperature 3000K, 4000K, 6000K Optional.
- Light source life of up to 50,000 hours, light fades small, energy saving, greatly reducing maintenance costs.
- Product configuration high-performance, high conversion rate of the drive power; with short circuit, overload, overvoltage and other protective measures to ensure that the entire lamp performance and stability another optional dimming power (1-10V, DALI dimming).

- 灯体及端盖采用优质铝合金 (6063-T5), 表面静电喷涂处理, 耐候、耐蚀及附着力强、不易变色, 颜色可选;
- 透光罩为高透光率、扩散型PMMA挤压成型灯罩; 强度高、耐高温及耐寒, 出光均匀, 防眩效果佳;
- 内置高亮度SMD光源, 光效可达120lm/W, 显色指数 ≥ 80 , 色温3000K、4000K、6000K可选;
- 光源寿命长达5万小时, 光衰小, 节能降耗, 极大降低维护成本;
- 产品配置高性能, 高转换率的驱动电源; 具有短路、过载、过压等保护措施, 确保整灯性能稳定, 另可选配调光电源 (1-10V、DALI调光);

Features 产品特点

Modern simple LED linear lamps, with its simple lines, fine craft and can change with the environment and shape, so that the office environment bright, comfortable, artistic expression strong; all-aluminum structure lighthouse, full To ensure the stability of the lamp to ensure the consistency of the life of the whole lamp and color temperature; direct-type SMD light source through the high transmittance diffusion PMMA lampshade, so that the light more uniform, soft and comfortable; Efficiency, efficiency up to 68%.

In addition to the standard lighting products, according to the site environment and design requirements, can be customized special shaped light band seamless, no shadow splicing, optimize the office environment, to achieve the perfect combination of people.

Product installation is divided into: lifting, ceiling installation, embedded installation; installation simple and convenient.

Product scope: airport, subway, high - grade office buildings, schools, hospitals, libraries, supermarkets and public buildings, such as space.


现代简约型LED线性灯具, 以其简洁的线条、精细的工艺以及可随环境而变的造型, 让办公环境明亮、舒适、艺术表现力强; 全铝合金结构灯架, 充分保证灯具的热稳定性, 确保整灯寿命及色温的一致性; 直照式的SMD光源通过高透光率扩散型PMMA灯罩, 让出光更均匀、柔和舒适; 最大限度满足灯具光输出效率, 效率可达68%。

除标准灯具产品外, 根据现场环境及设计要求, 可特殊订制异形光带的无缝、无影拼接, 优化办公环境, 实现人、境、光的完美结合;




产品安装方式分为: 吊装、吸顶式安装、嵌入式安装等; 安装简捷、方便;

产品适用范围: 机场、地铁、高档写字楼、学校、医院、图书馆、超市及公共建筑空间等;

Details 产品细节

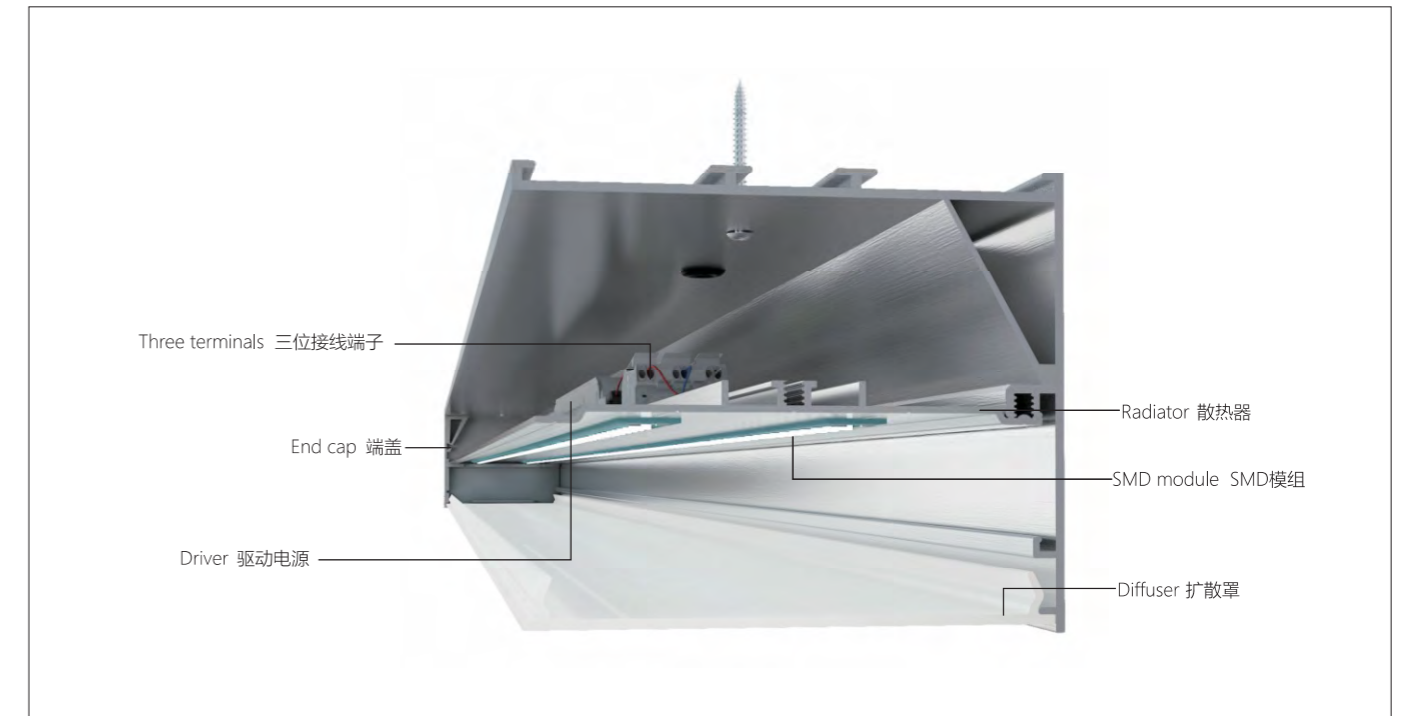

Specifications 产品规格

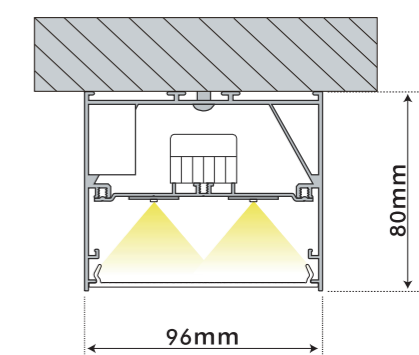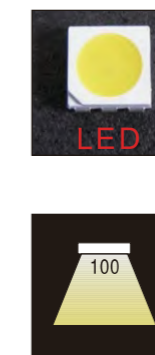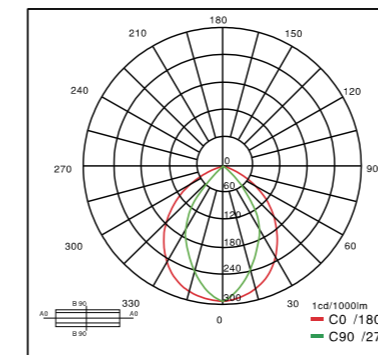

ArtNo.	Power	Flux	Size(mm)	Lampshade material	Color
E237.CT36.LED	36W	3132 lm	1200*96*80	PMMA	Silver/Matte White /Matte black
E237.CT50.LED	50W	4384 lm	1500*96*80	PMMA	Silver/Matte White /Matte black
E237.CT76.LED	76W	6578 lm	1780*96*80	PMMA	Silver/Matte White /Matte black
E237.CT100.LED	100W	8770 lm	2360*96*80	PMMA	Silver/Matte White /Matte black



E238 吊灯


Lighting your life



Parameters 产品参数

Type:	Pendant
Color:	Matt Black/Matt white/Silver
Light Source:	SMD LED
Diffuser:	PMMA
Reflector:	/
Color Temperature(K):	3000K/4000K/6000K
CIE:	Direct
Beam angle:	120°
CRI(Ra):	80-85
IP:	20
Fitting Efficiency:	80%
Application:	indoor

Details 产品细节

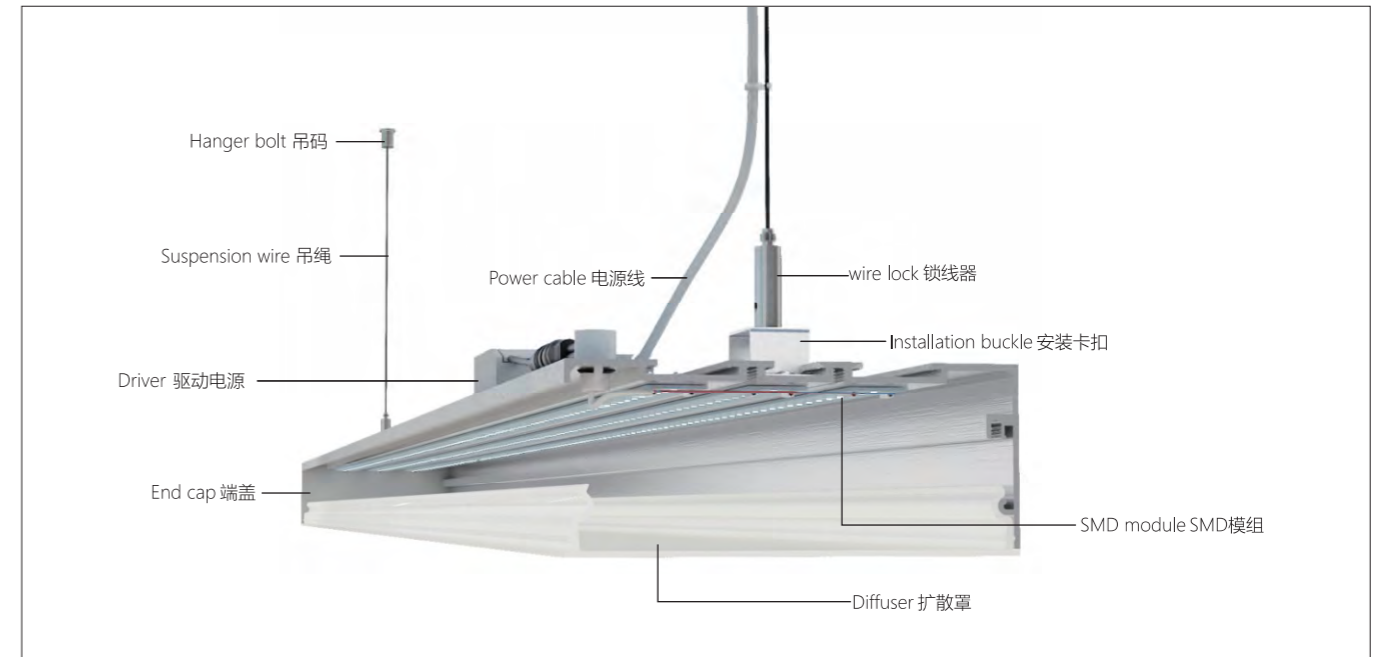

Material/Technic 材质/工艺

- The lamp body adopts high quality aluminum alloy (6063-T5), the end cap adopts imported die-casting aluminum ingot (ADC12), the surface electrostatic spraying treatment, weathering, corrosion resistance and strong adhesion, easy to change color, color optional;
- Transparent cover for the optical grade high transmittance, diffusion type PMMA extrusion molding shade; high strength, high temperature, light uniform, anti-glare effect is good;
- Built-in high brightness SMD light source, light efficiency up to 120lm / W, color rendering index ≥ 80 , color temperature 3000K, 4000K, 6000K optional.
- Light source life of up to 50,000 hours, light fades small, energy saving, greatly reducing maintenance costs.
- Product configuration high-performance, high conversion rate of the drive power; with short circuit, overload, overvoltage and other protective measures to ensure that the entire lamp performance and stability; another optional dimming power (1-10V, DALI dimming, SCR dimming).

- 灯体采用优质铝合金 (6063-T5), 端盖采用进口压铸铝锭 (ADC12), 表面静电喷涂处理, 耐候、耐蚀及附着力强、不易变色, 颜色可选;
- 透光罩为光学级高透光率、扩散型PMMA挤压成型灯罩; 强度高、耐高温, 出光均匀, 防眩效果佳;
- 内置高亮度SMD光源, 光效可达120lm/W, 显色指数 ≥ 80 , 色温3000K、4000K、6000K可选;
- 光源寿命长达5万小时, 光衰小, 节能降耗, 极大降低维护成本;
- 产品配置高性能, 高转换率的驱动电源; 具有短路、过载、过压等保护措施, 确保整灯性能稳定; 另可选配调光电源 (1-10V、DALI调光、可控硅调光);

Features 产品特点

Modern simple LED linear lamps, with its simple lines, fine craftsmanship and can change with the shape of the environment, so that the office environment bright, comfortable, artistic expression strong; all-aluminum structure lighthouse, fully guarantee the thermal stability of lamps Nature, to ensure the consistency of the life of the whole lamp and color temperature; direct-style SMD light source through the high transmittance diffusion PMMA lampshade, so that the light more uniform, soft and comfortable; to maximize the lamp light output efficiency, efficiency up to 68%.

In addition to the standard lighting products, according to the site environment and design requirements, can be customized special shaped light band seamless, no shadow splicing, optimize the office environment, to achieve the perfect combination of people.

Product installation is divided into: lifting, ceiling installation, embedded installation; installation simple and convenient.

Product scope: airport, subway, high-grade office buildings, schools, hospitals, libraries, supermarkets and public buildings, such as space.




现代简约型LED线性灯具, 以其简洁的线条、精细的工艺以及可随环境而变的造型, 让办公环境明亮、舒适、艺术表现力强; 全铝合金结构灯架, 充分保证灯具的热稳定性, 确保整灯寿命及色温的一致性; 直照式的SMD光源通过高透光率扩散型PMMA灯罩, 让出光更均匀、柔和舒适; 最大限度满足灯具光输出效率, 效率可达68%。

除标准灯具产品外, 根据现场环境及设计要求, 可特殊订制异形光带的无缝、无影拼接, 优化办公环境, 实现人、境、光的完美结合;

产品安装方式分为: 吊装、吸顶式安装、嵌入式安装等; 安装简捷、方便;

产品适用范围: 机场、地铁、高档写字楼、学校、医院、图书馆、超市及公共建筑空间等;



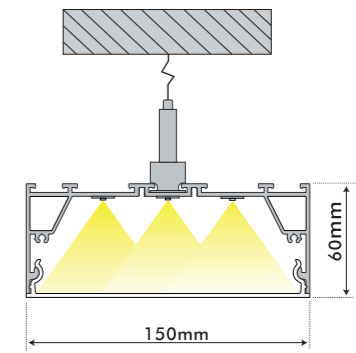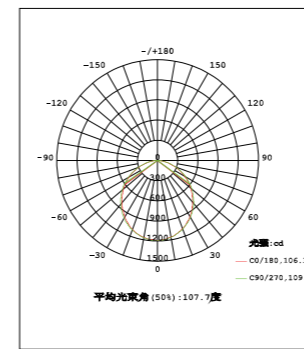






Specifications 产品规格




ArtNo.	Power	Flux	Size(mm)	Lampshade material	Color
E238.PT36.LED	36W	3132 lm	1200*150*60	Opal PMMA	Silver/Matte White /Matte black
E238.PT50.LED	50W	4384 lm	1500*150*60	Opal PMMA	Silver/Matte White /Matte black
E238.PT76.LED	76W	6578 lm	1780*150*60	Opal PMMA	Silver/Matte White /Matte black
E238.PT100.LED	100W	8770 lm	2360*150*60	Opal PMMA	Silver/Matte White /Matte black



Monomer accessories 单体配件




Name	Number	Name	Number
 Hanger bolt 吊码	2	 wire lock 锁线器	2
 Waterproof connectors 防水接头	1	 Wire Rope 钢丝绳	2
 Hanging cup fixed sheet metal parts 吊杯固定板金件	1	 Three terminals 3位接线端子	1
 Metal fixed suction a top piece 吸顶金属固定片	1	 Installation buckle 安装卡扣	2
 Screw 吸顶固定螺丝/螺帽	4		

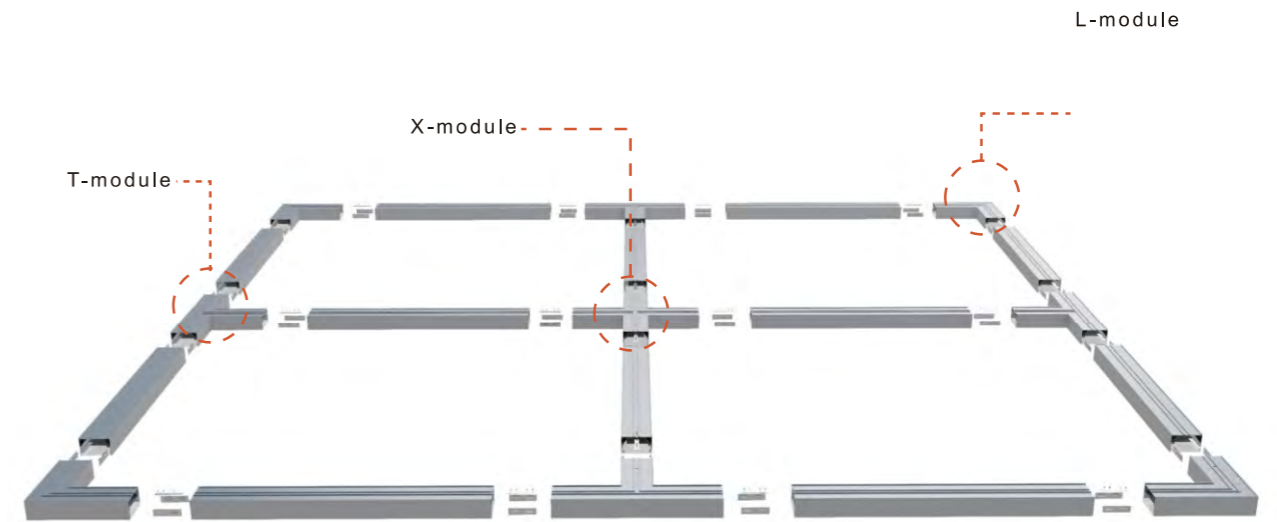Connection system 连接系统图



003

Expand accessories 拓展配件

L-module	Item No	Power	Flux(lm)	Size(mm)	Name
	E238-RL	18W	1044	226*315*150*60	Band connection piece (top) 光带连接片(侧)
	E238-RT	27W	1566	390*315*150*60	Band connection piece (top) 光带连接片(顶)
	E238-RX	36W	2088	390*480*150*60	

Expand together 拓展拼接

- (1) One font stitching, cross-shaped stitching, T-shaped stitching.
- (2) According to the requirements of customers customized shaped splicing.



E238 嵌灯


Lighting your life



Parameters 产品参数

Type:	RECESSED LAMP
Color:	Matt Black/Matt white/Silver
Light Source:	SMD LED
Diffuser:	PMMA
Reflector:	/
Color Temperature(K):	3000K/4000K/6000K
CIE:	Direct
Beam angle:	120°
CRI(Ra):	80-85
IP:	20
Fitting Efficiency:	80%
Application:	indoor

Details 产品细节

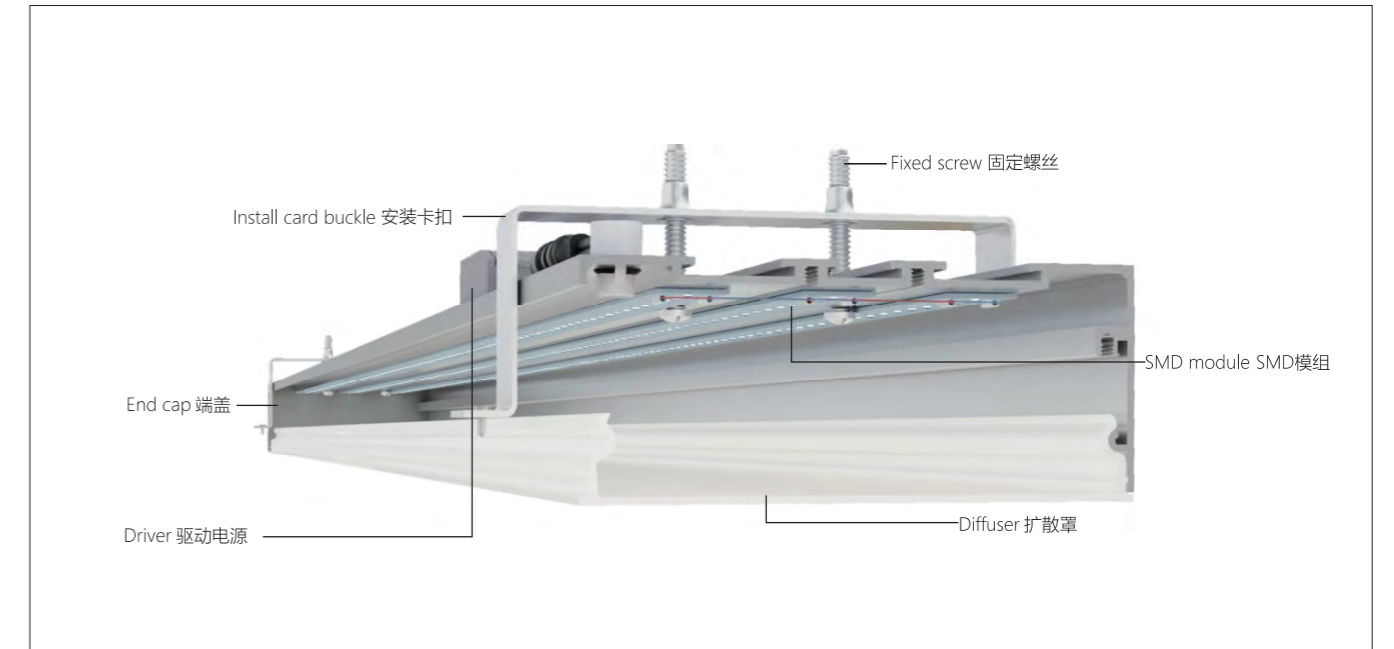

Material/Technic 材质/工艺

- The lamp body adopts high quality aluminum alloy (6063-T5), the end cap adopts imported die-casting aluminum ingot (ADC12), the surface electrostatic spraying treatment, weathering, corrosion resistance and strong adhesion, easy to change color, color optional;
- Transparent cover for the optical grade high transmittance, diffusion type PMMA extrusion molding shade; high strength, high temperature, light uniform, anti-glare effect is good;
- Built-in high brightness SMD light source, light efficiency up to 120lm / W, color rendering index ≥ 80 , color temperature 3000K, 4000K, 6000K optional.
- Light source life of up to 50,000 hours, light fades small, energy saving, greatly reducing maintenance costs.
- Product configuration high-performance, high conversion rate of the drive power; with short circuit, overload, overvoltage and other protective measures to ensure that the entire lamp performance and stability; another optional dimming power (1-10V, DALI dimming, SCR dimming).

- 灯体采用优质铝合金 (6063-T5), 端盖采用进口压铸铝锭 (ADC12), 表面静电喷涂处理, 耐候、耐蚀及附着力强、不易变色, 颜色可选;
- 透光罩为光学级高透光率、扩散型PMMA挤压成型灯罩; 强度高、耐高温, 出光均匀, 防眩效果佳;
- 内置高亮度SMD光源, 光效可达120lm/W, 显色指数 ≥ 80 , 色温3000K、4000K、6000K可选;
- 光源寿命长达5万小时, 光衰小, 节能降耗, 极大降低维护成本;
- 产品配置高性能, 高转换率的驱动电源; 具有短路、过载、过压等保护措施, 确保整灯性能稳定; 另可选配调光电源 (1-10V、DALI调光、可控硅调光);

Features 产品特点

Modern simple LED linear lamps, with its simple lines, fine craftsmanship and can change with the shape of the environment, so that the office environment bright, comfortable, artistic expression strong; all-aluminum structure lighthouse, fully guarantee the thermal stability of lamps Nature, to ensure the consistency of the life of the whole lamp and color temperature; direct-style SMD light source through the high transmittance diffusion PMMA lampshade, so that the light more uniform, soft and comfortable; to maximize the lamp light output efficiency, efficiency up to 68%.

In addition to the standard lighting products, according to the site environment and design requirements, can be customized special shaped light band seamless, no shadow splicing, optimize the office environment, to achieve the perfect combination of people.

Product installation is divided into: lifting, ceiling installation, embedded installation; installation simple and convenient.

Product scope: airport, subway, high-grade office buildings, schools, hospitals, libraries, supermarkets and public buildings, such as space.




现代简约型LED线性灯具, 以其简洁的线条、精细的工艺以及可随环境而变的造型, 让办公环境明亮、舒适、艺术表现力强; 全铝合金结构灯架, 充分保证灯具的热稳定性, 确保整灯寿命及色温的一致性; 直照式的SMD光源通过高透光率扩散型PMMA灯罩, 让出光更均匀、柔和舒适; 最大限度满足灯具光输出效率, 效率可达68%。

除标准灯具产品外, 根据现场环境及设计要求, 可特殊定制异形光带的无缝、无影拼接, 优化办公环境, 实现人、境、光的完美结合;

产品安装方式分为: 吊装、吸顶式安装、嵌入式安装等; 安装简捷、方便;

产品适用范围: 机场、地铁、高档写字楼、学校、医院、图书馆、超市及公共建筑空间等;

Specifications 产品规格

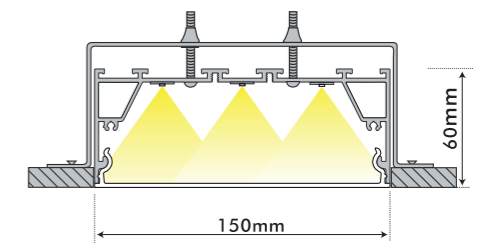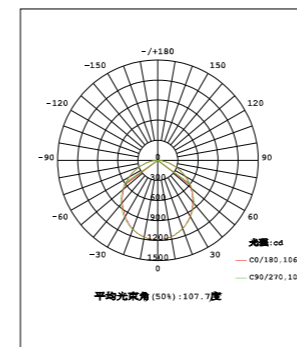

ArtNo.	Power	Flux	Size(mm)	Lampshade material	Color
E238.RT36.LED	36W	3132 lm	1200*150*60	Opal PMMA	Silver/Matte White /Matte black
E238.RT50.LED	50W	4384 lm	1500*150*60	Opal PMMA	Silver/Matte White /Matte black
E238.RT76.LED	76W	6578 lm	1780*150*60	Opal PMMA	Silver/Matte White /Matte black
E238.RT100.LED	100W	8770 lm	2360*150*60	Opal PMMA	Silver/Matte White /Matte black



E239 嵌灯

Lighting your life



Parameters 产品参数

Type:	RECESSED LAMP
Color:	Matte White/Silver
Light Source:	SMD LED
Diffuser:	PMMA
Reflector:	/
Color Temperature(K):	3000K/4000K/6000K
CIE:	Direct
Beam angle:	120°
CRI(Ra):	80-85
IP:	20
Fitting Efficiency:	80%
Application:	indoor

Material/Technic 材质/工艺

- The lamp body adopts high quality aluminum alloy (6063-T5), the end cap adopts imported die-casting aluminum ingot (ADC12), the surface electrostatic spraying treatment, weathering, corrosion resistance and strong adhesion, easy to change color, color optional.
- Transparent cover for high transmittance, diffusion type PMMA extrusion molding shade; high strength, high temperature and cold, light uniform, anti-glare effect is good.
- Built-in high brightness SMD light source, light efficiency up to 120lm / W, color rendering index ≥ 80 , color temperature 3000K, 4000K, 6000K optional.
- Light source life of up to 50,000 hours, light fades small, energy saving, greatly reducing maintenance costs.
- Product configuration high-performance, high conversion rate of the drive power; with short circuit, overload, overvoltage and other protective measures to ensure that the entire lamp performance and stability; another optional dimming power (1-10V, DALI dimming, SCR dimming).

- 灯体采用优质铝合金(6063-T5),端盖采用进口压铸铝锭(ADC12),表面静电喷涂处理,耐候、耐蚀及附着力强、不易变色,颜色可选;
- 透光罩为高透光率、扩散型PMMA挤压成型灯罩;强度高、耐高温及耐寒,出光均匀,防眩效果佳;
- 内置高亮度SMD光源,光效可达120lm/W,显色指数 ≥ 80 ,色温3000K、4000K、6000K可选;
- 光源寿命长达5万小时,光衰小,节能降耗,极大降低维护成本;
- 产品配置高性能,高转换率的驱动电源;具有短路、过载、过压等保护措施,确保整灯性能稳定;另可选配调光电源(1-10V、DALI调光、可控硅调光);

Features 产品特点

Modern simple LED linear lamps, with its simple lines, fine craft and can change with the environment and shape, so that office environment bright, comfortable and healthy; all-aluminum structure lighthouse, fully guarantee the lighting Thermal stability, to ensure the consistency of the life of the whole lamp and color temperature; direct-type SMD light source through the high transmittance diffusion type PMMA lampshade, so that the light is more uniform, soft and comfortable; to maximize the lamp light output efficiency, Efficiency up to 68%.

In addition to the standard lighting products, according to the site environment and design requirements, can be customized special shaped light band seamless, no shadow splicing, optimize the office environment, to achieve the perfect combination of people.

Product installation: embedded installation; configuration dedicated installation kit, so that installation more simple and convenient.

Product scope: airport, subway, high-grade office buildings, schools, hospitals, libraries, supermarkets and public buildings, such as space.


现代简约型LED线性灯具,以其简洁的线条、精细的工艺以及可随环境而变的造型,让办公环境明亮、舒适、健康;全铝合金结构灯架,充分保证灯具的热稳定性,确保整灯寿命及色温的一致性;直照式的SMD光源通过高透光率扩散型PMMA灯罩,让出光更均匀、柔和舒适;最大限度满足灯具光输出效率,效率可达68%。

除标准灯具产品外,根据现场环境及设计要求,可特殊订制异形光带的无缝、无影拼接,优化办公环境,实现人、境、光的完美结合;




产品安装方式:嵌入式安装;配置专用安装套件,让安装更简捷、方便;

产品适用范围:机场、地铁、高档写字楼、学校、医院、图书馆、超市及公共建筑空间等;

Details 产品细节

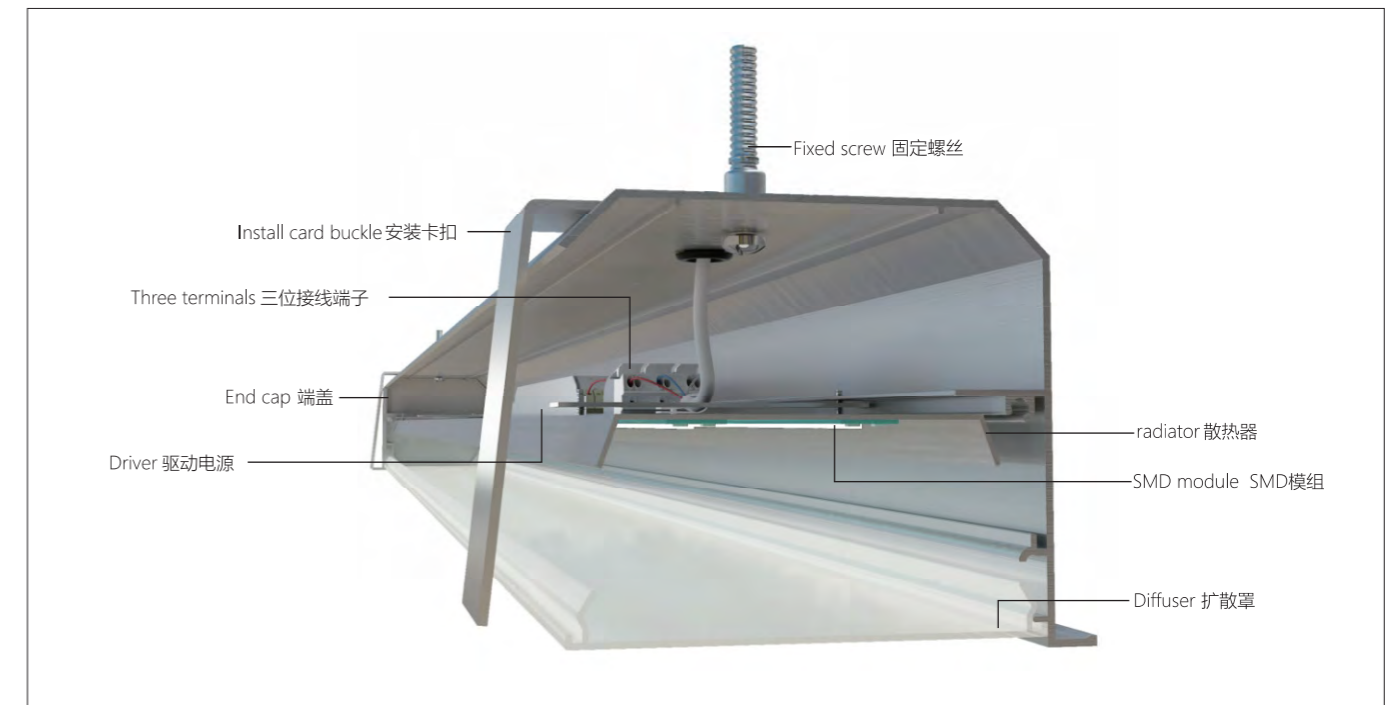

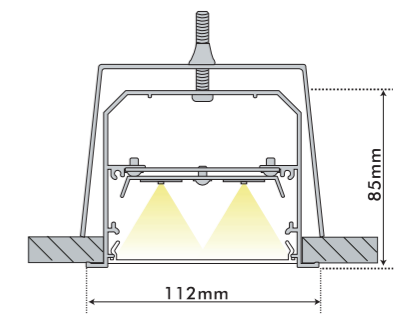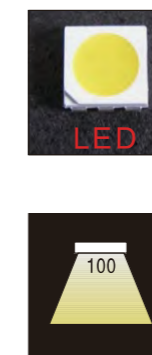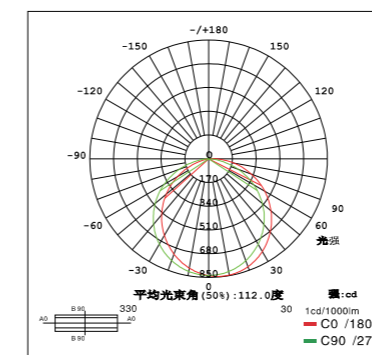


Specifications 产品规格




ArtNo.	Power	Flux	Size(mm)	Lampshade material	Color
E239.RT36.LED	36W	3132 lm	1200*112*85	PMMA	Silver/Matte White
E239.RT50.LED	50W	4384 lm	1500*112*85	PMMA	Silver/Matte White
E239.RT76.LED	76W	6578 lm	1780*112*85	PMMA	Silver/Matte White
E239.RT100.LED	100W	8770 lm	2360*112*85	PMMA	Silver/Matte White



Expand accessories 拓展配件

L-module	Item No	Power	Flux(lm)	Size(mm)	Name
	E239-RL	12W	1044	223*282*112*85	Band connection piece (top)
	E239-RT	18W	1566	390*452*112*85	光带连接片 (侧)
	E239-RX	24W	2088LM	390*282*112*85	


Connection system 连接系统

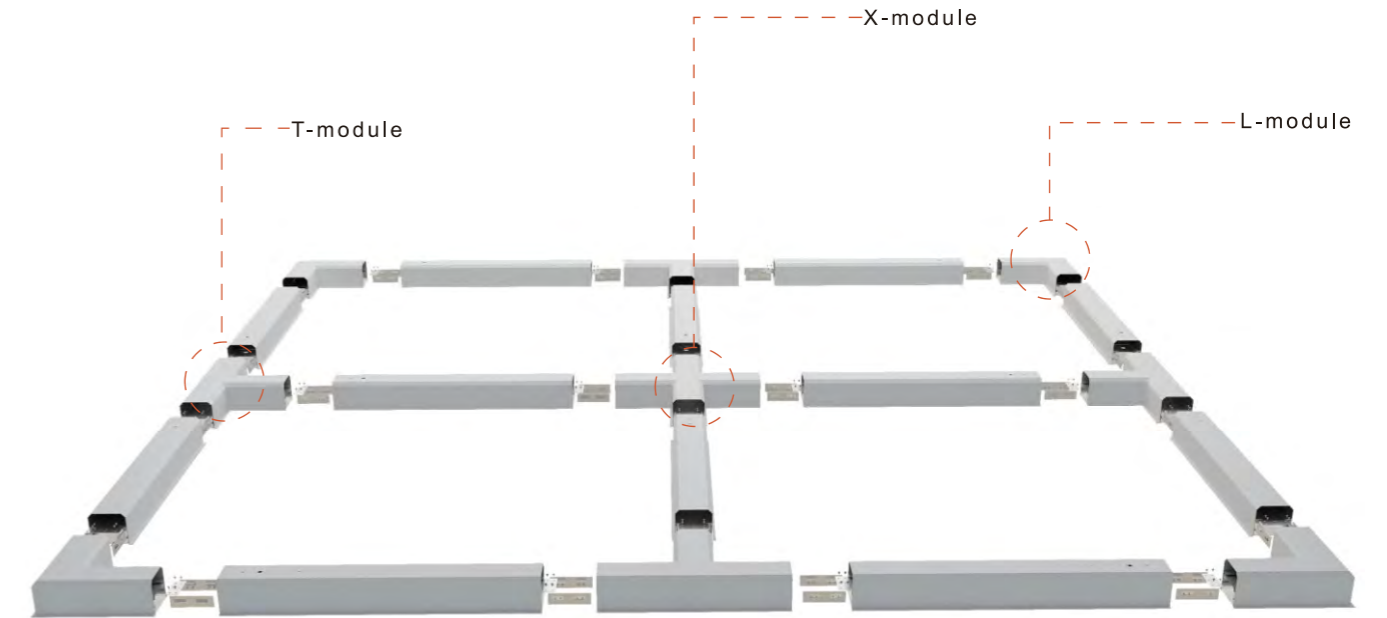


Expand together 拓展拼接

- (1) One word band matching, cross stitching, T type joining together.
 (2) According to the requirements of customers customized different stitching.


- (1) 一字型光带拼接、十字型拼接、T字型拼接；
 (2) 根据客户的要求进行定制异型拼接；




MIN: 45°

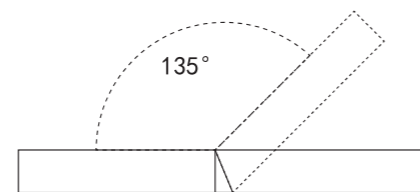

MAX: 360°

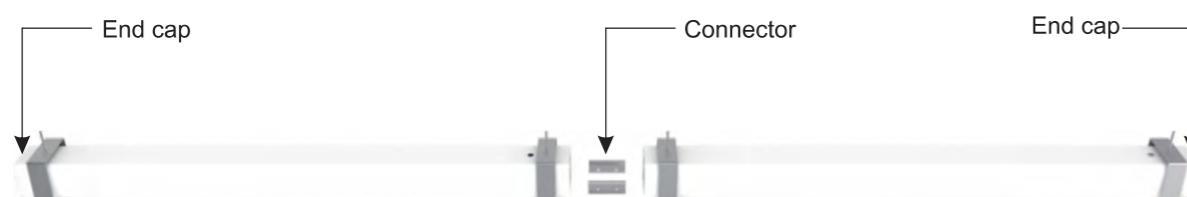

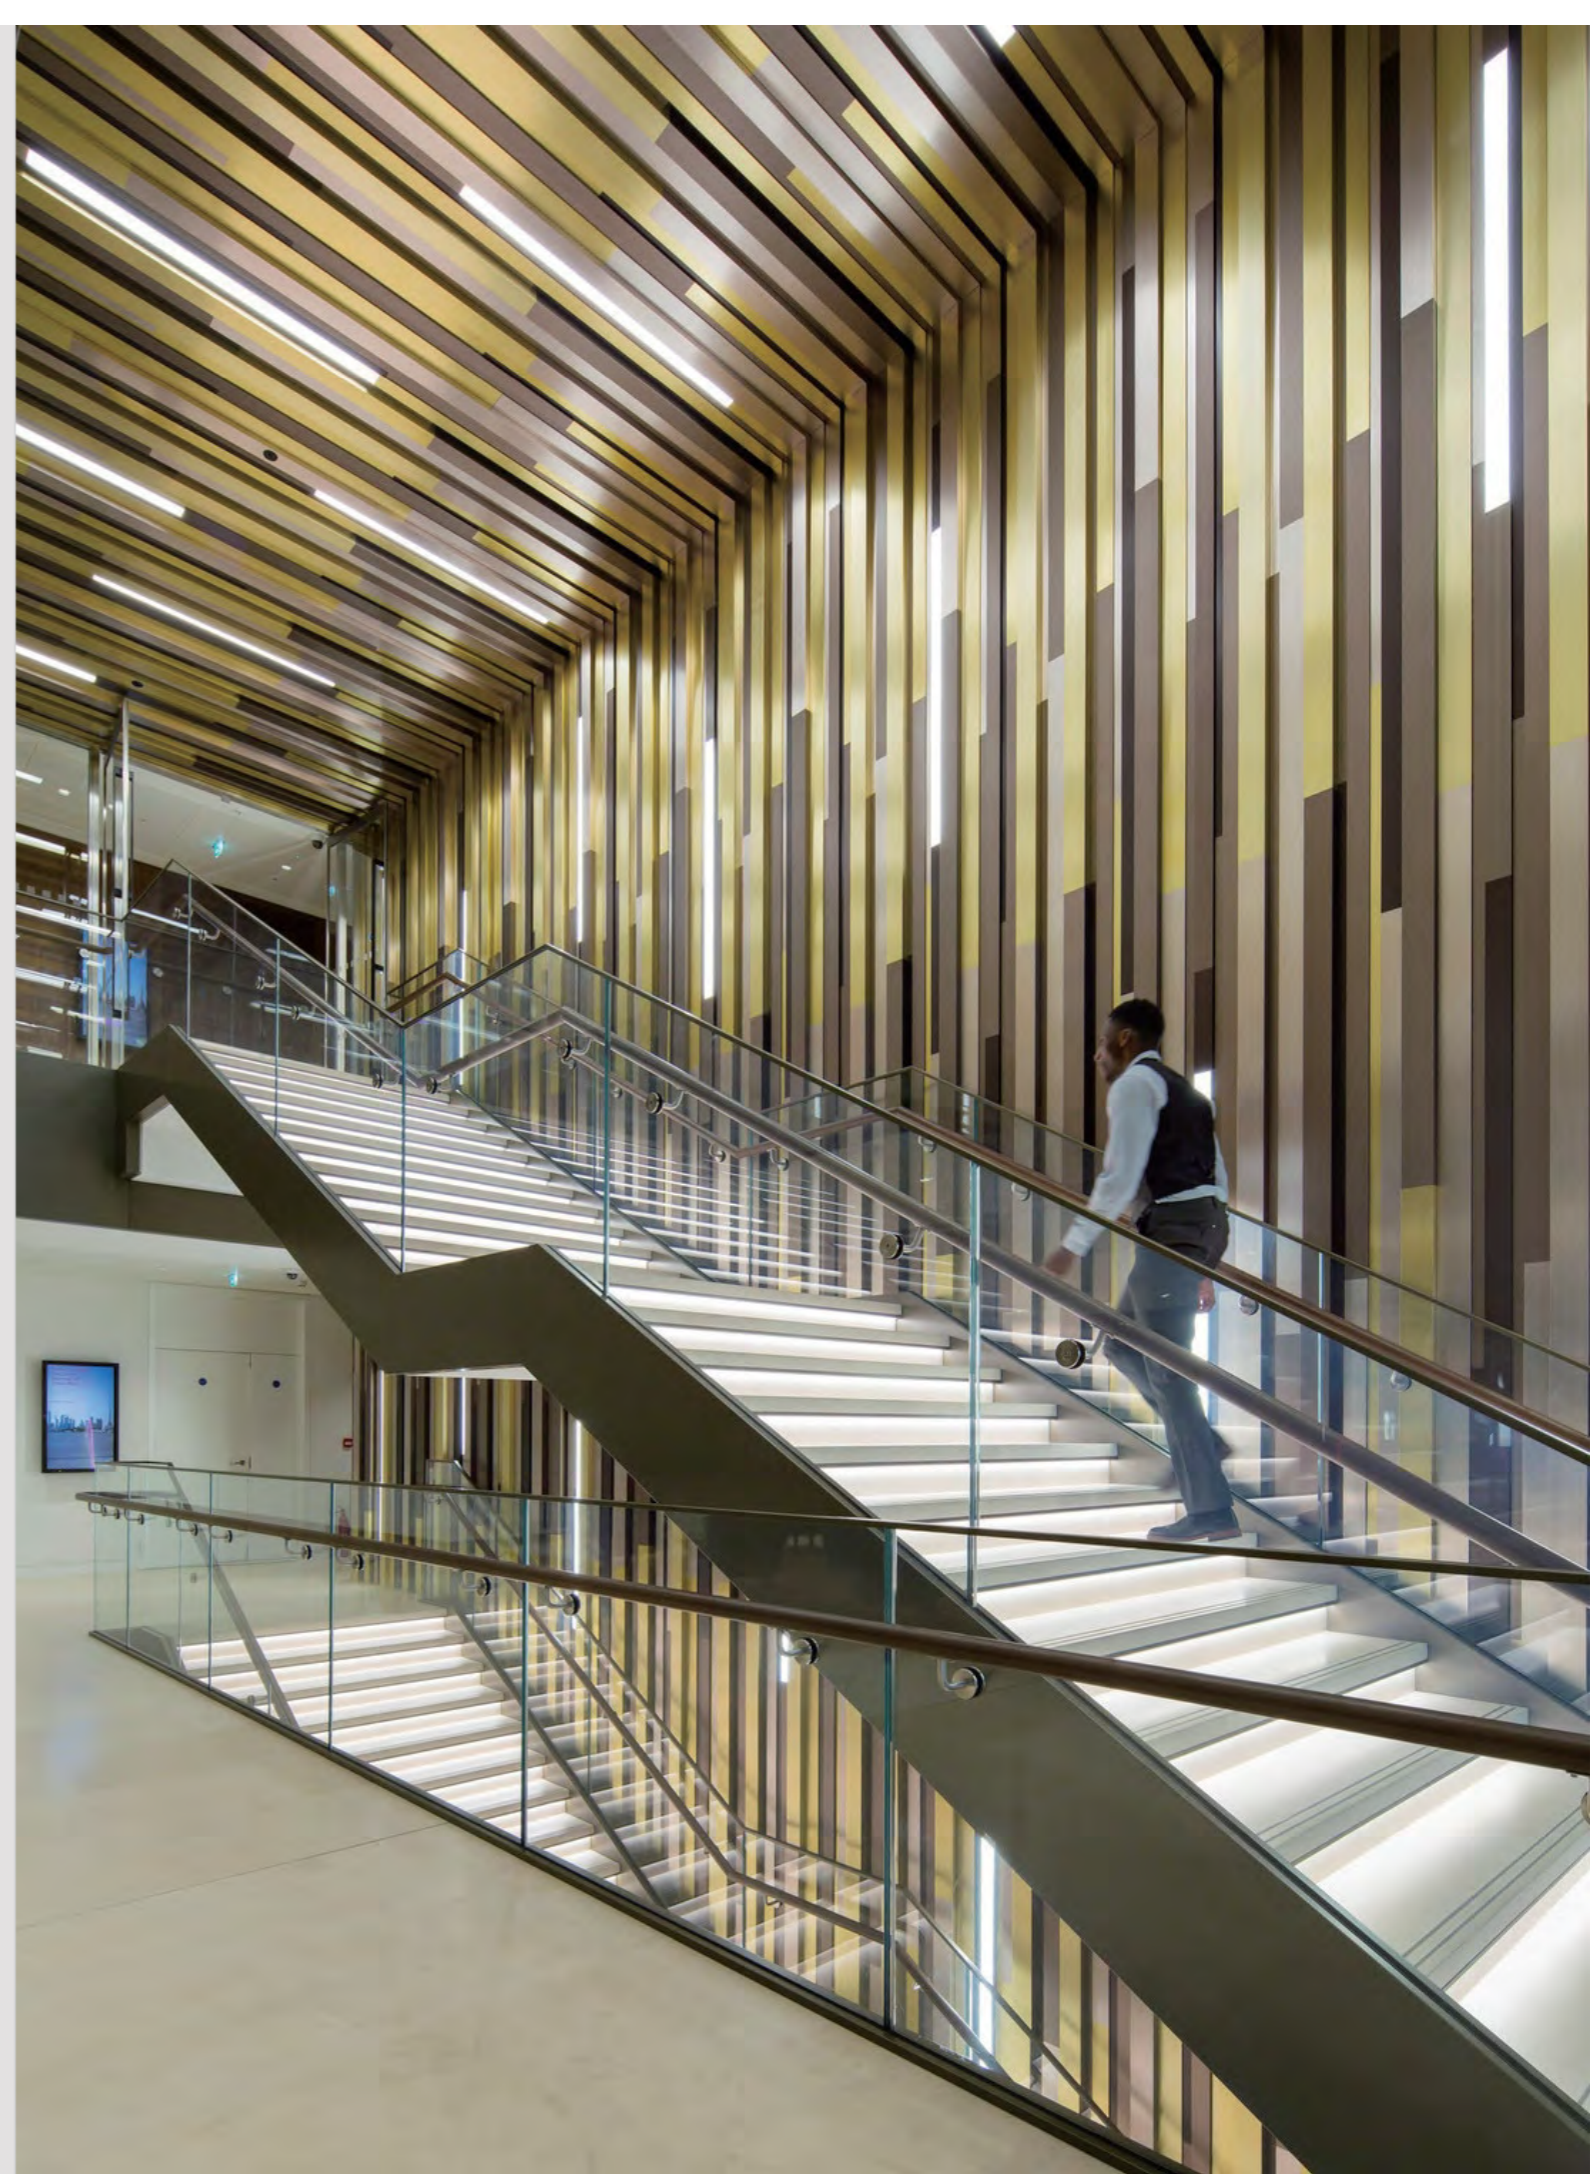

E241 吊灯


Lighting your life



Parameters 产品参数

Type:	Pendant
Color:	Matt Black/Matt white/Silver
Light Source:	SMD LED
Diffuser:	PMMA
Reflector:	/
Color Temperature(K):	3000K/4000K/6000K
CIE:	Direct
Beam angle:	120°
CRI(Ra):	80-85
IP:	20
Fitting Efficiency:	80%
Application:	indoor

Details 产品细节

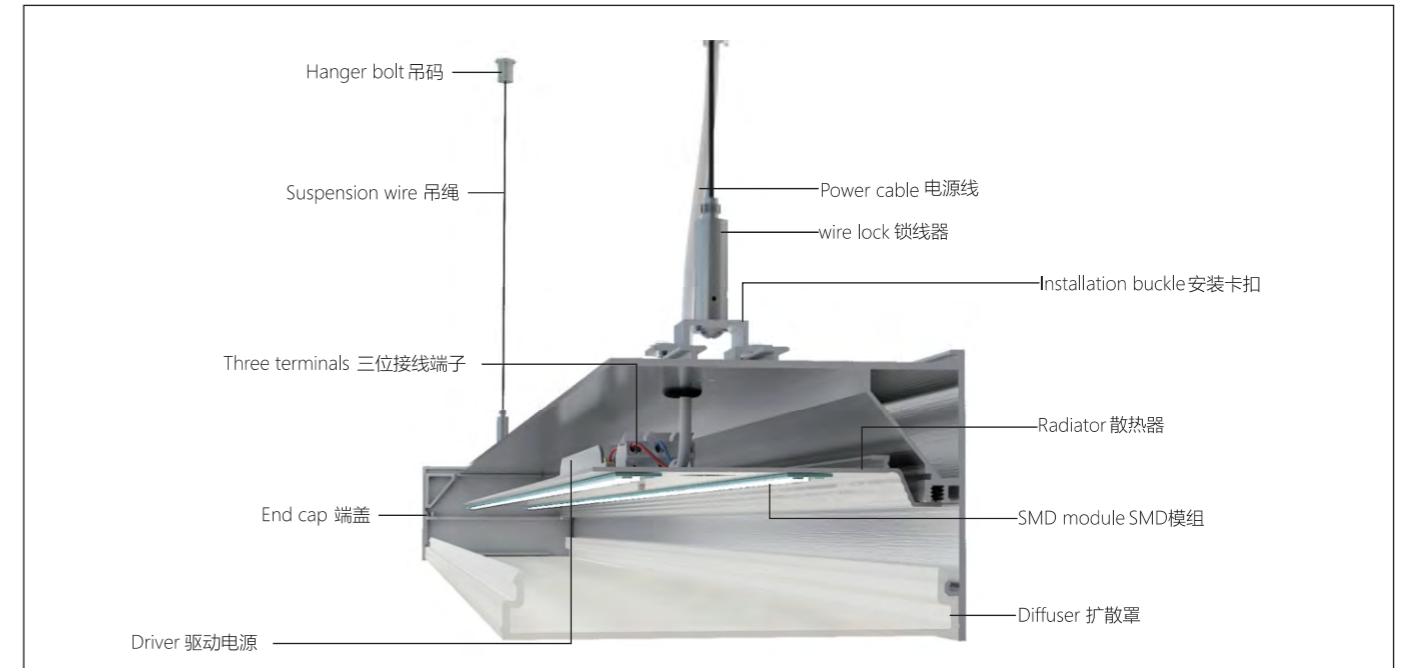

Material/Technic 材质/工艺

- The lamp body adopts high quality aluminum alloy (6063-T5), the end cap adopts imported die-casting aluminum ingot (ADC12), the surface electrostatic spraying treatment, weathering, corrosion resistance and strong adhesion, easy to change color, color optional;
- Transparent cover for the optical grade high transmittance, diffusion type PMMA extrusion molding shade; high strength, high temperature, light uniform, anti-glare effect is good;
- Built-in high brightness SMD light source, light efficiency up to 120lm / W, color rendering index ≥ 80 , color temperature 3000K, 4000K, 6000K optional. Light source life of up to 50,000 hours, light fades small, energy saving, greatly reducing maintenance costs.
- Product configuration high-performance, high conversion rate of the drive power; with short circuit, overload, overvoltage and other protective measures to ensure that
- the entire lamp performance and stability; another optional dimming power (1-10V, DALI dimming).

- 灯体采用优质铝合金 (6063-T5), 端盖采用进口压铸铝锭 (ADC12), 表面静电喷涂处理, 耐候、耐蚀及附着力强、不易变色, 颜色可选;
- 透光罩为光学级高透光率、扩散型PMMA挤压成型灯罩; 强度高、耐高温, 出光均匀, 防眩效果佳;
- 内置高亮度SMD光源, 光效可达120lm/W, 显色指数 ≥ 80 , 色温3000K、4000K、6000K可选;
- 光源寿命长达5万小时, 光衰小, 节能降耗, 极大降低维护成本;
- 产品配置高性能, 高转换率的驱动电源; 具有短路、过载、过压等保护措施, 确保整灯性能稳定; 另可选配调光电源 (1-10V、DALI调光);

Features 产品特点

Modern simple LED linear lamps, with its simple lines, fine craftsmanship and can change with the shape of the environment, so that the office environment bright, comfortable, artistic expression strong; all-aluminum structure lighthouse, fully guarantee the thermal stability of lamps Nature, to ensure the consistency of the life of the whole lamp and color temperature; direct-style SMD light source through the high transmittance diffusion PMMA lampshade, so that the light more uniform, soft and comfortable; to maximize the lamp light output efficiency, efficiency up to 68%.

In addition to the standard lighting products, according to the site environment and design requirements, can be customized special shaped light band seamless, no shadow splicing, optimize the office environment, to achieve the perfect combination of people.

Product scope: airport, subway, high - grade office buildings, schools, hospitals, libraries, supermarkets and public buildings, such as space.

Product scope: subway, high - grade office buildings, schools, hospitals, libraries, supermarkets and public buildings, such as space.




现代简约型LED线性灯具, 以其简洁的线条、精细的工艺以及可随环境而变的造型, 让办公环境明亮、舒适、艺术表现力强; 全铝合金结构灯架, 充分保证灯具的热稳定性, 确保整灯寿命及色温的一致性; 直照式的SMD光源通过高透光率扩散型PMMA灯罩, 让出光更均匀、柔和舒适; 最大限度满足灯具光输出效率, 效率可达68%。

除标准灯具产品外, 根据现场环境及设计要求, 可特殊订制异形光带的无缝、无影拼接, 优化办公环境, 实现人、境、光的完美结合;

产品安装方式分为: 吊装、吸顶式安装、嵌入式安装等; 安装简捷、方便;

产品适用范围: 机场、地铁、高档写字楼、学校、医院、图书馆、超市及公共建筑空间等;

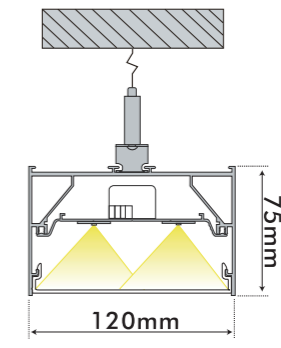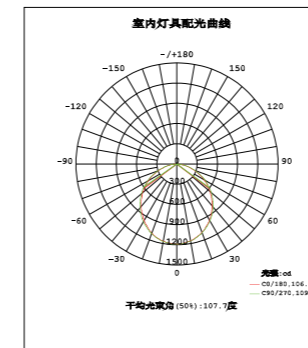


Specifications 产品规格



ArtNo.	Power	Flux	Size(mm)	Lampshade material	Color
E241.PT36.LED	36W	3132 lm	1200*120*75	Opal PMMA	Silver/Matte White /Matte black
E241.PT50.LED	50W	4384 lm	1500*120*75	Opal PMMA	Silver/Matte White /Matte black
E241.PT76.LED	76W	6578 lm	1780*120*75	Opal PMMA	Silver/Matte White /Matte black
E241.PT100.LED	100W	8770 lm	2360*120*75	Opal PMMA	Silver/Matte White /Matte black



Expand accessories 拓展配件

L-module	Item No	Power	Flux(lm)	L*W*H(mm)	Name	Number
	E241-RL	9-15.6W	2640	223*288*120*75	Band connection piece (top)	
					光带连接片 (侧)	
T-module	Item No	Power	Flux(lm)	L*W*H(mm)	Name	Number
	E241-RT	13.6-28.8W	3168	391*228*120*75	Band connection piece (top)	
					光带连接片 (顶)	
X-module	Item No	Power	Flux(lm)	L*W*H(mm)	Name	Number
	E241-RX	18-31.2W	4224	391*456*120*75		



Expand together 拓展拼接

(1) One word band matching, cross stitching, T type joining together.


(1)一字型光带拼接、十字型拼接、T字型拼接；

(2) According to the requirements of customers customized different stitching.

(2)根据客户的要求进行定制异型拼接；

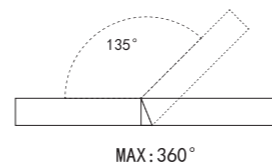


Connection system 连接系统图

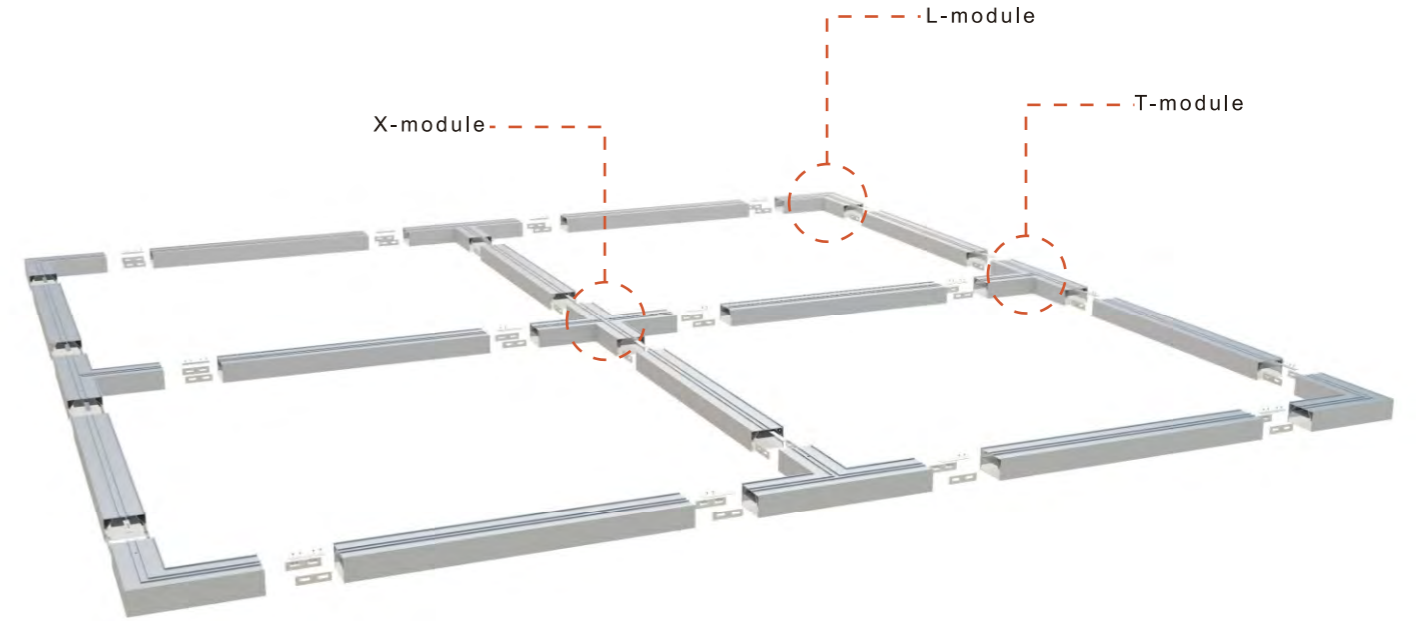

E241 嵌灯

Lighting your life

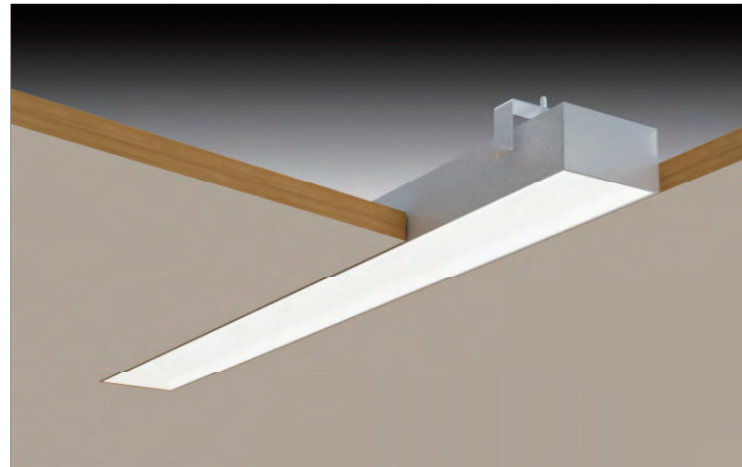

Parameters 产品参数

Type:	RECESSED LAMP
Color:	Matt Black/Matt white/Silver
Light Source:	SMD LED
Diffuser:	PMMA
Reflector:	/
Color Temperature(K):	3000K/4000K/6000K
CIE:	Direct
Beam angle:	120°
CRI(Ra):	75-85
IP:	20
Fitting Efficiency:	80%
Application:	indoor

Material/Technic 材质/工艺

- The lamp body adopts high quality aluminum alloy (6063-T5), the end cap adopts imported die-casting aluminum ingot (ADC12), the surface electrostatic spraying treatment, weathering, corrosion resistance and strong adhesion, easy to change color, color optional;
 - Transparent cover for the optical grade high transmittance, diffusion type PMMA extrusion molding shade; high strength, high temperature, light uniform, anti-glare effect is good;
 - Built-in high brightness SMD light source, light efficiency up to 120lm/W, color rendering index ≥ 80 , color temperature 3000K, 4000K, 6000K optional. Light source life of up to 50,000 hours, light fades small, energy saving, greatly reducing maintenance costs.
 - Product configuration high-performance, high conversion rate of the drive power; with short circuit, overload, overvoltage and other protective measures to ensure that
 - the entire lamp performance and stability; another optional dimming power (1-10V, DALI dimming).
- 灯体采用优质铝合金(6063-T5),端盖采用进口压铸铝锭(ADC12),表面静电喷涂处理,耐候、耐蚀及附着力强、不易变色,颜色可选;
 - 透光罩为光学级高透光率、扩散型PMMA挤压成型灯罩;强度高、耐高温,出光均匀,防眩效果佳;
 - 内置高亮度SMD光源,光效可达120lm/W,显色指数 ≥ 80 ,色温3000K、4000K、6000K可选;
 - 光源寿命长达5万小时,光衰小,节能降耗,极大降低维护成本;
 - 产品配置高性能,高转换率的驱动电源;具有短路、过载、过压等保护措施,确保整灯性能稳定;另可选配调光电源(1-10V、DALI调光);

Features 产品特点

Modern simple LED linear lamps, with its simple lines, fine craftsmanship and can change with the shape of the environment, so that the office environment bright, comfortable, artistic expression strong; all-aluminum structure lighthouse, fully guarantee the thermal stability of lamps Nature, to ensure the consistency of the life of the whole lamp and color temperature; direct-style SMD light source through the high transmittance diffusion PMMA lampshade, so that the light more uniform, soft and comfortable; to maximize the lamp light output efficiency, efficiency up to 68%.

In addition to the standard lighting products, according to the site environment and design requirements, can be customized special shaped light band seamless, no shadow splicing, optimize the office environment, to achieve the perfect combination of people.

Product scope: airport, subway, high - grade office buildings, schools, hospitals, libraries, supermarkets and public buildings, such as space.

Product scope: subway, high - grade office buildings, schools, hospitals, libraries, supermarkets and public buildings, such as space.


现代简约型LED线性灯具,以其简洁的线条、精细的工艺以及可随环境而变的造型,让办公环境明亮、舒适、艺术表现力强;全铝合金结构灯架,充分保证灯具的热稳定性,确保整灯寿命及色温的一致性;直照式的SMD光源通过高透光率扩散型PMMA灯罩,让出光更均匀、柔和舒适;最大限度满足灯具光输出效率,效率可达68%。

除标准灯具产品外,根据现场环境及设计要求,可特殊订制异形光带的无缝、无影拼接,优化办公环境,实现人、境、光的完美结合;




产品安装方式分为:吊装、吸顶式安装、嵌入式安装等;安装简捷、方便;

产品适用范围:机场、地铁、高档写字楼、学校、医院、图书馆、超市及公共建筑空间等;

Details 产品细节

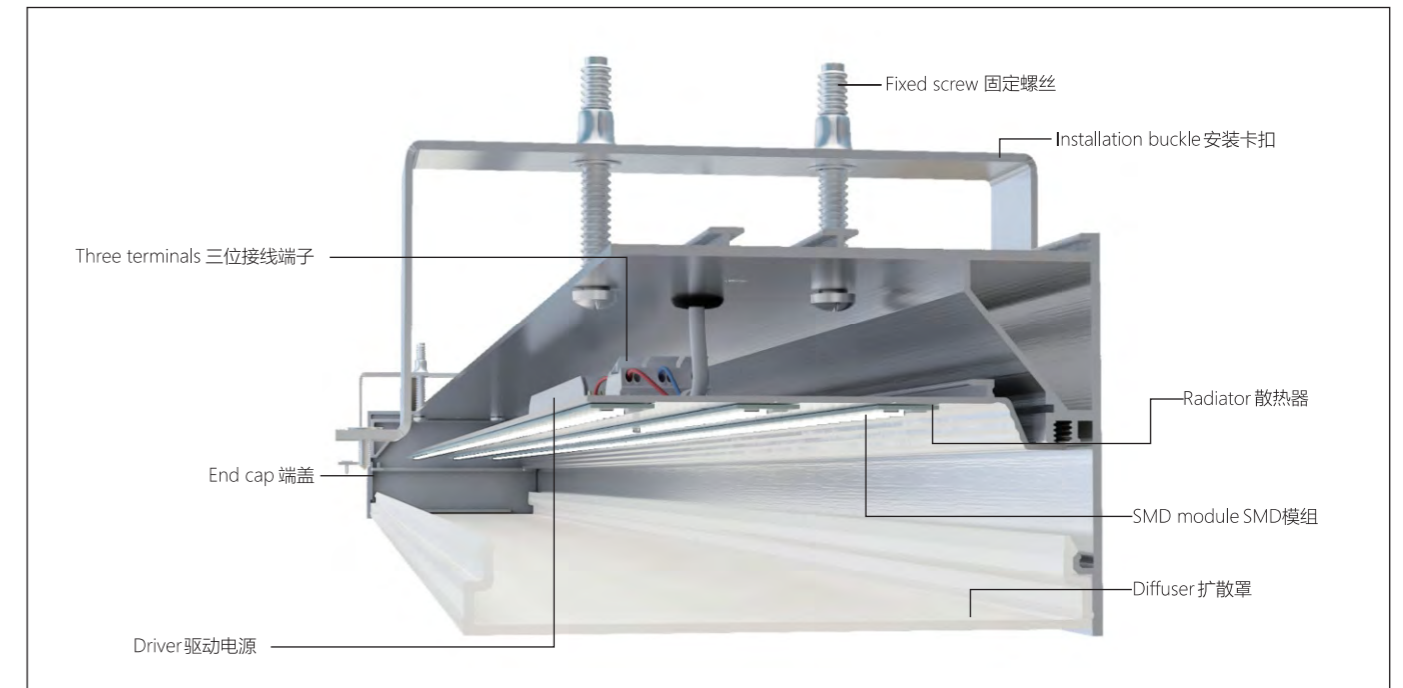

Specifications 产品规格

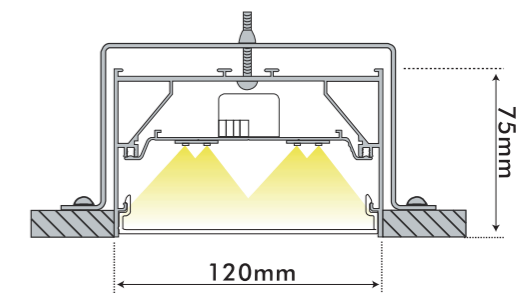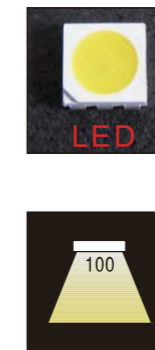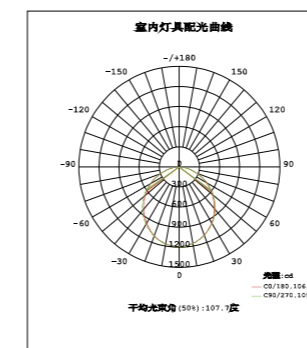

ArtNo.	Power	Flux	Size(mm)	Lampshade material	Color
E241.RT36.LED	36W	3132 lm	1200*120*75	Opal PMMA	Silver/Matte White /Matte black
E241.RT50.LED	50W	4384 lm	1500*120*75	Opal PMMA	Silver/Matte White /Matte black
E241.RT76.LED	76W	6578 lm	1780*120*75	Opal PMMA	Silver/Matte White /Matte black
E241.RT100.LED	100W	8770 lm	2360*120*75	Opal PMMA	Silver/Matte White /Matte black



E241 吸顶灯


Lighting your life



Parameters 产品参数

Type:	CEILING LAMP
Color:	Matt Black/Matt white/Silver
Light Source:	SMD LED
Diffuser:	PMMA
Reflector:	/
Color Temperature(K):	3000K/4000K/6000K
CIE:	Direct
Beam angle:	120°
CRI(Ra):	75-85
IP:	20
Fitting Efficiency:	80%
Application:	indoor

Details 产品细节

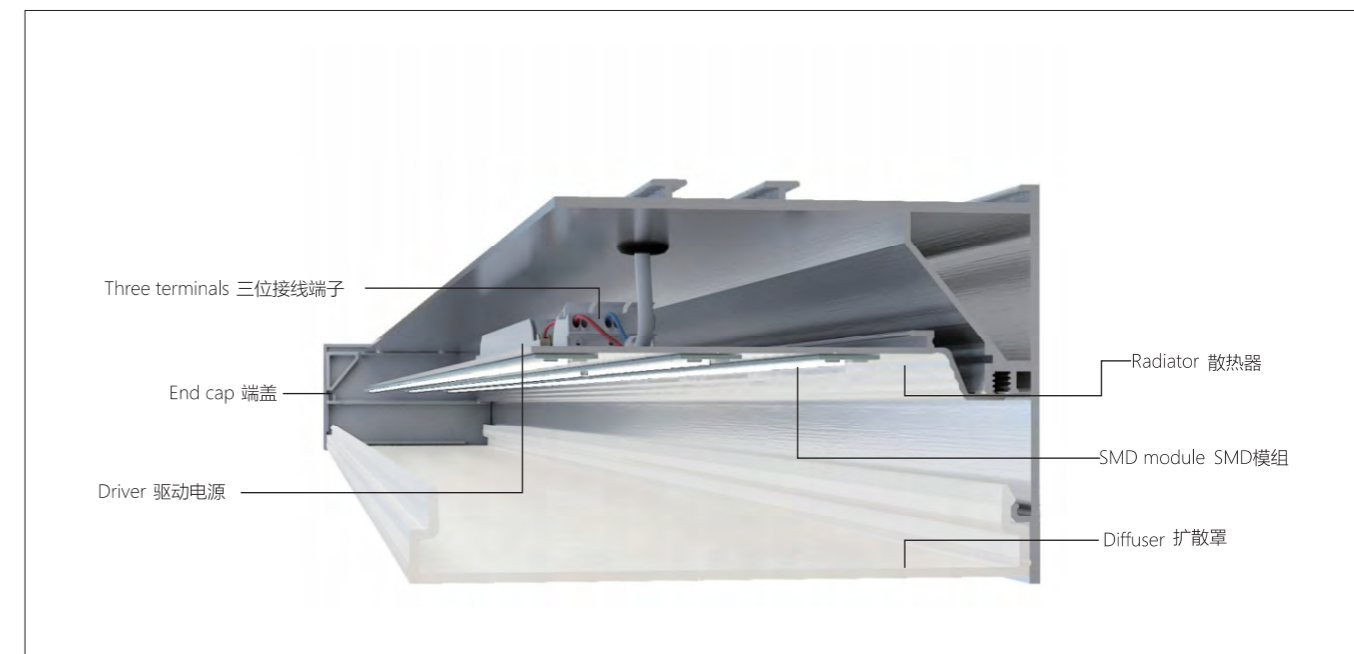

Material/Technic 材质/工艺

- The lamp body adopts high quality aluminum alloy (6063-T5), the end cap adopts imported die-casting aluminum ingot (ADC12), the surface electrostatic spraying treatment, weathering, corrosion resistance and strong adhesion, easy to change color, color optional;
 - Transparent cover for the optical grade high transmittance, diffusion type PMMA extrusion molding shade; high strength, high temperature, light uniform, anti-glare effect is good;
 - Built-in high brightness SMD light source, light efficiency up to 120lm / W, color rendering index ≥ 80 , color temperature 3000K, 4000K, 6000K optional. Light source life of up to 50,000 hours, light fades small, energy saving, greatly reducing maintenance costs.
 - Product configuration high-performance, high conversion rate of the drive power; with short circuit, overload, overvoltage and other protective measures to ensure that the entire lamp performance and stability; another optional dimming power (1-10V, DALI dimming).
- 灯体采用优质铝合金 (6063-T5), 端盖采用进口压铸铝锭 (ADC12), 表面静电喷涂处理, 耐候、耐蚀及附着力强、不易变色, 颜色可选;
 - 透光罩为光学级高透光率、扩散型PMMA挤压成型灯罩; 强度高、耐高温, 出光均匀, 防眩效果佳;
 - 内置高亮度SMD光源, 光效可达120lm/W, 显色指数 ≥ 80 , 色温3000K、4000K、6000K可选;
 - 光源寿命长达5万小时, 光衰小, 节能降耗, 极大降低维护成本;
 - 产品配置高性能, 高转换率的驱动电源; 具有短路、过载、过压等保护措施, 确保整灯性能稳定; 另可选配调光电源 (1-10V、DALI调光);

Features 产品特点

Modern simple LED linear lamps, with its simple lines, fine craftsmanship and can change with the shape of the environment, so that the office environment bright, comfortable, artistic expression strong; all-aluminum structure lighthouse, fully guarantee the thermal stability of lamps Nature, to ensure the consistency of the life of the whole lamp and color temperature; direct-style SMD light source through the high transmittance diffusion PMMA lampshade, so that the light more uniform, soft and comfortable; to maximize the lamp light output efficiency, efficiency up to 68%.

In addition to the standard lighting products, according to the site environment and design requirements, can be customized special shaped light band seamless, no shadow splicing, optimize the office environment, to achieve the perfect combination of people.

Product scope: airport, subway, high - grade office buildings, schools, hospitals, libraries, supermarkets and public buildings, such as space.

Product scope: subway, high - grade office buildings, schools, hospitals, libraries, supermarkets and public buildings, such as space.




现代简约型LED线性灯具, 以其简洁的线条、精细的工艺以及可随环境而变的造型, 让办公环境明亮、舒适、艺术表现力强; 全铝合金结构灯架, 充分保证灯具的热稳定性, 确保整灯寿命及色温的一致性; 直照式的SMD光源通过高透光率扩散型PMMA灯罩, 让出光更均匀、柔和舒适; 最大限度满足灯具光输出效率, 效率可达68%。

除标准灯具产品外, 根据现场环境及设计要求, 可特殊订制异形光带的无缝、无影拼接, 优化办公环境, 实现人、境、光的完美结合;

产品安装方式分为: 吊装、吸顶式安装、嵌入式安装等; 安装简捷、方便;

产品适用范围: 机场、地铁、高档写字楼、学校、医院、图书馆、超市及公共建筑空间等;

Specifications 产品规格

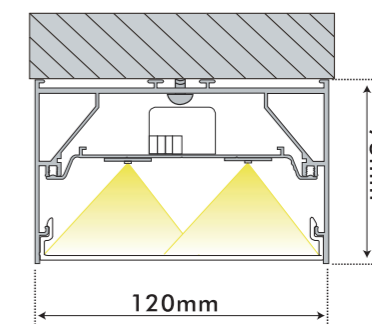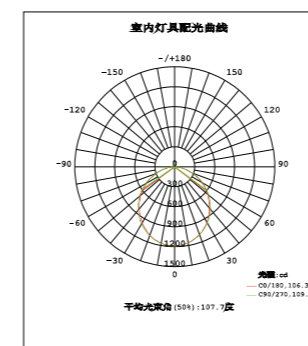

ArtNo.	Power	Flux	Size(mm)	Lampshade material	Color
E241.RT36.LED	36W	3132 lm	1200*120*75	Opal PMMA	Silver/Matte White /Matte black
E241.RT50.LED	50W	4384 lm	1500*120*75	Opal PMMA	Silver/Matte White /Matte black
E241.RT76.LED	76W	6578 lm	1780*120*75	Opal PMMA	Silver/Matte White /Matte black
E241.RT100.LED	100W	8770 lm	2360*120*75	Opal PMMA	Silver/Matte White /Matte black





E257 吊灯


Lighting your life



Parameters 产品参数

Type:	Pendant
Color:	Brushed oxidation
Light Source:	SMD LED
Diffuser:	PMMA
Reflector:	/
Color Temperature(K):	3000K/4000K/6000K
CIE:	Direct
Beam angle:	120°
CRI(Ra):	80-85
IP:	20
Fitting Efficiency:	80%
Application:	indoor

Details 产品细节

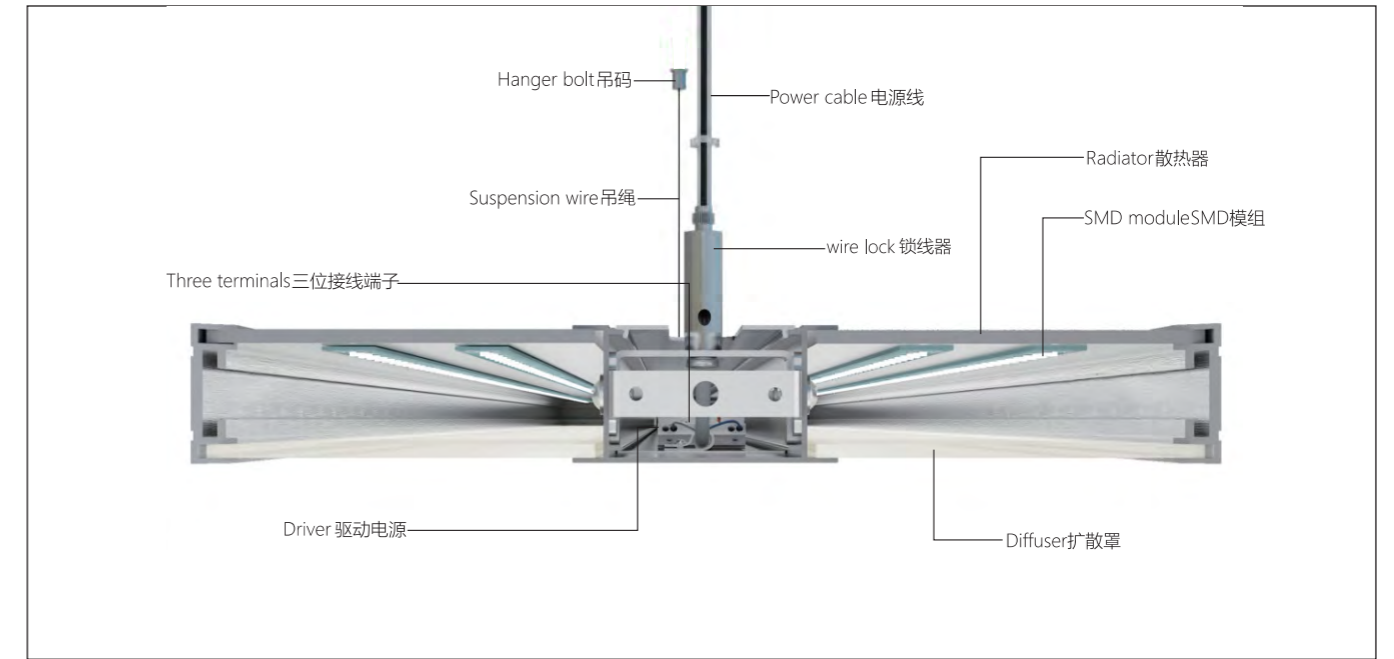

Material/Technic 材质/工艺

- Light body using high-quality aluminum alloy (6063-T5), the surface brushed aluminum color oxidation treatment, weathering, corrosion and wear, no color, color optional.
- Transparent cover for the high transmittance / diffusion type PMMA cast plate shade; high strength, high temperature and cold, light uniform, anti-glare effect is good.
- Built-in high brightness SMD light source, light efficiency up to 120lm / W, color rendering index ≥ 80 , color temperature 3000K, 4000K, 6000K optional.
- Light source life of up to 50,000 hours, light fades small, energy saving, greatly reducing maintenance costs.
- Product configuration high-performance, high conversion rate of the drive power; with short circuit, overload, overvoltage and other protective measures to ensure that the entire lamp performance and stability; another optional dimming power (1-10V, DALI dimming, SCR dimming).
- 灯体采用优质铝合金 (6063-T5), 表面拉丝铝本色氧化处理, 耐候、耐蚀及耐磨、不变色, 颜色可选;
- 透光罩为高透光率/扩散型PMMA压铸板灯罩; 强度高、耐高温及耐寒, 出光均匀, 防眩效果佳;
- 内置高亮度SMD光源, 光效可达120lm/W, 显色指数 ≥ 80 , 色温3000K、4000K、6000K可选;
- 光源寿命长达5万小时, 光衰小, 节能降耗, 极大降低维护成本;
- 产品配置高性能, 高转换率的驱动电源; 具有短路、过载、过压等保护措施, 确保整灯性能稳定; 另可选配调光电源 (1-10V、DALI调光、可控硅调光);

Features 产品特点

Simple line type LED lamps, so that the office environment is simple and taste; all-aluminum structure lighthouse, fully guarantee the thermal stability of lamps to ensure that the entire lamp life and color temperature consistency; direct-type SMD light source. Too high transmittance of the proliferation of PC film shade, so that the light more uniform, soft and comfortable; maximum to meet the light output efficiency of light, the efficiency of up to 68%.

Product installation: hanging line installation; installation simple and convenient.




Product scope: high-grade office buildings, schools, hospitals, libraries, supermarkets and public buildings, etc.

简约线条型LED灯具, 让办公环境简单而有品位; 全铝合金结构灯架, 充分保证灯具的热稳定性, 确保整灯寿命及色温的一致性; 直照式的SMD光源通过高透光率扩散型PC薄膜灯罩, 让出光更均匀、柔和舒适; 最大限度满足灯具光输出效率, 效率可达68%。

产品安装方式: 吊线安装; 安装简捷、方便;

产品适用范围: 高档写字楼、学校、医院、图书馆、超市及公共建筑空间等

Specifications 产品规格

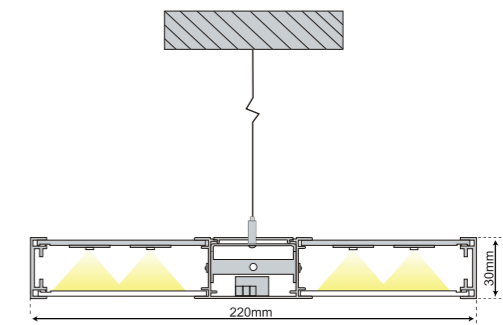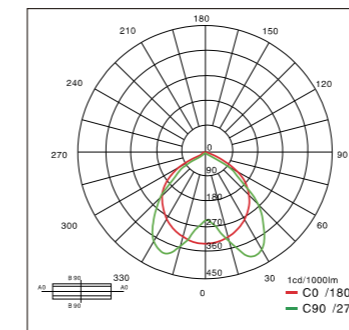

ArtNo.	Power	Flux	Size(mm)	Lampshade material	Color
E257.PT38.LED	38W	3289 lm	1200*220*30	PMMA	Brushed oxidation
E257.PT50.LED	50W	4384 lm	1500*220*30	PMMA	Brushed oxidation



E261 吊灯


Lighting your life



Parameters 产品参数

Type:	Pendant
Color:	Matt Black/Matt white/Silver
Light Source:	SMD LED
Diffuser:	PMMA
Reflector:	/
Color Temperature(K):	3000K/4000K/6000K
CIE:	Direct
Beam angle:	120°
CRI(Ra):	80-85
IP:	20
Fitting Efficiency:	80%
Application:	indoor

Details 产品细节



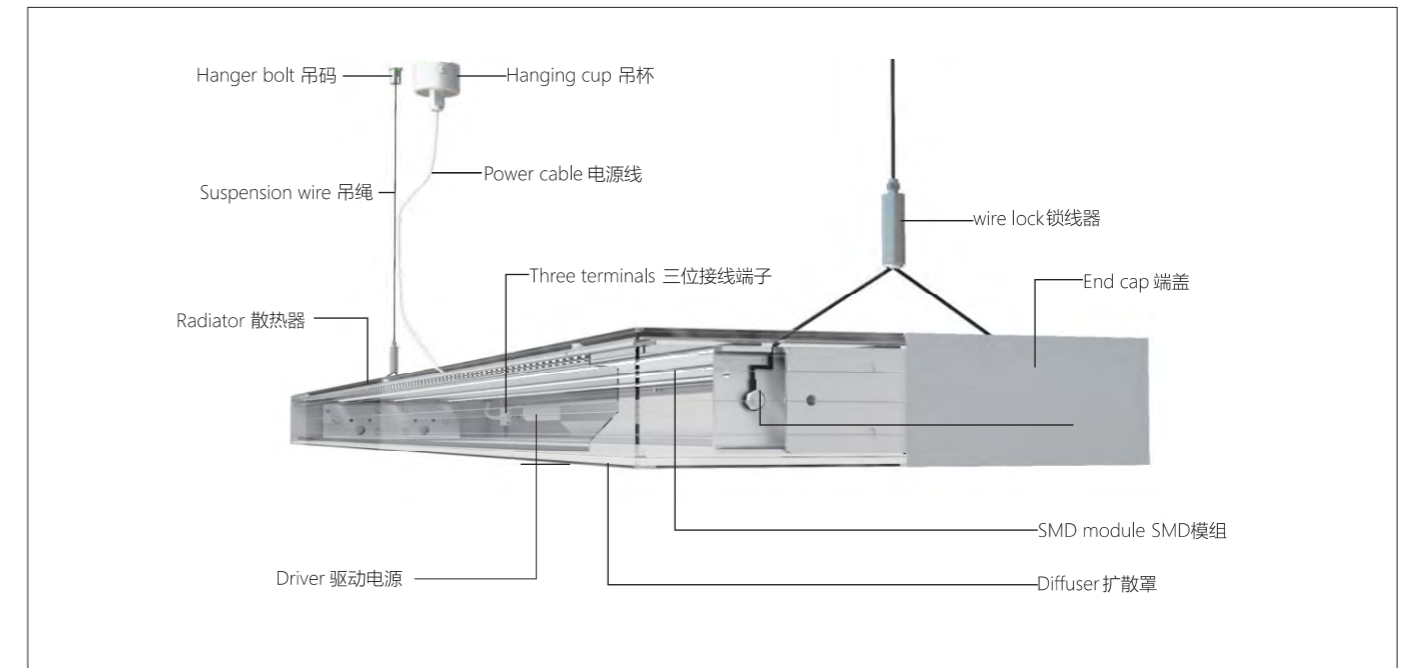


Material/Technic 材质/工艺

- Light body using high-quality aluminum alloy (6063-T5), the surface brushed aluminum color oxidation treatment, weathering, corrosion and wear, no color, color optional.
- Transparent cover for the high transmittance / diffusion type PMMA cast plate shade; high strength, high temperature and cold, light uniform, anti-glare effect is good.
- Built-in high brightness SMD light source, light efficiency up to 120lm / W, color rendering index ≥ 80 , color temperature 3000K, 4000K, 6000K optional.
- Light source life of up to 50,000 hours, light fades small, energy saving, greatly reducing maintenance costs.
- Product configuration high-performance, high conversion rate of the drive power; with short circuit, overload, overvoltage and other protective measures to ensure that the entire lamp performance and stability.

- 灯体采用优质铝合金 (6063-T5), 表面拉丝铝本色氧化处理, 耐候、耐腐蚀及耐磨、不变色, 颜色可选;
- 透光罩为高透光率/扩散型PMMA浇铸板灯罩; 强度高、耐高温及耐寒, 出光均匀, 防眩效果佳;
- 内置高亮度SMD光源, 光效可达120lm/W, 显色指数 ≥ 80 , 色温3000K、4000K、6000K可选;
- 光源寿命长达5万小时, 光衰小, 节能降耗, 极大降低维护成本;
- 产品配置高性能, 高转换率的驱动电源; 具有短路、过载、过压等保护措施, 确保整灯性能稳定;

Specifications 产品规格

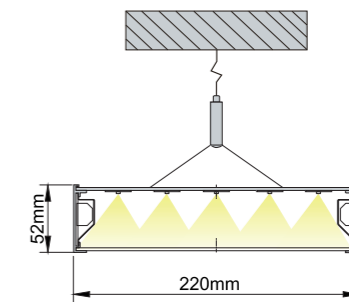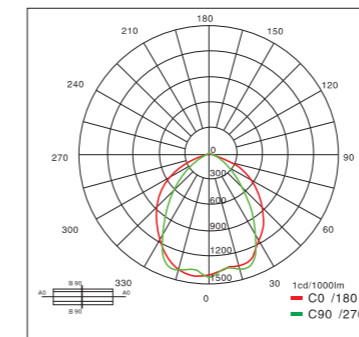

Features 产品特点

Simple line type LED lamps, so that the office environment is simple and taste; all-aluminum structure lighthouse, fully guarantee the thermal stability of lamps to ensure that the entire lamp life and color temperature consistency; direct-type SMD light source.

Too high transmittance of the proliferation of PC film shade, so that the light more uniform, soft and comfortable; maximum to meet the light output efficiency of light, the efficiency of up to 68%.

Product installation: lifting, ceiling installation; installation simple and convenient.

Product scope: high-grade office buildings, schools, hospitals, libraries, supermarkets and public buildings, etc.

简约线条型LED灯具, 让办公环境简单而有品位; 全铝合金结构灯架, 充分保证灯具的热稳定性, 确保整灯寿命及色温的一致性; 直照式的SMD光源通过高透光率扩散型PC薄膜灯罩, 让出光更均匀、柔和舒适; 最大限度满足灯具光输出效率, 效率可达68%。

产品安装方式: 吊装、吸顶安装; 安装简捷、方便;


产品适用范围: 高档写字楼、学校、医院、图书馆、超市及公共建筑空间等

ArtNo.	Power	Flux	Size(mm)	Lampshade material	Color
E261.PT40.LED	40W	3480 lm	1200*220*52	PMMA	Silver/Matte White /Matte black
E261.PT55.LED	55W	4785 lm	1500*220*52	PMMA	Silver/Matte White /Matte black



E261 吸顶灯


Lighting your life

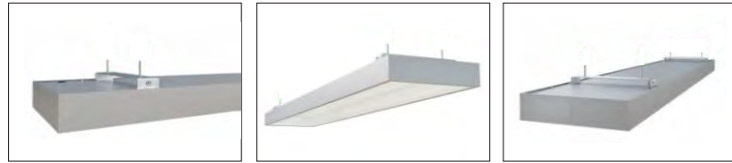

Parameters 产品参数

Type:	CEILING LAMP
Color:	Matt Black/Matt white/Silver
Light Source:	SMD LED
Diffuser:	PMMA
Reflector:	/
Color Temperature(K):	3000K/4000K/6000K
CIE:	Direct
Beam angle:	120°
CRI(Ra):	75-85
IP:	20
Fitting Efficiency:	80%
Application:	indoor

Details 产品细节

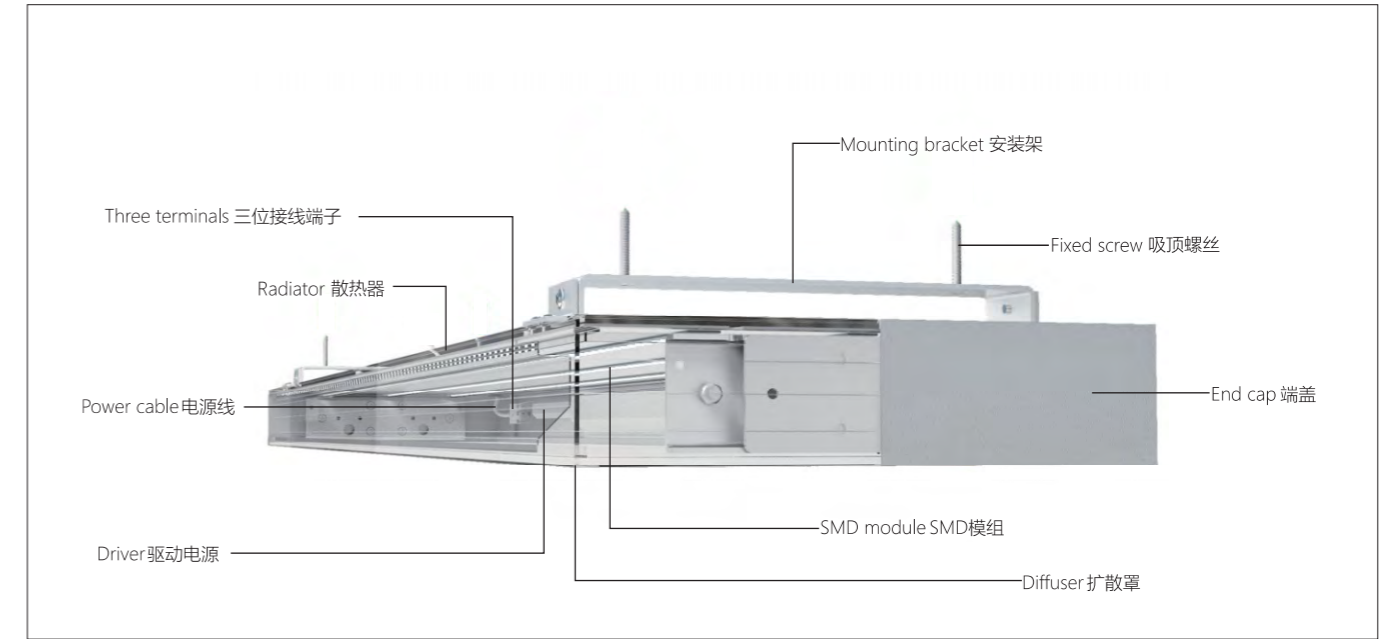

Material/Technic 材质/工艺

- Light body using high-quality aluminum alloy (6063-T5), the surface brushed aluminum color oxidation treatment, weathering, corrosion and wear, no color, color optional.
- Transparent cover for the high transmittance / diffusion type PMMA cast plate shade; high strength, high temperature and cold, light uniform, anti-glare effect is good.
- Built-in high brightness SMD light source, light efficiency up to 120lm / W, color rendering index ≥ 80 , color temperature 3000K, 4000K, 6000K optional.
- Light source life of up to 50,000 hours, light fades small, energy saving, greatly reducing maintenance costs.
- Product configuration high-performance, high conversion rate of the drive power; with short circuit, overload, overvoltage and other protective measures to ensure that the entire lamp performance and stability.

- 灯体采用优质铝合金 (6063-T5), 表面拉丝铝本色氧化处理, 耐候、耐腐蚀及耐磨、不变色, 颜色可选;
- 透光罩为高透光率/扩散型PMMA浇铸板灯罩; 强度高、耐高温及耐寒, 出光均匀, 防眩效果佳;
- 内置高亮度SMD光源, 光效可达120lm/W, 显色指数 ≥ 80 , 色温3000K、4000K、6000K可选;
- 光源寿命长达5万小时, 光衰小, 节能降耗, 极大降低维护成本;
- 产品配置高性能, 高转换率的驱动电源; 具有短路、过载、过压等保护措施, 确保整灯性能稳定;

Features 产品特点

Simple line type LED lamps, so that the office environment is simple and taste; all-aluminum structure lighthouse, fully guarantee the thermal stability of lamps to ensure that the entire lamp life and color temperature consistency; direct-type SMD light source.

Too high transmittance of the proliferation of PC film shade, so that the light more uniform, soft and comfortable; maximum to meet the light output efficiency of light, the efficiency of up to 68%.

Product installation: lifting, ceiling installation; installation simple and convenient.




Product scope: high-grade office buildings, schools, hospitals, libraries, supermarkets and public buildings, etc.

简约线条型LED灯具, 让办公环境简单而有品位; 全铝合金结构灯架, 充分保证灯具的热稳定性, 确保整灯寿命及色温的一致性; 直照式的SMD光源通过高透光率扩散型PC薄膜灯罩, 让出光更均匀、柔和舒适; 最大限度满足灯具光输出效率, 效率可达68%。

产品安装方式: 吊装、吸顶安装; 安装简捷、方便;

产品适用范围: 高档写字楼、学校、医院、图书馆、超市及公共建筑空间等

Specifications 产品规格

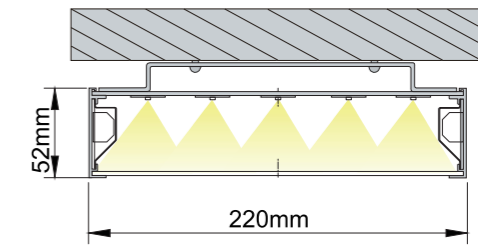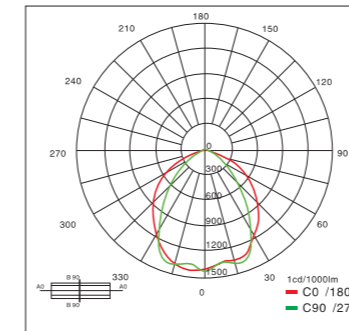


ArtNo.	Power	Flux	Size(mm)	Lampshade material	Color
E261.CT40.LED	40W	3480 lm	1200*220*52	PMMA	Silver/Matte White /Matte black
E261.CT55.LED	55W	4785 lm	1500*220*52	PMMA	Silver/Matte White /Matte black



E281 壁灯


Lighting your life

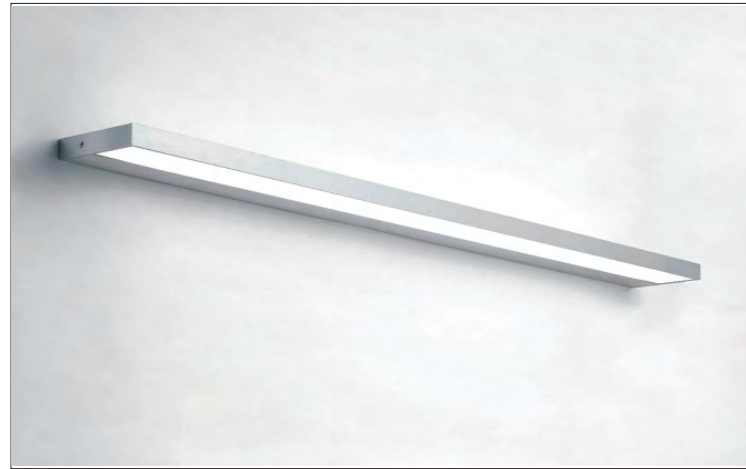

Parameters 产品参数

Type:	WALL LAMP
Color:	Brushed oxidation
Light Source:	SMD LED
Diffuser:	PMMA
Reflector:	/
Color Temperature(K):	3000K/4000K/6000K
CIE:	Direct
Beam angle:	120°
CRI(Ra):	80-85
IP:	20
Fitting Efficiency:	80%
Application:	indoor

Details 产品细节

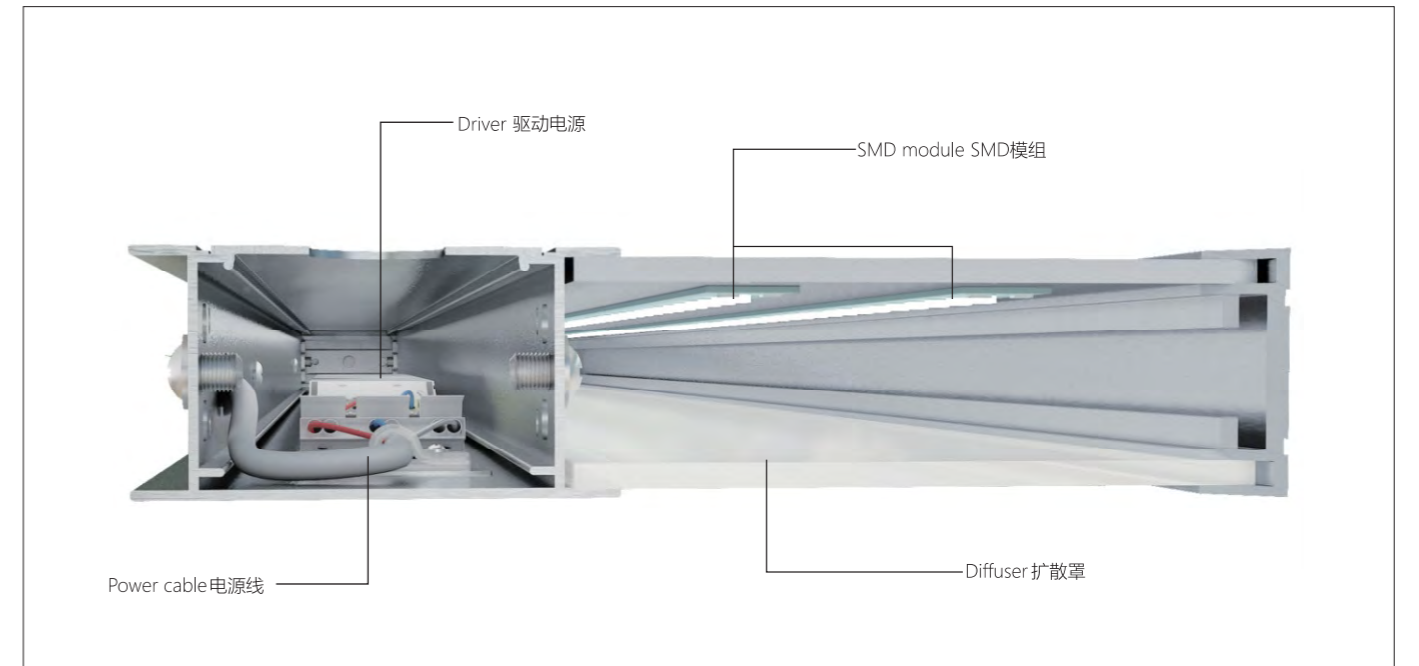

Material/Technic 材质/工艺

- Light body using high-quality aluminum alloy (6063-T5), the surface brushed aluminum color oxidation treatment, weathering, corrosion and wear, no color, color optional.
- Transparent cover for the high transmittance / diffusion type PMMA cast plate shade; high strength, high temperature and cold, light uniform, anti-glare effect is good.
- Built-in high brightness SMD light source, light efficiency up to 120lm / W, color rendering index ≥ 80 , color temperature 3000K, 4000K, 6000K optional.
- Light source life of up to 50,000 hours, light fades small, energy saving, greatly reducing maintenance costs.
- Product configuration high-performance, high conversion rate of the drive power; with short circuit, overload, overvoltage and other protective measures to ensure that the entire lamp performance and stability; another optional dimming power (1-10V, DALI dimming, SCR dimming).
- 灯体及端盖采用优质铝合金 (6063-T5), 表面静电喷涂处理, 耐候、耐蚀及附着力强、不易变色, 颜色可选;
- 透光罩为高透光率、扩散型PMMA压铸板灯罩; 强度高、耐高温及耐寒, 出光均匀、柔和;
- 内置高亮度SMD光源, 光效可达120lm/W, 显色指数 ≥ 80 , 色温3000K、4000K、6000K可选;
- 光源寿命长达5万小时, 光衰小, 节能降耗, 极大降低维护成本;
- 产品配置高性能, 高转换率的驱动电源; 具有短路、过载、过压等保护措施, 确保整灯性能稳定; 另可选配调光电源 (1-10V、DALI调光);

Features 产品特点

Modern simple LED linear lamps, with its simple lines, fine technology, so that the office environment bright, comfortable and healthy; all aluminum structure lighthouse, fully guarantee the thermal stability of lamps to ensure that the whole lamp life And the color temperature of the consistency of indirect SMD light source through the high transmittance diffusion type PMMA lampshade, and then by the control design surface secondary reflection, so that the light soft, comfortable, no shadow.

Product installation: wall lamp installation; installation more simple and convenient.

Product scope: high - grade office buildings, schools, hospitals, libraries and public buildings, such as space.



现代简约型LED线性灯具, 以其简洁的线条、精细的工艺, 让办公环境明亮、舒适、健康; 全铝合金结构灯架, 充分保证灯具的热稳定性, 确保整灯寿命及色温的一致性;

间接照式的SMD光源通过高透光率扩散型PMMA灯罩, 再经控照设计曲面二次反射, 使出光柔和、舒适、无暗影;

产品安装方式: 壁灯安装; 安装更简捷、方便;

产品适用范围: 高档写字楼、学校、医院、图书馆及公共建筑空间等;

Specifications 产品规格

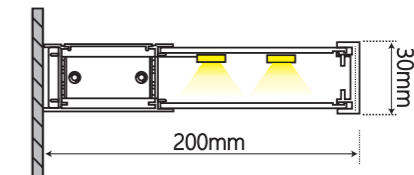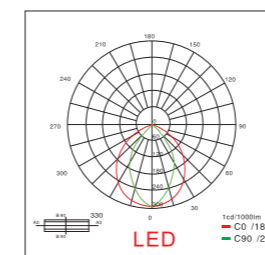

ArtNo.	Power	Flux	Size(mm)	Lampshade material	Color
E281.WT20.LED	20W	1740 lm	610*200*30	Opal PMMA	Brushed oxidation
E281.WT40.LED	40W	3480 lm	1200*200*30	Opal PMMA	Brushed oxidation



E285 壁灯


Lighting your life



Parameters 产品参数

Type:	WALL LAMP
Color:	Matt white/Silver
Light Source:	SMD LED
Diffuser:	PMMA
Reflector:	/
Color Temperature(K):	3000K/4000K/6000K
CIE:	Direct
Beam angle:	120°
CRI(Ra):	80-85
IP:	20
Fitting Efficiency:	80%
Application:	indoor

Details 产品细节

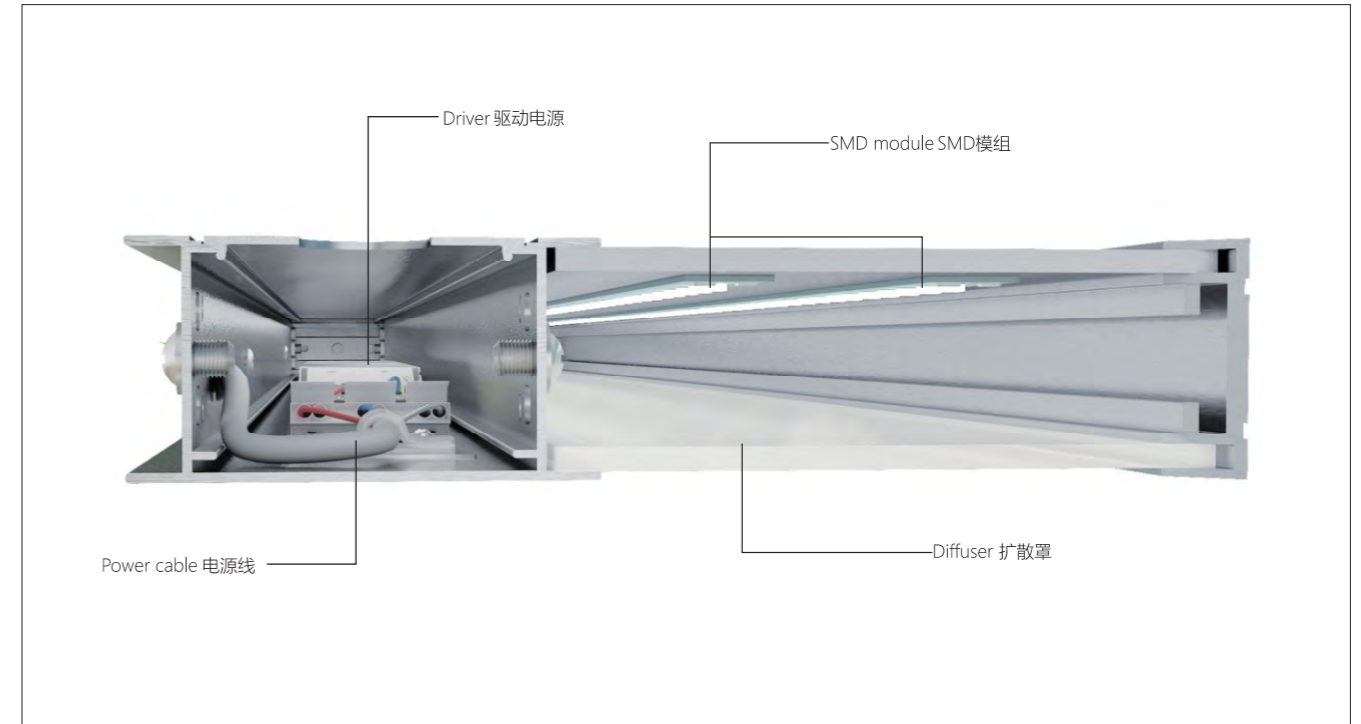

Material/Technic 材质/工艺

- Light body using high-quality aluminum alloy (6063-T5), the surface brushed aluminum color oxidation treatment, weathering, corrosion and wear, no color, color optional.
- Transparent cover for the high transmittance / diffusion type PMMA cast plate shade; high strength, high temperature and cold, light uniform, anti-glare effect is good.
- Built-in high brightness SMD light source, light efficiency up to 120lm / W, color rendering index ≥ 80 , color temperature 3000K, 4000K, 6000K optional.
- Light source life of up to 50,000 hours, light fades small, energy saving, greatly reducing maintenance costs.
- Product configuration high-performance, high conversion rate of the drive power; with short circuit, overload, overvoltage and other protective measures to ensure that the entire lamp performance and stability; another optional dimming power (1-10V, DALI dimming, SCR dimming).
- 灯体及端盖采用优质铝合金 (6063-T5), 表面静电喷涂处理, 耐候、耐蚀及附着力强、不易变色, 颜色可选;
- 透光罩为高透光率、扩散型PMMA压铸板灯罩; 强度高、耐高温及耐寒, 出光均匀、柔和;
- 内置高亮度SMD光源, 光效可达120lm/W, 显色指数 ≥ 80 , 色温3000K、4000K、6000K可选;
- 光源寿命长达5万小时, 光衰小, 节能降耗, 极大降低维护成本;
- 产品配置高性能, 高转换率的驱动电源; 具有短路、过载、过压等保护措施, 确保整灯性能稳定; 另可选配调光电源 (1-10V、DALI调光);

Features 产品特点

Modern simple LED linear lamps, with its simple lines, fine technology, so that the office environment bright, comfortable and healthy; all aluminum structure lighthouse, fully guarantee the thermal stability of lamps to ensure that the whole lamp life And the color temperature of the consistency of indirect SMD light source through the high transmittance diffusion type PMMA lampshade, and then by the control design surface secondary reflection, so that the light soft, comfortable, no shadow.

Product installation: wall lamp installation; installation more simple and convenient.


Product scope: high - grade office buildings, schools, hospitals, libraries and public buildings, such as space.

现代简约型LED线性灯具, 以其简洁的线条、精细的工艺, 让办公环境明亮、舒适、健康; 全铝合金结构灯架, 充分保证灯具的热稳定性, 确保整灯寿命及色温的一致性; 间接照式的SMD光源通过高透光率扩散型PMMA灯罩, 再经控制照设计曲面二次反射, 使出光柔和、舒适、无暗影;

产品安装方式: 壁灯安装; 安装更简捷、方便;

产品适用范围: 高档写字楼、学校、医院、图书馆及公共建筑空间等;

Specifications 产品规格

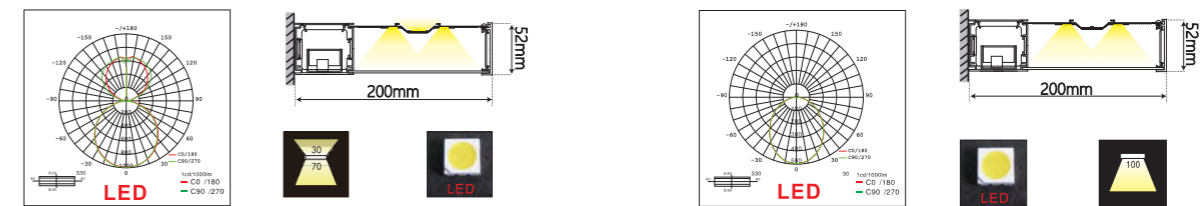

ArtNo.	Power	Flux	Size(mm)	Lampshade material	Color
E285.WT30.LED(上下照)	30W	1740lm+870lm	610*200*52	Opal PMMA	Matt white/Silver
E285.WT60.LED(上下照)	60W	3480lm+1740lm	1200*200*52	Opal PMMA	Matt white/Silver
E285.WT20.LED(下照)	20W	1740 lm	610*200*52	Opal PMMA	Matt white/Silver
E285.WT40.LED(下照)	40W	3480 lm	1200*200*52	Opal PMMA	Matt white/Silver

