




# **GO! Twirling Star Quilt**

finished size 70" x 77"

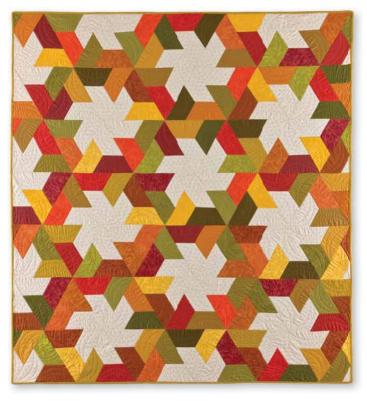

Fabric provided by Andover Fabrics.

## GO!® DIES USED

- GO! Half Hexagon-4½" Sides (4¼" Finished) (55437)
- GO! Strip Cutter-21/2" (2" Finished) (55017 or 55014)

# FABRIC REQUIREMENTS

- Fabric 1 (Variety of Prints)—6 yards total
- Fabric 2—3½ yards
- Binding—¾ yard
- Batting-80" x 87"
- Backing-6 yards

#### **CUTTING DIRECTIONS**

#### Fabric 1:

• Cut 21—9½" x width of fabric (WOF) strips Sub cut into 168—41/2" half hexagons

#### Fabric 2:

• Cut 11—9½" WOF strips Sub cut into 84—4½" half hexagons

### **Binding Fabric:**

• Cut 9 2½" x WOF strips

## **SEWING DIRECTIONS**

- Lay out two, Fabric #1 Half Hexagons and one, Fabric #2 Half Hexagon as shown.
- 2. Mark ½" from the corner (wrong side) on each hexagon where the three come together in the Unit center.
- 3. Sew two of the half hexagons together starting from the outside edge and sewing towards the 1/4" mark. Stop when you get to your 1/4" mark, backstitch.
- Sew the third Half Hexagon onto the two sewed in the previous step. Starting on the outside edge, sew to the 1/4" mark, stop, pivot, lining up fabric edges of the unsewn seam and sew to outside edge.
- 5. Repeat previous four steps to make a total of 84, Half Hexagon Triangles.
- Lay out Half Hexagon Triangles into 7 rows of 12 Triangles, as shown in the diagram, paying attention to placement.



- Sew blocks together into a row. Press seams in the same direction.
- Make a total of seven rows.
- 9. Sew rows together, flipping rows back and forth as needed.












2 of 2

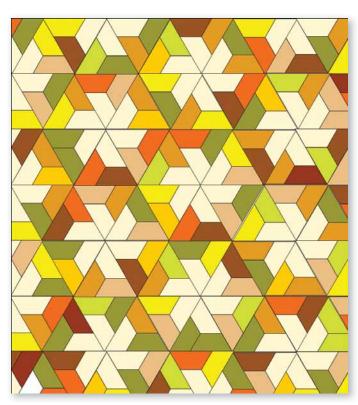

# **QUILTING AND FINISHING**

- Layer quilt top with batting and backing.
- Pin or baste layers together. 2.
- Model was custom machine quilted.
- Add binding, mitering the corners.