

Technical Specifications

Safety

ISO 13485:2003 approved
CE marking according to MDD93/42/EEC
Degree of protection against harmful ingress of water: IP X 1

Dimension and Weight

Dimension: 9.8in x 8.66in x 5.24in
(249mm x 220mm x 133mm)
Net Weight: 6.3lbs (2.9kg)
Gross Weight: 12lbs (5.5kg)

Operation Environment

Power: AC100-250V, 50/60Hz
Temperature: 32°F-104°F (5°C-40°C)
Humidity: 15%-93%

Patient Range

Patients: Neonate, Pediatric, or Adult

Performance Specifications

Display: 8.4inch TFT Color Touch Screen
Resolution: 800 X 600
Trace: Maximum 8 waveforms display
Indicator: Power, Battery, Alarm lights and QRS, Operating Key, Alarm sounds
Interface: Parameter cable interface
AC power input socket
Network interface
USB port
Battery: Lithium polymer plug & play rechargeable battery (4 hours of continuous working time)
Trend Time: 120 hours
Alarm: Audible and visual alarms with user-adjustable high and low limits
Networking: Connects to central monitoring system (LAN or Wireless)
Recorder (Optional): Built-in thermal array, 2 channels
Record Mode: Manual, Upon alarm, Continual, or Time-defined
Record Speed: 25mm/s or 50mm/s
Paper Width: 1.97in (50mm)

ECG

Lead Selection: 3-lead, 5-lead, 12-lead
Gain Selection: X1/4, X1/2, X1, X2, X4, Auto
Sweep Speed: 6.25mm/s, 12.5mm/s, 25mm/s, or 50mm/s

Filter Bandwidth: Mon: 0.5-40Hz
DIA: 0.05-130Hz
OPE: 1-20Hz

HR Range: Adu: 15-300bpm
Ped/Neo: 15-350bpm

HR Resolution: 1bpm
HR Accuracy: ±1% or ±2bpm
HR Alarming Time: <12s

ST Segment
Detection Alarm: -0.20mV-0.20mV (default)
Arrhythmia Analysis: Yes
Alarm: User-adjustable high, mid, low limit ranges

Anti-Electrical Interference

Line frequency, electro-surgery and defibrillation protection, pacemaker detection

Respiration

Measurement Method: Thoracic impedance

RR Range: Adu/Ped: 0-120rpm
Neo: 0-150rpm
RR Resolution: 1rpm
RRate Accuracy: ±1rpm
Apnea Alarm: Yes, 10-40s
Alarm: User-adjustable high and low limits

Lutech SpO₂

Saturation Range: 1-100%
Saturation Resolution: 1%
Saturation Accuracy: ±2% (70-100%, Adu/Ped)
±3% (70-100%, Neo)
Unspecified (0-69%)
PR Range: 20-250bpm
PR Accuracy: ±3bpm (non-motion)
±5bpm (motion)
Alarm: User-adjustable high, mid, low limit ranges

Nellcor SpO₂ (Optional)

Saturation Accuracy: ±3% (70-100%)
Unspecified (0-69%)
PR Range: 20-250bpm
PR Accuracy: ±3bpm

Masimo SpO₂ (Optional)

Saturation Accuracy: ±2% (70-100%, Adu/Ped)
±3% (70-100%, Neo)
Unspecified (0-69%)
PR Range: 25-240bpm
PR Accuracy: ±3bpm (non-motion)
±5bpm (motion)

NIBP

Measurement Method: Automatic oscillometric
Measurement Modes: Manual, Automatic
Auto Mode Times: Adjustable 1-480min
Pressure Types: Systolic, Diastolic, Mean
Pressure Units: mmHg/kPa selectable
Pressure Range:

Range for Systolic Pressure:
Adu: 40-270mmHg
Ped: 40-200mmHg
Neo: 40-135mmHg
Range for Diastolic Pressure:
Adu: 10-215mmHg
Ped: 10-150mmHg
Neo: 10-100mmHg
Range for Mean Pressure:
Adu: 20-235mmHg
Ped: 20-165mmHg
Neo: 20-110mmHg

Alarm Type: Systolic, Diastolic, Mean
Pressure Accuracy: ±5mmHg
PR Range: 40-240bpm
Over-Pressure Protection:
Adu: 300mmHg
Ped: 240mmHg
Neo: 150mmHg

Temperature

Temp Units: °C/°F selectable
Temp Range: 32-122°F (0-50°C)
Temp Resolution: 0.1°F (0.1°C)
Temp Accuracy: ±0.3°F (±0.1°C)

IBP (Optional)

Measured Pressures: P1, P2, ART, PA, CVP, LAP, RAP, ICP
Pressure Units: mmHg/kPa selectable
Pressure Range: 0-300mmHg
Pressure Accuracy: ±2% (100-300mmHg)
±4% (0-100mmHg)

CO₂ (Optional)

Measurement Method: Non-dispersive infrared (NDIR)

Respironics CO₂

Mainstream (Capnostat 5):
CO₂ Range: 0-150mmHg (at 760mmHg)
0-19.7% (at 760mmHg)
CO₂ Accuracy: ±2mmHg (0-40mmHg)
±5% of reading (41-70mmHg)
±8% of reading (71-100mmHg)
±10% of reading (101-150mmHg)
RR Range: 0-150rpm
Sidestream (LoFlo):
CO₂ Range: 0-150mmHg (at 760mmHg)
0-19.7% (at 760mmHg)
CO₂ Accuracy: ±2mmHg (0-40mmHg)
±3bpm (non-motion)
±5% of reading (41-70mmHg)
±8% of reading (71-100mmHg)
±10% of reading (101-150mmHg)
RR Range: 2-150rpm

PhaseIn CO₂ Mainstream (IRMA) or Sidestream (ISA)

CO₂ Range: 0-15vol%
CO₂ Accuracy: ±2mmHg (0-40mmHg)
RR Range: 0-150rpm

PhaseIn Anaesthetic Gas (Optional)

Measurement Method: Non-dispersive infrared (NDIR)
Mainstream (IRMA AX+):

AG Range: CO₂: 0-10vol%
N₂O: 0-100vol%
HAL: 0-8vol%
ISO: 0-8vol%
ENF: 0-8vol%
SEV: 0-10vol%
DES: 0-22vol%
AG Accuracy: CO₂: ±0.3vol%+2% of reading
N₂O: ±0.2vol%+2% of reading
HAL: ±0.15vol%+5% of reading
ISO: ±0.15vol%+5% of reading
ENF: ±0.15vol%+5% of reading
SEV: ±0.15vol%+5% of reading
DES: ±0.15vol%+5% of reading
RR Range: 0-150rpm
Sidestream (ISA AX+/OR+):
AG Range: CO₂: 0-10vol%
N₂O: 0-100vol%
HAL: 0-8vol%
ISO: 0-8vol%
ENF: 0-8vol%
SEV: 0-10vol%
DES: 0-22vol%

AG Accuracy: O₂: 0-100% (for ISA OR+ only)
CO₂: ±0.2vol%+2% of reading
N₂O: ±0.2vol%+2% of reading
HAL: ±0.15vol%+5% of reading
ISO: ±0.15vol%+5% of reading
ENF: ±0.15vol%+5% of reading
SEV: ±0.15vol%+5% of reading
DES: ±0.15vol%+5% of reading
O₂: ±1vol%+2% of reading (for ISA OR+ only)
RR Range: 0-150rpm

Standard Configuration

ECG/HR, Lutech SpO₂, NIBP, Resp., Temp., and Pulse Rate.

Optional Configuration

Nellcor SpO₂, Masimo SpO₂, IBP, Respironics or PhaseIn CO₂ (Mainstream or Sidestream), PhaseIn Anaesthetic Gas (Mainstream or Sidestream), Recorder, Central Monitoring System (LAN or Wireless, HL-7), Special parameters for neonate and pediatric patients.



Datalys™ 750

Mobile...Versatile...

Multi-Parameter Patient Monitor.

LUTECH INDUSTRIES, INC.

105 Remington Blvd., Suite C, Ronkonkoma, NY 11779 U.S.A.

Ph: 631-676-7432

Fx: 631-619-0723

Website: www.lutechmedical.com

E-mail: info@lutechmedical.com



User-friendly Interface

Multi interface support, including standard display, large-font display, trend coexist display, bed-to-bed view display, and OxyCRG dynamic view display, color of waveform and parameter is changeable.

Super Reliability

The design and production of product strictly comply with the CE standards. The safety, stability and durability of the product are well guaranteed. At least 10 days of aging inspection to maintain product's reliability.

Rich Clinical Information

Excellent software processing techniques, including arrhythmia analysis, pacemaker analysis, OxyCRG, S-T segment analysis, drug close calculation etc.

Power-off Protection

24 hours of full data, alarm recall and trend graphic saving in case of power failure.

Alarm System

3-levels if audible/visual alarm, breath asphyxia alarm and alarm recall function. It can transfer the change of illness accurately and timely

Patient Information System

Powerful information system, including patient information input, multi-language selection, and 96 hours trend graphic storage and review. It can meet the requirements of clinic analysis and data management.

Network System

Bi-directional communications with central monitoring system, both wired and wireless solution support.



- Lightweight and compact, 6.3 lbs
- Li-ion battery provides 4 hours of continuous working time



Features


- 8.4" TFT Color Touch Screen
- Specially designed for easy transport in ambulances
- Anti-Shaking, stabilized working system
- Car Inverter support
- Built-in Lithium battery allows for up to 4 hours of continuous working time
- ST segment analysis and arrhythmia analysis
- 120 hours of graphical trend and data records
- Multi-optional functions support, can be used in ICU and OR



- Big font Display
- OxyCRG: Display the interactive relationship between heart rate, respiration and oxygen on the same screen, convenient for observing the clinical changes of neonates.
- ST analysis
- Arr. analysis
- Drug-dose calculations.etc



- USB socket: extend memory capacity, convenient for computer data saving and file recording
- Net Port: Maximum 128 Units bedside monitors to connect the central monitoring system, wired or wireless network supportable

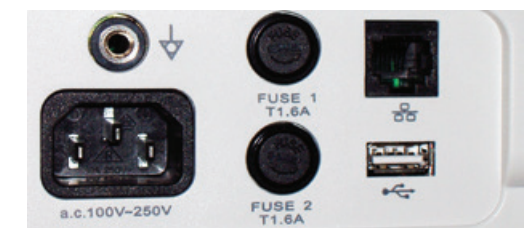

Various Mounting Solutions

