

### 色的表现能力

**CRI:**  
显色指数

**Ra:**  
一般显色指数

**Rf:**  
逼真度

**Rg:**

### COLOR PERFORMANCE

**Cri:**  
color rendering index


**Ra:**  
general color rendering index

**Rf:**  
fidelity

**Rg:**  
saturation

# 肌肤质感 无主灯缔造者

Skin feel  
Smart lighting  
Creator



### CRI :

显色指数，R1-R15的平均值

显色指数大于90的灯具可以使物体看起来更加接近自然色，然而，现在很少的半导体照明灯具可以达到这种效果。超高显指可以让外在的颜色和材质的特点更突出，因而更加体现出本身的颜色特点。特别适用于精品店的展示和重要的社交活动场所等地方。

#### Color rendering index, average of r1-r15

Lamps with a color rendering index greater than 90 can make the object look closer to the natural color, however, now Few semiconductor lighting fixtures can achieve this effect.

Super high display can make the external color and material characteristics more prominent, and thus more reflect their own color characteristics.

It is especially suitable for the display of boutiques, important social activities and other places.

### Ra :


一般显色指数，R1-R8的平均值

显指的高低直接影响到人的用眼健康，**天自照明呵护你的眼睛。**

#### General color rendering index, average value of r1-r8

The height of manifesting fingers directly affects people's eye health, and the sky lights your eyes.

- More Colorful 颜色更加艳丽
- Whiter White 更白的白色
- Prominent Value 凸显价值

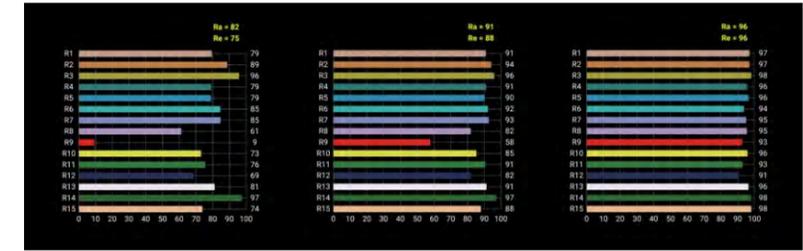

普通光色 Ordinary light color      3000K健康光色 3000K healthy light color      2700K健康光色 2700K healthy light color


### R9 :

指的是饱和红色，对应红色波长为 650nm

当 R9 < 0 时，说明光源的红光成份不足，红色严重失真，光源无法显示红色。数值越大对红色的还原性就越高，简单来说灯具 R9 越高，在水果、鲜花等场合照射出来的效果就更好，更加鲜艳。尤其是作为商业照明主力的 LED 产品的 R9 值也就更不能为负数了。

#### It refers to saturated red, corresponding to the red wavelength of 650nm

When R9 < 0, the red component of the light source is insufficient, the red is seriously distorted, and the light source cannot display red. The higher the value is, the higher the reducibility of red is. In short, the higher the R9 of the lamp is, the better the effect of combined shooting in fruit, flowers and other fields is, and the more vivid it is. Especially as the main commercial lighting LED products R9 value can not be negative.


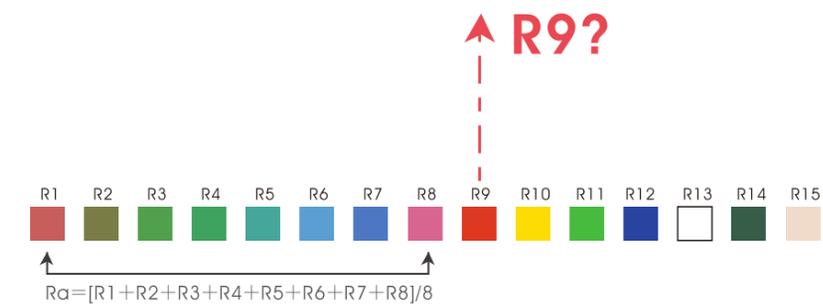


### R9 :

在设计高显色 LED 时，不能仅仅考虑一般显色指数 Ra，更要关注对饱和红色的特殊显色指数 R9，以及对红、黄、绿、蓝等 4 种饱和色的特殊显色指数的平均值 R ( 9-12 )。

因为研究发现一般显色指数 Ra 对 LED 的显色性评价存在与视觉评价不一致的问题。

一般显色指数 Ra 较低的 LED 白光在视觉上的显色性可能并不一定较差，反之，Ra 较高的 LED 白光在视觉上显色性可能并不一定较好，只有 Ra 和 R9 同时具有较高值时才能保证 LED 白光的高显色性。

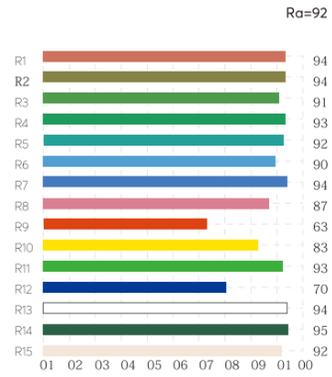

### R9 :

When designing high color rendering led, we should not only consider the general color rendering index RA, but also pay attention to the special color rendering index R9 of saturated red and the average value R (9-12) of the special color rendering index of red, yellow, green, blue and other four saturated colors.

Because it is found that the general color rendering index RA is inconsistent with the visual evaluation of LED color rendering.

Generally, the color rendering of LED white light with a lower color rendering index RA may not be necessarily poor in vision. On the contrary, the color rendering of LED white light with a higher RA may not be necessarily good in vision. Only when RA and R9 have a higher value at the same time can the high color rendering of LED white light be guaranteed.

### Rf 逼真度

用于表征各标准色在测试光源照射下与参考光源相比的相似程度 ( 100 代表完全相同， 0 代表差别很大 )

### Rf FIDELITY

It is used to characterize the similarity of each standard color compared with the reference light source under the illumination of the test light source (100 represents the endIt's all the same. 0 means a big difference.)



### Rg 饱和度

代表各标准色在测试光源下与参考光源相比饱和度的改变 ( 100 代表饱和度和相同，大于 100 表示光源可以提高颜色的饱和度，低于 100 则代表颜色饱和度在测试光源下较低 )

### Rg saturation

Represents the change of saturation of each standard color compared with the reference light source under the test light source (100 represents the same saturation, more than 100 represents that the light source can improve the color saturation, and less than 100 represents that the color saturation is lower under the test light source)

### 亮彩：

$R_a > 90, R_f > 86, 105 < R_g < 110$

色彩饱和度高于参考光源，提升物体色彩的鲜艳程度；

### Bright color:

The color saturation is higher than the reference light source, which improves the brightness of the object color;

### 真彩：

$R_a > 95, R_f > 92, 100 < R_g < 105$

色彩饱和度与标准光源相近，可无缝替代传统光源。

### True color:

The color saturation is similar to the standard light source, which can replace the traditional light source seamlessly.



- $R_a$ ：一般显色指数；  $R_a$ ：General color rendering index;
- $R_f$ ：色彩逼真度；  $R_f$ ：Color fidelity;
- $R_g$ ：色彩饱和度；  $R_g$ ：Color saturation;

# Subdividing PROFESSIONAL Light and COLOR

Help Customers To Design  
The Solutions With Different Colors  
By Specific Applications

帮助客户根据  
特定场景设计不同颜色  
的解决方案

细分  
专业光色

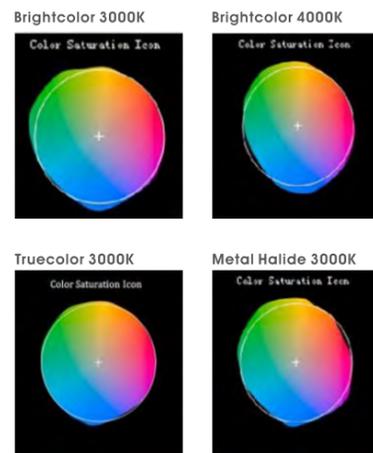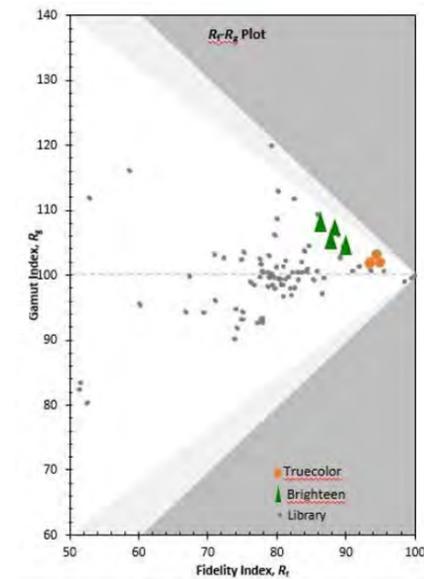



适用于：  
古建筑、酒店、别墅等外景

特点：  
低色温灯光超强穿透力，增加视觉可视距离，提升建筑可视性，塑造典雅的气质

1700K / 氛围系列



适用于：  
超市店内 / 熟食区

特点：  
突出食材本色，更显食物色泽，提高消费者购物欲望

1800K / 食品系列



适用于：  
酒店、餐厅 / 宗教建筑

特点：  
装点室内氛围，渲染环境气氛，营造温馨的效果

2000K / 氛围系列



适用于：  
酒店客房、咖啡厅、餐厅、红木家具

特点：  
自然流畅、戏剧性灯光效，创造更加舒适、温馨的环境提升红木纹理

2500K / 暖彩系列



适用于：  
酒店、餐厅、别墅、会所

特点：  
创造舒适、放松的环境

2700K / 标准系列



适用于：  
酒店、餐厅、别墅、会所实木家具

特点：  
更加温暖、更加温馨、更加舒适的环境光；提升实木纹理和价值环境

2800K / 暖彩系列



适用于：  
服装店铺、女士服装

特点：  
高饱和度和色彩，更显色泽诱惑感，偏重而又夹杂着欢快的灯光，给人探究、端庄的感觉

3000K (B) / 炫彩系列



适用于：  
服装、酒店、餐饮、会所

特点：  
高显色标准光色，综合应用广泛，真是还原物体本色，营造高品质、舒适光环境

3000K (A) / 炫彩系列



适用于：  
鲜肉

特点：  
既突出新鲜肉品的鲜美，又不改变环境颜色，给人真实可靠的品质，提高购买欲

3200K (M) / 炫彩系列



适用于：  
服装店铺、各类服装

特点：  
高饱和度和色彩，更显服装色泽，突出服装的材质，塑造品牌

3400K (B) / 炫彩系列



适用于：  
服装店铺、商品

特点：  
活跃、清新脱俗的灯光，创新光色，给人全新的视觉体验

3500K (A) / 标准系列



适用于：  
瓷砖卫浴、白色家电、婚纱店铺

特点：  
高饱和度和色彩，欢快的灯光，更加突出白色的纯洁大方

4000K (B) / 炫彩系列



适用于：  
运动休闲服饰

特点：  
高显色、欢乐灯光，为空间添加活跃元素，营造运动休闲的氛围

4000K (A) / 标准系列



适用于：  
珠宝店铺、床上用品店

特点：  
白中带蓝的灯光，更显梦幻，突出珠宝的璀璨闪耀

7000K (A) / 标准系列



适用于：  
水晶类珠宝、钻石

特点：  
湛蓝灯光极低的穿透性，形成珠宝截面全反射光，散发出闪耀的梦幻蓝，更添诱惑色彩

9500K (D) / 湛蓝系列

## 如何避免污染 How to Avoid Pollution



- 正确的光
- 正确的灯具
- 正确的照射方式

Correct light

Correct luminaire

Correct illumination


CORRECT LIGHT  
正确的光

SDCM色容差和颜色差异：


| SDCM:  | CCT 3000K  |
|--------|------------|
| 1X:    | 大多数人察觉不到色差 |
| 2-3X:  | 一些人开始察觉到色差 |
| 4X:    | 大多数人感觉到色差  |
| 4X 以上: | 会察觉到色差     |

SDCM color tolerance and color difference:

| SDCM:  | CCT 3000K  |
|--------|--|
| 1X:    | Most people don't notice the color difference            |
| 2-3X:  | Some people are beginning to notice the color difference |
| 4X:    | Most people feel color difference                        |
| 4X 以上: | Color difference will be detected                        |



1-7 SDCM ellipses




COLOR COORDINATES  
色坐标

光的质量决定了生活的质量


光线色温越低，蓝光越少，促进褪黑激素分泌，因此在夜间改用低色温照明可以减少光线对生理时钟的扰乱，促进睡眠，

The quality of light determines the quality of life


The lower the color temperature of the light, the less the blue light, which promotes the blackening Prime secretion, so switch to low color temperature lighting at night, Can reduce the disturbance of light on the physiological clock, and promote.Go to sleep and increase sleep quality.

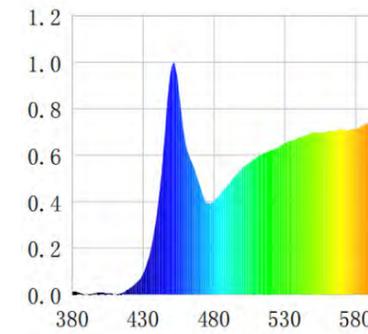

● 普通光色 (蓝光高)

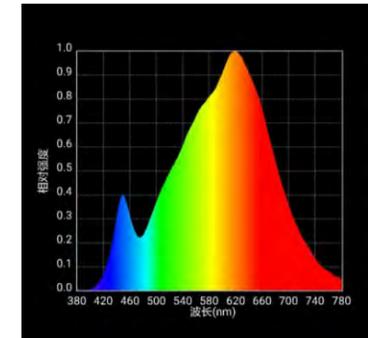


● 3000K健康光色 (蓝光低)

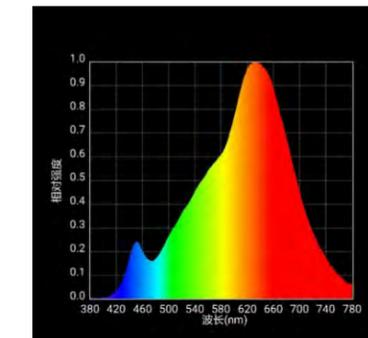

● 2700K健康光色 (蓝光非常低)


### CORRECT LUMINAIRE 正确的灯具



遮光角度 61°




TA-A07509Z-BW



遮光角度 68°




TG-M05507Z2-B



遮光角度 66°



TG-M07509Z2-B



遮光角度 67°



TG-D07509L-B




### 超舒适光学组件

新款的超舒适光学组件达到UGR < 10和亮度 < 1500cd/m2, 完全消除眩光

### Ultra-comfortable optical components

The new ultra-comfort optical components reach UGR < 10, And brightness < 1500cd/m2, completely eliminate glare

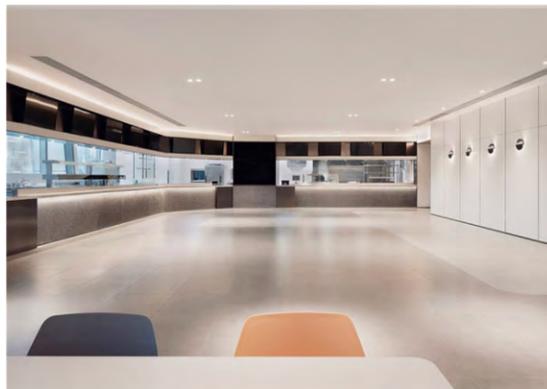

### UGR 统一眩光值

UGR是评论室内照明不舒服眩光的量化指标, 它度量处于视觉环境中的照明装置发出的光对于人眼引起不舒服感主观反应的心理量。

共七档: 28、25、22、19、16、13、10

### UGR unified glare value

UGR is a quantitative indicator for commenting on indoor lighting discomfort glare, which measures lighting devices in a visual environment. The amount of light emitted is a psychological amount of subjective response to discomfort in the human eye.


A total of seven files: 28, 25, 22, 19, 16, 13, 10

CORRECT ILLUMINATION  
正确的照射方式


下照式 上照式 洗墙式  
擦光式 泛光式 内透式

Downward illumination Illumination type Wall washing  
Buffing type Flood type Internally permeable


CEILING LIGHT TROUGH  
天花灯槽




HIDDEN CEILING LIGHT  
隐藏天花筒灯




CEILING RAIL SPOTLIGHT  
天花轨道射灯




SMALLPOX RAIL  
天花路轨



FOOT LINE LIGHT  
脚线灯




HIDDEN CEILING WALL WASHER  
暗藏天花洗墙灯




CORRECT INSTALLATION NODE  
正确的安装节点


CONTINUOUS LIGHT STRIP AT THE BOTTOM OF THE CABINET  
柜底连续式灯带




Wardrobe light  
衣柜灯




STEP LIGHT  
梯级灯



Comb-end continuous lamp strip  
and comb-back continuous headlight strip  
梳化底连续式灯带  
及梳化背连续式上照灯带



FOOT LINE LIGHT  
脚线灯



### 不同光束角的光斑 - 精准控光

为了让场景、物体的搭配更显立体以及层次感，我们应在整体空间光的使用布局上配上各自合适使用的灯具，精准控制光的角度；

精准控光实现的方式有三种：精准的控光、精准的光束、精准的比例。

#### Spots With Different Beam Angles - Precise Light Control

In order to make the collocation of scenes and objects more three-dimensional and hierarchical, we should match appropriate lamps on the overall spatial light use layout, and accurately control the light angle;


There are three ways to achieve precise light control: precise light control, precise light beam and precise proportion.




光照射在物体上的角度 (注：本图为示意图，最终解释权归天自照明所有)

#### The angle at which light shines on an object

(Note: This figure is a schematic diagram, and the ultimate right of interpretation rests with the illumination).

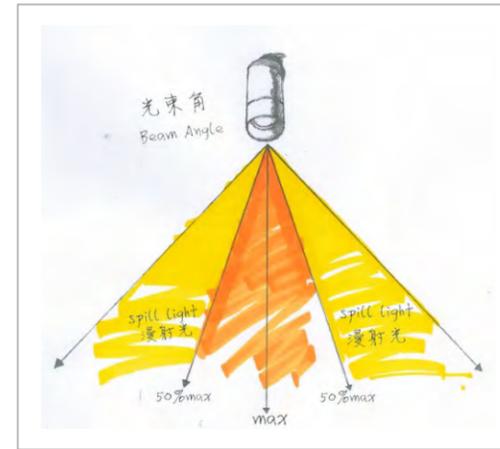

光束角 Diffuse light

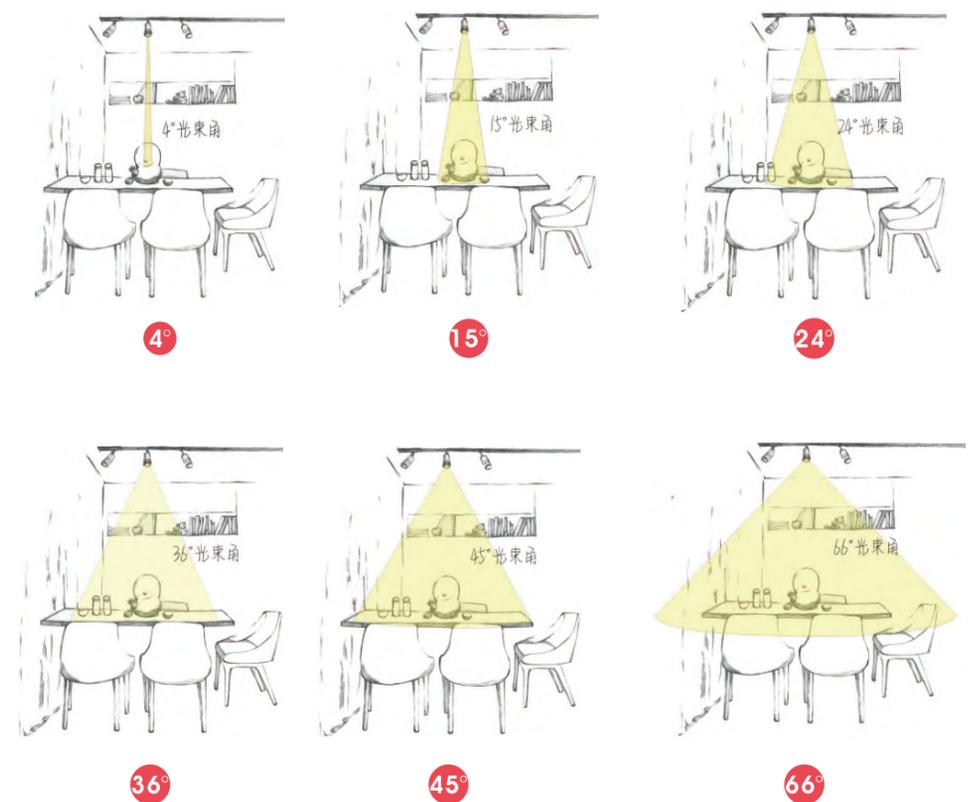

55M天越 / Series

P / 019-038

TZ-TY05502-Y048



TZ-TY05502-W051



TZ-TY05502-Y049



TZ-TY05502-Y050



TZ-TY05502-W052



TZ-TY05502-W053



Contents

75M天越 / Series

P / 039-054

TZ-TY07502-Y054



TZ-TY07502-W057



TZ-TY07502-Y055



TZ-TY07502-Y056



TZ-TY07502-W058



TZ-TY07502-W059



**偏光洗墙 / Series P / 055-064**

TZ-DP05501-Y063



TZ-DP07501-Y064



TZ-DP09501-Y065



**DETA / Series P / 065-074**

TZ-DT07502-Y060



TZ-DT07502-Y061



**IP44 / Series P / 075-080**

TZ-FS05501-Y068



TZ-FS07501-Y069



**北斗 / Series P / 081-094**

TZ-BD00101-Y083



TZ-BD00201-Y08



TZ-BD00301-Y085



TZ-BD00501-Y086



TZ-BD00701-Y087



TZ-BD01001-Y088



**筒灯云 / Series P / 095-100**

TA-SZ07501-Y053



TA-SZ09501-Y054



TA-SZ12001-Y055



**低压灯带 / Series P / 101-108**

UN-DC24-2835  
-120-4.8-W8+3M胶



UN-DC24-2835  
-120-9.6-W8+3M胶



UN-DC24-2835  
-120-14.4-W8+3M胶



明见 / Series P/109-138



思见 / Series P/139-172



阿卡 / Series P/173-188




轻盈 / Series P/189-200



线条灯 / Series

P / 201-208

UG-LL1001



UG-LL1003



UG-LL1006



UG-LL1004



磁吸灯 / Series

P / 209-224

R20/5 无边嵌入式



TG-ST-B



SM明装/吊装



S20明装/吊装



六种模块 / Series

P / 225-250

泛光模块



射灯模块



格栅模块



吊灯模块






可调式格栅模块



装饰吊灯模块



CORRECT LUMINAIRE  
正确的灯具

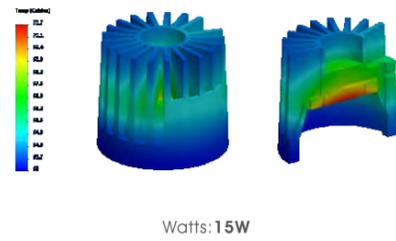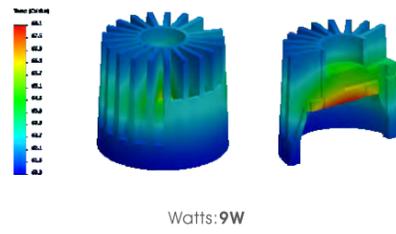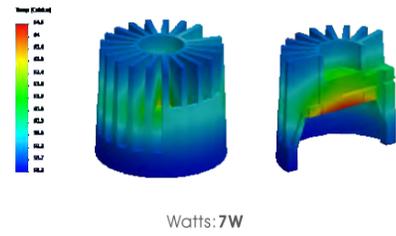

散热器

我们就可能发生的最坏情况进行了测试。我们利用热成像和流体动力学知识，综合热传导、热辐射、热对流的最佳状态，为产品制定了最好的几何结构，经典太阳花设计，从而维持LED最佳运行温度。

HEAT SINK

We tested the worst case possible. We use thermal imaging and fluid dynamics knowledge, The best state of heat conduction, heat radiation and heat convection, the best geometry for the product, Classic sunflower design to maintain optimal LED operating temperature.



55M / Series  
75M

虹吸原理，瞬间散热  
经典太阳花设计，散热面积大  
Siphon principle, instant cooling  
Classic sunflower design with large heat dissipation area

进口光学定制，精准控光，柔和舒适  
Imported Optical Customization, Precise Light Control, Soft and Comfortable

Black Light Technology / Ø55  
01 - 55M / 黑光技术

TZ-TY05502-Y048 TZ-TY05502-W051



TZ-TY05502-Y048/ TZ-TY05502-W051



TZ-TY05502-Y049/ TZ-TY05502-W052



TZ-TY05502-Y050/ TZ-TY05502-W053



Black Light Technology / Ø75  
02 - 75M / 黑光技术

TZ-TY07502-Y054 TZ-TY07502-W057



TZ-TY07502-Y054/ TZ-TY07502-W057



TZ-TY07502-Y055 / TZ-TY07502-W058



TZ-TY07502-Y056/ TZ-TY07502-W059



1 强大的散热系统，虹吸原理瞬间对流，温升低，长寿命。

Powerful cooling system, siphon principle, instantaneous convection, low temperature rise, long life



2 进口芯片，Ra > 97,博物馆级别光效。

Imported chip Ra > 97, museum level light effect



3 台湾光学结构，纳米真空镀膜技术，高反射、折射率精准控光。

Taiwan optical structure, nano vacuum coating technology, high reflection, Refractive index, precise light control



4 多重防眩光处理, 30°灵活偏光调节结构，出光无杂斑。

Multiple anti-glare treatment, 30-degree flexible polarization adjustment structure, no speckles.



5 窄边框、无边框面环；小圆、椭圆、黑光等替换自如。

Narrow border, no border ring; small circle, ellipse, black light, etc.



6 自主开模仿眩罩,主推黑光技术。

The self-opening anti-glare cover is mainly





强大的散热系统，虹吸原理，瞬间对流；进口芯片加持，Ra > 97，台湾光学结构，纳米真空镀膜技术，高反射、折射率精准控光，博物馆级别光效；拥有多重防眩光处理，30°灵活偏光调节结构，出光无杂斑；自主开模防眩罩，主推黑光技术，窄边框、无边框面环可选，更有小圆、椭圆、黑光等替换自如。

Powerful heat dissipation system, siphon principle, instantaneous convection; imported chip processing, RA > 97, Taiwan optical structure, nano vacuum coating technology, high reflection, refractive index precise light control, broad Museum level light effect; multiple anti glare processing, 30° flexible polarizing adjustment structure, out of light without speckles; self opening anti glare cover, mainly pushing black light technology, narrow frame, frameless face ring Optional, more small circle, ellipse, black light and so on replace freely.

55M / Series

Black Light Technology

黑光技术

见光不见灯

See no light

# 55M / Series

SOLVE LIGHT POLLUTION 解 | 决 | 光 | 污 | 染

## 55天越系列

小圆、椭圆、防眩罩光源模组任意换，安装售后无后顾之忧；  
0~30°灵活偏光调节结构，下照洗墙完美结合；  
UGR < 10，无眩光，**主推黑光技术**，见光不见灯；  
97显色指数，博物馆级光效；  
适用餐饮酒店、别墅会所；

## 55 Days Over Series



Small circle, ellipse, anti-glare light source module can be changed at will, no worries after installation;  
0 ~ 30 ° flexible polarization adjustment structure, perfect combination of under-wash wall;  
UGR < 10, no glare, the main push is black light technology, see light but no light;  
97 color rendering index, museum-level light effect;  
Applicable catering hotels, villa clubs;













01 - 55M / 配光曲线

/ Light distribution curve / Ø55 /

TZ-TY05502-Y048

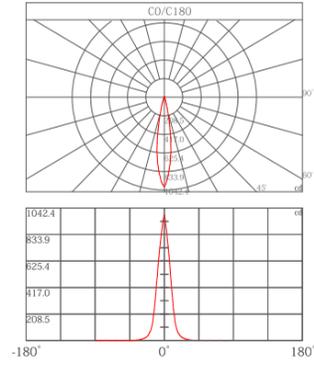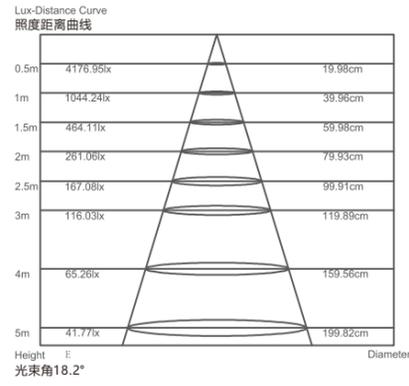

TZ-TY05502-Y049

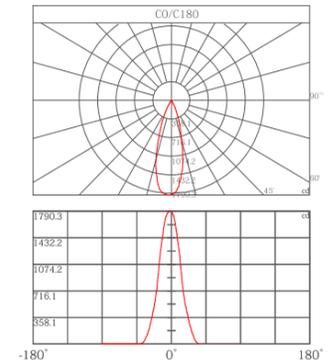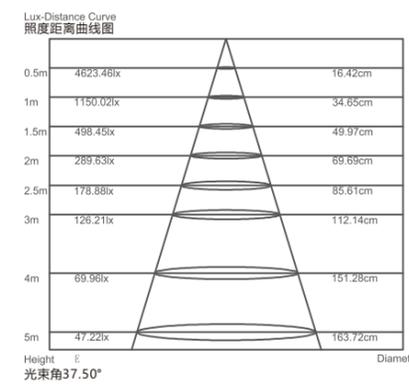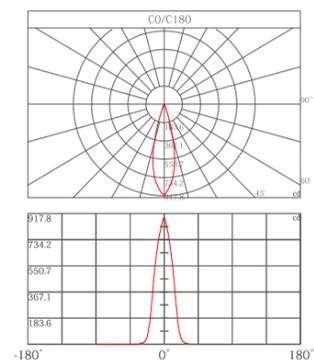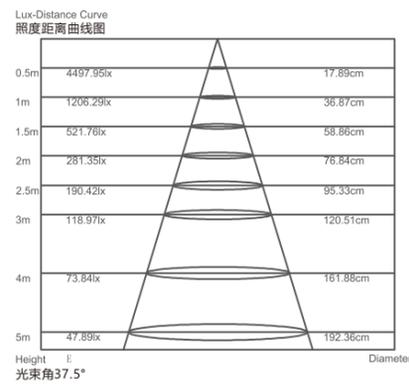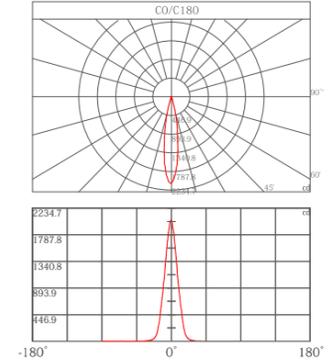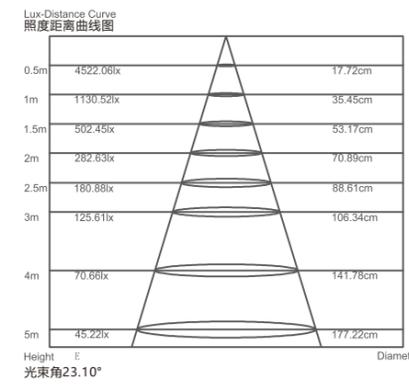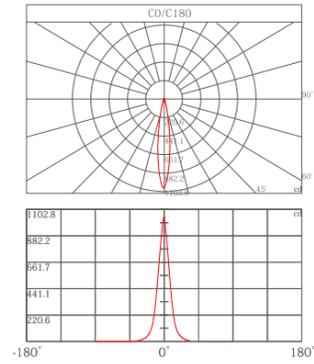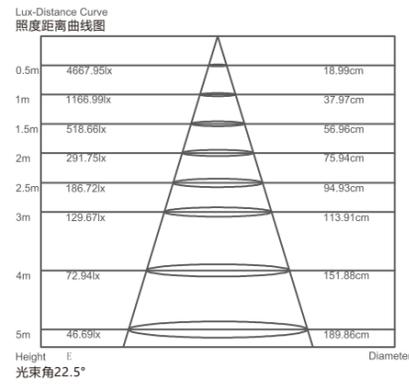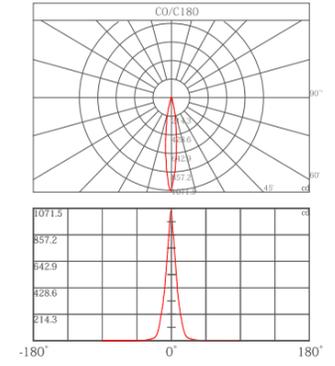
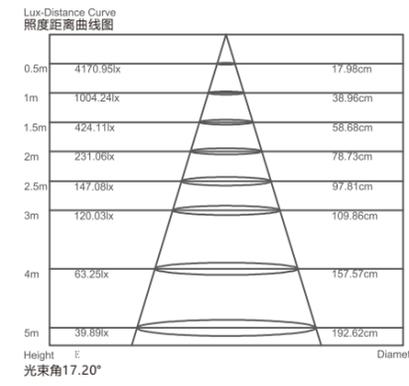


## 01 - 55M / 配光曲线



/ Light distribution curve / Ø55 /

### TZ-TY05502-Y050



Lux-Distance Curve  
照度距离曲线图

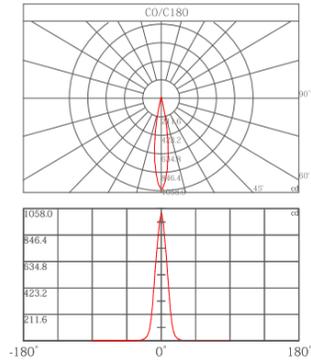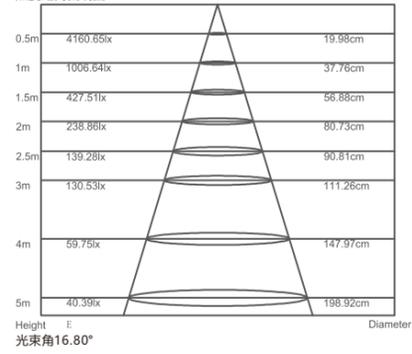

Lux-Distance Curve  
照度距离曲线图

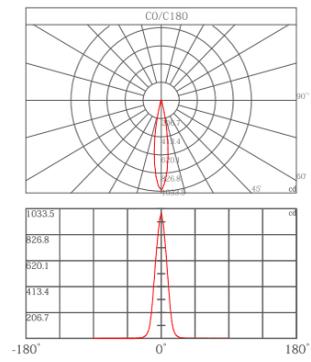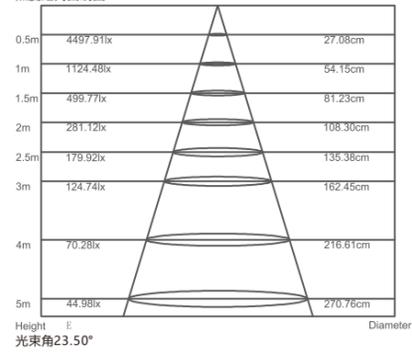

Lux-Distance Curve  
照度距离曲线图

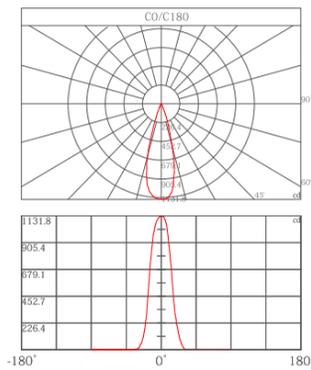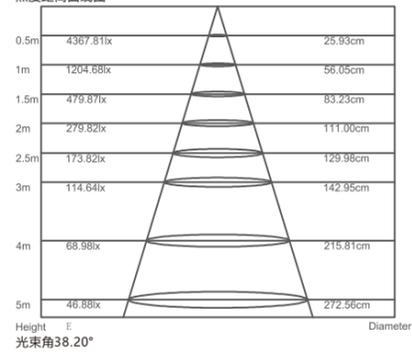

01 - 55M / 黑光技术 / Black Light Technology / Ø55 /  /  / 

### TZ-TY05502-Y048

Power: **7W**

Beam Angle:  15°,  24°,  36°

Color:  white,  Black

Structure:  Adjustable,  Fixed




#### Optional:

Cup body color:  Black ,  Chrome 

Cup body color:  Black ,  Chrome 

 edge

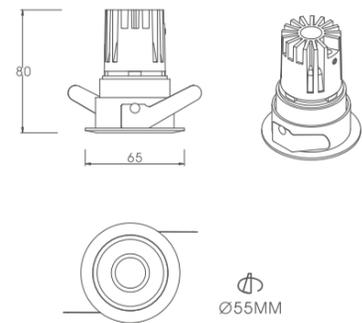

CRI: >97   CCT: 2700K,3000K,4000K   Input Voltage: AC220-240V   Ambient Temperature: -20°C-+45°C

   IP20

02 - 55M / 黑光技术 / Black Light Technology / Ø55 /  /  / 

### TZ-TY05502-W051

Power: **7W**

Beam Angle:  15°,  24°,  36°

Color:  white,  Black

Structure:  Adjustable,  Fixed




#### Optional:

 Cup body color:  Black ,  Chrome

 Cup body color:  Black ,  Chrome

 boundless

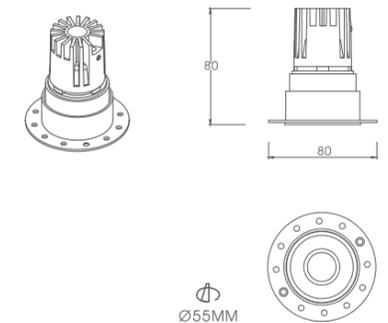

CRI: >97   CCT: 2700K,3000K,4000K   Input Voltage: AC220-240V   Ambient Temperature: -20°C-+45°C

   IP20

01 - 55M / 黑光技术 / Black Light Technology / Ø55 /  /  / 

### TZ-TY05502-Y048

Power: **7W**

Beam Angle:  15°,  24°,  36°

Color:  white,  Black

Structure:  Adjustable,  Fixed




#### Optional:

Cup body color:  Black,  Chrome 

Cup body color:  Black,  Chrome 

 edge

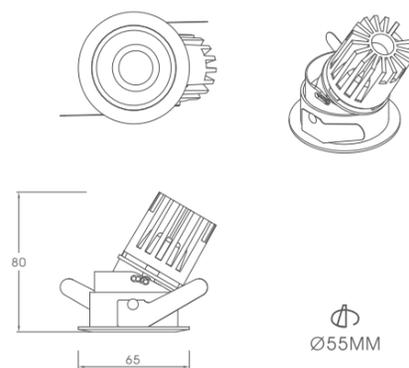

CRI: >97 CCT: 2700K,3000K,4000K Input Voltage: AC220-240V Ambient Temperature: -20°C-+45°C

  IP20

02 - 55M / 黑光技术 / Black Light Technology / Ø55 /  /  / 

### TZ-TY05502-W051

Beam Angle:  15°,  24°,  36°

Power: **7W**

Structure:  Adjustable,  Fixed

Color:  white,  Black




#### Optional:

 Cup body color:  Black,  Chrome

 Cup body color:  Black,  Chrome

 boundless

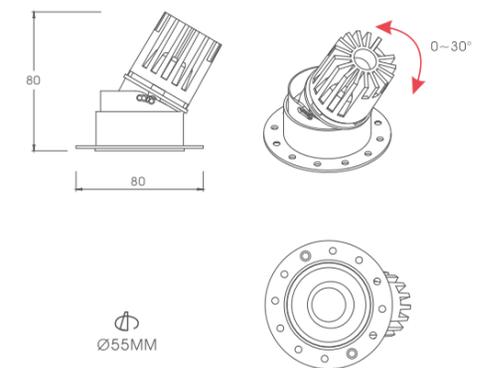

CRI: >97 CCT: 2700K,3000K,4000K Input Voltage: AC220-240V Ambient Temperature: -20°C-+45°C

  IP20

01 - 55M / 黑光技术 / Black Light Technology / Ø55 /  /  / 

### TZ-TY05502-W053

Power:  
7W

Color:  
 white,  Black

Beam Angle:  
 15°,  24°,  36°

Structure:  
 Adjustable,  Fixed




#### Optional:

Cup body color:  Black,  White



 boundless

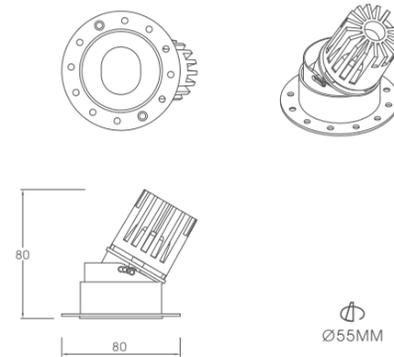

CRI: >97 CCT: 2700K,3000K,4000K Input Voltage: AC220-240V Ambient Temperature: -20°C--+45°C

  IP20

02 - 55M / 黑光技术 / Black Light Technology / Ø55 /  /  / 

### TZ-TY05502-Y050

Beam Angle:  
 15°,  24°,  36°

Structure:  
 Adjustable,  Fixed

Power:  
7W

Color:  
 white,  Black




#### Optional:



Cup body color:  Black,  White

 edge

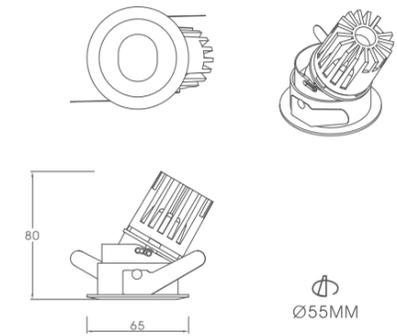

CRI: >97 CCT: 2700K,3000K,4000K Input Voltage: AC220-240V Ambient Temperature: -20°C--+45°C

  IP20

01 - 55M / 黑光技术 / Black Light Technology / Ø55 /  /  / 

### TZ-TY05502-Y049

Power: **7W**

Beam Angle:  15°,  24°,  36°

Color:  white,  Black

Structure:  Adjustable,  Fixed




#### Optional:

Cup body color:  Black,  white



 edge

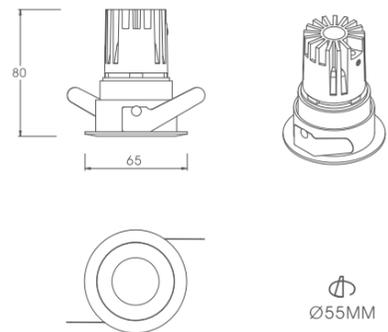

CRI: >97 CCT: 2700K, 3000K, 4000K Input Voltage: AC220-240V Ambient Temperature: -20°C-+45°C

  IP20

01 - 55M / 黑光技术 / Black Light Technology / Ø55 /  /  / 

### TZ-TY05502-W052

Power: **7W**

Beam Angle:  15°,  24°,  36°

Color:  white,  Black

Structure:  Adjustable,  Fixed




#### Optional:

Cup body color:  Black,  White



 edge

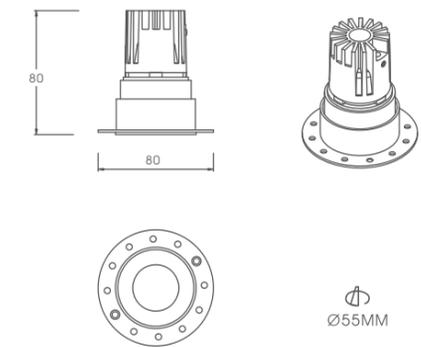

CRI: >97 CCT: 2700K, 3000K, 4000K Input Voltage: AC220-240V Ambient Temperature: -20°C-+45°C

  IP20

# 75M / Series



## 75天越系列

30°灵活偏光调节结构，多重防眩光处理，出光无杂斑；

自主开模防眩罩，主推黑光技术，见光不见；

针对不同空间照明而设计了圆孔、椭圆孔、等不同形状前盖满足打光要求。

## 75 Days Over Series

30° flexible polarizing adjustment structure, multiple anti glare processing, light without speckles;

Self mold opening anti glare cover, main push black light technology, no light;







According to different space lighting, different shapes such as round hole, elliptical hole, etc. are designedThe front cover meets the lighting requirements.









01 - 75M / 配光曲线

/ Light distribution curve / Ø75 /

TZ-TY07502-Y054

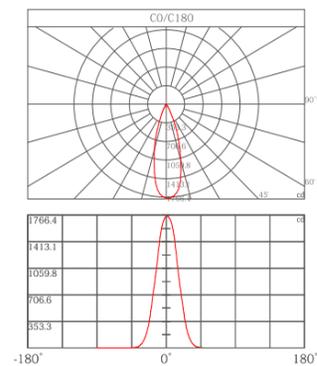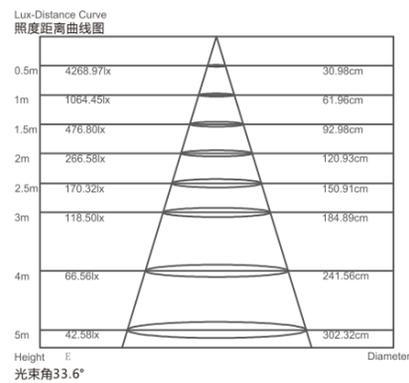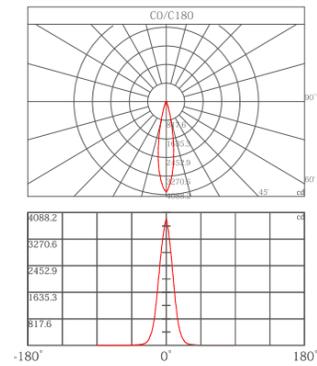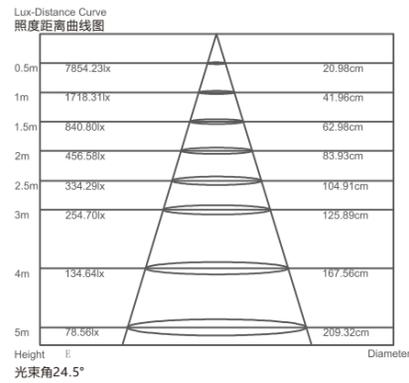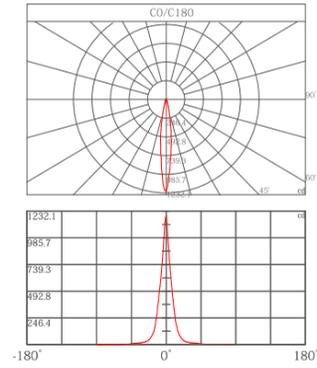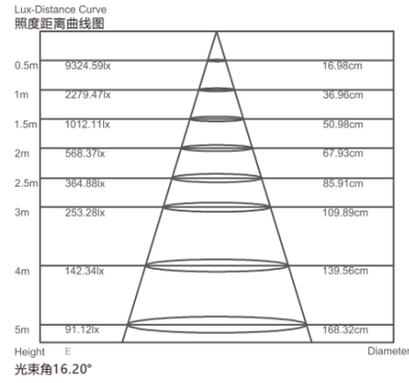








TZ-TY07502-Y056

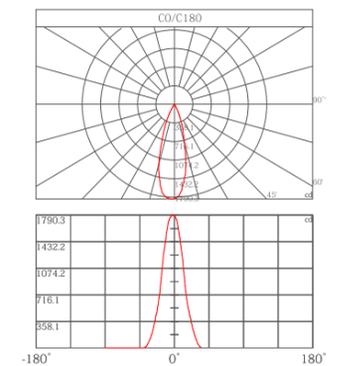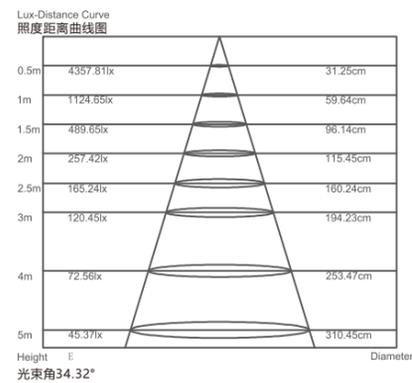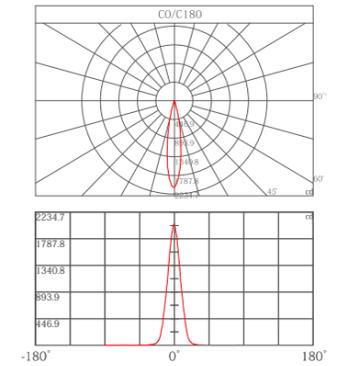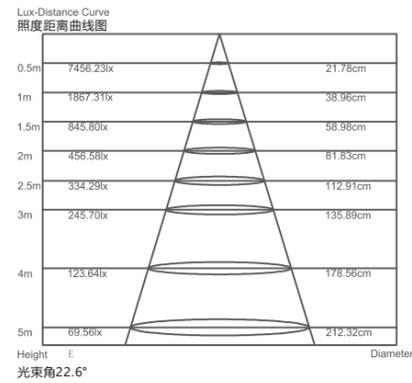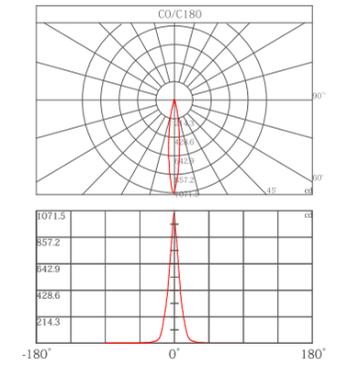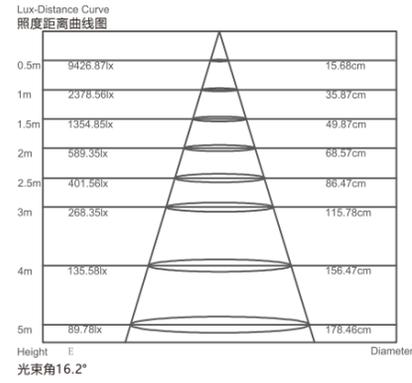

01 - 75M / 配光曲线

/ Light distribution curve / Ø75 /

TZ-TY07502-Y055

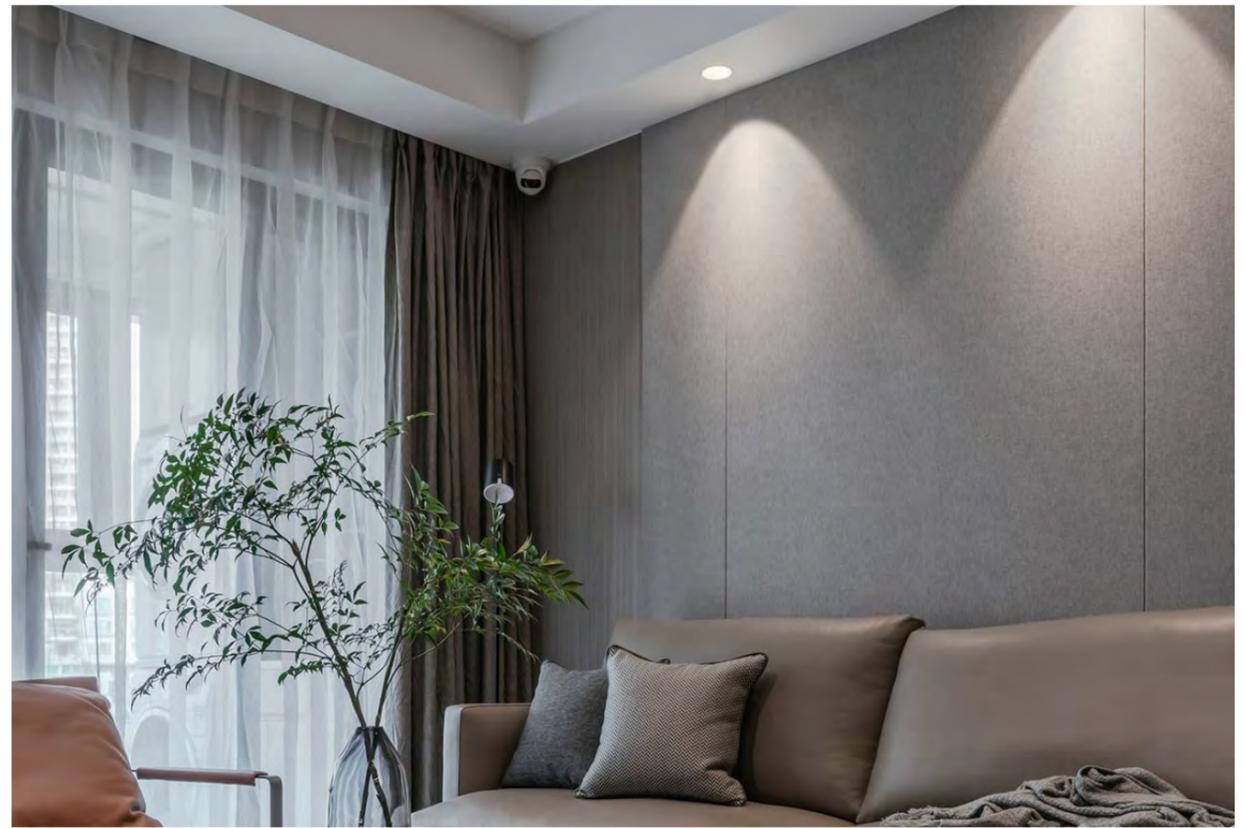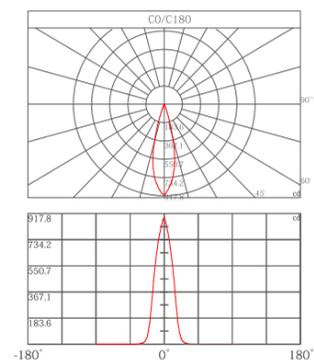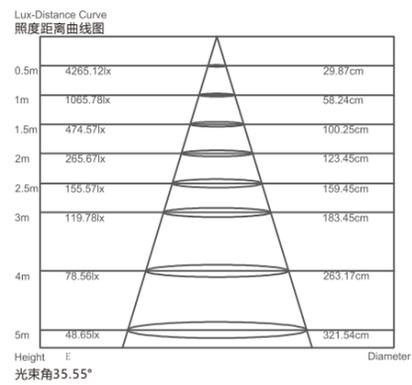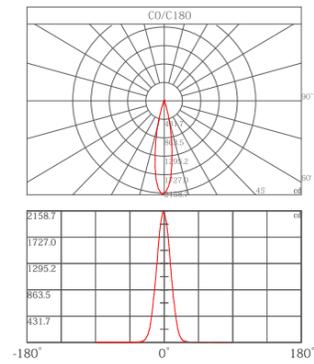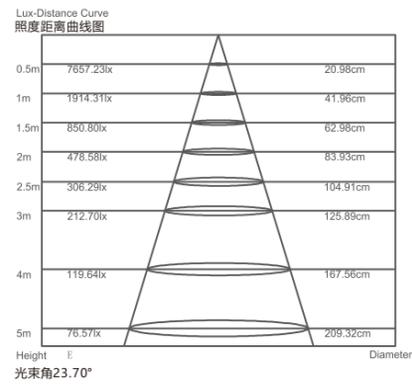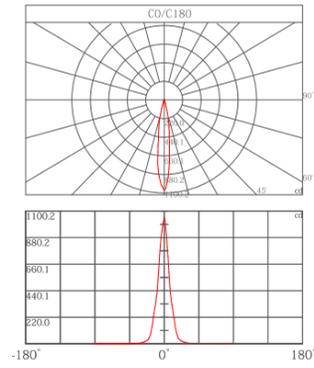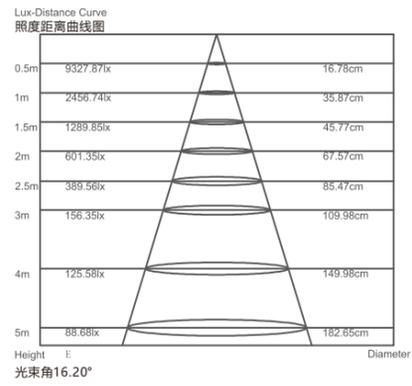

02 - 75M / 黑光技术 / Black Light Technology / Ø75 /  /  / 

### TZ-TY07502-Y054

Power:  
9W/12W/15W

Beam Angle:  
 15°,  24°,  36°

Color:  
 white,  Black

Structure:  
 Adjustable,  Fixed



#### Optional:


Cup body color:  Black ,  Chrome



Cup body color:  Black ,  Chrome



 edge

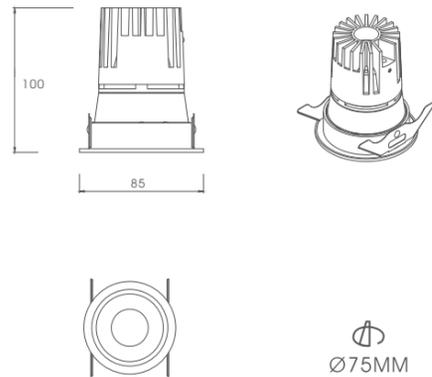

CRI: >97   CCT: 2700K,3000K,4000K   Input Voltage: AC220-240V   Ambient Temperature: -20°C-+45°C

  IP20

02 - 75M / 黑光技术 / Black Light Technology / Ø75 /  /  / 

### TZ-TY07502-W057

Beam Angle:  
 15°,  24°,  36°

Power:  
9W/12W/15W

Structure:  
 Adjustable,  Fixed

Color:  
 white,  Black



#### Optional:




Cup body color:  Black ,  Chrome



Cup body color:  Black ,  Chrome

 boundless

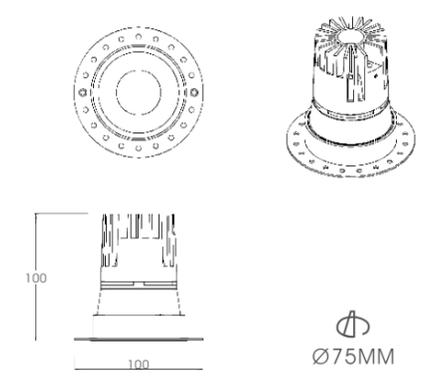

CRI: >97   CCT: 2700K,3000K,4000K   Input Voltage: AC220-240V   Ambient Temperature: -20°C-+45°C

  IP20

02 - 75M / 黑光技术 / Black Light Technology / Ø75 /  /  / 

### TZ-TY07502-Y054

Power:  
9W/12W/15W

Beam Angle:  
 15°,  24°,  36°

Color:  
 Chrome,  Black

Structure:  
 Adjustable,  Fixed



#### Optional:


Cup body color:  Black ,  Chrome



Cup body color:  Black ,  Chrome



 edge

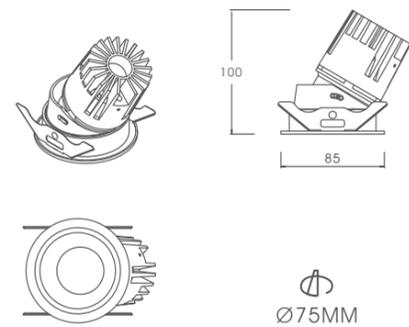

CRI: >97 CCT: 2700K,3000K,4000K Input Voltage: AC220-240V Ambient Temperature: -20°C-+45°C

   IP20

02 - 75M / 黑光技术 / Black Light Technology / Ø75 /  /  / 

### TZ-TY07502-W057

Beam Angle:  
 15°,  24°,  36°

Power:  
9W/12W/15W

Structure:  
 Adjustable,  Fixed

Color:  
 Chrome,  Black



#### Optional:




Cup body color:  Black ,  Chrome



Cup body color:  Black ,  Chrome

 boundless

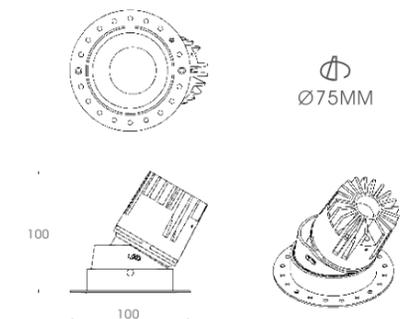

CRI: >97 CCT: 2700K,3000K,4000K Input Voltage: AC220-240V Ambient Temperature: -20°C-+45°C

   IP20

02 - 75M / 黑光技术 / Black Light Technology / Ø75 /  /  / 

### TZ-TY07502-W058

Power:  
9W/12W/15W

Beam Angle:  
 15°,  24°,  36°

Color:  
 Chrome,  Black

Structure:  
 Adjustable,  Fixed





#### Optional:

Cup body color:  White



 boundless



Ø75MM

CRI: >97 CCT: 2700K,3000K,4000K Input Voltage: AC220-240V Ambient Temperature: -20°C-+45°C

  IP20

02 - 75M / 黑光技术 / Black Light Technology / Ø75 /  /  / 

### TZ-TY07502-Y055

Beam Angle:  
 15°,  24°,  36°

Power:  
9W/12W/15W

Structure:  
 Adjustable,  Fixed

Color:  
 Chrome,  Black




#### Optional:

Cup body color:  White



 edge



Ø75MM

CRI: >97 CCT: 2700K,3000K,4000K Input Voltage: AC220-240V Ambient Temperature: -20°C-+45°C

  IP20

02 - 75M / 黑光技术 / Black Light Technology / Ø75 /  /  / 

### TZ-TY07502-W059

Power:  
9W/12W/15W

Beam Angle:  
 15°,  24°,  36°

Color:  
 Chrome,  Black

Structure:  
 Adjustable,  Fixed




#### Optional:

Cup body color:  White



 boundless

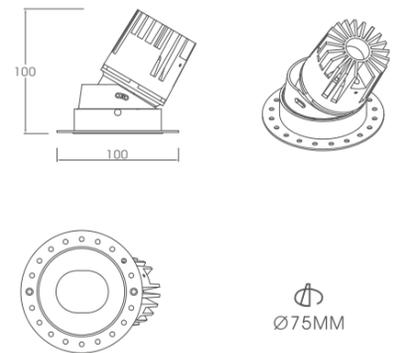

CRI: >97 CCT: 2700K,3000K,4000K Input Voltage: AC220-240V Ambient Temperature: -20°C-+45°C

  IP20

02 - 75M / 黑光技术 / Black Light Technology / Ø75 /  /  / 

### TZ-TY07502-Y056

Beam Angle:  
 15°,  24°,  36°

Power:  
9W/12W/15W

Structure:  
 Adjustable,  Fixed

Color:  
 Chrome,  Black




#### Optional:

Cup body color:  White



 edge

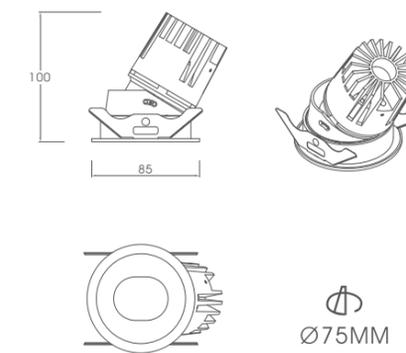

CRI: >97 CCT: 2700K,3000K,4000K Input Voltage: AC220-240V Ambient Temperature: -20°C-+45°C


  IP20

# POLARIZED WASH WALL / Series

## 偏光洗墙




TZ-DP05501-Y063    TZ-DP07501-Y064    TZ-DP09501-Y065

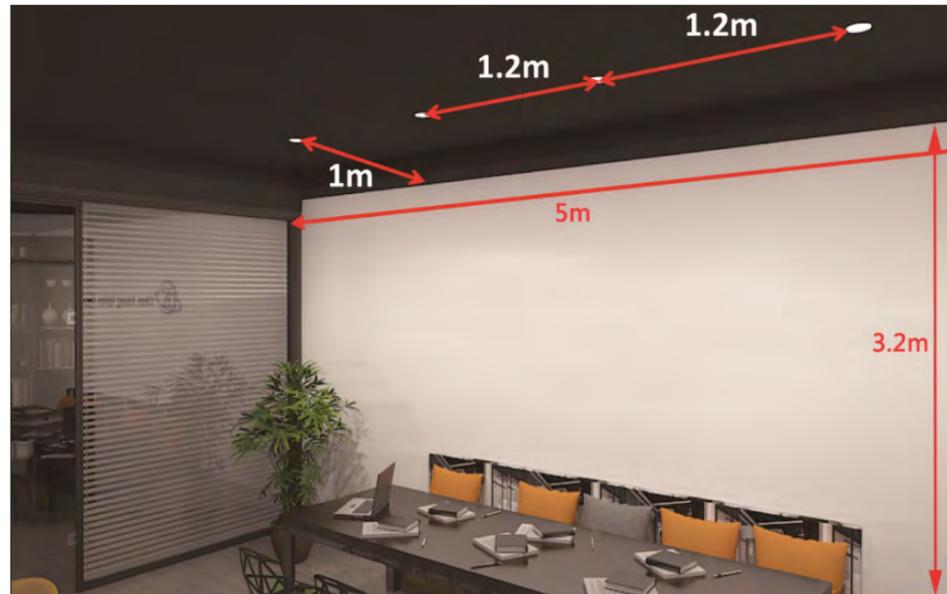


### 洗墙灯 / 配光曲线

/ Light distribution curve / Ø75 /


TZ-DP05501-Y063

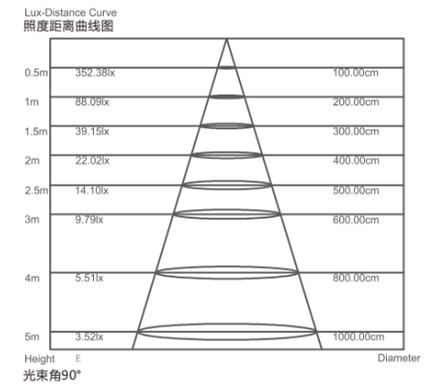


TZ-DP07501-Y064

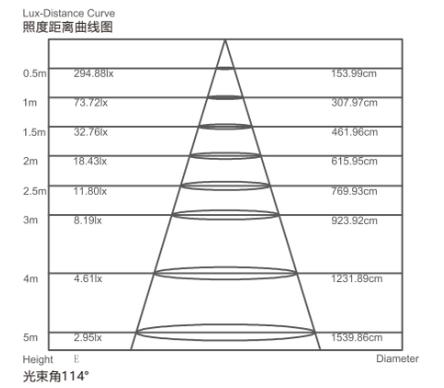


TZ-DP09501-Y065

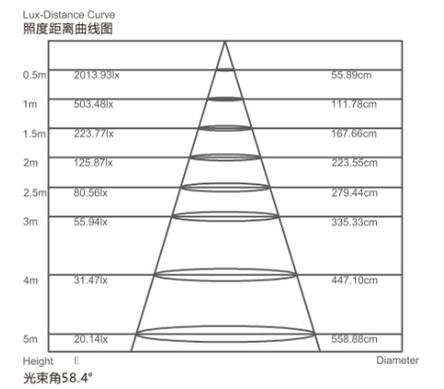



SIDE VIEW  
侧视图



TOP VIEW  
俯视图

### TZ-DP05501-Y063



Power:  
7W

Beam Angle:  
35\*75°

Color:  
 white,  Black


Structure:  
 Adjustable,  Fixed

#### Optional:



Cup body color:  Black,  White



  
boundless




  
Ø55MM

CRI: >97    CCT: 2700K, 3000K, 4000K    Input Voltage: AC220-240V    Ambient Temperature: -20°C-+45°C

   IP20

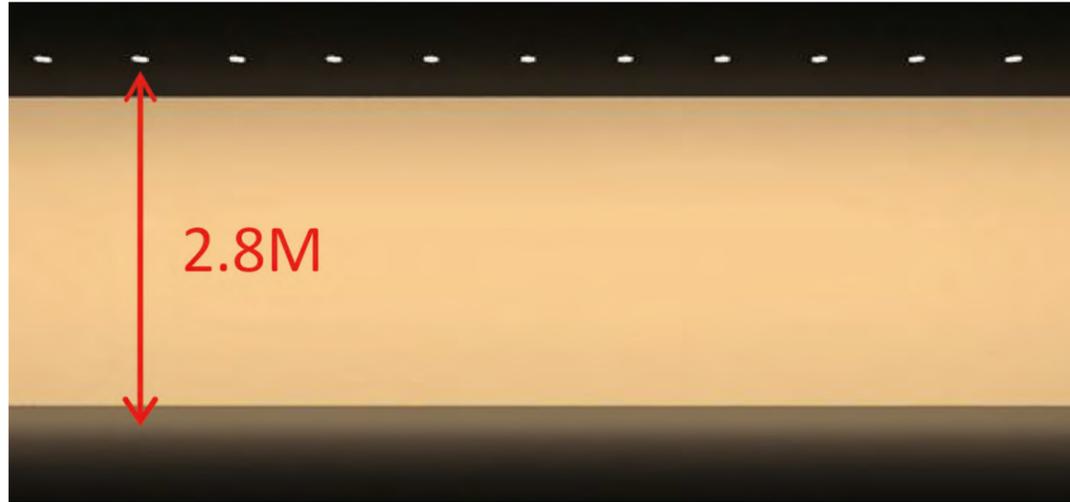

SIDE VIEW  
侧视图



TOP VIEW  
俯视图

### TZ-DP07501-Y064



Power:  
9W

Beam Angle:  
77\*92°

Color:  
 white,  Black


Structure:  
 Adjustable,  Fixed

#### Optional:



Cup body color:  Black,  White


 boundless




 Ø75MM

CRI: >97      CCT: 2700K, 3000K, 4000K      Input Voltage: AC220-240V      Ambient Temperature: -20°C-+45°C

   IP20

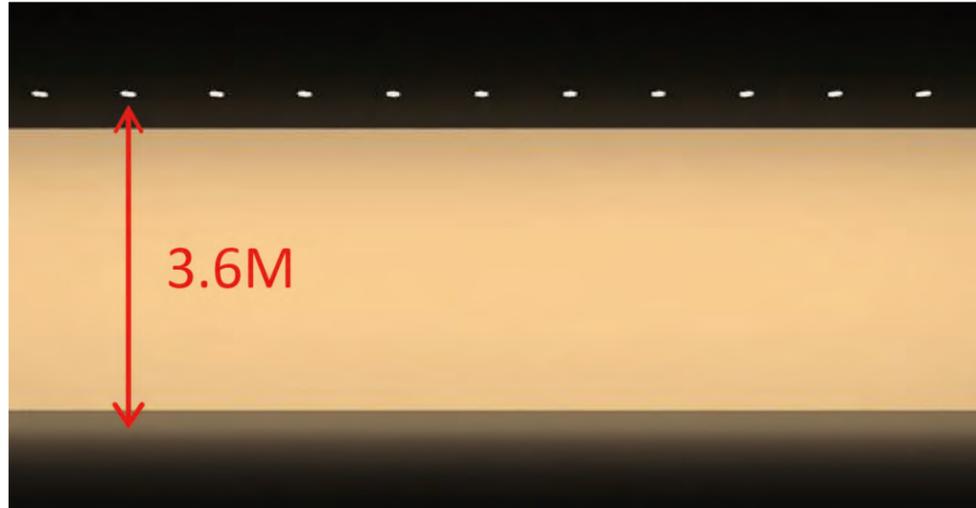

SIDE VIEW  
侧视图



TOP VIEW  
俯视图

### TZ-DP09501-Y065



|   |  |
|---|--|
| Power:<br>20W   | Beam Angle:<br>76*90°  |
| Color:<br><input checked="" type="checkbox"/> white, <input type="checkbox"/> Black | Structure:<br><input type="checkbox"/> Adjustable, <input checked="" type="checkbox"/> Fixed |

#### Optional:



Cup body color:  Black,  White


 boundless

P  
0  
6  
3

肌  
肤  
质  
感  
无  
主  
灯  
·  
缔造者

P  
0  
6  
4

LIGHT ENVIRONMENT ENGINEERING

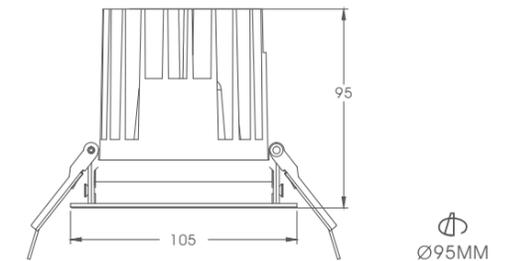

CRI: >97      CCT: 2700K, 3000K, 4000K      Input Voltage: AC220-240V      Ambient Temperature: -20°C-+45°C

   IP20



# DETA

/ Series



有黑、白、金、铬色四色防眩圈，  
可任意调换

Black, white, gold and chrome four-color  
anti-glare ring, Can be exchanged freely



有黑、白色两色面环

Black and white face ring



## DETA系列

开孔 $\phi$ 75，全国主流尺寸，9W/12W/15W，灯具外形优雅大方，完美  
灯具结构，散热器功能强大；

进口光学定制，**精准控光，柔和舒适**；

黑色白色面环；

黑色、白色、铬色、金色的防眩圈任意调换，适合不同装饰  
风格；

偏光结构专业设计，**0~40°偏光调节**，下照洗墙完美结合；

UGR < 10，无眩光，见光不见灯；

97显色指数，博物馆级光效，适用餐饮酒店、别墅会所；

## DETA series

Opening  $\phi$ 75, national mainstream size, 9W/12W/15W, elegant  
appearance, perfect

Lamp structure and powerful radiator;

Imported optical customization, precise light control, soft and  
comfortable;

Black and white face ring;

Black, white, chrome, gold anti-glare ring can be exchanged  
arbitrarily, suitable for different decoration

Style;

Professional design of polarized structure, 0 ~ 40° polarized light  
adjustment, perfect combination for under-wall washing


UGR < 10, no glare, no light when seen;

97 color rendering index, museum-level light effect, suitable for  
catering hotels, villa clubs;



# DETA

/ Series

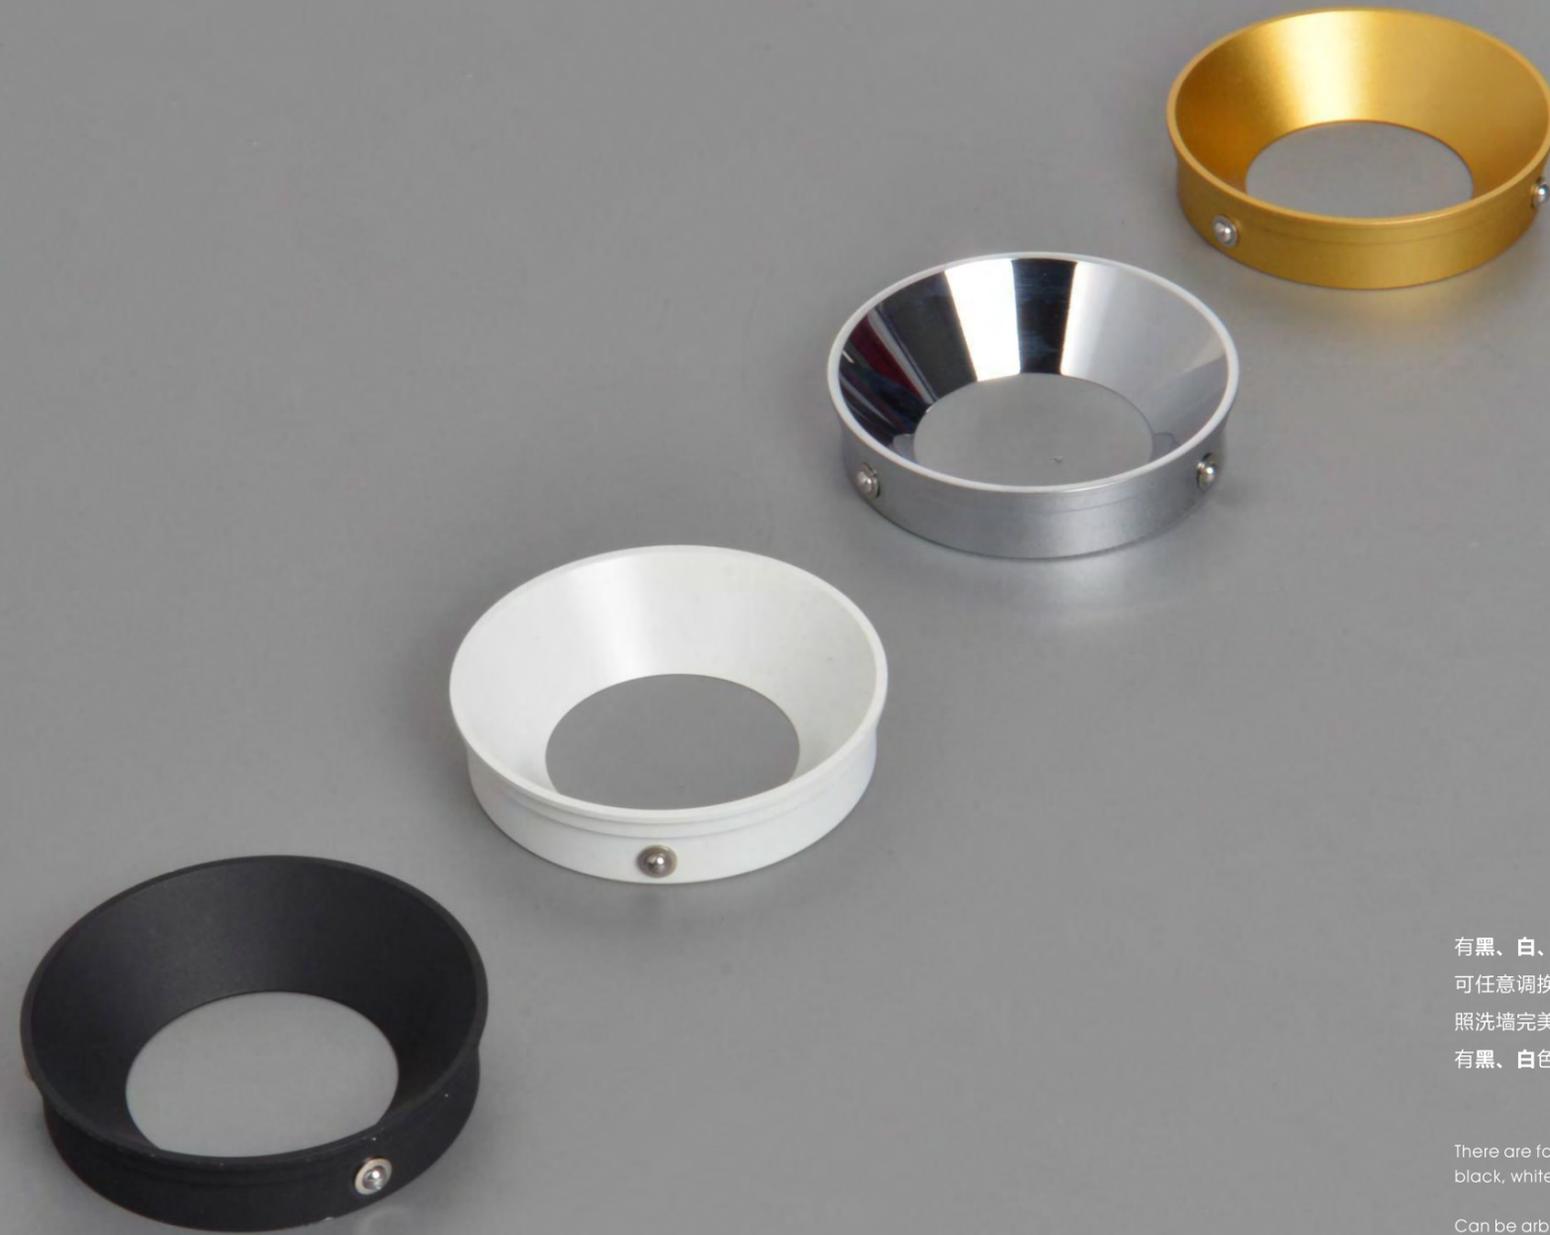

有黑、白、金、铬色四色防眩圈；  
可任意调换，0~40°偏光调节，下  
照洗墙完美结合出光无杂斑；  
有黑、白色两色面环可选；

There are four anti-glare rings in  
black, white, gold and chrome;

Can be arbitrarily changed, 0 ~ 40 °  
polarization adjustment, down  
Washing the wall perfectly







combined with light without spots;  
Available in black and white face  
rings;

DETA / Series

配光曲线

Light distribution curve

TZ-DT07502-Y060

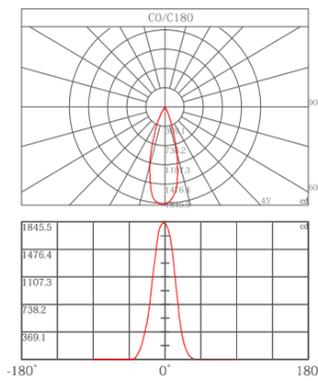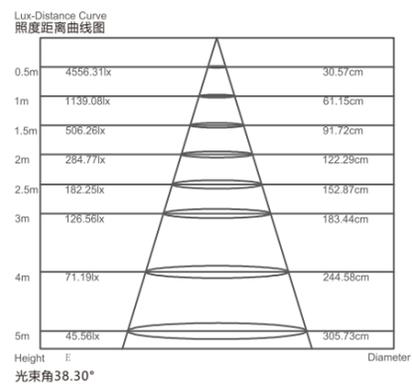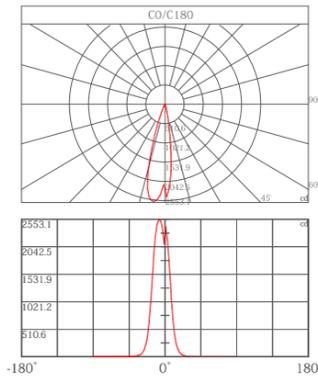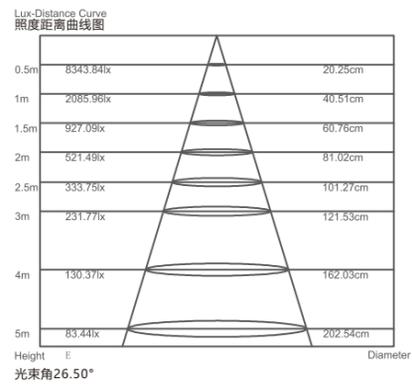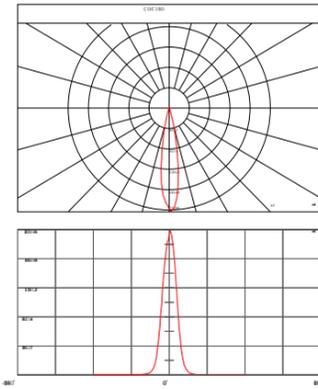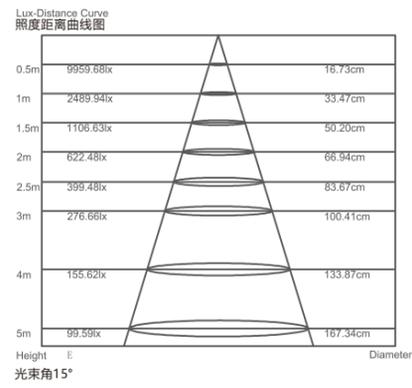

### TZ-DT07502-Y060

Power:  
9W/12W/15W

Beam Angle:  
 15°,  24°,  36°

Color:  
 Chrome,  Black

Structure:  
 Adjustable,  Fixed



#### Optional:

Cup body color:  Black,  Chrome,  White,  Light gold



Cup body color:  Black,  Chrome,  White,  Light gold




Cup body color:  Black,  Chrome,  White,  Light gold



Cup body color:  Black,  Chrome,  White,  Light gold



edge



CRI: >97 CCT: 2700K,3000K,4000K Input Voltage: AC220-240V Ambient Temperature: -20°C-+45°C

CE IP20

### TZ-DT07502-Y061

Power:  
9W/12W/15W

Beam Angle:  
 15°,  24°,  36°

Color:  
 Chrome,  Black

Structure:  
 Adjustable,  Fixed



#### Optional:



Cup body color:  Black,  Chrome,  White,  Light gold



Cup body color:  Black,  Chrome,  White,  Light gold




Cup body color:  Black,  Chrome,  White,  Light gold



Cup body color:  Black,  Chrome,  White,  Light gold



edge

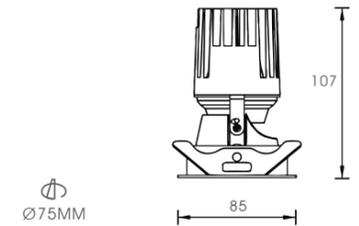

CRI: >97 CCT: 2700K,3000K,4000K Input Voltage: AC220-240V Ambient Temperature: -20°C-+45°C

CE IP20


IP44<sup>Series</sup>

Waterproof splash body

防水溅灯体

见光不见灯

See no light

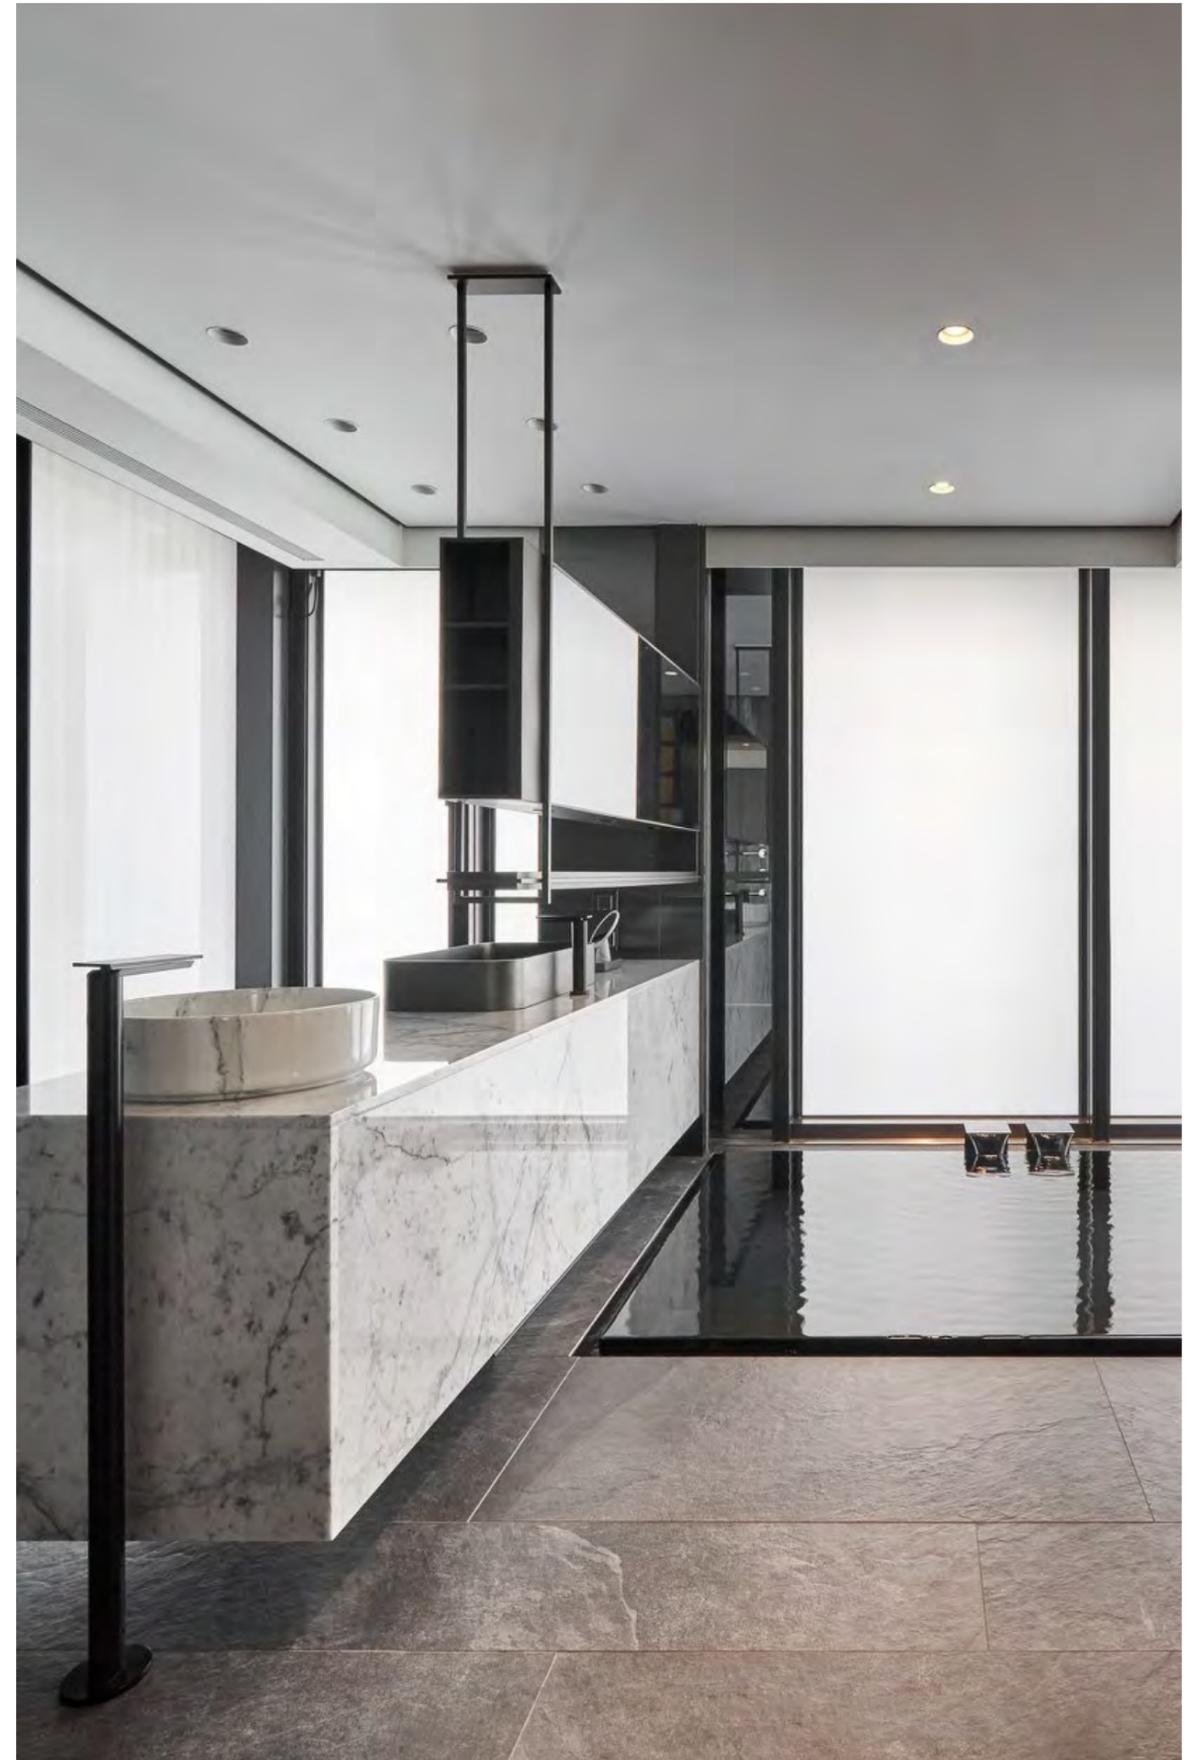

P 0 7 7

肌肤质感无主灯·缔造者

P 0 7 8

LIGHT ENVIRONMENT ENGINEERING



IP44 / Series  
Waterproof splash body  
防水溅灯体

02 - IP44 / 防水溅类 / Waterproof splash / Ø55 / 

### TZ-FS05501-Y068

#### IP44

Power:  
7W


Color:  
 White

Beam Angle:  
 55°

Structure:  
 Adjustable,  Fixed



 edge

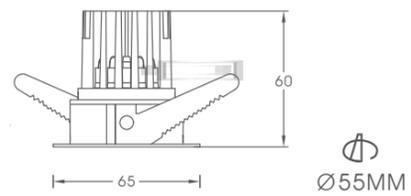

CRI 97

CCT: 2700K,3000K,4000K

Input Voltage: AC220-240V

Ambient Temperature: -20°C-+45°C

  IP44

02 - IP44 / 防水溅类 / Waterproof splash / Ø75 / 

### TZ-FS07501-Y069

#### IP44

Power:  
9W/12W


Color:  
 White

Beam Angle:  
 60°

Structure:  
 Adjustable,  Fixed



 edge

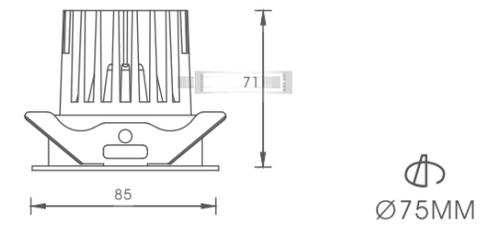

CRI 97

CCT: 2700K,3000K,4000K

Input Voltage: AC220-240V

Ambient Temperature: -20°C-+45°C

  IP44

# 北斗

/ beidou series

UGR < 19, 无眩光, 见光不见灯 30°

UGR < 19, no glare, see no light





1头灯体



2头灯体



3头灯体




5头灯体



7头灯体



10头灯体

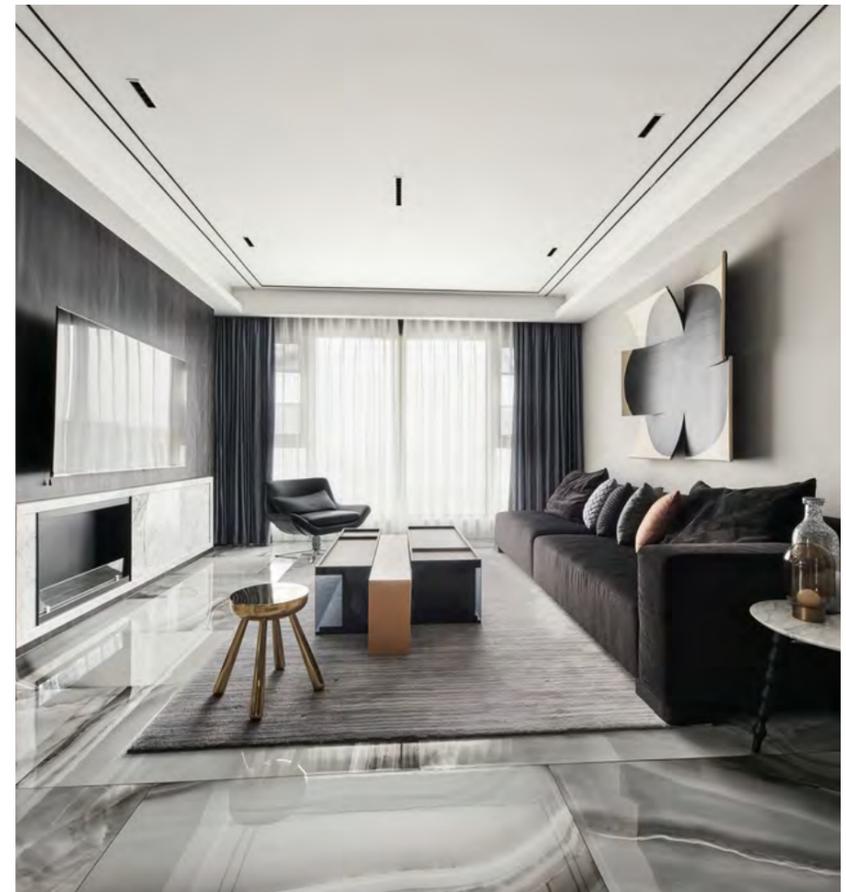

There are 1, 2, 3, 5, 7, and 10 hidden spotlights, Meet the lighting needs of different spaces  
有1、2、3、5、7、10头隐光射灯，满足不同空间的照明需求



# 北斗

/ beidou series



## 配光曲线

Light distribution curve



### TZ-BD00101-Y083

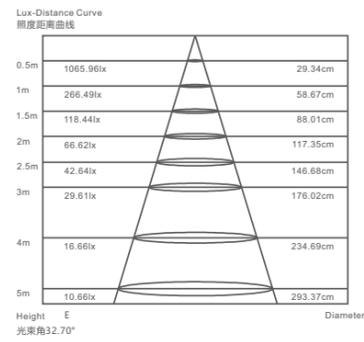



### TZ-BD00201-Y084

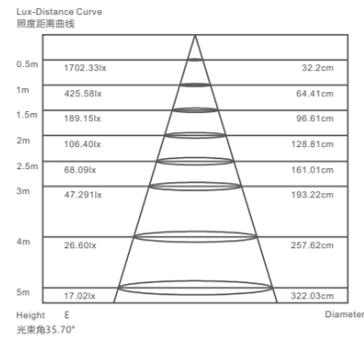



### TZ-BD00301-Y085

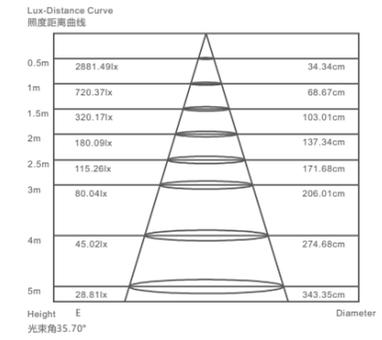



### TZ-BD00501-Y086

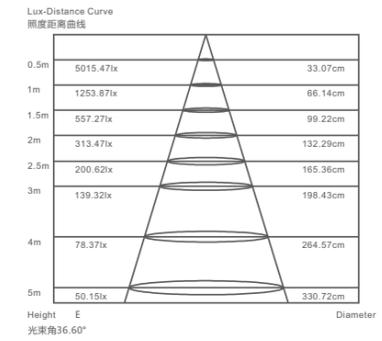

### TZ-BD00701-Y087

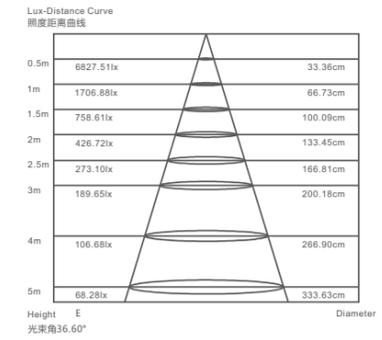

### TZ-BD01001-Y088

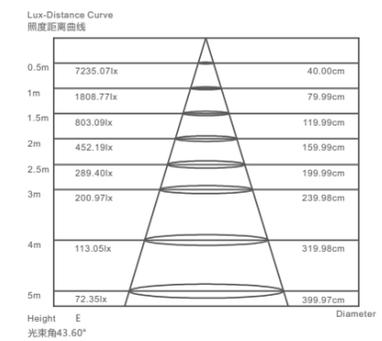

北斗 / 1/头灯体 / Beidou / 1/headlight body / 36

### TZ-BD00101-Y083

Power:  
2W

Beam Angle:  
15°/25°/36°

Color:  
 white,  Black

Structure:  
 Adjustable,  Fixed




Optional:

Cup body color:  Black ,  White



Cup body color:  Black ,  White

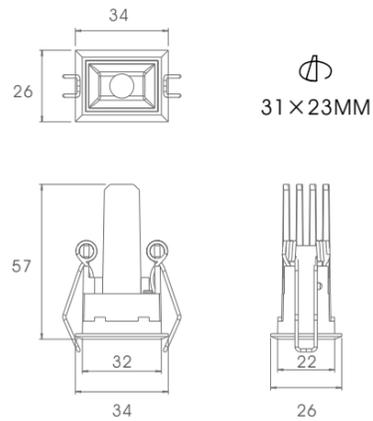

CRI: >95    CCT: 3000K    Input Voltage: AC220-240V    Ambient Temperature: -20°C-+45°C

IP20

北斗 / 2/头灯体 / Beidou / 2/headlight body / 36

### TZ-BD00201-Y084

Power:  
4W

Beam Angle:  
15°/25°/36°

Color:  
 white,  Black

Structure:  
 Adjustable,  Fixed




Optional:



Cup body color:  Black ,  White



Cup body color:  Black ,  White

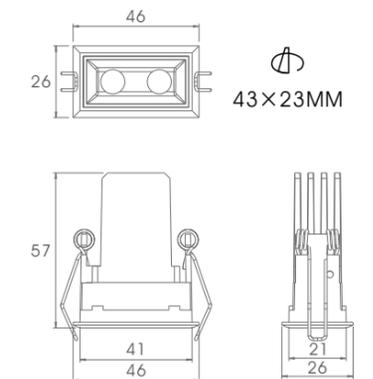

CRI: >95    CCT: 3000K    Input Voltage: AC220-240V    Ambient Temperature: -20°C-+45°C

IP20



北斗 / 3/头灯体 / Beidou / 3/ headlight body / 38

### TZ-BD00301-Y085

Power: 6W  
 Beam Angle: 15°/25°/36°  
 Color:  white,  Black  
 Structure:  Adjustable,  Fixed





Optional:

Cup body color:  Black ,  White



Cup body color:  Black ,  White

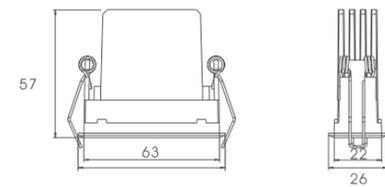

CRI: >95   CCT: 2700K, 3000K, 4000K   Input Voltage: AC220-240V   Ambient Temperature: -20°C - +45°C

IP20

北斗 / 5/头灯体 / Beidou / 5/ headlight body / 38

### TZ-BD00501-Y086

Power: 8W  
 Beam Angle: 15°/25°/36°  
 Color:  white,  Black  
 Structure:  Adjustable,  Fixed





Optional:

Cup body color:  Black ,  White



Cup body color:  Black ,  White

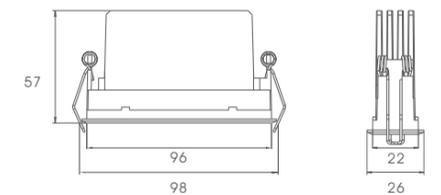

CRI: >95   CCT: 3000K   Input Voltage: AC220-240V   Ambient Temperature: -20°C - +45°C

IP20

北斗 / 7/头灯体 / Beidou / 7/ headlight body /  36°

### TZ-BD00701-Y087

Power:  
12W

Beam Angle:  
15°/25°/36°

Color:  
 white,  Black

Structure:  
 Adjustable,  Fixed




Optional:

Cup body color:  Black ,  White



Cup body color:  Black ,  White

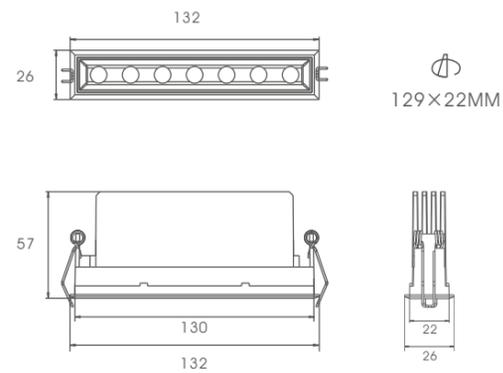

CRI: >95   CCT: 2700K, 3000K, 4000K   Input Voltage: AC220-240V   Ambient Temperature: -20°C - +45°C

IP20

北斗 / 10/头灯体 / Beidou / 10/ headlight body /  36°

### TZ-BD01001-Y088

Power:  
16W

Beam Angle:  
15°/25°/36°

Color:  
 white,  Black

Structure:  
 Adjustable,  Fixed




Optional:



Cup body color:  Black ,  White



Cup body color:  Black ,  White

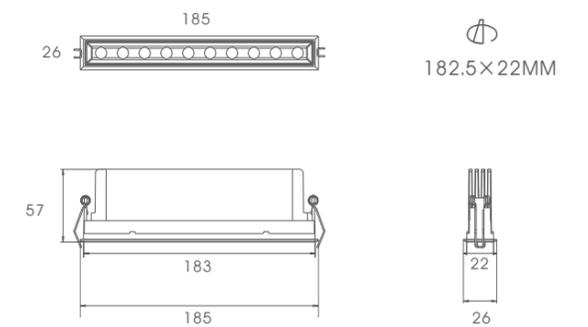

CRI: >95   CCT: 3000K   Input Voltage: AC220-240V   Ambient Temperature: -20°C - +45°C

IP20

# 筒灯云 / Series



**光源隐藏, 黑光技术筒灯**  
Light source hidden, black light technology downlight



The height of the lamp body is 59-82mm, and the flat design style is not affected by space.



灯体高度**59-82mm**,扁平化设计风格, 不受空间影响

UGR < 16, NO GLARE, SEE NO LIGHT



UGR < 16, 无眩光, 见光不见灯

## 配光曲线 Light distribution curve



### TA-SZ07501-Y053

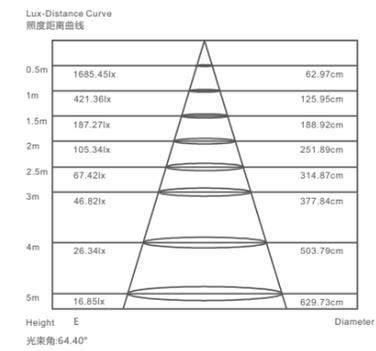

### TA-SZ07501-Y054

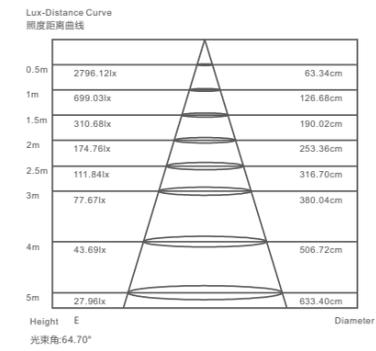

### TA-SZ07501-Y055

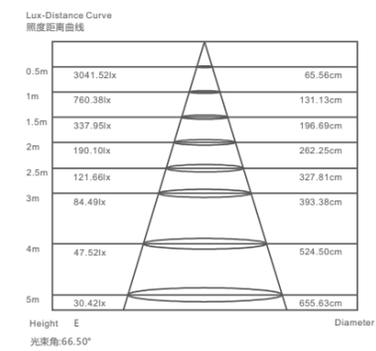

筒灯云 / Downlight cloud series / 66

### TA-SZ07501-Y053



Power:  
**9W**

Beam Angle:  
15°/24°/38°/60°


Color:  
 white,  Black

Structure:  
 Adjustable,  Fixed

#### Optional:

Power:  
**9W**

Cup body color:  White,  Black



  
Ø75MM

CRI: >90   CCT: 2700K, 3000K, 4000K   Input Voltage: AC220-240V   Ambient Temperature: -20°C-+45°C

  IP20

P103

智能灯光行业领军品牌

P104

LIGHT ENVIRONMENT ENGINEERING

筒灯云 / SERIES

P097

肌肤质感无主灯·缔造者

P098

LIGHT ENVIRONMENT ENGINEERING

筒灯云 / Downlight cloud series / 66

### TA-SZ07501-Y054

Power:  
**12W**

Beam Angle:  
15°/24°/38°/60°

Color:  
 white,  Black


Structure:  
 Adjustable,  Fixed



#### Optional:

Power:  
**12W**

Cup body color:  White ,  Black



Ø95MM

CRI: >90    CCT: 3000K    Input Voltage: AC220-240V    Ambient Temperature: -20°C-+45°C

CE IP20

筒灯云 / Downlight cloud series / 66

### TA-SZ07501-Y055

Power:  
**20W**

Beam Angle:  
15°/24°/38°/60°

Color:  
 white,  Black


Structure:  
 Adjustable,  Fixed



#### Optional:

Power:  
**20W**

Cup body color:  White ,  Black

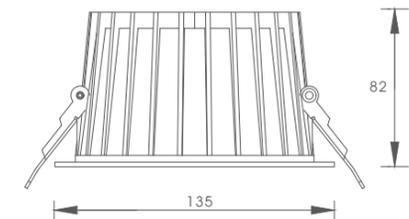

Ø120MM

CRI: >90    CCT: 3000K    Input Voltage: AC220-240V    Ambient Temperature: -20°C-+45°C

CE IP20



## 低压灯带 / Series

CRI>90, color consistency  
CRI>90, 光色一致性

# POINTLESS LIGHT SOURCE


## 无点光源

出光柔和，无亮点或暗区；  
 侧面 & 正面发光，满足不同的光线造型；  
 IP67 防护等级，可短暂浸水；  
 采用高品质防紫外硅胶材料作为外壳，可真正暴露在户外使用；  
 配套安装卡扣，安装简易。可剪切，使用灵活

Soft light output, no bright spots or dark areas;  
 Side & front lighting to meet different light shapes;  
 IP67 protection, can be immersed in water for a short time;  
 Adopt high-quality UV-resistant silicone material as the shell, which can be truly exposed to outdoor use;  
 Supporting installation buckle, easy installation. Shearable and flexible

## OUTLINE FRAME


轮廓框架

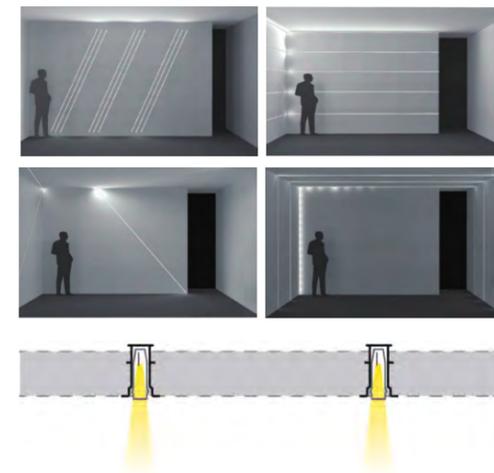

主要用于墙体的线条装饰或轮廓线条。  
 Contour Frame Mainly Used For Line Decoration Or Contour Lines Of Walls.


## BACKGROUND LIGHT

背景光

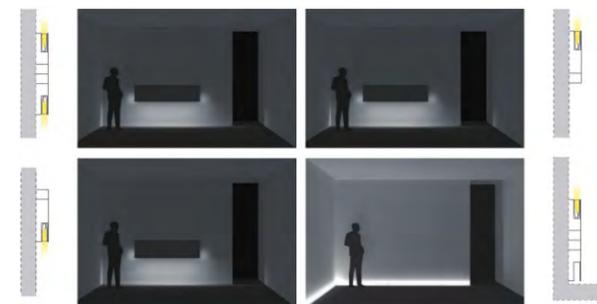

## BACKGROUND LIGHT

阴阳角的安装

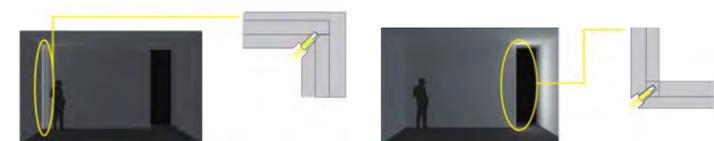

可以直接安装在阴角或阳角的石膏板或者普通的砖石上  
 Contour Frame Mainly Used For Line Decoration Or Contour Lines Of Walls.

## 前端控制


FRONT END CONTROL

我们采用的灯珠是按照等级采购或自主封装的，LED 在封装时是按照芯片颜色坐标进行筛选和划分等级。为避免贴在同一线路板上的灯珠被混淆，并且保证同一线路板上使用的仅仅是一个等级的灯珠，我们在储存和运输过程中是按照成品灯珠的等级进行分类和管理的。此外，在成品出货

时都会进行视觉颜色的检查。为了满足客户的需求，可以从天自照明购买到行业内非标准色温的产品，天自照明为此制定了严格的规章制度，以便对非标色温产品的把控。

The lamp beads we use are purchased according to the grade or independently packaged. The LEDs are filtered and graded according to the chip color coordinates when packaging. In order to avoid confusion of lamp beads attached to the same circuit board, and to ensure that only one grade of lamp beads is used on the same circuit board, we classify and manage the finished lamp beads during storage and transportation. In addition, the finished product is shipped

Visual color checks are performed at all times. In order to meet the needs of customers, you can purchase products from Tianzi Lighting with non-standard color temperature in the industry. Tianzi Lighting has formulated strict rules and regulations to control non-standard color temperature products.

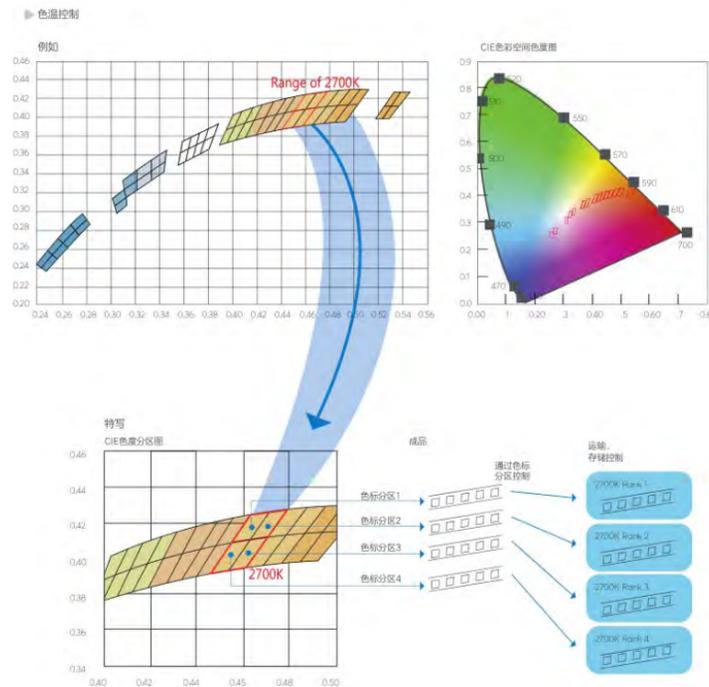

## 成品控制


Finished product control

光色的一致性优质灯带的重要指标之一，灯珠的优劣决定了光源的品质。

从荧光粉配色、点胶、芯片 BIN 分区、贴片到测试，每一道工序和环节都十分重要，并且都有自己严苛的流程。在成品出厂前还要经过最后一次光色的比对和检测。主要的检测步骤有：

The consistency of light color is one of the important indicators of high-quality light strips, and the quality of the light beads determines the quality of the light source.

From phosphor color matching, dispensing, chip BIN partitioning, patching, and testing, every process and link is very important and has its own rigorous processes. Before the finished product leaves the factory, it is subjected to the last light color comparison and detection. The main detection steps are:

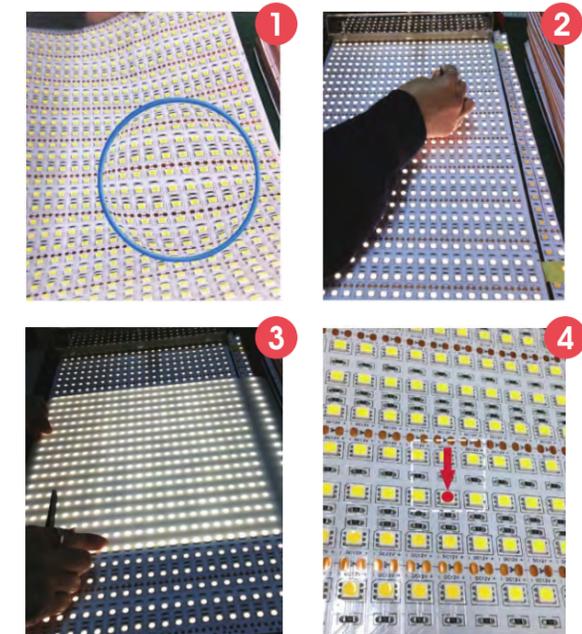

一、检查灯珠表面清洁度，肉眼观察灯珠有无污点、黑点，是否有连锡情况。

二、将成品置于测试架上，接通电路后点亮光源，对出现死灯、空焊、裂胶、爆亮的不良品用标签标注。

三、在光源上覆盖亚克力板，观察成品与对色首件的光色，再次确保同批产品光色一致，不良品用标签标注。

四、不良品送回检修。

低压灯带 / Low-voltage light strip / 120

P  
1  
0  
7

肌肤质感无主灯·缔造者

P  
1  
0  
8

LIGHT ENVIRONMENT ENGINEERING



UN-DC24-2835-120-4.8-W8+3M胶 | Power: **4.8W/M**

MODEL

UN-DC24-2835-120-4.8-W8+3M胶 | Beam Angle:  120° | Color:  white,  Black

CCT:  3000K(6030),  4000K(6040) | Ambient Temperature: -20°C~+45°C | Input Voltage: AC220~240V | CRI: >90

CE  IP20



UN-DC24-2835-120-9.6-W8+3M胶 | Power: **9.6W/M**

MODEL

UN-DC24-2835-120-9.6-W8+3M胶 | Beam Angle:  120° | Color:  white,  Black

CCT:  3000K(12030),  4000K(12040) | Ambient Temperature: -20°C~+45°C | Input Voltage: AC220~240V | CRI: >90

CE  IP20



UN-DC24-2835-120-14.4-W8+3M胶 | Power: **14.4W/M**

MODEL

UN-DC24-2835-120-14.4-W8+3M胶 | Beam Angle:  120° | Color:  white,  Black

CCT:  3000K(18030),  4000K(18040) | Ambient Temperature: -20°C~+45°C | Input Voltage: AC220~240V | CRI: >90

CE  IP20



明见 / Series  
Black Light Technology  
防眩技术

舒适无眩光 / 直视不刺眼

Comfortable without glare / direct vision without glare

有边框 / Have a border

∅ 55有边框可调嵌入式



无边框 / No border

∅ 60无边框可调嵌入式



有边框 / Have a border

∅ 75有边框可调嵌入式



无边框 / No border

∅ 80无边框可调嵌入式



## 角度调节


光束角可选：15° / 24° / 36°

### ANGLE ADJUSTMENT

Beam angle: 15° / twenty-four° / thirty-six°



直照照射茶几



调节角度照射画


### 亮度限制曲线（无发光侧边灯具）

直径: 200mm / 长度: mm / 宽度: 200mm / 高度: mm


(cd/m<sup>2</sup>)

| Y      | 45° | 50° | 55° | 60° | 65° | 70° | 75° | 80° | 85° |
|--------|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| C0 05  | 97  | 232 | 9   |     |     |     |     |     |     |
| C90 28 | 98  | 281 | 3   |     |     |     |     |     |     |

| 眩光等级 | 质量等级 | 使用照度 (lx) |      |      |      |      |      |      |      |
|------|------|-----------|------|------|------|------|------|------|------|
|      |      | 2000      | 1000 | 500  | ≤300 |      |      |      |      |
| 1.15 | A    |           |      |      |      |      |      |      |      |
| 1.5  | B    |           | 2000 | 1000 | 500  | ≤300 |      |      |      |
| 1.85 | C    |           |      | 2000 | 1000 | 500  | ≤300 |      |      |
| 2.2  | D    |           |      |      | 2000 | 1000 | 500  | ≤300 |      |
| 2.55 | E    |           |      |      |      | 2000 | 1000 | 500  | ≤300 |

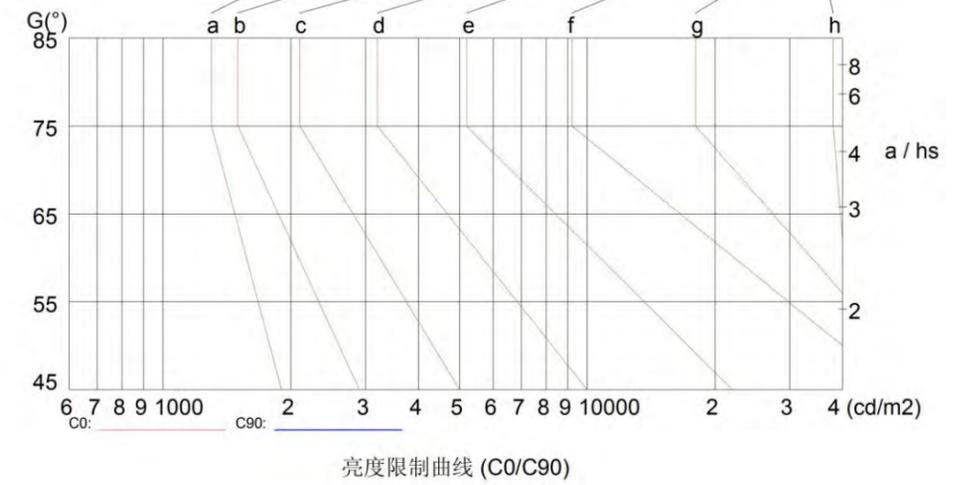

### 光束角模拟示意图：

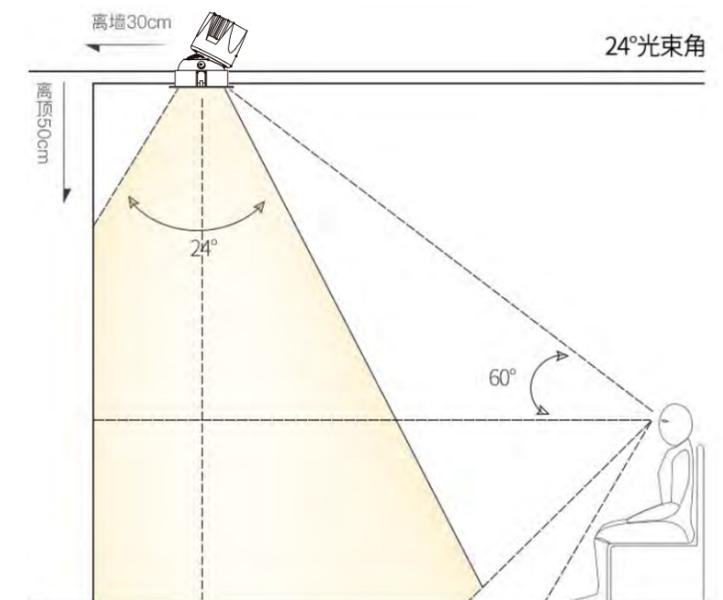

## 显色 97

接近自然光色彩更逼真




< 70

< 80

> Ra 90


## 色温选择

建议休息放松时的灯光,选3000K比如卧室灯光  
平常基础照明选4000K,更加接近自然光

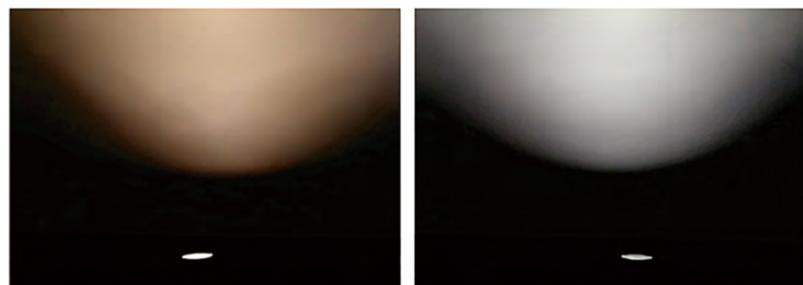

3000K

4000K

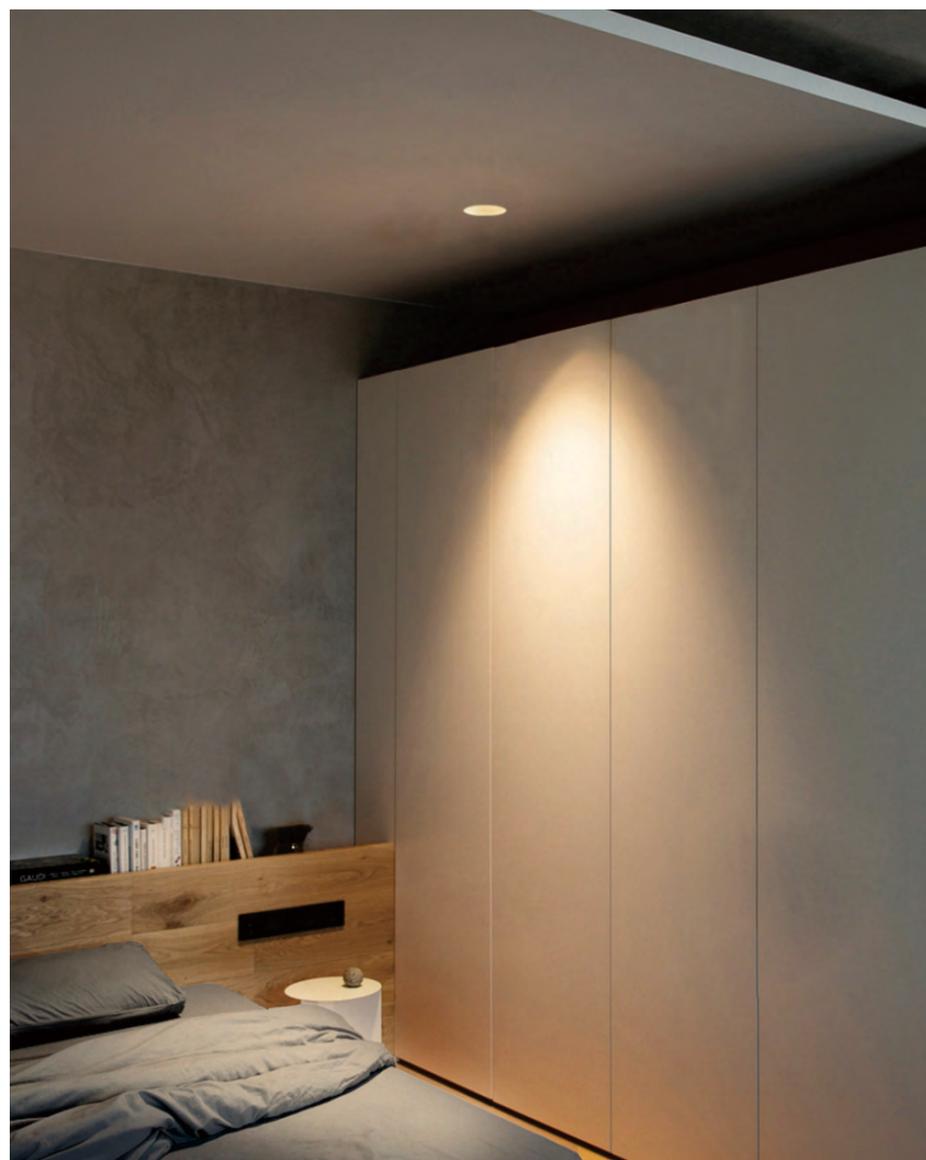



光效实拍:

7W / 3000K

03 - 明见 / 55MJ / 配光曲线



/ Light distribution curve / Ø55 /

照度距离曲线





Ø55 / 7W / 15°

照度距离曲线



Ø55 / 7W / 24°

照度距离曲线





Ø55 / 7W / 36°

03 - 明见 / 75MJ / 配光曲线



/ Light distribution curve / Ø75 /

照度距离曲线





Ø75 / 9W / 15°

照度距离曲线




Ø75 / 9W / 24°

照度距离曲线



Ø75 / 9W / 36°

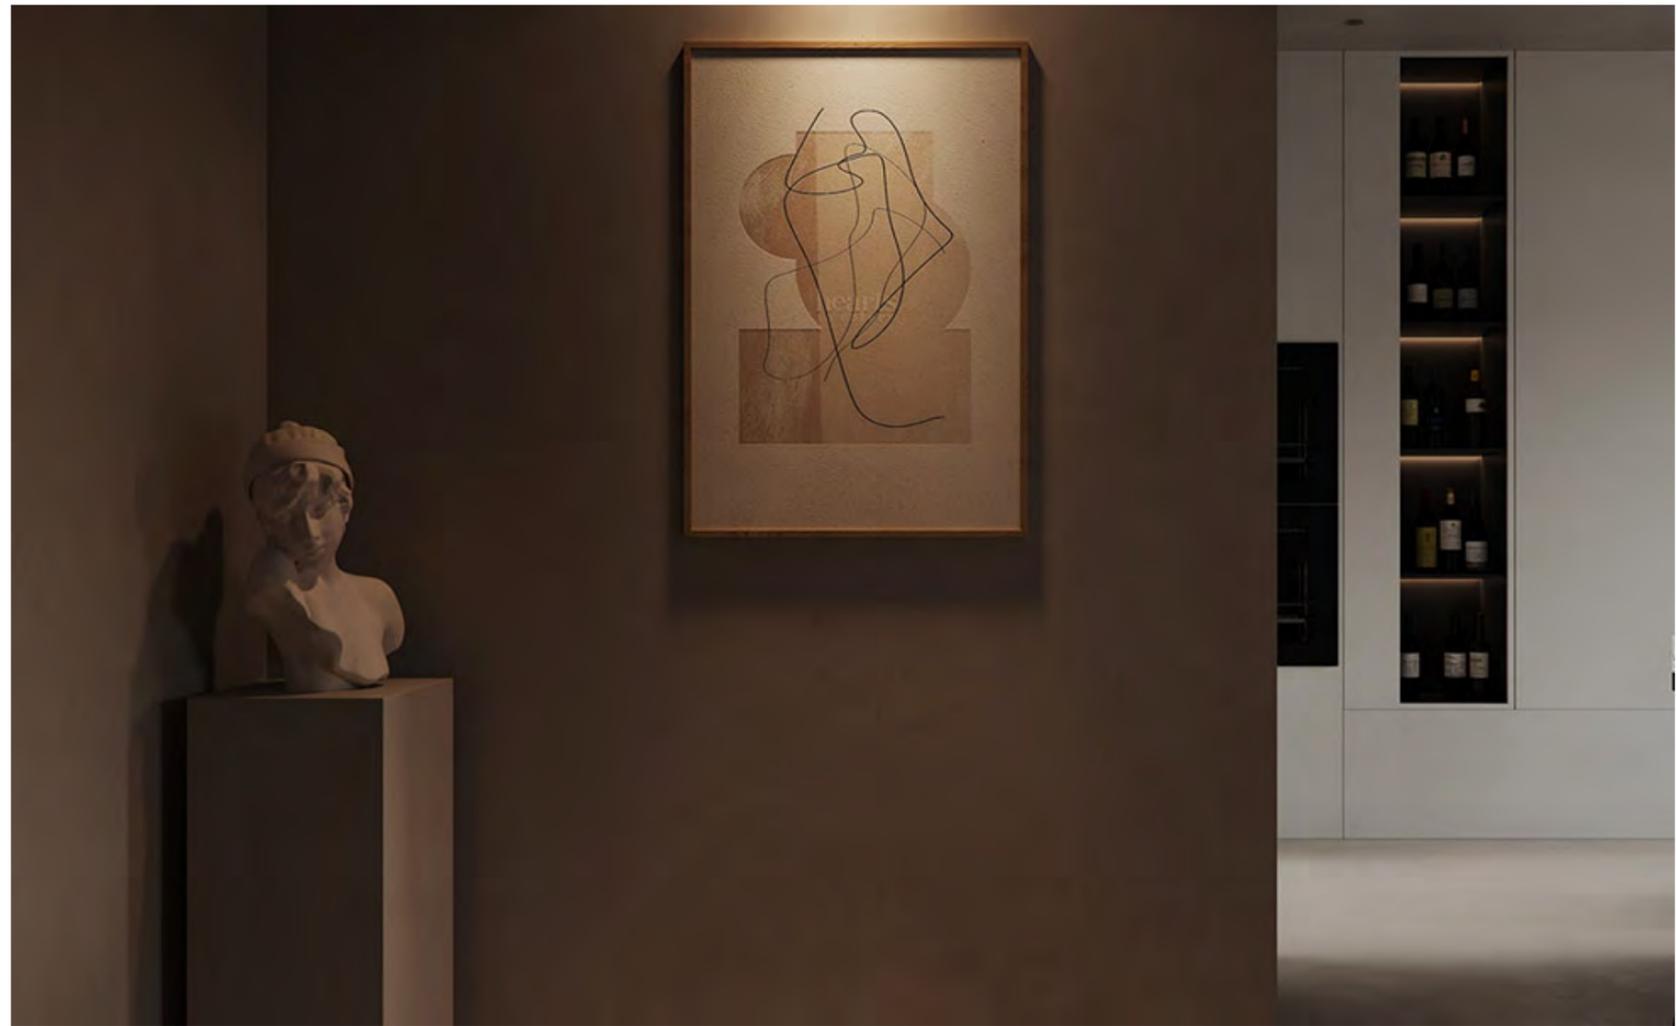

### 防眩技术

# 2022 NEW

Comfortable without glare / direct vision without glare  
舒适无眩光 / 直视不刺眼

明见 / Series Ø55  
Black Light Technology



TZ-MJ05502-Y028



TZ-MJ05502-W031


### TZ-MJ05502-Y028

Power: **7W**  
 Beam Angle:  15°,  24°,  36°  
 Color:  Elegant white  
 Structure:  Adjustable,  Fixed  
 Product Size: 62\*78mm



#### Optional:

- Model: TZ-MJ05502-Y028  
Cup body color: Black chrome 
- Model: TZ-MJ05502-Y028  
Cup body color: Chrome 
- Model: TZ-MJ05502-Y028  
Cup body color: White 
- Model: TZ-MJ05502-Y028  
Cup body color: black 



CRI: > 97 CCT: 2700K, 3000K, 3500K, 4000K  
 SD CM<3 UGR<10 RP>785 Input Voltage: 220-240V  
 Ambient Temperature: -20°C~+45°C Total light source flux: 455lm

  IP20


### TZ-MJ05502-W031

Power: **7W**  
 Beam Angle:  15°,  24°,  36°  
 Color:  Elegant white  
 Structure:  Adjustable,  Fixed  
 Product Size: 80\*78mm



#### Optional:

- Model: TZ-MJ05502-W031  
Cup body color: Black chrome 
- Model: TZ-MJ05502-W031  
Cup body color: Chrome 
- Model: TZ-MJ05502-W031  
Cup body color: White 
- Model: TZ-MJ05502-W031  
Cup body color: Black 



CRI: > 97 CCT: 2700K, 3000K, 3500K, 4000K  
 SD CM<3 UGR<10 RP>785 Input Voltage: 220-240V  
 Ambient Temperature: -20°C~+45°C Total light source flux: 455lm

03 - 明见 / 55MJ / 防眩技术 / Anti dazzle Technology / Ø55 /  /  /  / 15 24 30

### TZ-MJ05502-Y030

Power: **7W**  
 Beam Angle:  15°,  24°,  36°  
 Color:  Elegant white  
 Structure:  Adjustable,  Fixed  
 Product Size: 62\*78mm



#### Optional:

Cup body color:  White




 edge

CRI: > 97    Current: 0.058 a    CCT: 3000K, 4000K    Input Voltage : AC221.0V

Width of luminous surface: 200 mm    Ambient Temperature: -20°C~+45°C

Diameter of light emitting surface: 200mm    Total light source flux: 341.42 lm

Light surface width: 200mm



CRI: > 97    CCT: 2700K, 3000K, 3500K, 4000K

SD CM<3    UGR<10    RP>785    Input Voltage: 220-240V

Ambient Temperature: -20°C~+45°C    Total light source flux: 412 lm

  IP20

03 - 明见 / 60MJ / 防眩技术 / Anti dazzle Technology / Ø60 /  /  /  / 15 24 30

### TZ-MJ05502-W033

Power: **7W**  
 Beam Angle:  15°,  24°,  36°  
 Color:  Elegant white  
 Structure:  Adjustable,  Fixed  
 Product Size: 80\*78mm



#### Optional:

Cup body color:  White




 boundless

CRI: > 97    Current: 0.058 a    CCT: 3000K, 4000K    Input Voltage : AC221.0V

Width of luminous surface: 200 mm    Ambient Temperature: -20°C~+45°C

Diameter of light emitting surface: 200mm    Total light source flux: 341.42 lm

Light surface width: 200mm

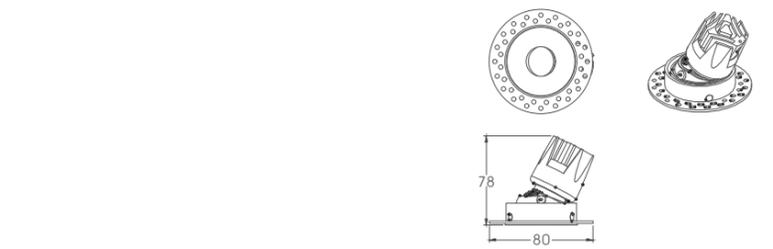

CRI: > 97    CCT: 2700K, 3000K, 3500K, 4000K

SD CM<3    UGR<10    RP>785    Input Voltage: 220-240V

Ambient Temperature: -20°C~+45°C    Total light source flux: 412 lm

  IP20

### TZ-MJ05502-Y029

Power:  
7W

Beam Angle:  
 15°,  24°,  36°

Color:  
 Elegant white

Structure:  
 Adjustable,  Fixed





Product Size:  
62\*78mm

#### Optional:

Cup body color:  White



 edge



CRI: > 97 CCT: 2700K, 3000K, 3500K, 4000K

SD CM<3 UGR<10 RP>785 Input Voltage: 220-240V

Ambient Temperature: -20°C~+45°C Total light source flux: 428lm

  IP20

### TZ-MJ05502-W032

Beam Angle:  
 15°,  24°,  36°

Power:  
7W

Structure:  
 Adjustable,  Fixed

Color:  
 Elegant white





Product Size:  
80\*78mm

#### Optional:

Cup body color:  White



 boundless



CRI: > 97 CCT: 2700K, 3000K, 3500K, 4000K

SD CM<3 UGR<10 RP>785 Input Voltage: 220-240V

Ambient Temperature: -20°C~+45°C Total light source flux: 428lm

  IP20



## 防眩技术

# 20 22 NEW

Comfortable without glare / direct vision without glare  
舒适无眩光 / 直视不刺眼

明见 Series Ø75  
Black Light Technology



TZ-MJ07502-Y036



TZ-MJ07502-W039

03 - 明见 / 75MJ / 防眩技术 / Anti dazzle Technology / Ø75 / / / 15 24 30

### TZ-MJ07502-Y036


Power: **9W/12W**  
 Beam Angle:  15°,  24°,  36°  
 Color:  Elegant white  
 Structure:  Adjustable,  Fixed  
 Product Size: 82\*98mm



#### Optional:

- Model: TZ-MJ07502-Y036  
Cup body color: Black chrome 
- Model: TZ-MJ07502-Y036  
Cup body color: Chrome 
- Model: TZ-MJ07502-Y036  
Cup body color: White 
- Model: TZ-MJ07502-Y036  
Cup body color: black 

edge



CRI: > 97 CCT: 2700K, 3000K, 3500K, 4000K  
 SD CM<3 UGR<10 RP>785 Input Voltage: 220-240V  
 Ambient Temperature: -20°C~+45°C Total light source flux: 622lm

IP20

03 - 明见 / 80MJ / 防眩技术 / Anti dazzle Technology / Ø80 / / / 15 24 30

### TZ-MJ07502-W039


Power: **9W/12W**  
 Beam Angle:  15°,  24°,  36°  
 Color:  Elegant white  
 Structure:  Adjustable,  Fixed  
 Product Size: 100\*98mm



#### Optional:

- Model: TZ-MJ07502-W039  
Cup body color: Black chrome 
- Model: TZ-MJ07502-W039  
Cup body color: Chrome 
- Model: TZ-MJ07502-W039  
Cup body color: White 
- Model: TZ-MJ07502-W039  
Cup body color: Black 

boundless



CRI: > 97 CCT: 2700K, 3000K, 3500K, 4000K  
 SD CM<3 UGR<10 RP>785 Input Voltage: 220-240V  
 Ambient Temperature: -20°C~+45°C Total light source flux: 622lm

IP20

03 - 明见 / 75MJ / 防眩技术 / Anti dazzle Technology / Ø75 /  /  /  / 15 24 30

### TZ-MJ07502-Y038

Power:  
**9W/12W**

Beam Angle:  
 15°,  24°,  36°



Color:  
 white,

Structure:  
 Adjustable,  Fixed


Product Size:  
82\*98mm

#### Optional:

Cup body color:  White



edge



CRI: > 97

CCT: 2700K, 3000K, 3500K, 4000K

SD CM<3 UGR<10 RP>785

Input Voltage: 220-240V

Ambient Temperature: -20°C~+45°C

Total light source flux: 598lm

  IP20

03 - 明见 / 80MJ / 防眩技术 / Anti dazzle Technology / Ø80 /  /  /  / 15 24 30

### TZ-MJ07502-W041

Beam Angle:  
 15°,  24°,  36°

Power:  
**9W/12W**



Structure:  
 Adjustable,  Fixed

Color:  
 Elegant white,


Product Size:  
100\*98mm

#### Optional:

Cup body color:  White



boundless



CRI: > 97

CCT: 2700K, 3000K, 3500K, 4000K

SD CM<3 UGR<10 RP>785

Input Voltage: 220-240V

Ambient Temperature: -20°C~+45°C

Total light source flux: 598lm

  IP20

03 - 明见 / 75MJ / 防眩技术 / Anti dazzle Technology / Ø75 /  /  / 15 24 30

### TZ-MJ07502-Y037

Power:  
**9W/12W**

Beam Angle:  
 15°,  24°,  36°

Color:  
 white,

Structure:  
 Adjustable,  Fixed




Product Size:  
82\*98mm

#### Optional:

Cup body color:  White



 edge



CRI: > 97

CCT: 2700K, 3000K, 3500K, 4000K

SD CM<3 UGR<10 RP>785

Input Voltage: 220-240V

Ambient Temperature: -20°C~+45°C

Total light source flux: 602lm

  IP20

03 - 明见 / 80MJ / 防眩技术 / Anti dazzle Technology / Ø80 /  /  / 15 24 30

### TZ-MJ07502-W040

Beam Angle:  
 15°,  24°,  36°

Power:  
**9W/12W**

Structure:  
 Adjustable,  Fixed

Color:  
 Elegant white,




Product Size:  
100\*98mm

#### Optional:

Cup body color:  White



 boundless



CRI: > 97

CCT: 2700K, 3000K, 3500K, 4000K

SD CM<3 UGR<10 RP>785

Input Voltage: 220-240V

Ambient Temperature: -20°C~+45°C

Total light source flux: 602lm

  IP20

思见 / Series

Black Light Technology  
防眩技术



深防眩  
/  
不见刺眼光

Deep anti dazzle  
/  
invisible glare



□ 圆孔 / Circular Hole



□ 椭圆孔 / Oval hole



□ 喇叭口 / Bellmouth





见光不见灯-效果图

See light without light - effect drawing

## 定制专属色温

根据空间不同需求，营造不同的氛围

打造专属你的休闲空间



3000K

光线柔和  
营造惬意、温馨氛围

4000K

舒适愉悦  
拯救色温纠结者





无频闪 · 阅读不伤眼



No stroboscopic reading,  
no eye injury



03 - 思见 / 55S / 配光曲线



/ Light distribution curve /  $\varnothing 55$  /

照度距离曲线





$\varnothing 55 / 7W / 15^\circ$

照度距离曲线



$\varnothing 55 / 7W / 24^\circ$

照度距离曲线





$\varnothing 55 / 7W / 36^\circ$

03 - 思见 / 75S / 配光曲线



/ Light distribution curve /  $\varnothing 75$  /

照度距离曲线





$\varnothing 75 / 9W / 15^\circ$

照度距离曲线



$\varnothing 75 / 9W / 24^\circ$

照度距离曲线



$\varnothing 75 / 9W / 36^\circ$

## 防眩技术

# 20 22 NEW

思见 / Series

Black Light Technology

深防眩

/

不见刺眼光

Deep anti dazzle

/

invisible glare

Ø55



TZ-SJ05502-Y012



TZ-SJ05502-W015

### TZ-SJ05502-Y012


Power: **7W**  
 Beam Angle:  15°,  24°,  36°  
 Color:  Elegant white  
 Structure:  Adjustable,  Fixed  
 Product Size: 63\*65mm



#### Optional:

- Model: TZ-SJ05502-Y012  
Cup body color: Black chrome 
- Model: TZ-SJ05502-Y012  
Cup body color: Chrome 
- Model: TZ-SJ05502-Y012  
Cup body color: White 
- Model: TZ-SJ05502-Y012  
Cup body color: black 

 edge



CRI: > 97 CCT: 2700K, 3000K, 3500K, 4000K  
 SD CM<3 UGR<13 RP>785 Input Voltage: 220-240V  
 Ambient Temperature: -20°C~+45°C Total light source flux: 488lm

  IP20

### TZ-SJ05502-W015


Power: **7W**  
 Beam Angle:  15°,  24°,  36°  
 Color:  Elegant white  
 Structure:  Adjustable,  Fixed  
 Product Size: 84\*65mm



#### Optional:

- Model: TZ-SJ05502-W015  
Cup body color: Black chrome 
- Model: TZ-SJ05502-W015  
Cup body color: Chrome 
- Model: TZ-SJ05502-W015  
Cup body color: White 
- Model: TZ-SJ05502-W015  
Cup body color: Black 

 boundless



CRI: > 97 CCT: 2700K, 3000K, 3500K, 4000K  
 SD CM<3 UGR<13 RP>785 Input Voltage: 220-240V  
 Ambient Temperature: -20°C~+45°C Total light source flux: 488lm

  IP20

### TZ-SJ05502-Y014

Power: **7W**  
Beam Angle:  15°,  24°,  36°

Color:  Elegant white,  Elegant black  
Structure:  Adjustable,  Fixed




Product Size: 63\*65mm

#### Optional:

Cup body color:  white



 edge



CRI: > 97 CCT: 2700K, 3000K, 3500K, 4000K

SD CM < 3 UGR < 13 RP > 785 Input Voltage: 220-240V

Ambient Temperature: -20°C ~ +45°C Total light source flux: 459lm

  IP20

### TZ-SJ05502-W017

Beam Angle:  15°,  24°,  36°

Structure:  Adjustable,  Fixed



Power: **7W**


Color:  Elegant white,

Product Size: 84\*65mm

#### Optional:

 Cup body color:  white

 boundless



CRI: > 97 CCT: 2700K, 3000K, 3500K, 4000K

SD CM < 3 UGR < 13 RP > 785 Input Voltage: 220-240V

Ambient Temperature: -20°C ~ +45°C Total light source flux: 459lm

  IP20

### TZ-SJ05502-Y013

Power: **7W**  
 Beam Angle:  15°,  24°,  36°  
 Color:  Elegant white  
 Structure:  Adjustable,  Fixed  
 Product Size: 63\*65mm




#### Optional:

Cup body color:  White



 edge



CRI: > 97 CCT: 2700K, 3000K, 3500K, 4000K  
 SD CM<3 UGR<13 RP>785 Input Voltage: 220-240V  
 Ambient Temperature: -20°C~+45°C Total light source flux: 467lm

  IP20

### TZ-SJ05502-W016

Power: **7W**  
 Beam Angle:  15°,  24°,  36°  
 Color:  Elegant white  
 Structure:  Adjustable,  Fixed  
 Product Size: 84\*65mm




#### Optional:

 Cup body color:  White




 boundless



CRI: > 97 CCT: 2700K, 3000K, 3500K, 4000K  
 SD CM<3 UGR<13 RP>785 Input Voltage: 220-240V  
 Ambient Temperature: -20°C~+45°C Total light source flux: 467lm

  IP20

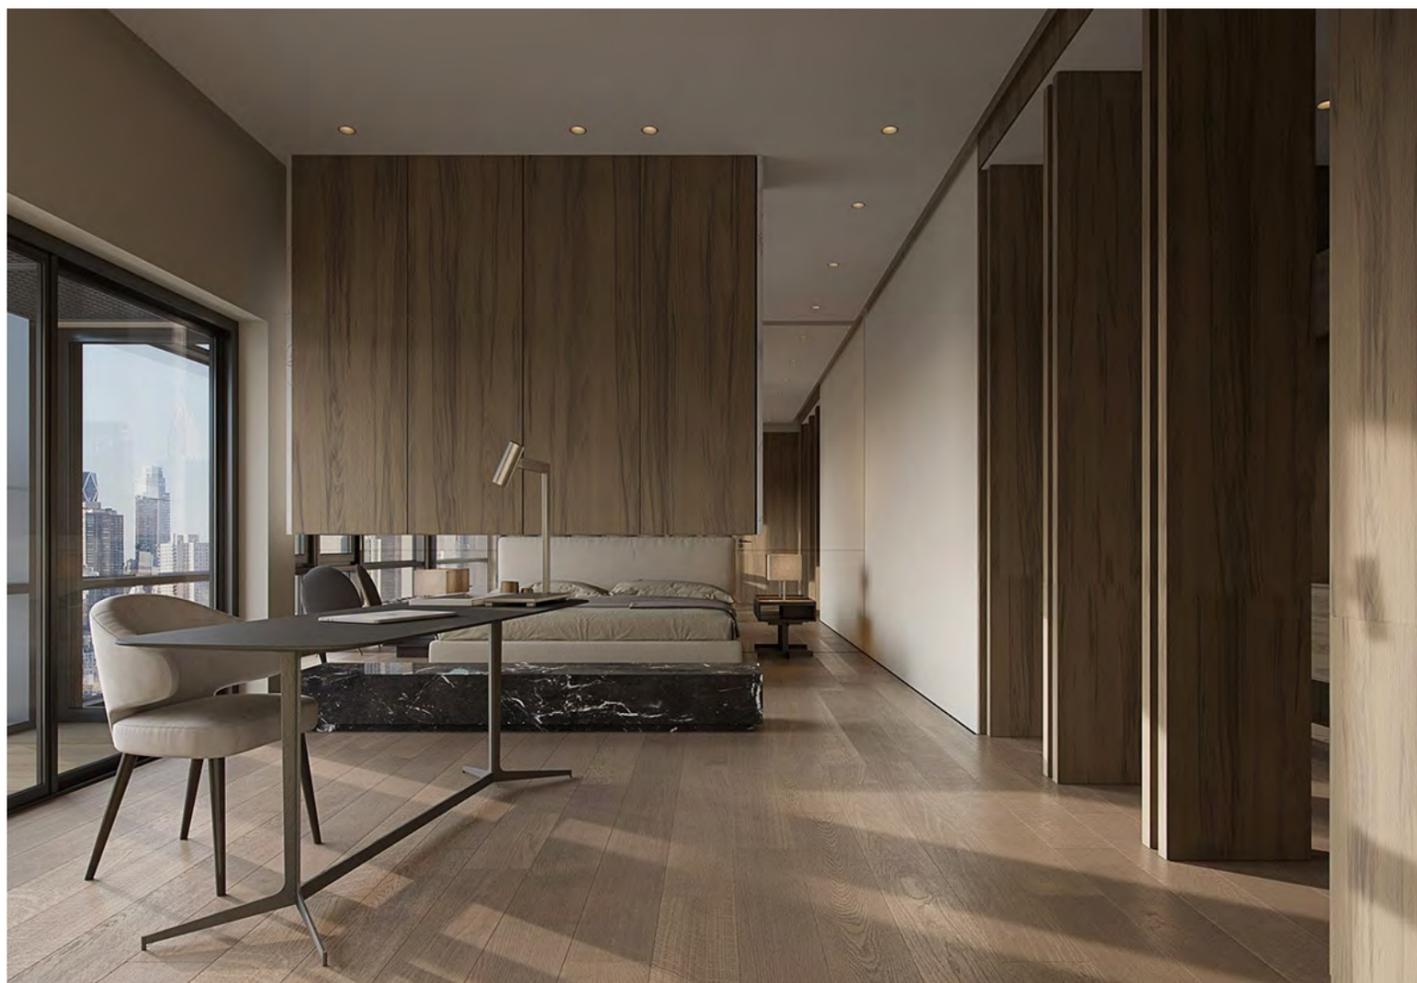

## 防眩技术

# 2022 NEW

思见 series

Black Light Technology

深防眩

/

不见刺眼光

Deep anti dazzle

/

invisible glare

Ø75



TZ-SJ07502-Y020



TZ-SJ07502-W023

### TZ-SJ07502-Y020

Power:  
**9W/12W**

Beam Angle:  
 15°,  24°,  36°

Color:  
 Elegant white

Structure:  
 Adjustable,  Fixed



Product Size:  
83\*70mm

#### Optional:


Model: TZ-SJ07502-Y020  
Cup body color: Black chrome 

Model: TZ-SJ07502-Y020  
Cup body color: Chrome 

Model: TZ-SJ07502-Y020  
Cup body color: White 

Model: TZ-SJ07502-Y020  
Cup body color: black 

 edge



CRI: > 97 CCT: 2700K, 3000K, 3500K, 4000K

SD CM<3 UGR<13 RP>785 Input Voltage: 220-240V

Ambient Temperature: -20°C~+45°C Total light source flux: 648lm

  IP20

### TZ-SJ07502-W023

Power:  
**9W/12W**

Beam Angle:  
 15°,  24°,  36°

Color:  
 Elegant white

Structure:  
 Adjustable,  Fixed



Product Size:  
104\*70mm

#### Optional:


Model: TZ-SJ07502-W023  
Cup body color: Black chrome 

Model: TZ-SJ07502-W023  
Cup body color: Chrome 

Model: TZ-SJ07502-W023  
Cup body color: White 

Model: TZ-SJ07502-W023  
Cup body color: Black 

 boundless



CRI: > 97 CCT: 2700K, 3000K, 3500K, 4000K

SD CM<3 UGR<13 RP>785 Input Voltage: 220-240V

Ambient Temperature: -20°C~+45°C Total light source flux: 648lm

  IP20

### TZ-SJ07502-Y022

Power:  
**9W/12W**

Color:  
 Elegant white

Product Size:  
83\*70mm

Beam Angle:  
 15°,  24°,  36°

Structure:  
 Adjustable,  Fixed




#### Optional:

Cup body color:  White



 edge



CRI: > 97 CCT: 2700K, 3000K, 3500K, 4000K

SD CM < 3 UGR < 13 RP > 785 Input Voltage: 220-240V

Ambient Temperature: -20°C ~ +45°C Total light source flux: 607lm

  IP20

### TZ-SJ07502-W025

Beam Angle:  
 15°,  24°,  36°

Structure:  
 Adjustable,  Fixed

Power:  
**9W/12W**


Color:  
 Elegant white

Product Size:  
104\*70mm

#### Optional:

 Cup body color:  White

 boundless



CRI: > 97 CCT: 2700K, 3000K, 3500K, 4000K

SD CM < 3 UGR < 13 RP > 785 Input Voltage: 220-240V

Ambient Temperature: -20°C ~ +45°C Total light source flux: 607lm

  IP20

### TZ-SJ07502-Y021

Power:  
**9W/12W**

Beam Angle:  
 15°,  24°,  36°

Color:  
 Elegant white

Structure:  
 Adjustable,  Fixed




Product Size:  
83\*70mm

#### Optional:

Cup body color:  White



 edge



CRI: > 97

CCT: 2700K, 3000K, 3500K, 4000K

SD CM < 3 UGR < 13 RP > 785

Input Voltage: 220-240V

Ambient Temperature: -20°C ~ +45°C

Total light source flux: 616lm

  IP20

### TZ-SJ07502-W024

Beam Angle:  
 15°,  24°,  36°

Power:  
**9W/12W**

Structure:  
 Adjustable,  Fixed

Color:  
 Elegant white




Product Size:  
104\*70mm

#### Optional:

 Cup body color:  White



 boundless



CRI: > 97

CCT: 2700K, 3000K, 3500K, 4000K

SD CM < 3 UGR < 13 RP > 785

Input Voltage: 220-240V

Ambient Temperature: -20°C ~ +45°C

Total light source flux: 616lm

  IP20

阿卡 / Series  
NiteCore Extreme  
无极调光

舒适无眩光 / 直视不刺眼

Comfortable without glare / direct vision without glare




2700K-6000K

范围色温可任意调节，同时可调节亮度

可搭配网关、传感器、智能音箱，APP或其他设备  
实现智能场景，语音控制远程控制，自动化任务



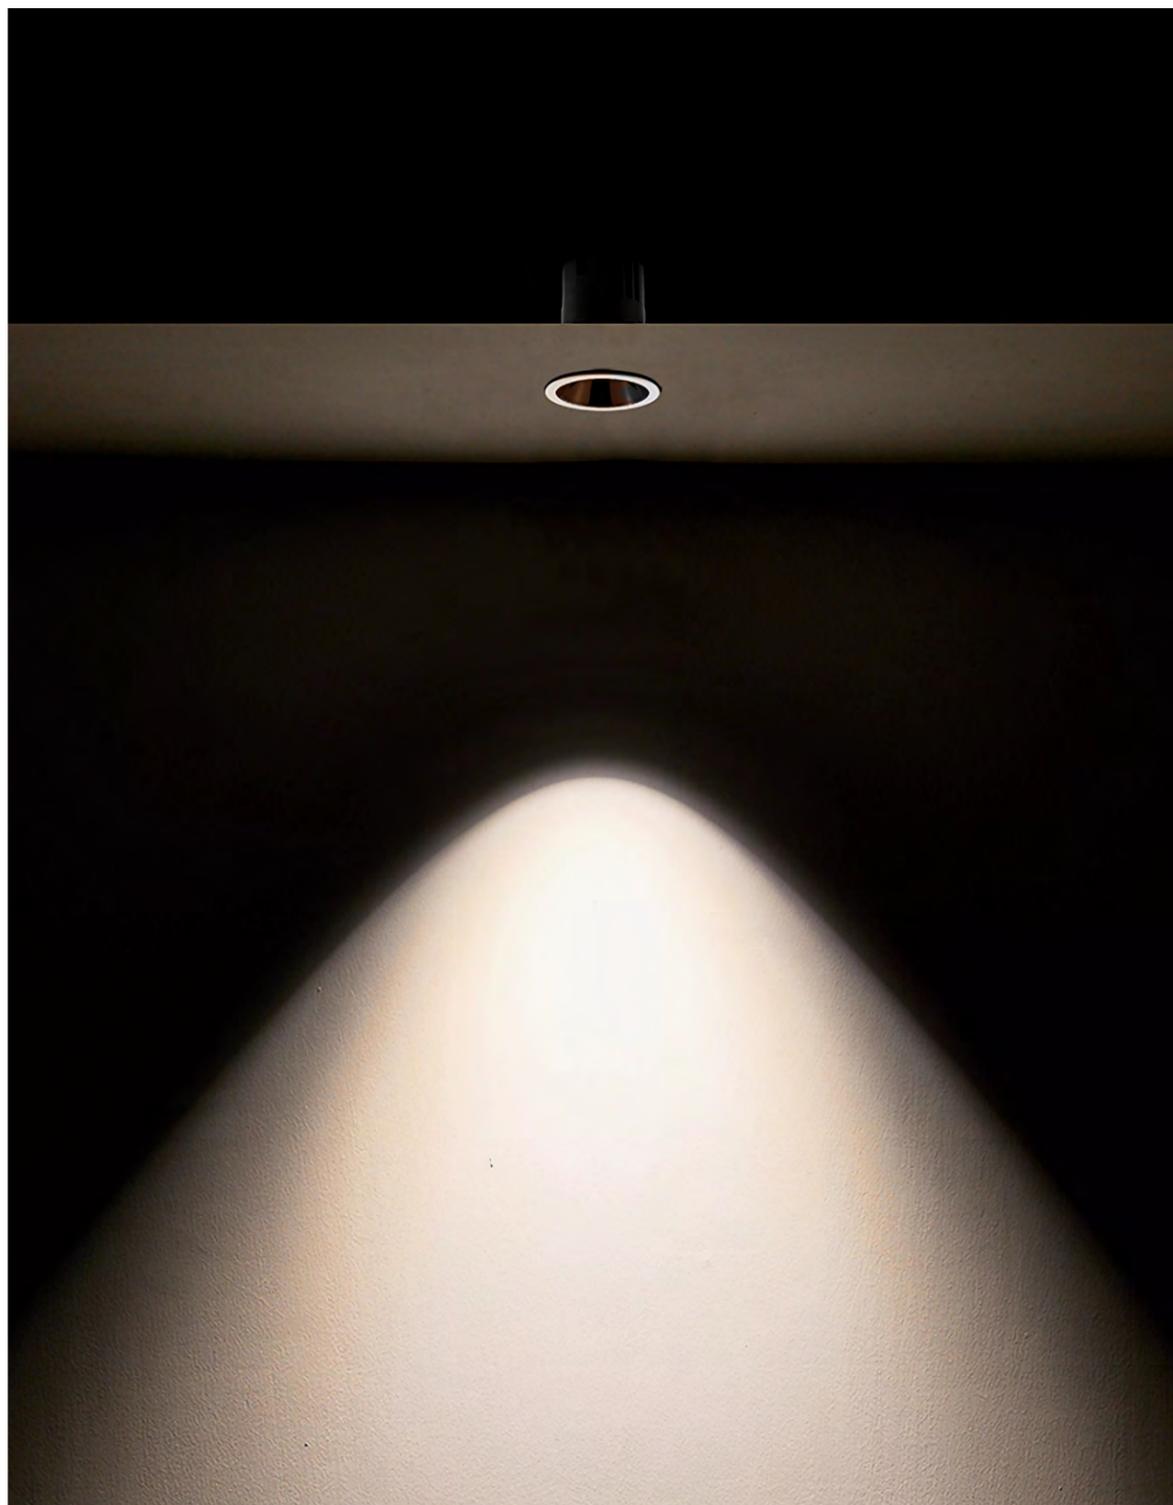

深层防眩更健康

Deep anti glare for better health

UGR<10 截光角>60°

## 自由调控，无忧无虑

根据空间不同需求，营造不同的氛围

打造专属你的休闲空间



3000K

光线柔和  
营造惬意、温馨氛围



4000K

舒适愉悦  
拯救色温纠结者





阿卡 / 配光曲线



/ NiteCore Extreme / Ø55 /





Ø55 / 10W / 15°

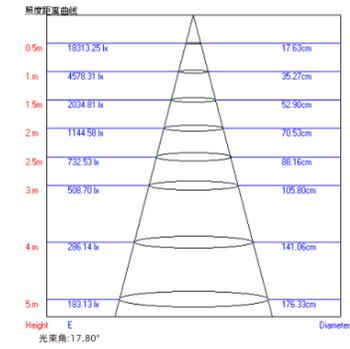



Ø75 / 15W / 15°





Ø55 / 10W / 24°

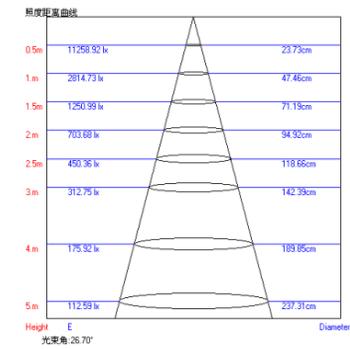

Ø75 / 15W / 24°





Ø55 / 10W / 36°

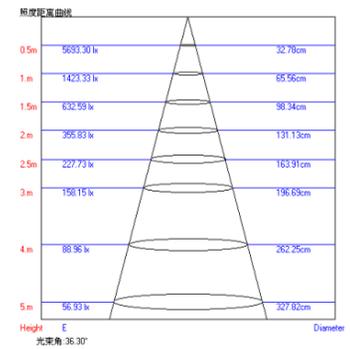



Ø75 / 15W / 36°

阿卡 / 配光曲线



/ NiteCore Extreme / Ø55 /



Ø95 / 20W / 30°



Ø95 / 20W / 45°



Ø95 / 20W / 55°

阿卡 / 无极调光 / NiteCore Extreme / Ø55 /

TZ-AK05502-Y001



Beam Angle:  
 15°,  24°,  36°

Structure:  
 Adjustable,  Fixed

Power:  
**7W/10W**


Color:  
 Elegant white  
 Elegant black

Product Size:  
 62\*84mm

Optional:

-  Model: TZ-AK05502-Y001  
Cup body color: Black chrome
-  Model: TZ-AK05502-Y001  
Cup body color: Chrome
-  Model: TZ-AK05502-Y001  
Cup body color: White
-  Model: TZ-AK05502-Y001  
Cup body color: black

boundless



|                                  |                                 |
|----------------------------------|---------------------------------|
| CRI: >97                         | CCT: 2700K, 3000K, 3500K, 4000K |
| SD CM<3 UGR<10 RP>785            | Input Voltage: 220-240V         |
| Ambient Temperature: -20°C~+45°C | Total light source flux: 566lm  |

CE IP20

阿卡 / 无极调光 / NiteCore Extreme / Ø55 /  /  / 

### TZ-AK05502-Y002

Power:  
**7W/10W**

Beam Angle:  
 15°,  24°,  36°



Color:  
Elegant white  
Elegant black

Structure:  
 Adjustable,  Fixed


Product Size:  
62\*84mm

#### Optional:

Model: TZ-AK05502-Y002  
Cup body color: White



 edge



CRI: >97 CCT: 2700K, 3000K, 3500K, 4000K

SD CM<3 UGR<10 RP>785 Input Voltage: 220-240V

Ambient Temperature: -20°C~+45°C Total light source flux: 566lm

  IP20

阿卡 / 无极调光 / NiteCore Extreme / Ø55 /  /  / 

### TZ-AK05502-Y003



Beam Angle:  
 15°,  24°,  36°

Power:  
**7W/10W**

Structure:  
 Adjustable,  Fixed

Color:  
Elegant white  
Elegant black


Product Size:  
62\*84mm

#### Optional:

Model: TZ-AK05502-Y003  
Cup body color: White



 boundless



CRI: >97 CCT: 2700K, 3000K, 3500K, 4000K

SD CM<3 UGR<10 RP>785 Input Voltage: 220-240V

Ambient Temperature: -20°C~+45°C Total light source flux: 566lm

  IP20

阿卡 / 无极调光 / NiteCore Extreme / Ø75 /  /  /  / 15° 24° 36°

### TZ-AK07502-Y004

Power:  
**9W/12W/15W**

Beam Angle:  
 15°,  24°,  36°

Color:  
Elegant white  
Elegant black

Structure:  
 Adjustable,  Fixed



Product Size:  
86\*88mm

#### Optional:

Model: TZ-AK07502-Y004  
Cup body color: Black chrome



Model: TZ-AK07502-Y004  
Cup body color: Chrome



Model: TZ-AK07502-Y004  
Cup body color: White




Model: TZ-AK07502-Y004  
Cup body color: black



Model: TZ-AK07502-Y004  
Cup body color: Misty silver

Model: TZ-AK07502-Y004  
Cup body color: Golden

 edge



K

CRI: >97 CCT: 2700K, 3000K, 3500K, 4000K

SD CM<3 UGR<10 RP>785 Input Voltage: 220-240V

Ambient Temperature: -20°C~+45°C Total light source flux: 566lm

  IP20

阿卡 / 无极调光 / NiteCore Extreme / Ø75 /  /  /  / 15° 24° 36°

### TZ-AK07502-Y005



Beam Angle:  
 15°,  24°,  36°

Power:  
**10W/12W**

Structure:  
 Adjustable,  Fixed

Color:  
Elegant white  
Elegant black


Product Size:  
86\*88mm

#### Optional:

Model: TZ-AK07502-Y005  
Cup body color: White



 boundless



CRI: >97 CCT: 2700K, 3000K, 3500K, 4000K

SD CM<3 UGR<10 RP>785 Input Voltage: 220-240V

Ambient Temperature: -20°C~+45°C Total light source flux: 566lm

  IP20

阿卡 / 无极调光 / NiteCore Extreme / Ø75 /  /  /  / 15° 24° 36°

### TZ-AK07502-Y006

Power:  
**10W/12W**

Beam Angle:  
 15°,  24°,  36°



Color:  
Elegant white  
Elegant black

Structure:  
 Adjustable,  Fixed


Product Size:  
86\*88mm

#### Optional:

Model: TZ-AK07502-Y006  
Cup body color: White



 edge



CRI: >97 CCT: 2700K, 3000K, 3500K, 4000K

SD CM<3 UGR<10 RP>785 Input Voltage: 220-240V

Ambient Temperature: -20°C~+45°C Total light source flux: 566lm

  IP20

阿卡 / 无极调光 / NiteCore Extreme / Ø75 /  /  /  / 25° 40°

### TZ-AK07502-Y007



Beam Angle:  
24°

Power:  
**10W/12W**

Structure:  
 Adjustable,  Fixed

Color:  
Elegant white  
Elegant black


Product Size:  
86\*88mm

#### Optional:

Model: TZ-AK07502-Y007  
Cup body color: Chrome



 boundless



CRI: >97 CCT: 2700K, 3000K, 3500K, 4000K

SD CM<3 UGR<10 RP>785 Input Voltage: 220-240V

Ambient Temperature: -20°C~+45°C Total light source flux: 566lm

  IP20

阿卡 / 无极调光 / NiteCore Extreme / Ø95 / / / 15° 24° 30° 45° 55°

### TZ-AK09502-Y008

Power:  
18W/20W/25W/30W

Color:  
Elegant white  
Elegant black

Product Size:  
108\*133mm

Beam Angle:  
 15°,  24°,  36°  
 30°,  45°,  55°

Structure:  
 Adjustable,  Fixed



#### Optional:

Model: TZ-AK09502-Y008  
Cup body color: Black chrome



Model: TZ-AK09502-Y008  
Cup body color: Chrome




Model: TZ-AK09502-Y008  
Cup body color: White



Model: TZ-AK09502-Y008  
Cup body color: black



edge



CRI: >97 CCT: 2700K, 3000K, 3500K, 4000K

SD CM<3 UGR<10 RP>785 Input Voltage: 220-240V

Ambient Temperature: -20°C~+45°C Total light source flux: 566lm

IP20

阿卡 / 无极调光 / NiteCore Extreme / Ø95 / / / 25° 45°

### TZ-AK09502-Y009



Beam Angle:  
24°

Structure:  
 Adjustable,  Fixed

Power:  
18W/20W/25W/30W

Color:  
Elegant white  
Elegant black


Product Size:  
108\*133mm

#### Optional:

Model: TZ-AK09502-Y009  
Cup body color: Chrome



boundless



CRI: >97 CCT: 2700K, 3000K, 3500K, 4000K

SD CM<3 UGR<10 RP>785 Input Voltage: 220-240V

Ambient Temperature: -20°C~+45°C Total light source flux: 566lm

IP20

P  
1  
8  
7

肌  
肤  
感  
无  
主  
灯  
·  
缔造者

P  
1  
8  
8

LIGHT ENVIRONMENT ENGINEERING



# 20 22 NEW

轻盈 / Series

Small caliber, large function

小口径，大作用

舒适无眩光 / 直视不刺眼

Comfortable without glare / direct vision without glare

□有边框 / Have a border

- Ø35 有边框可调嵌入式
- Ø45 有边框可调嵌入式
- Ø55 有边框可调嵌入式



□无边框 / No border

- Ø40 无边框可调嵌入式
- Ø45 无边框可调嵌入式
- Ø55 无边框可调嵌入式





舒适无眩光 / 直视不刺眼 Comfortable without glare / direct vision without glare




轻盈 / Series  
Small caliber, large function  
小口径，大作用

/ 轻盈 / 配光曲线


/ Light distribution curve /

照度距离曲线




Ø45 / 12W / 15°

照度距离曲线




Ø45 / 12W / 36°

照度距离曲线




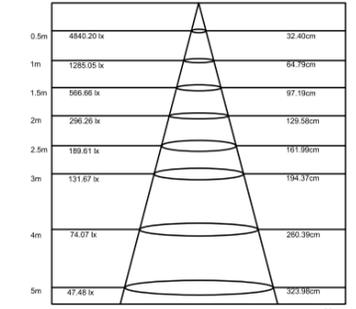


Ø35 / 8W / 36°


照度距离曲线



Ø55 / 15W / 15°




照度距离曲线

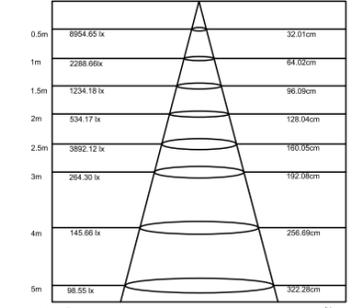


Ø55 / 15W / 36°

照度距离曲线




Ø35 / 8W / 24°

照度距离曲线





Ø45 / 12W / 24°

照度距离曲线



Ø55 / 15W / 24°



/ 轻盈 / 配光曲线

/ Light distribution curve /

### TZ-QY03502-Y042

Power: 5W  
 Beam Angle:  15°  24°  36°  
 Color: Elegant black  
 Structure:  Adjustable,  Fixed  
 Product Size: 40\*H90mm




#### Optional:

Model: TZ-QY03502-Y042  
 Cup body color:  black



 edge

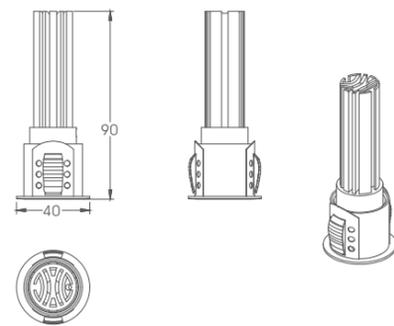

CRI: >95 CCT: 2700K, 3000K, 3500K, 4000K  
 SD CM<3 UGR<13 RP>785 Input Voltage: 220-240V  
 Ambient Temperature: -20°C~+45°C Total light source flux: 432lm

  IP20

### TZ-QY04502-Y043

Beam Angle:  15°  24°  36°  
 Structure:  Adjustable,  Fixed  
 Color:  Elegant black  
 Product Size: 52\*H102mm  
 52\*H112mm




#### Optional:



Model: TZ-QY04502-Y043  
 Cup body color:  black

 edge

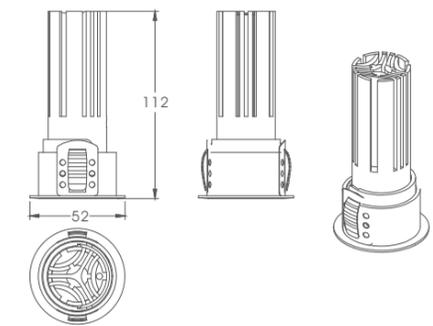

CRI: > 97 CCT: 2700K, 3000K, 3500K, 4000K  
 SD CM<3 UGR<13 RP>785 Input Voltage: 220-240V  
 Ambient Temperature: -20°C~+45°C Total light source flux: 975lm

  IP20

04 - 轻盈 / 55S / 防眩技术 / Anti dazzle Technology / Ø55 /  /  /  / 15 24 30

### TZ-QY05502-Y044

Power: **12W/15W**

Beam Angle:  15°,  24°,  36°

Color: **Elegant black**

Structure:  Adjustable,  Fixed

Product Size: 62\*H112mm  
62\*H127mm




#### Optional:

Model: TZ-QY05502-Y044  
Cup body color:  black



 edge

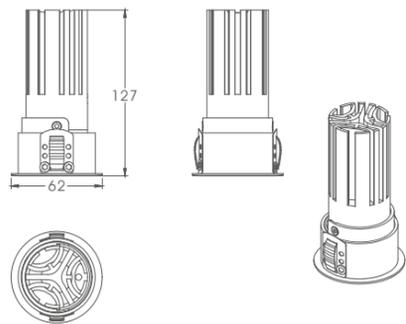

CRI: >97 CCT: 2700K, 3000K, 3500K, 4000K

SD CM<3 UGR<13 RP>785 Input Voltage: 220-240V

Ambient Temperature: -20°C~+45°C Total light source flux: 1224lm

  IP20

04 轻盈 / 40S / 防眩技术 / Anti dazzle Technology / Ø40 /  /  /  / 15 24 30

### TZ-QY03502-W045

Beam Angle:  24°,  36°

Power: **5W**

Structure:  Adjustable,  Fixed

Color:  Elegant black

Product Size: 60\*H90mm




#### Optional:

Model: TZ-QY03502-W045  
Cup body color:  black



 boundless

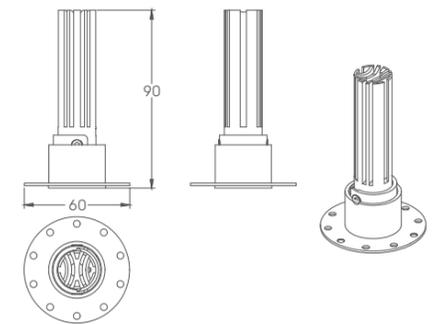

CRI: >95 CCT: 2700K, 3000K, 3500K, 4000K

SD CM<3 UGR<13 RP>785 Input Voltage: 220-240V

Ambient Temperature: -20°C~+45°C Total light source flux: 432lm

  IP20

04 - 轻盈 / 45S / 防眩技术 / Anti dazzle Technology / Ø45 /  /  / 15 24 30

### TZ-QY04502-W046

Power: **9W/12W**  
 Beam Angle:  15°,  24°,  36°  
 Color: **Elegant black**  
 Structure:  Adjustable,  Fixed  
 Product Size:  
 70\*H102mm  
 70\*H112mm




#### Optional:

Model: TZ-QY04502-W046  
 Cup body color:  black



 boundless

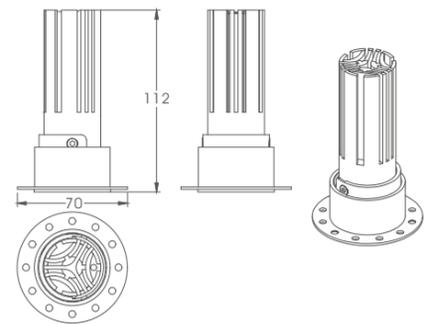

CRI: > 97 CCT: 2700K, 3000K, 3500K, 4000K  
 SD CM<3 UGR<13 RP>785 Input Voltage: 220-240V  
 Ambient Temperature: -20°C~+45°C Total light source flux: 975lm

  IP20

04 轻盈 / 55S / 防眩技术 / Anti dazzle Technology / Ø55 /  /  / 15 24 30

### TZ-QY05502-W047

Beam Angle:  15°,  24°,  36°  
 Structure:  Adjustable,  Fixed  
 Power: **12W/15W**  
 Color:  Elegant black  
 Product Size:  
 80\*H112mm  
 80\*H127mm




#### Optional:

Model: TZ-QY05502-W047  
 Cup body color:  black



 boundless

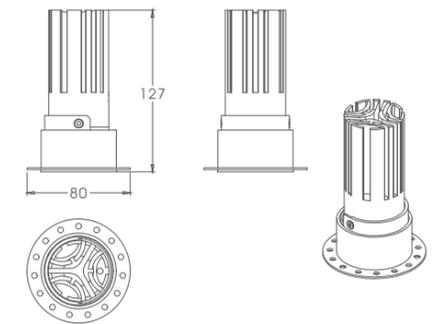

CRI: > 97 CCT: 2700K, 3000K, 3500K, 4000K  
 SD CM<3 UGR<13 RP>785 Input Voltage: 220-240V  
 Ambient Temperature: -20°C~+45°C Total light source flux: 1224lm

  IP20




LINE LIGHT  
线条灯



## TG-L043068/ 下发光-吊装系统

|                                     |                                    |
|-------------------------------------|------------------------------------|
| Features:<br>吊装/嵌入/吸顶/挂壁式系统         | Lighting method:<br>直接照明           |
| Color:<br>□ white, □ Black, □Silver | Beam angle:<br>110°                |
| Glare index:<br><19                 | Overall lighting effect:<br>70lm/W |
| Light strip form:<br>可拼接            | CRI:<br>>97                        |
| Voltage frequency:<br>220V / 50Hz   | Applications:<br>写字楼/公共建筑/酒店/商城    |

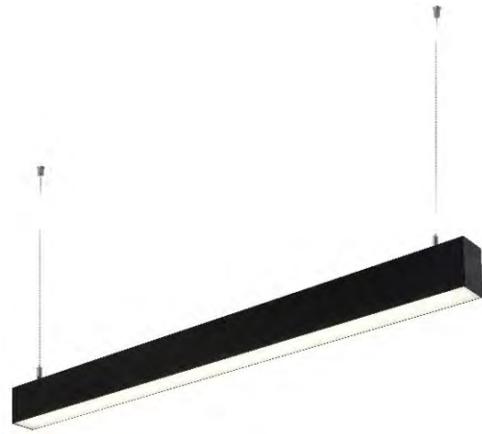

### light source:

|                               |  |                                       |                                  |                         |
|-------------------------------|--|---------------------------------------|----------------------------------|-------------------------|
| Light source category:<br>SMD | Light source brand:<br>LED 2835 Edison+Osram3030 | CCT:<br>2700k/3000K/4000K/5000k/5700k | Color rendering index:<br>≥80/90 | Average life:<br>50000h |
|-------------------------------|--|---------------------------------------|----------------------------------|-------------------------|

回 CE 户 IP20

### Electric appliance

|                             |  |                        |                     |
|-----------------------------|--|------------------------|---------------------|
| Type of appliance:<br>LED驱动 | Electrical appliance brand:<br>OSRAM TRIDONIC 3AAA | Power factor:<br>□0.92 | Average life:<br>5年 |
|-----------------------------|--|------------------------|---------------------|

### Remarks:

- 1、施工现场的实际情况应符合灯具的尺寸
- 2、灯具的安装工作需由专业人士完成

### Main material

|                                    |                                |                            |                                |
|------------------------------------|--------------------------------|----------------------------|--------------------------------|
| Lamp body material:<br>高纯度A6063航空铝 | End cap material:<br>ADC12 铝合金 | Surface treatment:<br>静电喷漆 | Panel material:<br>PC散光罩 德国BWF |
|------------------------------------|--------------------------------|----------------------------|--------------------------------|

### Section size chart:

|  | 功率  | 光通量    | 色温                      | 长*宽*高      |
|--|-----|--------|-------------------------|------------|
|  | 15W | 1200lm | 2700K/4000K/5000K/5700K | 595*43*68  |
|  | 20W | 1700lm | 2700K/4000K/5000K/5700K | 890*43*68  |
|  | 30W | 2500lm | 2700K/4000K/5000K/5700K | 1180*43*68 |
|  | 36W | 3000lm | 2700K/4000K/5000K/5700K | 1470*43*68 |
|  | 45W | 3800lm | 2700K/4000K/5000K/5700K | 1760*43*68 |
|  | 50W | 4200lm | 2700K/4000K/5000K/5700K | 2050*43*68 |
|  | 60W | 5100lm | 2700K/4000K/5000K/5700K | 2340*43*68 |

### Engineering case:



## TG-L060088吊线洗墙灯

|                                     |                                    |
|-------------------------------------|------------------------------------|
| Features:<br>吊装/嵌入/吸顶/挂壁式系统         | Glare index:<br><19                |
| Lighting method:<br>直接照明            | Overall lighting effect:<br>70lm/W |
| Color:<br>□ white, □ Black, □Silver | CRI:<br>>97                        |
| Beam angle:<br>110°                 | Voltage frequency:<br>220V / 50Hz  |
| Light strip form:<br>可拼接            | Applications:<br>写字楼/公共建筑/酒店/商城    |



### light source:

|                               |  |                                       |                                  |                         |
|-------------------------------|--|---------------------------------------|----------------------------------|-------------------------|
| Light source category:<br>SMD | Light source brand:<br>LED 2835 Edison+Osram3030 | CCT:<br>2700k/3000K/4000K/5000k/5700k | Color rendering index:<br>≥80/90 | Average life:<br>50000h |
|-------------------------------|--|---------------------------------------|----------------------------------|-------------------------|

回 CE 户 IP20

### Electric appliance

|                             |  |                        |                     |
|-----------------------------|--|------------------------|---------------------|
| Type of appliance:<br>LED驱动 | Electrical appliance brand:<br>OSRAM TRIDONIC 3AAA | Power factor:<br>□0.92 | Average life:<br>5年 |
|-----------------------------|--|------------------------|---------------------|

### Remarks:

- 1、施工现场的实际情况应符合灯具的尺寸
- 2、灯具的安装工作需由专业人士完成

### Main material

|                                    |                                |                            |                                |
|------------------------------------|--------------------------------|----------------------------|--------------------------------|
| Lamp body material:<br>高纯度A6063航空铝 | End cap material:<br>ADC12 铝合金 | Surface treatment:<br>静电喷漆 | Panel material:<br>PC散光罩 德国BWF |
|------------------------------------|--------------------------------|----------------------------|--------------------------------|

### Section size chart:

|  | 功率  | 光通量    | 色温                      | 长*宽*高      |
|--|-----|--------|-------------------------|------------|
|  | 15W | 970lm  | 2700K/4000K/5000K/5700K | 600*60*88  |
|  | 20W | 1300lm | 2700K/4000K/5000K/5700K | 890*60*88  |
|  | 30W | 1950lm | 2700K/4000K/5000K/5700K | 1180*60*88 |
|  | 36W | 2340lm | 2700K/4000K/5000K/5700K | 1470*60*88 |
|  | 45W | 2900lm | 2700K/4000K/5000K/5700K | 1760*60*88 |
|  | 50W | 3200lm | 2700K/4000K/5000K/5700K | 2050*60*88 |
|  | 60W | 3900lm | 2700K/4000K/5000K/5700K | 2340*60*88 |

### Engineering case:



## TG-L020020嵌入明装系统

|  |                                      |
|--|--------------------------------------|
| Features:<br>嵌入明装灯系统                     | Lighting method:<br>直接照明             |
| Overall lighting effect:<br>70lm/W       | CRI:<br>>97                          |
| Light strip form:<br>可拼接                 | Color:<br>□ white, □ Black, □ Silver |
| Appearance size (mm):<br>长度可定制 W20 X H20 | Applications:<br>写字楼/公共建筑/酒店/商城      |
| Voltage frequency:<br>DC 24V             | Beam angle:<br>110°                  |
| Glare index:<br><19                      | Total power:<br>10W/M                |



### light source:

|                               |                                    |                                       |                         |                                  |
|-------------------------------|------------------------------------|---------------------------------------|-------------------------|----------------------------------|
| Light source category:<br>SMD | Light source brand:<br>Edison 2835 | CCT:<br>2700K/3000K/4000K/5000k/5700k | Light flux:<br>700 lm/M | Color rendering index:<br>≥80/90 |
| Average life:<br>50000h       |                                    |                                       |                         |                                  |

回 CE 户 IP20

### Electric appliance

|                                    |                         |                     |
|------------------------------------|-------------------------|---------------------|
| Type of appliance:<br>LED 24V 开关电源 | Power factor:<br>□0. 90 | Average life:<br>3年 |
|------------------------------------|-------------------------|---------------------|

### Remarks:

- 1、施工现场的实际情况应符合灯具的尺寸
- 2、灯具的安装工作需由专业人士完成



### Main material


|                                    |                          |                            |                                |
|------------------------------------|--------------------------|----------------------------|--------------------------------|
| Lamp body material:<br>高纯度A6063航空铝 | End cap material:<br>ABS | Surface treatment:<br>静电喷漆 | Panel material:<br>PC散光罩 德国BWF |
|------------------------------------|--------------------------|----------------------------|--------------------------------|


### Engineering case:



### Section size chart:



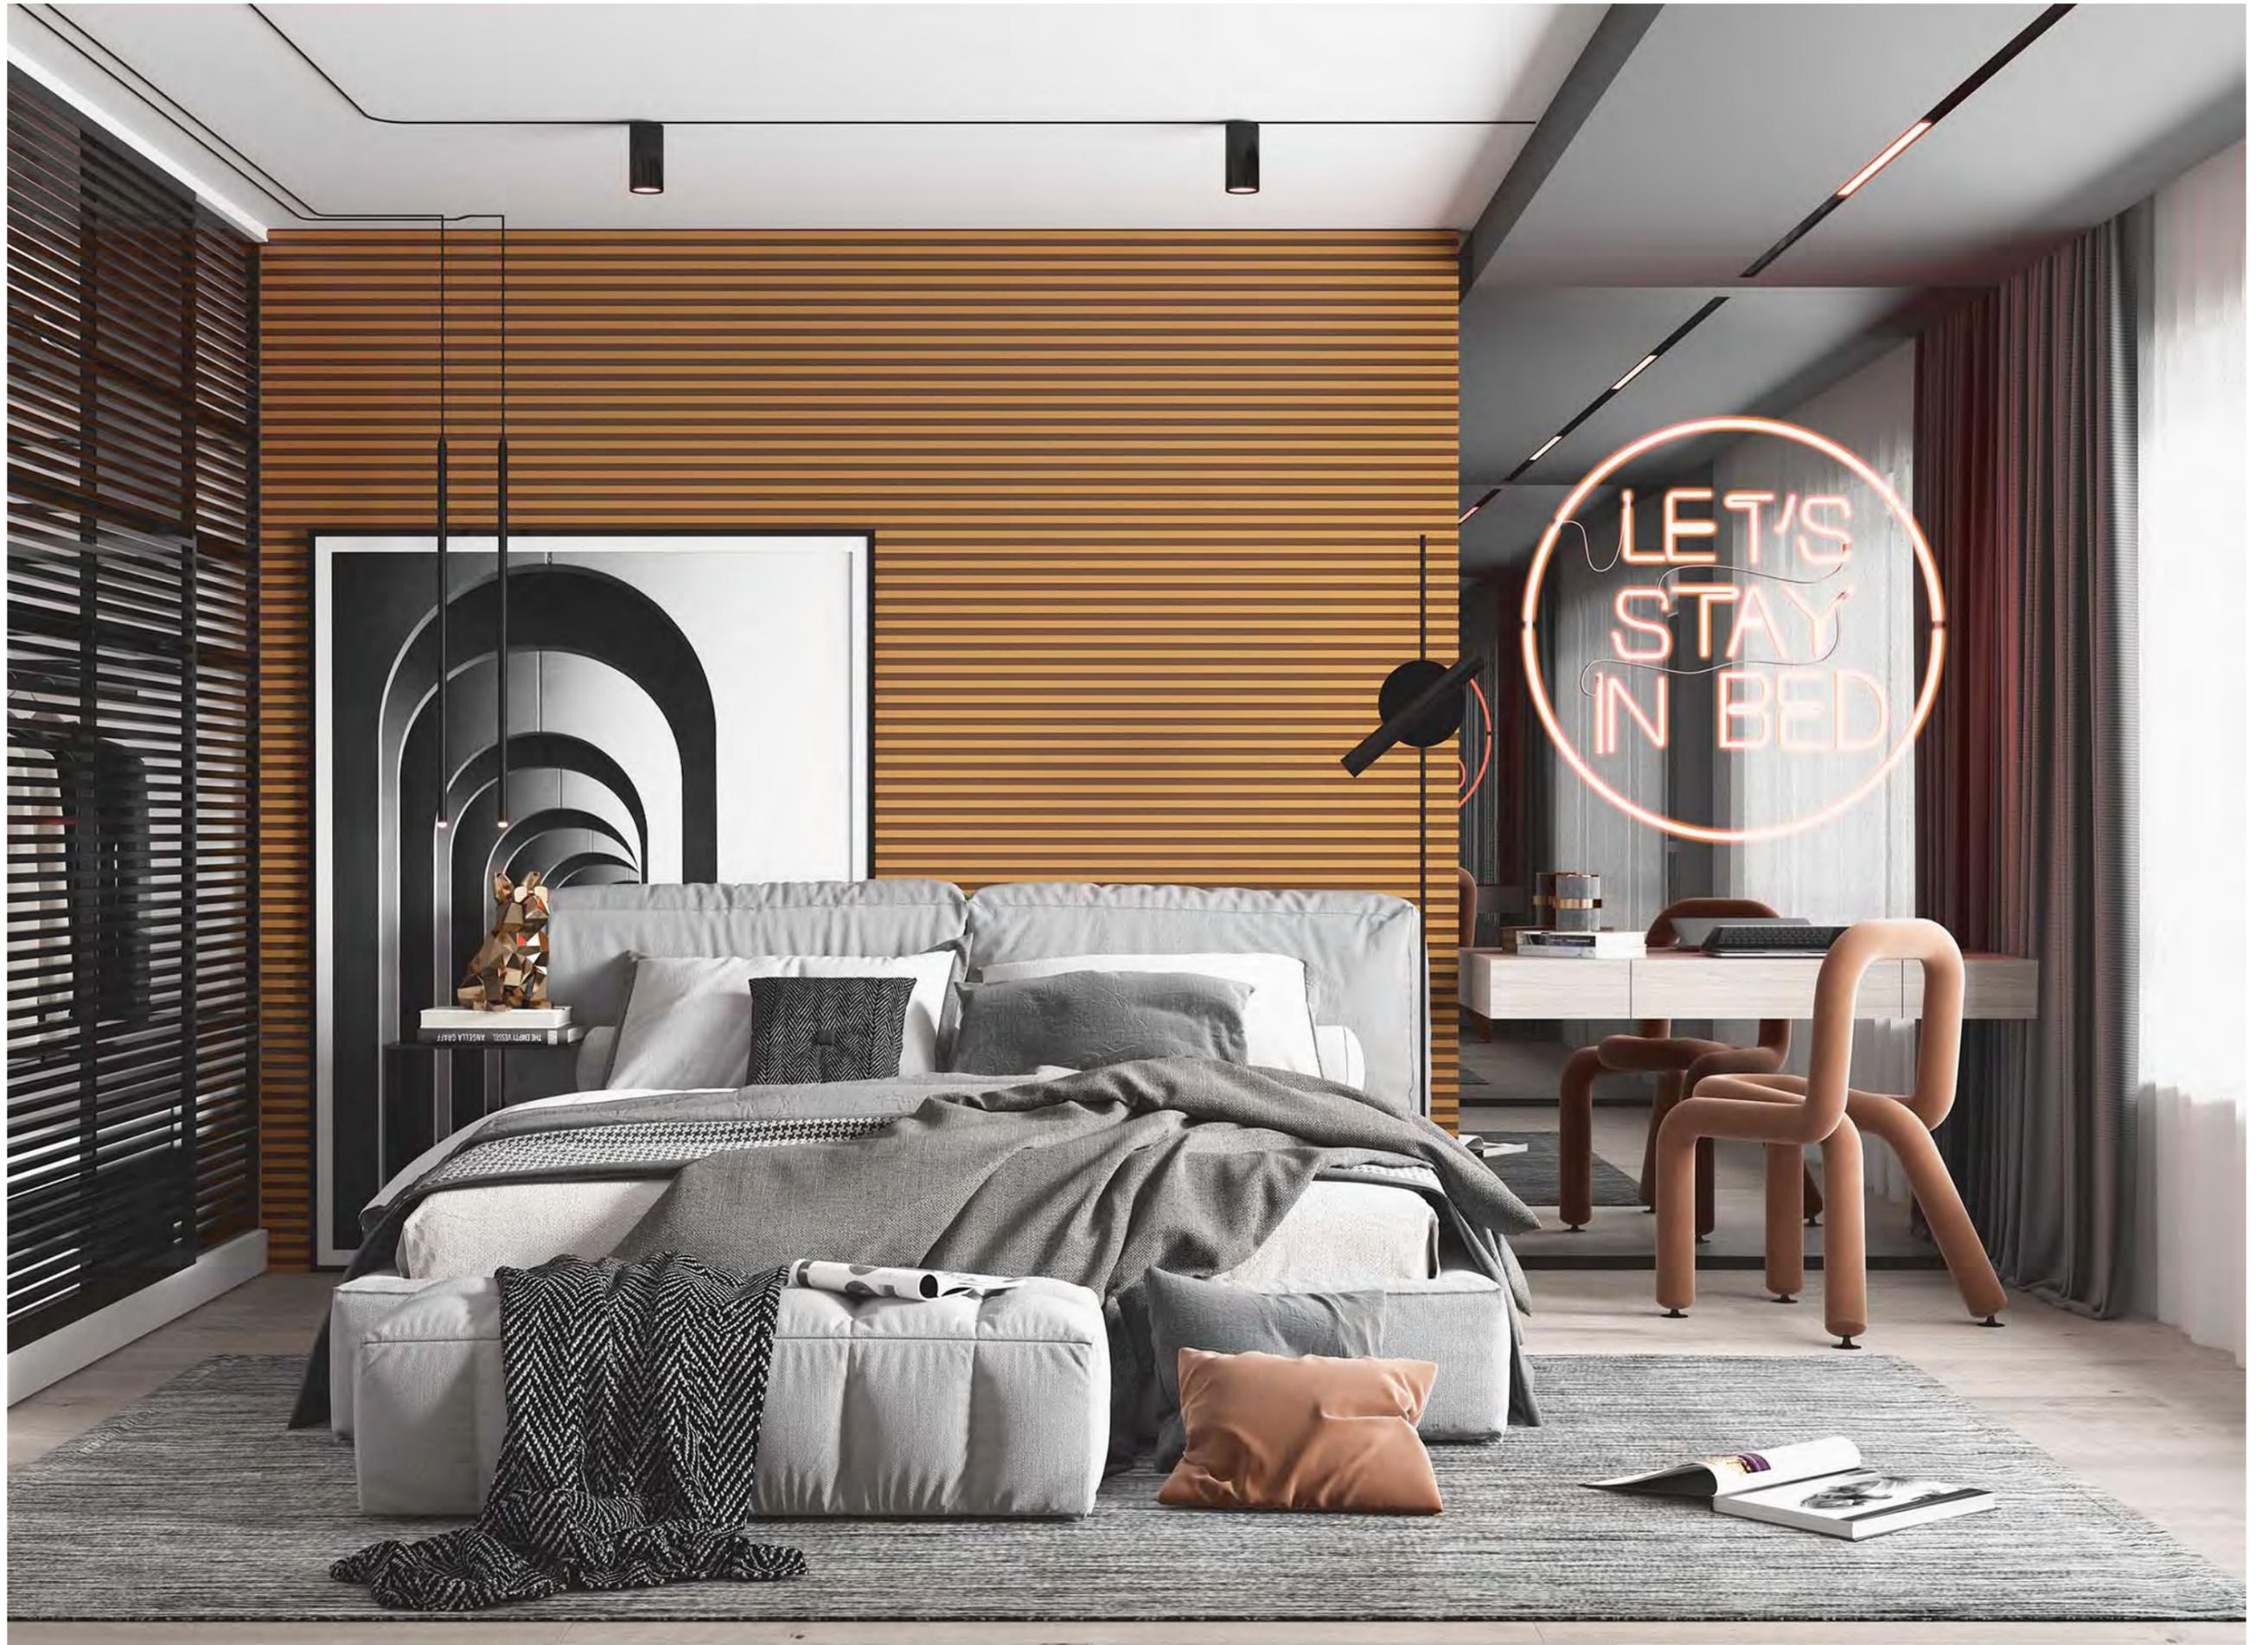

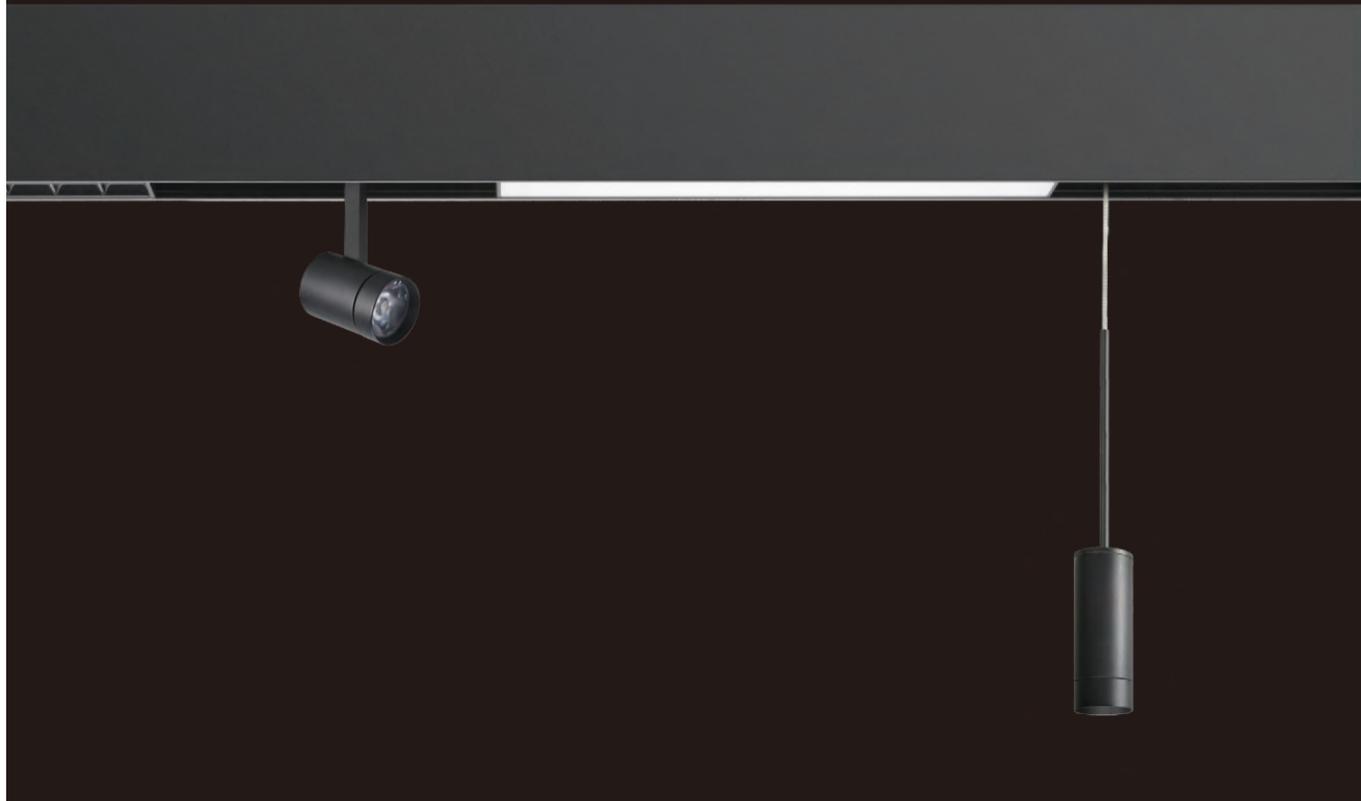

## MAGNETIC SERIES 磁吸系列

The combination installation of magnetic suction module can increase the sense of science and technology, and different modules can be replaced at any time to meet different lighting needs in the actual scene.


Installation groove adopts drawing aluminium forming structure, which can be cut and assembled freely according to actual demand, and realize seamless splicing.

Suitable for high-quality shops, high-end department stores, clubs, exhibition space, villas, office space, etc

磁吸模块的组合安装可增加科技感，不同的模块可以替换在实际场景中随时满足不同的照明需求。

安装槽采用拉铝成型结构，可根据实际需要自由切割组装，实现无缝连接合股。

适用于高档商店、高档百货、会所、展览空间、别墅、办公空间等




MAGNETIC SERIES  
磁吸系列

P  
2  
1  
3

肌肤质感无主灯·缔造者

P  
2  
1  
4

LIGHT ENVIRONMENT ENGINEERING

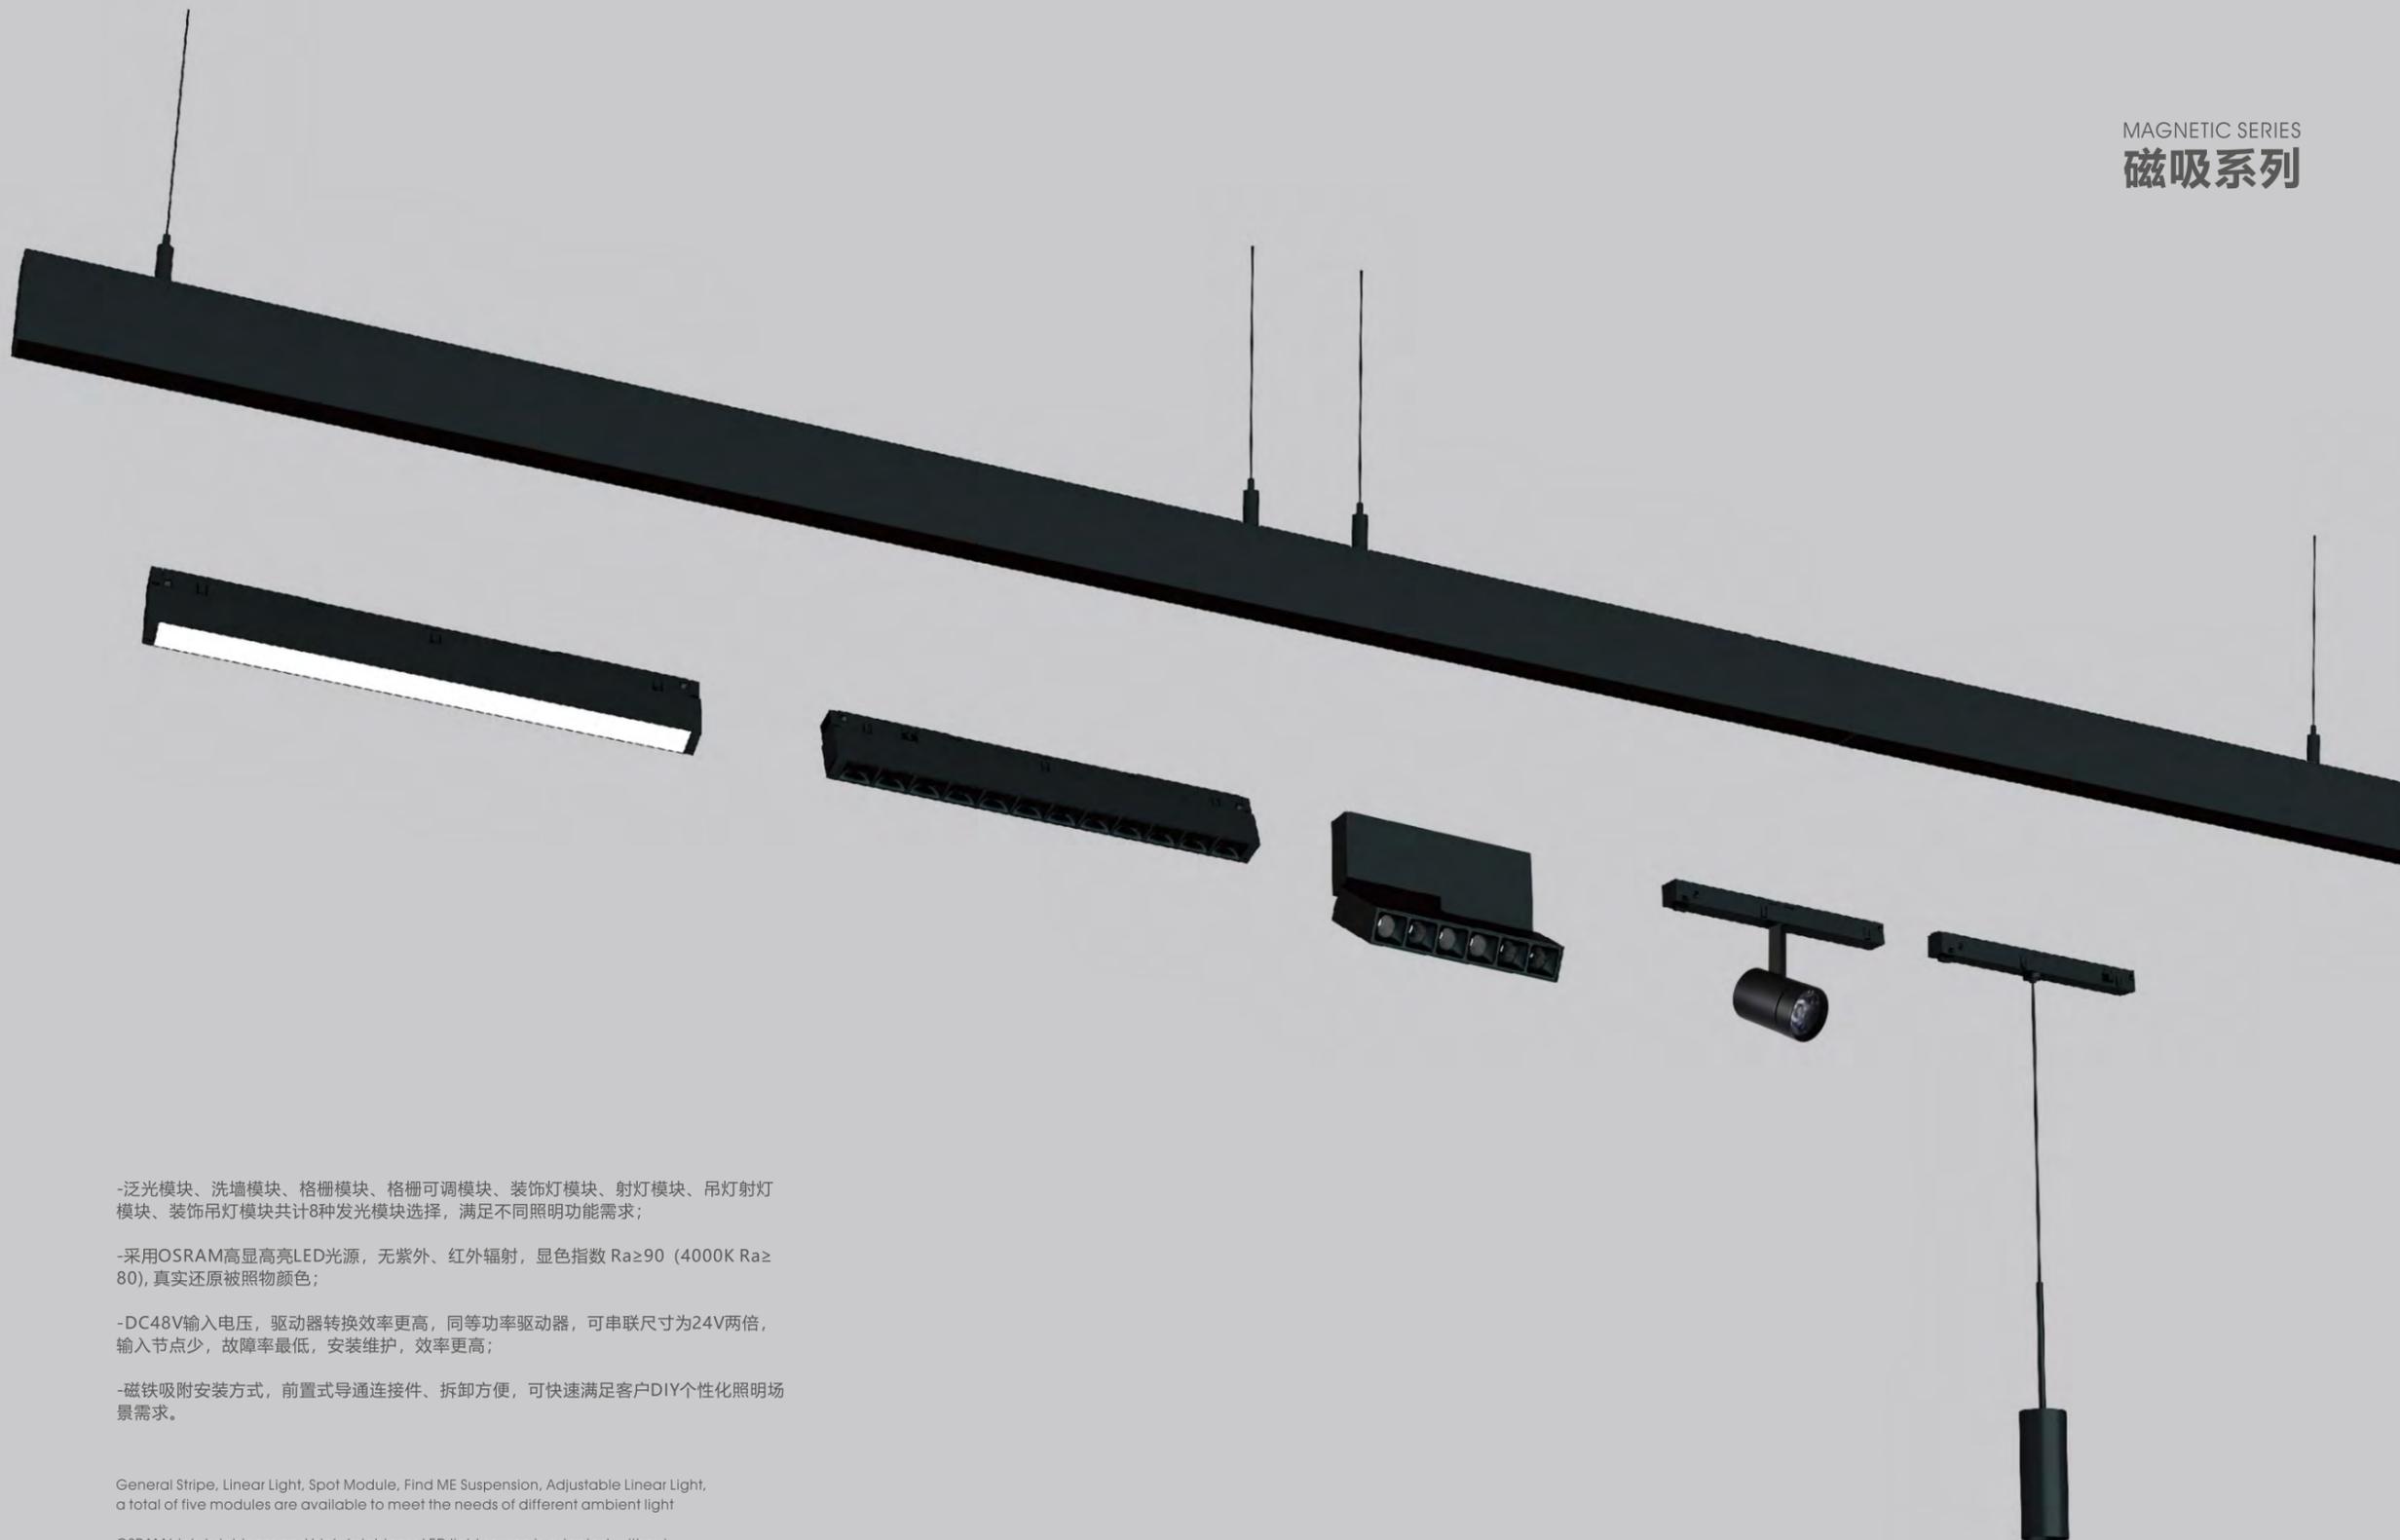

-泛光模块、洗墙模块、格栅模块、格栅可调模块、装饰灯模块、射灯模块、吊灯射灯模块、装饰吊灯模块共计8种发光模块选择，满足不同照明功能需求；

-采用OSRAM高显高亮LED光源，无紫外、红外辐射，显色指数  $Ra \geq 90$  ( $4000K Ra \geq 80$ )，真实还原被照物颜色；

-DC48V输入电压，驱动器转换效率更高，同等功率驱动器，可串联尺寸为24V两倍，输入节点少，故障率最低，安装维护，效率更高；

-磁铁吸附安装方式，前置式导通连接件、拆卸方便，可快速满足客户DIY个性化照明场景需求。

General Stripe, Linear Light, Spot Module, Find ME Suspension, Adjustable Linear Light, a total of five modules are available to meet the needs of different ambient light

OSRAM high-brightness and high-brightness LED light source is adopted, without ultraviolet and infrared radiation, and the color rendering index  $Ra \geq 90$  ( $4000K Ra \geq 80$ ) is used to truly restore the color of the object being illuminated.


DC 48V input voltage, drive conversion efficiency is higher, the same power drive, series size 24V double, less input nodes, lower failure rate, installation and maintenance efficiency is higher;

Magnet adsorption installation, front through connector, easy to disassemble, can quickly meet the needs of customers DIY personalized lighting scene.


Borderless embedded  
**R20/5 无边嵌入式**

PHYSICAL

|              |       |        |        |        |
|--------------|-------|--------|--------|--------|
| Track length | 500mm | 1000mm | 1500mm | 2000mm |
| Weight(kg)   | 0.615 | 1.23   | 1.845  | 2.46   |



|          |      |
|----------|------|
| TG-A2505 | 0.5M |
| TG-A2510 | 1M   |
| TG-A2515 | 1.5M |
| TG-A2520 | 2M   |



| Inner Corner       |                |         |              |          |
|--------------------|----------------|---------|--------------|----------|
| CODE               | MATERIAL       | Voltage | L(mm)        | Finished |
| <b>TG-25A-L90</b>  | Aluminum alloy | 48V     | 70x70x54(mm) | Black    |
| CORNER 90°         |                |         |              |          |
| CODE               | MATERIAL       | Voltage | L(mm)        | Finished |
| <b>TG-25A-L90N</b> | Aluminum alloy | 48V     | 74x74x66(mm) | Black    |
| Outner Corner      |                |         |              |          |
| CODE               | MATERIAL       | Voltage | L(mm)        | Finished |
| <b>TG-25A-L90W</b> | Aluminum alloy | 48V     | 74x74x66(mm) | Black    |

拼接/导电配件 (另配)



|            |                          |  |                  |                          |  |
|------------|--------------------------|--|------------------|--------------------------|--|
| R20-5阴角    | TG25A-L90N<br>74*74*66mm |  | I型导通接头           | TG25-I                   |  |
| R20-5阳角    | TG25A-L90W<br>74*74*66mm |  | L型导通接头           | TG25-L                   |  |
| R20-5 90°角 | TG25A-L90<br>70*70*54    |  | AC 220V<br>恒压驱动器 | TG2.1A-48V<br>TG4.2A-48V |  |

使用说明

重点照明系统安装槽，长度0.5米、1米、2米，需与照明模块(另配)及驱动器模块(另配)配套方可使用

Instructions

Installation slot of key lighting system. 0.5m, 1m and 2m long. can be used only when it is matched with lighting module (additional) and driver module (additional)

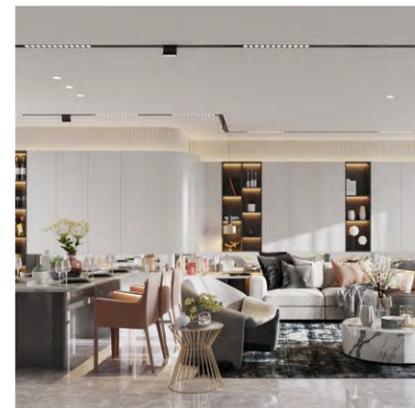

90° Corner is applicable to the same level of 90° Corner;  
Inner Corner is suitable for different plane 90° Corner (such as a wall to the ceiling);  
The Outer Corner is suitable for the different plane 90° Corner (such as the wall Corner);  
For connection to the driver.  
The inner part of the profile is always supplied in black.

使用说明

重点照明线形系统形转角安装槽，适用同一平面间90°转角处；  
重点照明线形系统内90°转角安装槽，适用于不同平面间90°转角处；  
(如墙面到天花)  
重点照明线形系统外90°转角安装槽，适用于不同平面间90°转角处；  
(如墙面转角处)


Narrow edge embedded

## TG-25B 窄边嵌入式


### PHYSICAL

Length(mm) 500mm 1000mm 1500mm 2000mm

Weight(kg) 0.585 1.17 1.755 2.34



|          |      |
|----------|------|
| TG-B2505 | 0.5M |
| TG-B2510 | 1M   |
| TG-B2515 | 1.5M |
| TG-B2520 | 2M   |



| Inner Corner       |                |         |              |          |
|--------------------|----------------|---------|--------------|----------|
| CODE               | MATERIAL       | Voltage | L(mm)        | Finished |
| <b>TG-25B-L90</b>  | Aluminum alloy | 48V     | 50x50x54(mm) | Black    |
| CORNER 90°         |                |         |              |          |
| CODE               | MATERIAL       | Voltage | L(mm)        | Finished |
| <b>TG-25B-L90N</b> | Aluminum alloy | 48V     | 74x74x39(mm) | Black    |
| Outner Corner      |                |         |              |          |
| CODE               | MATERIAL       | Voltage | L(mm)        | Finished |
| <b>TG-25B-L90W</b> | Aluminum alloy | 48V     | 74x74x39(mm) | Black    |

### 拼接/导电配件 (另配)


|         |                          |  |                  |                          |  |
|---------|--------------------------|--|------------------|--------------------------|--|
| 内90°转角  | TG25B-L90N<br>74*74*39mm |  | I型导通接头           | TG25-I                   |  |
| 外90°转角  | TG25B-L90W<br>74*74*39mm |  | L型导通接头           | TG25-L                   |  |
| 90°转角组件 | TG25B-L90<br>50*50*54mm  |  | AC 220V<br>恒压驱动器 | TG2.1A-48V<br>TG4.2A-48V |  |

### 使用说明

重点照明系统安装槽，长度0.5米、1米、2米，需与照明模块(另配)及驱动器模块(另配)配套方可使用

### Instructions

Installation slot of key lighting system. 0.5m, 1m and 2m long, can be used only when it is matched with lighting module (additional) and driver module (additional)



90° Corner is applicable to the same level of 90° Corner;  
Inner Corner is suitable for different plane 90° Corner (such as a wall to the ceiling);  
The Outer Corner is suitable for the different plane 90° Corner (such as the wall Corner);  
For connection to the driver.  
The inner part of the profile is always supplied in black.


### 使用说明

重点照明线形系统形转角安装槽，适用同一平面间90°转角处；  
重点照明线形系统内90°转角安装槽，适用于不同平面间90°转角处；  
(如墙面到天花)  
重点照明线形系统外90°转角安装槽，适用于不同平面间90°转角处；  
(如墙面转角处)

Surface mount  
**S20 明装**

**PHYSICAL**

Length(mm) 500mm 1000mm 1500mm 2000mm  
Weight(kg) 0.505 1.01 1.515 2.02



TG-C2505 0.5M  
TG-C2510 1M  
TG-C2515 1.5M  
TG-C2520 2M



| Inner Corner       |                |         |              |          |
|--------------------|----------------|---------|--------------|----------|
| CODE               | MATERIAL       | Voltage | L(mm)        | Finished |
| <b>TG-25C-L90</b>  | Aluminum alloy | 48V     | 50x50x54(mm) | Black    |
| CORNER 90°         |                |         |              |          |
| CODE               | MATERIAL       | Voltage | L(mm)        | Finished |
| <b>TG-25C-L90N</b> | Aluminum alloy | 48V     | 74x74x26(mm) | Black    |
| Outner Corner      |                |         |              |          |
| CODE               | MATERIAL       | Voltage | L(mm)        | Finished |
| <b>TG-25C-L90W</b> | Aluminum alloy | 48V     | 74x74x26(mm) | Black    |

拼接/导电配件


|          |                          |  |                  |                          |  |
|----------|--------------------------|--|------------------|--------------------------|--|
| S20阴角    | TG25C-L90N<br>74*74*26mm |  | I型导通接头           | TG25-I                   |  |
| S20阳角    | TG25C-L90W<br>74*74*26mm |  | L型导通接头           | TG25-L                   |  |
| S20 90°角 | TG25C-L90<br>50*50*54mm  |  | AC 220V<br>恒压驱动器 | TG2.1A-48V<br>TG4.2A-48V |  |

**使用说明**

重点照明系统安装槽，长度0.5米、1米、2米，需与照明模块(另配)及驱动器模块(另配)配套方可使用

**Instructions**

Installation slot of key lighting system. 0.5m, 1m and 2m long, can be used only when it is matched with lighting module (additional) and driver module (additional)



90° Corner is applicable to the same level of 90° Corner;  
Inner Corner is suitable for different plane 90° Corner (such as a wall to the ceiling);  
The Outer Corner is suitable for the different plane 90° Corner (such as the wall Corner);  
For connection to the driver.  
The inner part of the profile is always supplied in black.


**使用说明**

重点照明线形系统转角安装槽，适用同一平面间90°转角处；  
重点照明线形系统内90°转角安装槽，适用于不同平面间90°转角处；  
(如墙面到天花)  
重点照明线形系统外90°转角安装槽，适用于不同平面间90°转角处；  
(如墙面转角处)


Simple version  
**TG-25D 明装精简版**

PHYSICAL

|            |       |        |        |        |
|------------|-------|--------|--------|--------|
| Length(mm) | 500mm | 1000mm | 1500mm | 2000mm |
| Weight(kg) | 0.4   | 0.8    | 1.2    | 1.6    |



|          |      |
|----------|------|
| TG-D2505 | 0.5M |
| TG-D2510 | 1M   |
| TG-D2515 | 1.5M |
| TG-D2520 | 2M   |



导电配件


|                  |                          |  |
|------------------|--------------------------|--|
| I型导通接头           | TG25-I                   |  |
| L型导通接头           | TG25-L                   |  |
| AC 220V<br>恒压驱动器 | TG2.1A-48V<br>TG4.2A-48V |  |

使用说明

重点照明系统安装槽，长度0.5米、1米、2米，需与照明模块(另配)及驱动器模块(另配)配套方可使用

Instructions

Installation slot of key lighting system. 0.5m, 1m and 2m long, can be used only when it is matched with lighting module (additional) and driver module (additional)




90° Corner is applicable to the same level of 90° Corner;  
Inner Corner is suitable for different plane 90° Corner (such as a wall to the ceiling);  
The Outer Corner is suitable for the different plane 90° Corner (such as the wall Corner);  
For connection to the driver.  
The inner part of the profile is always supplied in black.


使用说明

重点照明线形系统转角安装槽，适用同一平面间90°转角处；  
重点照明线形系统内90°转角安装槽，适用于不同平面间90°转角处；  
(如墙面到天花)  
重点照明线形系统外90°转角安装槽，适用于不同平面间90°转角处；  
(如墙面转角处)


### Ceiling recessed, Wall recessed Installation

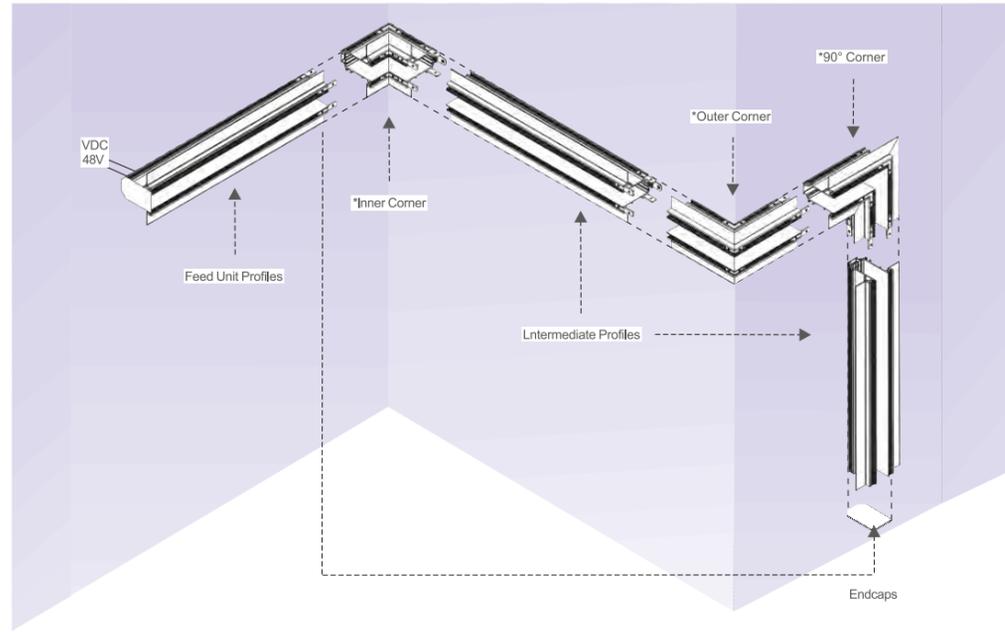

### Suspension Installation

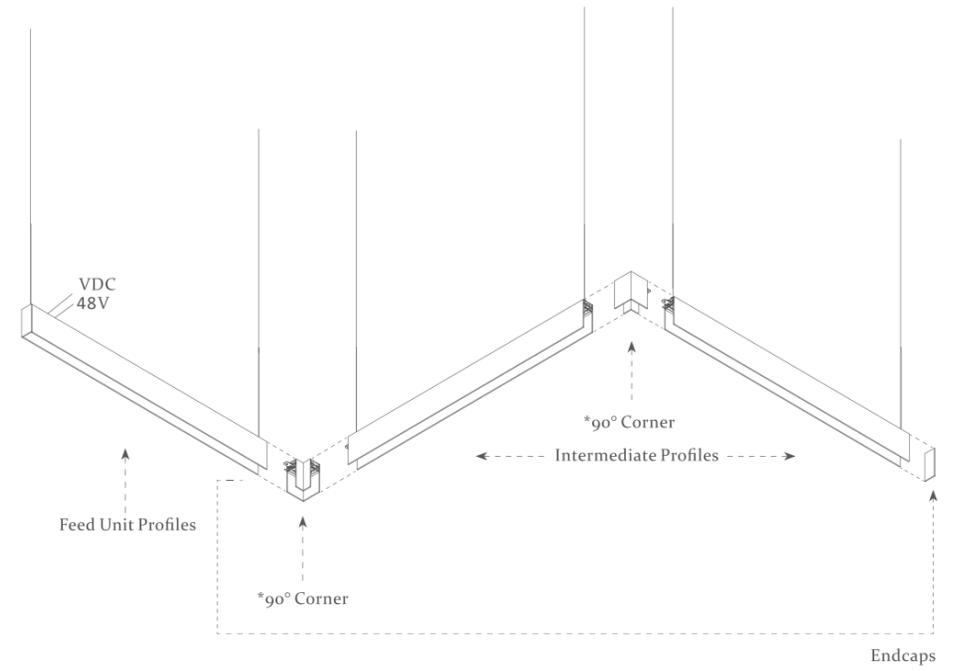


### Surface Installation

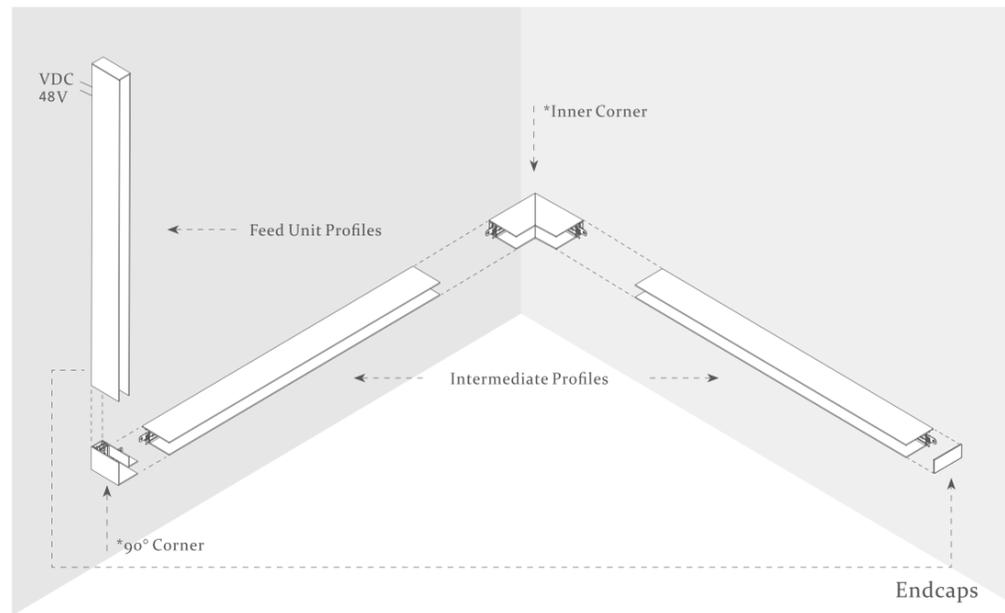




## 6种模块 6 MODULES

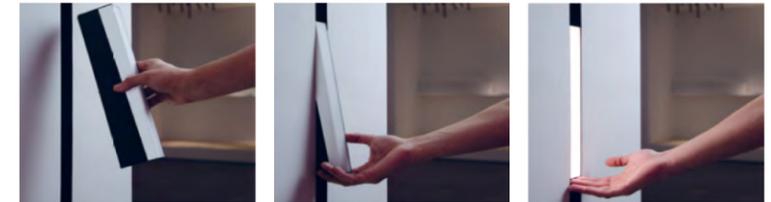


磁铁式检方式，安装拆卸更灵活，可根据现场情况自主DIY照明模块，从而设置不同照明场景

Magnet inspection mode, more flexible installation and disassembly, independent DIY lighting module according to the site conditions, so as to set different lighting scenes

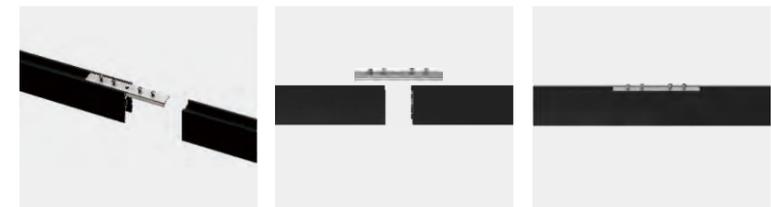

外置恒压驱动器外观尺寸与明装吊线式安装槽完全一致,且能实现拼接，解决吸顶/吊线安装驱动器无处安置问题

The external constant pressure driver's appearance size is completely consistent with that of the open mounted suspension installation slot, and the splicing can be realized, so as to solve the problem that there is no place for the ceiling / suspension installation driver

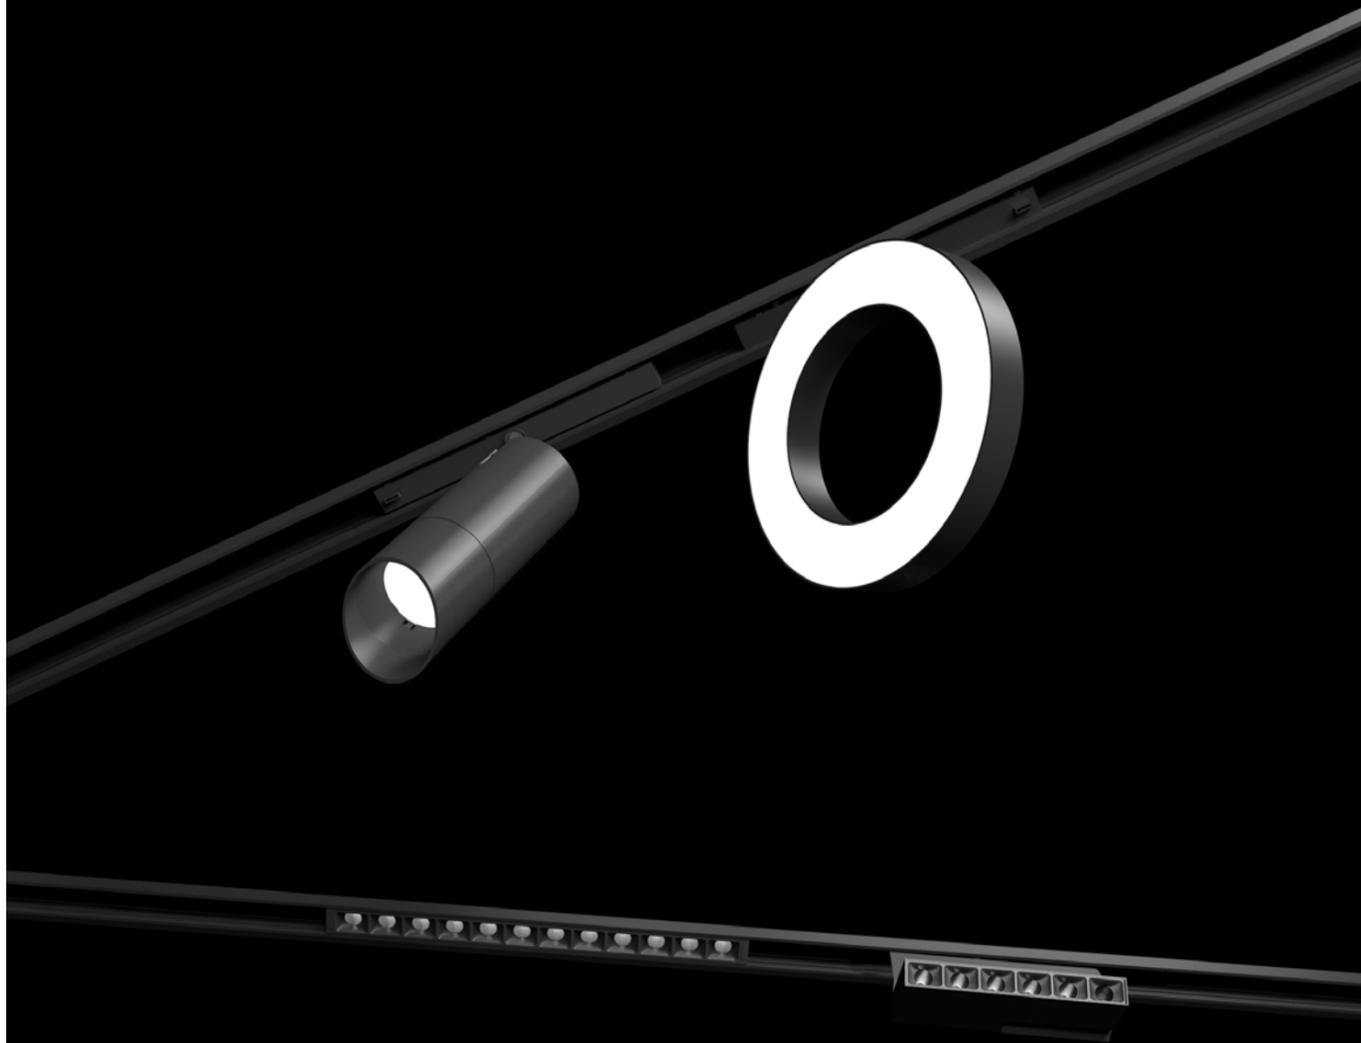

Lighting Module  
照明模块

| 产品线: | 安装方式:   | 照明模块类型:   | 产品长度:                                  |
|------|---|---|--|
|      | ST-A: 嵌入式<br>ST-B: 嵌入式窄边<br>ST-C: 明装<br>ST-D: 明装经济版 | J: 基础照明模块<br>G: 格栅模块<br>S: 射灯模块<br>D: 吊线灯模块<br>T: 透镜模块<br>Z: 装饰吊灯 | 03:长度300mm<br>06:长度600mm<br>09:长度900mm |

配件类型:

| 产品长度:                                    | 配件类型:   |
|--|---|
| 05:长度500mm<br>10:长度1000mm<br>20:长度2000mm | EC: End cap堵头<br>I: I connector I型连接器<br>L: L connector L型连接器<br>180:180连接件<br>L90:90°转角<br>L90N:内90°转角(墙面到天花)<br>L90W:外90°转角<br>T90:T形连接件<br>X90:十形连接件<br>DXB:吊线安装配件包<br>XDB:吸顶配件包 |

平面式、格栅式、格栅可调式、洗墙式、射灯、吊灯、装饰灯、装饰吊灯共8种不同  
类型照明模块，可延伸19种配光类型，满足不同照明功能需求；  
采用OSRAM高显高亮LED光源，无紫外、红外辐射，显色指数Ra≥90(4000K Ra≥  
80)，真实还原被照物颜色；  
DC 48V输入电压，驱动器转换效率更高，同等功率驱动器，可串联尺寸为24V两  
倍，输入节点少，故障率更低，安装维护效率更高；  
磁铁吸附安装方式，前置式导通连接件、拆卸方便，可快速满足客户DIY个性化照  
明场景需求；  
适用于精品店铺、高端百货商场、会所、展陈空间、别墅、办公、汽车展厅、金  
融、银行等空间。

There are 8 different types of lighting modules, including plane type, grid type, grid adjustable  
type, wall washing type, spotlight, chandelier, decorative lamp and decorative chandelier,  
which can extend 19 types of light distribution to meet different lighting function requirements;  
OSRAM high brightness LED light source is adopted, without ultraviolet and infrared radiation,  
color rendering index RA ≥ 90 (4000Kra ≥ 80), and the color of the object is truly restored;  
DC 48V input voltage, the driver conversion efficiency is higher, the same power driver, can be  
connected in series with the size of 24V twice, less input nodes, lower failure rate, higher  
installation and maintenance efficiency;  
Magnet adsorption installation mode, front conductive connector, easy to disassemble, can  
quickly meet the needs of DIY personalized lighting scene;  
It is suitable for boutique stores, high-end department stores, clubs, exhibition spaces, villas,  
offices, automobile exhibition halls, finance, banks and other spaces.



Flood module  
泛光模块

产品参数

| 型号      | 光源类型         | 功率  | 输入参数  | 光束角  | 光通量    | 外观尺寸(mm)      | 灯体材质     |
|---------|--------------|-----|-------|------|--------|---------------|----------|
| TG25J02 | LED SMD 2835 | 5W  | DC48V | 110° | 350lm  | L200*W45*H20  | 铝合金+阻燃PC |
| TG25J03 |              | 7W  |       |      | 500lm  | L300*W45*H20  |          |
| TG25J06 |              | 14W |       |      | 1000lm | L600*W45*H20  |          |
| TG25J09 |              | 21W |       |      | 1500lm | L900*W45*H20  |          |
| TG25J12 |              | 28W |       |      | 2000lm | L1200*W45*H20 |          |

色温：2700K/3000K/3500K/4000K 显色指数：Ra≥90 外观颜色：BK

电器

| 型号         | 功率   | 材质  | 外观颜色 | 输入电压    | 功率因数   |
|------------|------|-----|------|---------|--------|
| TG2.1A-48V | 100W | 铝合金 | BK   | AC 220V | PF：0.5 |
| TG4.2A-48V | 200W |     |      |         |        |





安装槽


|             |                                  |  |
|-------------|----------------------------------|--|
| R20/5 无边嵌入式 | TG-25B-05/TG-25B-10<br>TG-25B-20 |  |
| S20明装/吊装    | TG-25A-05/TG-25A<br>TG-25A-2010  |  |
| SM明装/吊装     | TG-25C-05/TG-25C-10<br>TG-25C-20 |  |
| 明装精简版       | TG-25D-05/TG-25D-10<br>TG-25D-20 |  |

电器 (另配)

|                  |                          |  |
|------------------|--------------------------|--|
| AC 220V<br>恒压驱动器 | TG2.1A-48V<br>TG4.2A-48V |  |
|------------------|--------------------------|--|

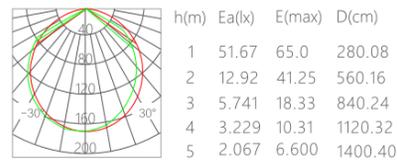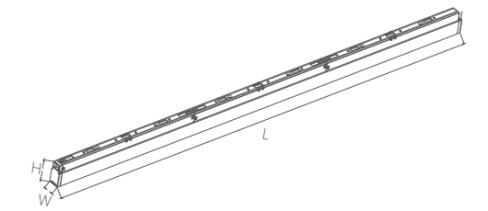

Beam Angle110° 7W 3000K

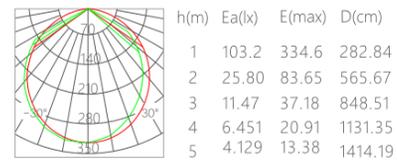

Beam Angle110° 14W 3000K



Grille module  
格栅模块


产品参数

| 型号      | 光源类型         | 功率  | 输入参数   | 光束角         | 光通量    | 外观尺寸(mm)     | 灯体材质     |
|---------|--------------|-----|--------|-------------|--------|--------------|----------|
| TG25G02 | LED SMD 2835 | 10W | DC 48V | 12°/34°/48° | 500lm  | L200*W45*H20 | 铝合金+阻燃PC |
| TG25G03 |              | 21W |        |             | 1500lm | L300*W45*H20 |          |
| TG25G06 |              | 42W |        |             | 3000lm | L600*W45*H20 |          |

色温：2700K/3000K/3500K/4000K 显色指数：Ra≥90 外观颜色：BK

电器

| 型号         | 功率   | 材质  | 外观颜色 | 输入电压    | 功率因数     |
|------------|------|-----|------|---------|----------|
| TG2.1A-48V | 100W | 铝合金 | BK   | AC 220V | PF : 0.5 |
| TG4.2A-48V | 200W |     |      |         |          |

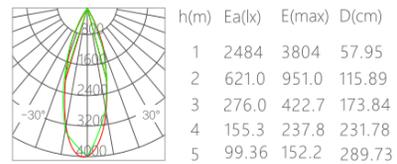


Beam Angle34° 20W 3000K

安装槽

|             |                               |  |
|-------------|-------------------------------|--|
| R20/5 无边嵌入式 | TG25B-05/TG25B-10<br>TG25B-20 |  |
| S20明装/吊装    | TG25A-05/TG25A-10<br>TG25A-20 |  |
| SM明装/吊装     | TG25C-05/TG25C-10<br>TG25C-20 |  |
| 明装精简版       | TG25D-05/TG25D-10<br>TG25D-20 |  |

电器 (另配)

|                  |                          |  |
|------------------|--------------------------|--|
| AC 220V<br>恒压驱动器 | TG2.1A-48V<br>TG4.2A-48V |  |
|------------------|--------------------------|--|

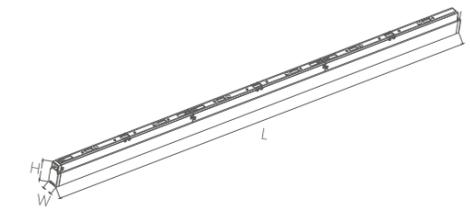

Grille module (adjustable)  
**格栅模块 (可调)**

产品参数

| 型号       | 光源类型   | 功率  | 输入参数   | 光束角         | 显色指数  | 光通量    | 外观颜色 | 灯体材质     |
|----------|--------|-----|--------|-------------|-------|--------|------|----------|
| TG25G02K | LED点光源 | 10W | DC 48V | 12°/24°/36° | Ra≥90 | 500lm  | BK   | 铝合金+阻燃PC |
| TG25G03K |        | 20W |        |             |       | 1000lm |      |          |

色温：2700K/3000K/3500K/4000K

电器

| 型号         | 功率   | 材质  | 外观颜色 | 输入电压    | 功率因数     |
|------------|------|-----|------|---------|----------|
| TG2.1A-48V | 100W | 铝合金 | BK   | AC 220V | PF : 0.5 |
| TG4.2A-48V | 200W |     |      |         |          |





安装槽

|             |                               |  |
|-------------|-------------------------------|--|
| R20/5 无边嵌入式 | TG25B-05/TG25B-10<br>TG25B-20 |  |
| S20明装/吊装    | TG25A-05/TG25A-10<br>TG25A-20 |  |
| SM明装/吊装     | TG25C-05/TG25C-10<br>TG25C-20 |  |
| 明装精简版       | TG25D-05/TG25D-10<br>TG25D-20 |  |

电器 (另配)

|                  |                          |  |
|------------------|--------------------------|--|
| AC 220V<br>恒压驱动器 | TG2.1A-48V<br>TG4.2A-48V |  |
|------------------|--------------------------|--|

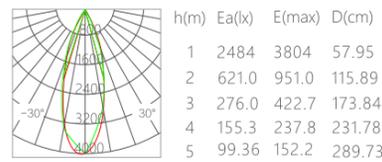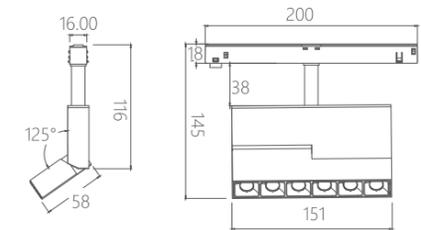

Beam Angle34° 20W 3000K



Spotlight module  
射灯模块


产品参数

| 型号    | 光源类型    | 功率  | 输入参数   | 光束角         | 显色指数  | 光通量    | 外观颜色 | 灯体材质     |
|-------|---------|-----|--------|-------------|-------|--------|------|----------|
| TG25S | LED COB | 7W  | DC 48V | 12°/24°/36° | Ra≥90 | 420lm  | BK   | 铝合金+阻燃PC |
|       |         | 9W  |        |             |       | 550lm  |      |          |
|       |         | 15W |        |             |       | 900lm  |      |          |
|       |         | 30W |        |             |       | 1800lm |      |          |

色温：2700K/3000K/3500K/4000K

电器

| 型号         | 功率   | 材质  | 外观颜色 | 输入电压    | 功率因数     |
|------------|------|-----|------|---------|----------|
| TG2.1A-48V | 100W | 铝合金 | BK   | AC 220V | PF : 0.5 |
| TG4.2A-48V | 200W |     |      |         |          |

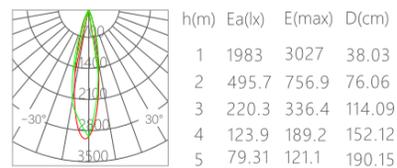


Beam Angle24° 7W 3000K

安装槽

|             |                               |  |
|-------------|-------------------------------|--|
| R20/5 无边嵌入式 | TG25B-05/TG25B-10<br>TG25B-20 |  |
| S20明装/吊装    | TG25A-05/TG25A-10<br>TG25A-20 |  |
| SM明装/吊装     | TG25C-05/TG25C-10<br>TG25C-20 |  |
| 明装精简版       | TG25D-05/TG25D-10<br>TG25D-20 |  |

电器 (另配)

|                  |                          |  |
|------------------|--------------------------|--|
| AC 220V<br>恒压驱动器 | TG2.1A-48V<br>TG4.2A-48V |  |
|------------------|--------------------------|--|

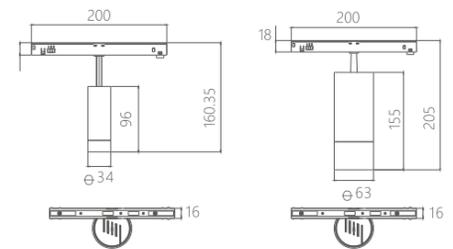

Chandelier module  
吊灯模块


产品参数

| 型号    | 光源类型    | 功率  | 输入参数   | 光束角         | 显色指数  | 光通量   | 外观颜色 | 灯体材质     |
|-------|---------|-----|--------|-------------|-------|-------|------|----------|
| TG25D | LED COB | 7W  | DC 48V | 12°/24°/36° | Ra≥90 | 420lm | BK   | 铝合金+阻燃PC |
|       |         | 9W  |        |             |       | 550lm |      |          |
|       |         | 15W |        |             |       | 900lm |      |          |

色温：2700K/3000K/3500K/4000K

电器

| 型号         | 功率   | 材质  | 外观颜色 | 输入电压    | 功率因数    |
|------------|------|-----|------|---------|---------|
| TG2.1A-48V | 100W | 铝合金 | BK   | AC 220V | PF: 0.5 |
| TG4.2A-48V | 200W |     |      |         |         |



| h(m) | Ea(lx) | E(max) | D(cm)  |
|------|--------|--------|--------|
| 1    | 1983   | 3027   | 38.03  |
| 2    | 495.7  | 756.9  | 76.06  |
| 3    | 220.3  | 336.4  | 114.09 |
| 4    | 123.9  | 189.2  | 152.12 |
| 5    | 79.31  | 121.1  | 190.15 |


Beam Angle 24° 7W 3000K

安装槽

|             |                               |  |
|-------------|-------------------------------|--|
| R20/5 无边嵌入式 | TG25B-05/TG25B-10<br>TG25B-20 |  |
| S20明装/吊装    | TG25A-05/TG25A-10<br>TG25A-20 |  |
| SM明装/吊装     | TG25C-05/TG25C-10<br>TG25C-20 |  |
| 明装精简版       | TG25D-05/TG25D-10<br>TG25D-20 |  |

电器 (另配)

|                  |                          |  |
|------------------|--------------------------|--|
| AC 220V<br>恒压驱动器 | TG2.1A=48V<br>TG4.2A=48V |  |
|------------------|--------------------------|--|

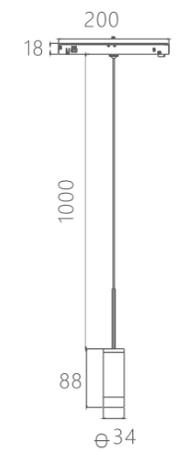

Decorative light module  
装饰灯模块

产品参数


| 型号    | 光源类型    | 功率       | 输入参数   | 光束角         | 显色指数  | 光通量            | 外观颜色 |
|-------|---------|----------|--------|-------------|-------|----------------|------|
| TG25Z | LED SMD | 7W<br>9W | DC 48V | 12°/24°/36° | Ra≥90 | 420lm<br>550lm | BK   |

灯体材质  
铝合金+阻燃PC

色温：2700K/3000K/3500K/4000K

电器

| 型号         | 功率   | 材质  | 外观颜色 | 输入电压    | 功率因数    |
|------------|------|-----|------|---------|---------|
| TG2.1A-48V | 100W | 铝合金 | BK   | AC 220V | PF: 0.5 |
| TG4.2A-48V | 200W |     |      |         |         |



Beam Angle 12° 7W


| h(m) | Ea(lx) | E(max) | D(cm)  |
|------|--------|--------|--------|
| 1    | 0.1904 | 0.3403 | 134.31 |
| 2    | 0.0476 | 0.0851 | 268.62 |
| 3    | 0.0212 | 0.0378 | 402.93 |
| 4    | 0.0119 | 0.0213 | 537.24 |
| 5    | 0.0076 | 0.0136 | 671.55 |

安装槽



|             |                               |  |
|-------------|-------------------------------|--|
| R20/5 无边嵌入式 | TG25B-05/TG25B-10<br>TG25B-20 |  |
| S20明装/吊装    | TG25A-05/TG25A-10<br>TG25A-20 |  |
| SM明装/吊装     | TG25C-05/TG25C-10<br>TG25C-20 |  |
| 明装精简版       | TG25D-05/TG25D-10<br>TG25D-20 |  |

电器 (另配)

|                  |                          |  |
|------------------|--------------------------|--|
| AC 220V<br>恒压驱动器 | TG2.1A=48V<br>TG4.2A=48V |  |
|------------------|--------------------------|--|

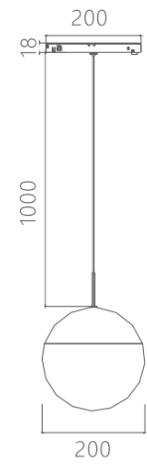

导轨角接选择方式：

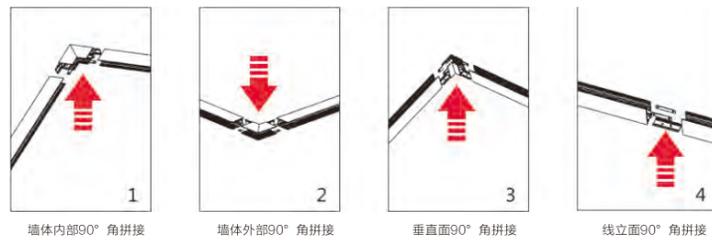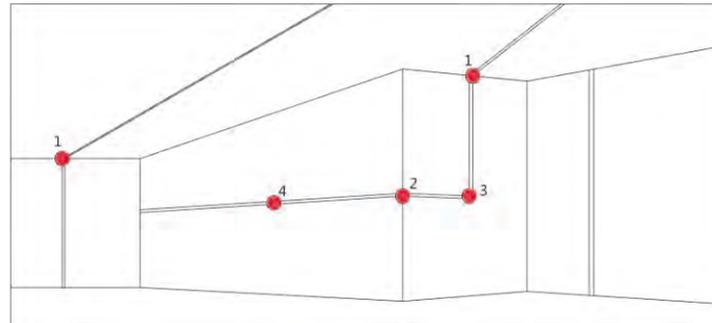


导轨角接选择说明：

注意：


- 1, 一般现场施工与图纸设计之前存在一定的差异, 从而导致预埋件 (安装槽) 其尺寸与现场不符;
- 2, 在现场施工中, 再其安全许可的条件下, 可由专业的操作人员根据其预埋件 (安装槽) 现在实际尺寸, 进行90°。导轨条的切割 (线型切割)
- 3, 切割时, 建议使用铝合金专用的锯刀刀片 (锯刀刀片  $\phi$  不得 < 300mm)

导轨条的长度灵活多变, 可根据现场安装的实际尺寸的要求进行合理的切割, 拼接其需要的部分

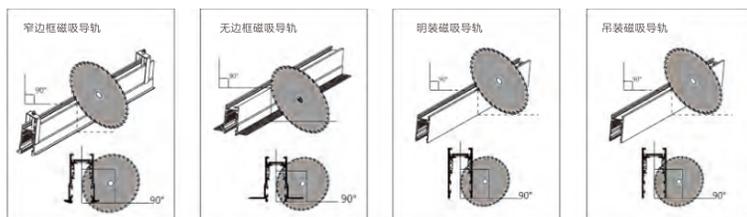



电源安装说明：

1, 外接电源 (适用于窄边框, 无边框以及明装导轨)

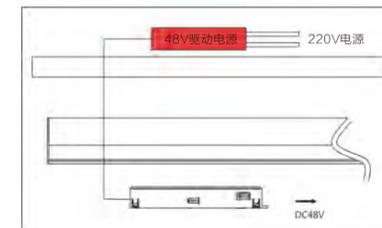

| 序号 | 标记 | 颜色  | 作用                |
|----|----|-----|-------------------|
| 1  | V+ | 红色线 | 48V输入驱动正极         |
| 2  | 1  | 黑色线 | 48V输入驱动负极         |
| 3  | 2  | 蓝色线 | 0-10V可控硅正极成2回路控制线 |
| 4  | 3  | 棕色线 | 0-10V可控硅负极或3回路控制线 |

2, 电源一体化 (适用于明装, 吊装导轨)

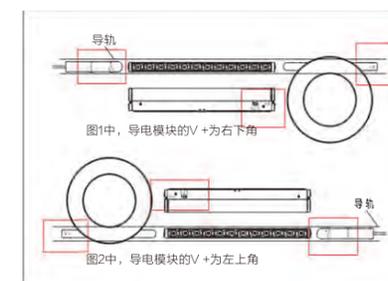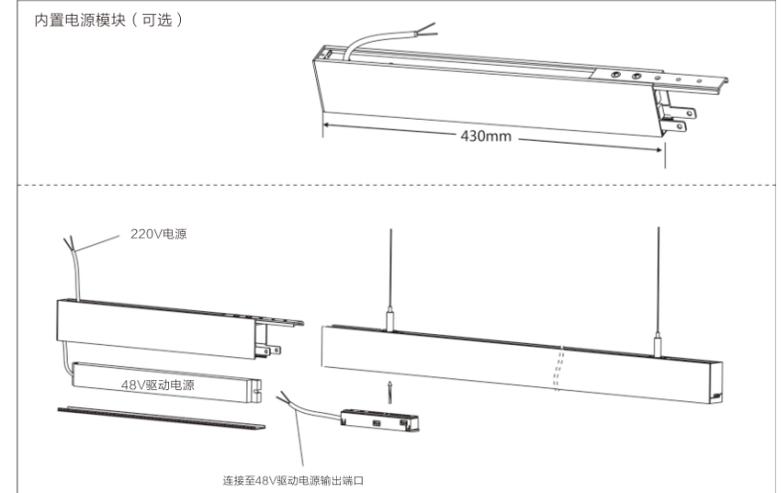


导电模块与灯具模块连接方式  
 1, 灯具模块中的“V+”与导电模块的“V+”应为相同的位置, 保证其正常的电源传导  
 2, 假设导电模块接头“V+”在右下角, 那么灯具模块的“V+”也应该在右下角, 如图1所示




无边框轨道安装说明

注意:

- 1, 嵌入式 (无限嵌入), 适合壁挂式 (嵌在墙上) 石膏屋顶空间和其他空间需要用于批灰轴承材料木材复合板和其他材料, 可以开槽, 可以表面批灰, 板最大承重量大于5倍的总重量在任何情况下不得的灯具是一种隔热衬垫或类似材料覆盖确保最低产品周围的空间
- 2, 可直接拼接成角度拼接, 对应的90度组件需单独购买后拼接安装。吊顶厚度10-30mm, 吊槽宽度34mm

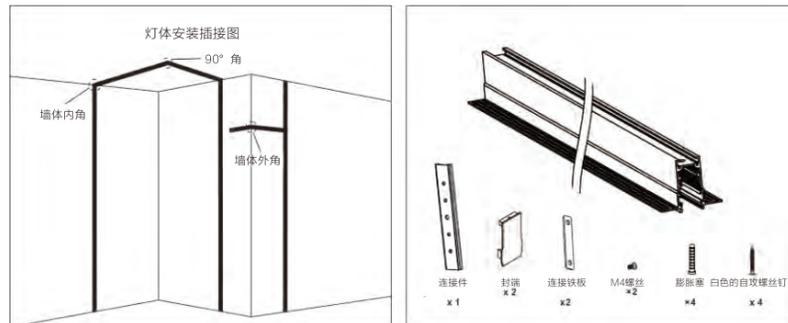


无边框轨道装置安装程序

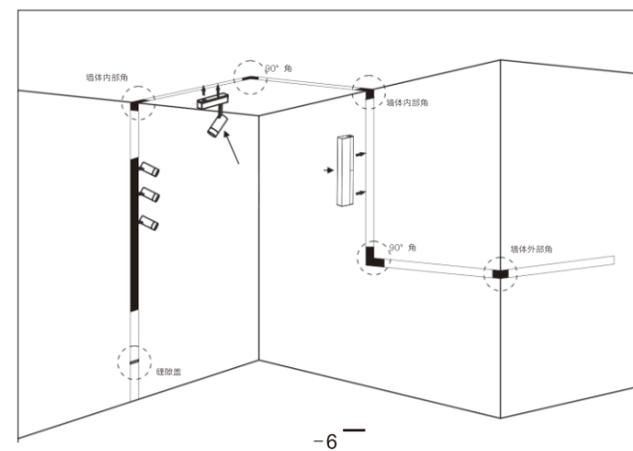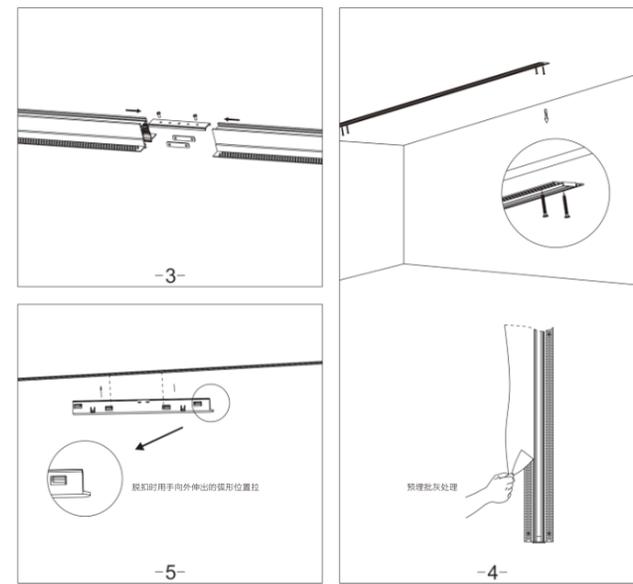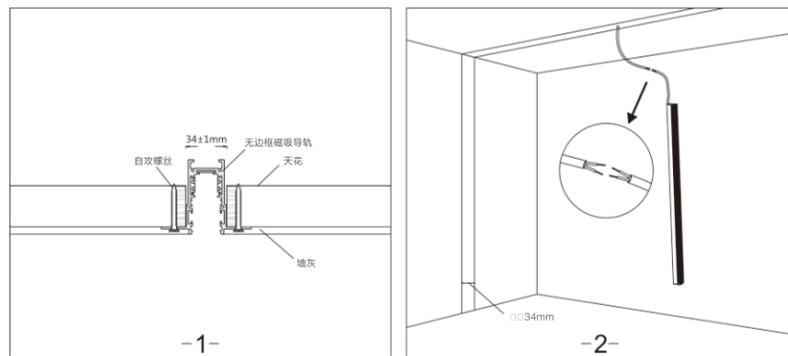


### 内嵌式窄边框导轨安装说明

注意:

1,放入式线性灯体,适用于木质天花板、金属天花板等不能用于除灰的天花板空间,安装板的最大承载能力应大于灯具总重量的5倍,在任何情况下都不应在灯具上覆盖纸垫或类似材料,以确保产品周围的空间最小2,直线拼接可直接拼接安装在拼接灯体上,角动接需单独购买相应的90°corner components,然后拼接安装吊顶厚:5-15mm吊顶槽宽度:34mm(公差:±1/-0mm)

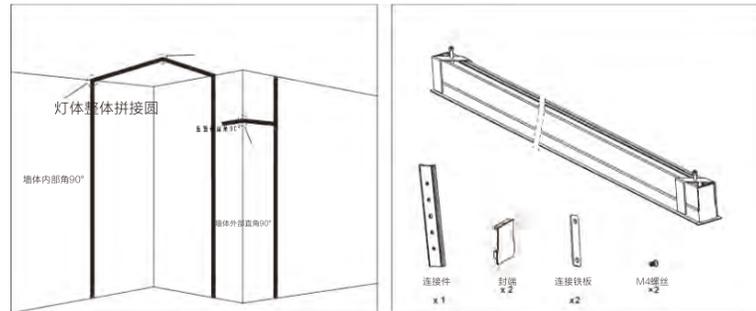

导轨连接(单独购买)动力连接件(线长1.2米),适用于沟槽的横向连接






导轨连接(单独购买)直插式动力接头,适用于安装沟槽直插式



导向接头(单独购买)软连接头,适用于安装90°连接槽



### 内嵌式窄边框导轨安装程序

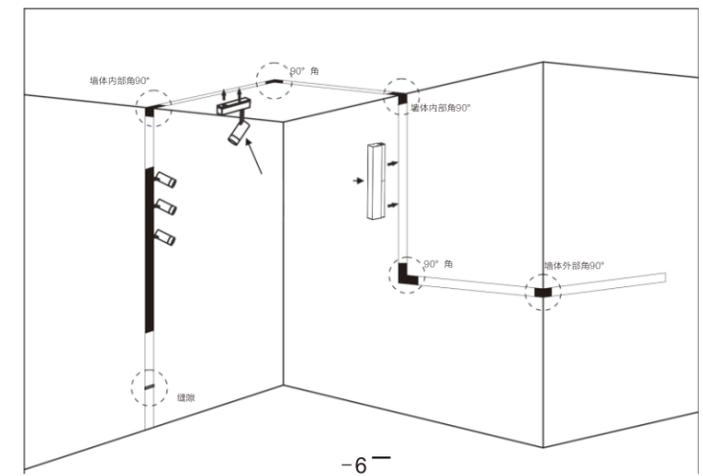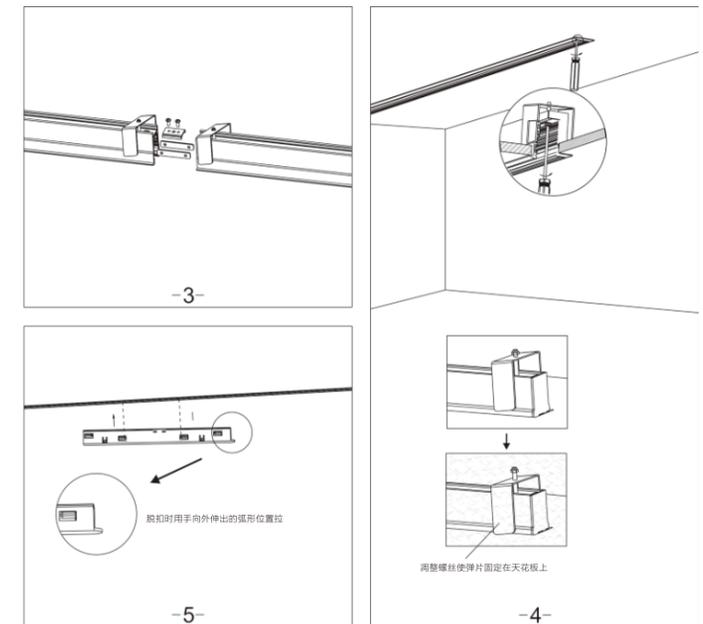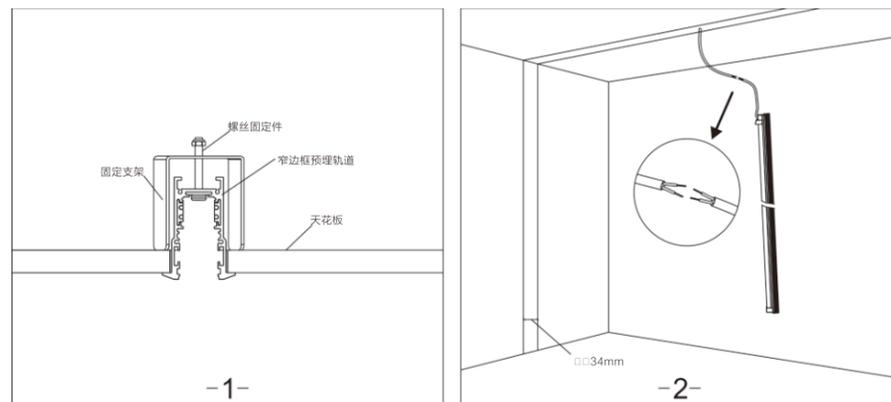

### 吊装轨道安装说明

注意:

1. 敞开式/无吊顶的空间或有格 的空间吊顶, 可采用吊顶或吊顶式磁吸导轨 (明装式) 安装
2. 拼接可根据拼接灯体进行直接拼接和平插, 角拼接需购买相应的90°特殊角度元件后进行拼接安装



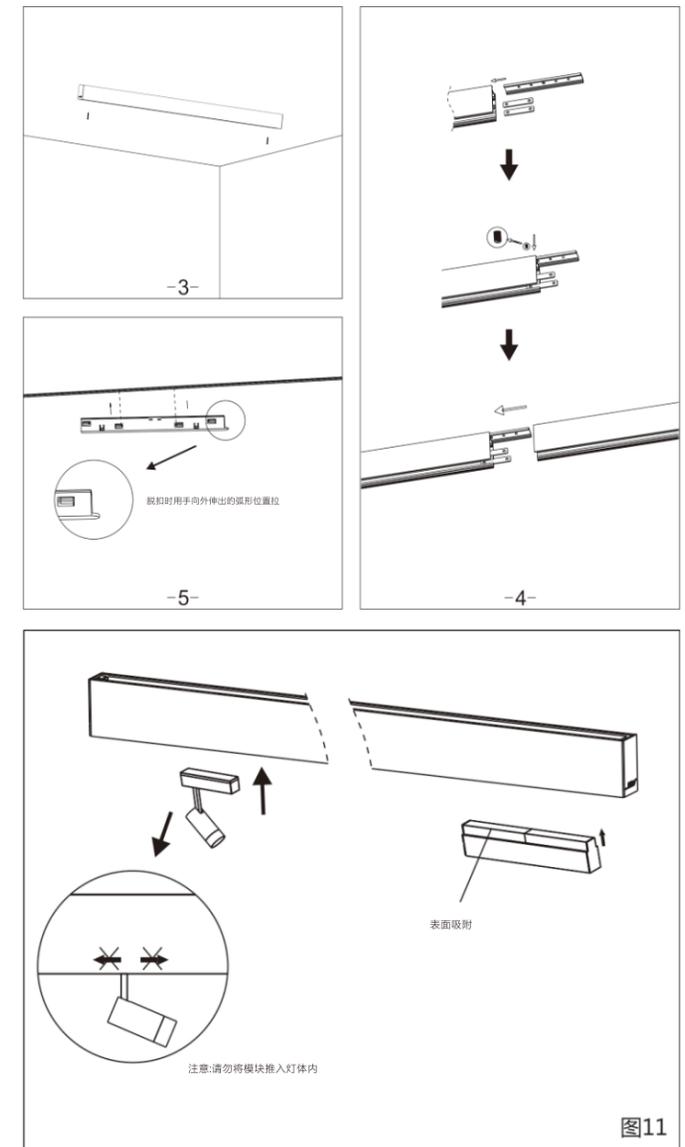


图11


### 吊装轨道装置安装程序

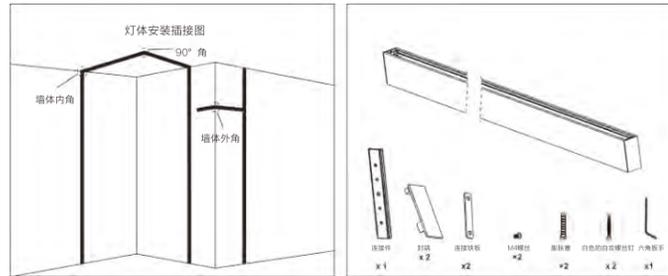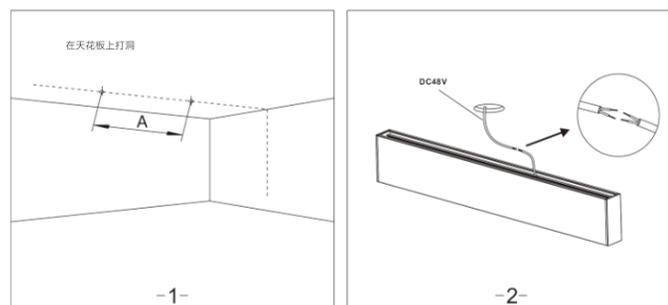

### 吊装轨道安装说明

注意:

1. 敞开式/无吊顶的空间或有格的空间吊顶, 可采用吊顶或吊顶式磁吸导轨(明装式)安装
2. 拼接可根据拼接灯体进行直接拼接和平插, 角拼接需购买相应的90°特殊角度元件后进行拼接安装

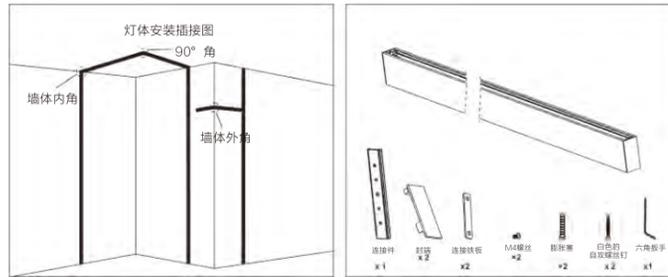

### 吊装轨道安装程序

