


BOLAWRAP 150 SPECIFICATION SHEET ▶




DEVICE SPECIFICATION

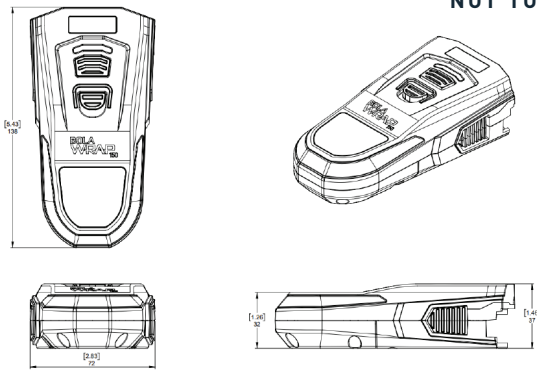

Material	PC/ABS
Weight	Under 11 oz (0.29 kg) w/cassette and battery pack
Capacity	3000 mAh
Energetic Component	Zirconium Potassium Perchlorate (ZPP) - based propellant
Effective Range	10-25 ft (3-8 meters)
Reload Time	2-6 seconds
US Patent No.s	wrap.com/patents


TESTS PASSED - SAAMI-Z299.5-2016 ABUSIVE MISHANDLING TEST | MIL-STD-810G DROP TEST (SHOCK) - HUMIDITY -SALT FOG IEC 60529 FOR IP63 INGRESS TEST | FCC TITLE 47 PART 15 B PER ANSI C63.4 | ICES-003 & ICES-GEN FOR ISED (CANADA)

CASSETTE SPECIFICATION

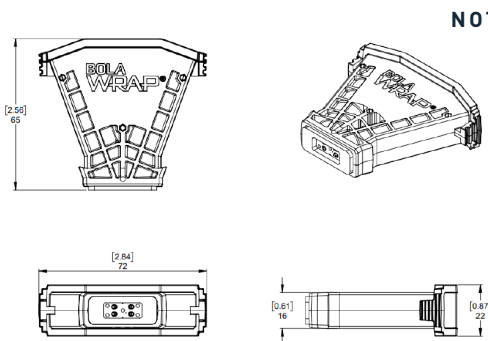

Material	Noryl
Weight	Under 2 oz (0.054 kg)
Energetic Component	ZPP
Sound Volume	158-162 dB
Kevlar® Cord Length	7 ft 6 in +/- 1 in (2.3 meters +/- .1 meters)
Kevlar® Cord Strength	230 +/- 20 lb. (104 kg +/- 9 kg)
Wraps Around Body	1-3 times

BATTERY SPECIFICATION

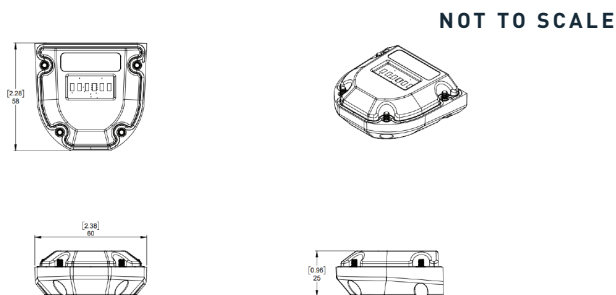

Material	PC/ABS
Battery Type	Two Lithium Metal (non-rechargeable)
Capacity	3000 mAh
Weight	Under 3 oz (0.07 kg)

PRODUCT FEATURES

- Electronic
- Textured grip pads
- Dual LED flashlights
- Reversible cassette installation
- Green multi-dot laser on target when powered on

WRAP Technologies, Inc.
 1817 W 4th St. | Tempe, AZ 85281
 800-583-2652 | +1 480-658-2794
 support@wrap.com
 wrap.com

WARNING: Serious injury if not use as instructed. Obey warnings, instructions and all laws. Comply with current training materials and use of force policies.