






DIGITALLY CONTROLLABLE BEAM, COLOUR AND OUTPUT

aeroslight.co.uk

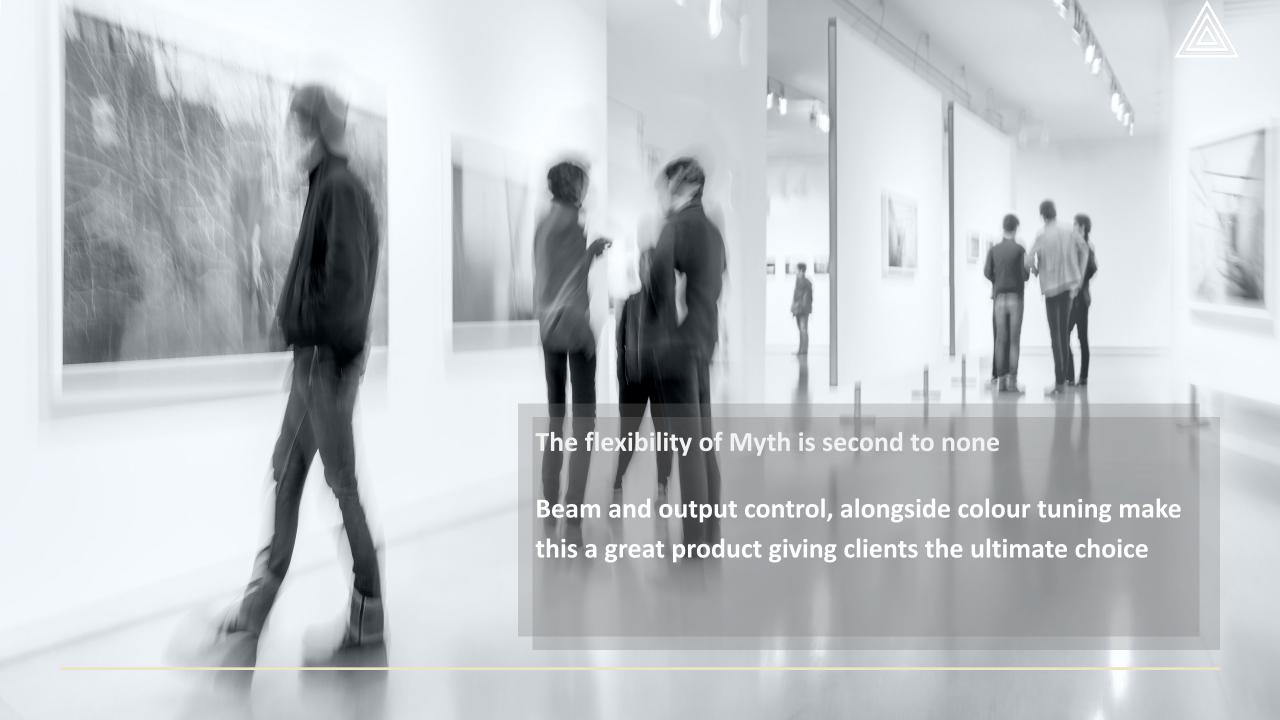





DIGITALLY CONTROLLABLE BEAM, COLOUR & OUTPUT

Digitally controllable beam, colour and output

DIGITAL BEAM CONTROL

A digitally controlled, surface mounted track spot with fully integral driver and controls in 2 sizes MINI & MIDI. Myth delivers 1000 or 2000 lumens respectively, at around 100 lumens per Watt.

Myth has outstanding flexibility with digital beam (from 10 to 50 degree) colour and output control via Casambi wireless or Dali control, with a range of colour options from Tuneable White, to RGBW, or just single colour.





Digitally controllable beam, colour and output

SLEEK & CLEAN DESIGN

Myth is a super sleek, fully integrated luminaire with a powder coated finish in white or black. As a track spot, Myth can be simply mounted onto a 3 circuit mains track, low voltage track, or simply a surface mounted connection box.

A broad range of accessories can also be added including long snoot, honeycomb louvre, wash wash ring and barn doors



aeros PRODUCT LOGIC - Size & Output Options



MICRO

The MICRO will deliver super high power, from really micro luminaires, providing 600 lumens at over 100 lumens per Watt . Its compact size package means it can be designed into some really sleek luminaires.

PRODUCTS COMPATIBLE

To Follow 2025

MINI

The MINI delivers 1000 lumens at over 100 lumens per Watt . Its compact size package means it can be designed into some super sleek luminaires, and by using the Genius+ MINI module, digital beam control becomes a reality, with onboard Casambi or Dali wireless control.

PRODUCTS COMPATIBLE

MYTH – Digital Track Spot

PURE – Digital Pendant

EVO – Diglital Downlight*

MIDI

The MIDI delivers 2000 lumens at over 100 lumens per Watt . Its compact size package means it can be designed into some super sleek luminaires, and by using the Genius+ MIDI module, digital beam control becomes a reality, with onboard Casambi or Dali wireless control.

PRODUCTS COMPATIBLE

MYTH – Digital Track Spot

PURE – Digital Pendant

EVO – Diglital Downlight*

MAXI

MAXI is all about output and light quality, delivering delivers 3000 lumens at over 100 lumens per Watt . Its compact size package means it can be designed into some super sleek luminaires, and by using the Genius+ MAXII module, digital beam control becomes a reality, with onboard Casambi or Dali wireless control.

PRODUCTS COMPATIBLE

MYTH - Digital Track Spot*

PURE - Digital Pendant*

EVO – Diglital Downlight*


Digitally controllable beam, colour and output

BROAD APPLICATION

The product is designed for application into museums, high end hospitality and retail, allowing designers the option to create schemes with incredible flexibility.

From all day dining, to museum exhibitions everything can be catered for, from high 98 CRI, to candle whiskey scene candle warmth, it can be delivered by Myth Genius.



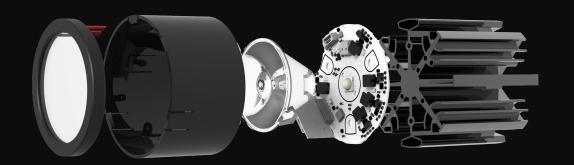



GENIUS – full digital control via Casambi or Dali, controlling beam, output and colour

Genius + provides 3 great choices - 5000K to 2200K for broad flexibility and 3000K to 1800K for high end hospitality and residential application. Finally there is a RGBW colour change option with an excellent 2700K warm white, all of which are at 90 CRI or more... For near perfect colour rendering applications, Genius X offers 98+ CRI 5000K to 2700K tuneable and with digital beam choice.

AIR – full digital control via Casambi or Dali, controlling beam, output and colour

Fixed beam with digital output and tuneable white colour control (or static colour)
Air provides all static colour and tuneable white with a range of fixed beam angles, all at either 90 or 98+ CRI

aeros Modules – High efficacy, high colour rendering with digital beam control



Air +

The **highest efficiency** module based around the Bridgelux Thrive, delivering over 120 lumens per Watt at 90 CRI. Choices of static white; a range of beams from 15-50, and dimming control via Dali, Casambi or other options.

- 3 Size options for 1000, 2000, & 3000 delivered lumens
- High effacy at over 120 lumens per watt
- Single colour options with choice of whites 27, 30 & 40K
- Fully dimmable via dali, 0-10, triac or with the option of remote mounted wireless Casambi control
- Choice of fixed beam from 15-50°

Air X

Incredible CRI at 98 CRI based around the Bridgelux F90, delivering over 100 lumens per Watt. Choices of static white; a range of beams from 15-50, & dimming control via Dali Casambi, or other options.

- 3 Size options for 800, 1500, & 2500 delivered lumens
- Super high efficacy at over 150 lumens per watt
- Single colour options with choice of whites.
- Fully dimmable via dali, 0-10, triac or with the option of remote mounted wireless Casambi control
- Choice of fixed beam from 15-50°

Genius

A static white 90 CRI digitally controllable module with beam & output control via Casambi or Dali control. Static whites can be dimmed and beam angles can still be changed digitally, make the Genius module the simplest of the family at 90 CRI

- 3 Size options for 800, 1500, and 2500 delivered lumens
- 90 CRI minimum colour rendering
- Integral Digital beam, output and colour change options via Casambi or Dali.
- Single colour choice of white
- High efficacy, over 100 lumens per Watt delivered
- Choice of beam from option; 15-45° or 10-50°

Genius+

A digitally controllable 90 CRI module with beam, output and colour change via Casambi or Dali control. Tuneable white, static white, or RGBW colour changing options deliver excellent flexibility, making this the ultimate digitally controlled light module

- 3 Size options for 800, 1500, and 2500 delivered lumens
- 90 CRI minimum colour rendering
- Integral Digital beam, output and colour change options via Casambi or Dali.
- Tuneable white, RGBW, and single colour white options
- High efficacy, over 100 lumens per Watt delivered
- Choice of beam from option; 15-45° or 10-50°

Genius^X

A digitally controllable 96 CRI module with beam, output and colour change via Casambi or Dali control. Tuneable white, static white, or RGBW colour changing options deliver excellent flexibility.

- 3 Size options for 800, 1500, and 2500 delivered lumens
- Integral Digital beam, output and colour change options via Casambi or Dali.
- Greater than 96 CRI for incredible colour rendering
- Tuneable white, RGBW, and single colour white options
- High efficacy, over 100 lumens per Watt delivered
- Choice of beam from option; 15-45° or 10-50°

JAN 2025


MYTH MINI

PRODUCT SPECIFICATION CODES









Myth is a digitally controlled, surface mounted track spot with fully integral driver and controls. MYTH MIDI delivers over 1000 lumens at over 100 lumens per Watt and has outstanding flexibility with digital beam, colour and output control via Casambi wireless or Dali control, with a range of colour options from Tuneable White, to RGBW, or just single colour.

The product is designed for application into museums, high end hospitality and retail, allowing designers the option to create schemes with incredible flexibility. From all day dining, to museum exhibitions everything can be catered for, from high 98 CRI, to candle whiskey scene candle warmth, it can be delivered by the Myth family.

- Minimalist fully integrated Trackspot with multiple control options including casambi Digital Beam change technology with Genius light
- Delivering over 1000 lumens at over 100 Lumens per Watt. Extra high CRI option at 98+ CRI.
- Part of the Myth trackspot family with higher and lower output options

- Choice of aeros Light module with high efficiency, high CRI or ultra high CRI performance.
- Low voltage track option with remote digital control Choice of static colour, tunebale white or RGBW.
- Choice of control options, including Casambi, Dali and Phase Range of beam angles 15,24,36,50 or digital beam change
- Black, white and RAL paint finish options.



aeros



Luminaire specification

| Mounting | 3 Circuit Mains Track/LV Track/Surface |
|---------------|--|
| Module Size | MINI |
| Head Diameter | 75mm |
| Body Material | Extruded & Machined Aluminium |
| Finish | Matt Powder Coat |
| IP Rating | IP20 |
| Weight | 1kg |
| Warranty | 5 Years |









| Part | Finish | Code | Mounting | Code | | Notes | | | | | | | |
|---------|-----------|----------|------------|----------|-----|----------|---|----------------|--------------|--------------|------------------|---------|--|
| MYMIN | BLACK | BL | TRACK 230V | TK230 | | | | | | | | | |
| | WHITE | WH | TRACK LV | TK48 | | | | | | | | | |
| | RAL | RA | SURFACE | SURF | | | | | | | | | |
| | | | | | | Module | part code | | | | | | |
| | | | | | 190 | AIR+ | | | ens / 110 Lu | | | | |
| | | | | | | AIR* | Colour | Colour | ens / IIO Lo | mens pw | 1 | | |
| | | | | | | Module | Temp | Code | Beam | Degres | Control | Code | |
| | | | | | | AIP | 2700 | 27 | 15 | 15 | DALI | DA | |
| | | | | | | | 3000 | 30 | 24 | 24 | CASAMBI | CA | |
| | | | | | | | 4000 | 4000 | 36 | 36 | BUBBLYNET | BN | |
| | | | | | | | | | 50 | 50 | PHASE | PA | |
| | | | | | | | | | | | 1-10 VOLT | OT | |
| | | | | | | AIR X | 98+ CRI / 9 | 900+ Lum | ens / 90 Lun | nens pw | | | |
| | | | | | | | Colour | Colour | 2000 | | | | |
| | - | - | | | H | Module | Temp | Code | Beam | Degres | Control | Code | |
| | | | | | | AIX | 2700 | 27 | 15 | 15 | Non | NC | |
| | | | | | | | 3000 | 30 | 24 | 24 | DALI | DA | |
| | | | | | | | 4000 | 4000 | 36 | 36 | CASAMBI | CA | |
| | | | | | | | | | 50 | 50 | BUBBLYNET | PA | |
| | | | | | | | | | - | - | PHASE | BN | |
| | 1 | | | | | | | | | 1 | 1-10 VOLT | OT | |
| | | | | | | GENIUS | 90+ CRI / 900+ Lumens / 100 Lumens pw / Ditgital beam control | | | | | | |
| | 2 | | | | | Module | Colour | Colour | Beam | Degres | Control | Code | |
| | | | | | | GNS | 2700 | | | | | | |
| | | | | | | | 3000 | | 10-50 | LV10 | DALI | DX | |
| | | | | | | | 4000 | | 15-35 | LV15 | CASAMBI | CA | |
| | | | | | | | | | | | BUBBLYNET | BN | |
| | | | | | | | | | | | | | |
| | | | | | | GENIUS+ | | | ens / 100 Li | umens pw / D | itgital beam con | trol | |
| | | | | | | Module | Colour | Colour | Beam | Degres | Control | Code | |
| | | | 100 | | | GNP | RGBW (2700) | RGBW | 10-50 | LV10 | DALI | DA | |
| | | | | | | 1000 | 1800-3000 | TWW | 15-35 | LV15 | CASAMBI | CA | |
| | | | | | | | 2200-5000 | TWW | 10.00 | 1 | BUBBLYNET | BN | |
| | | | | | L | | | | | | | Dit | |
| | | | | | | GENIUS X | | | | | | | |
| | | | | | | Module | Colour Temp | Colour Code | Beam | Degres | Control | Code | |
| | | | | | | GNX | 2700-5000 | TWW | 10-50 | LV15 | DALI | DA | |
| | | | | | | | | | 25-40 | LV24 | CASAMBI | CA | |
| | | | | | | | | | | BUBBLYNET | BN | | |
| 1yth pa | rt code g | eneratio | on | | | | | | | | | | |
| | 1 | Finish | 1 | Mounting | 1 | Module | 1 | Colour Temp | 1 | Beam | 1 | Control | |
| | | | | | | | | | | | | | |

Cross louver (MYMINCRL)


Barn door (MVMINBDO)

- 1000 Lumen Output at 100 Lumens per Watt
- Full Digital Control via Casambi or Dali controlling beam, output and colour
- Full integrated track spot with 240 Volt & LV Option
- 90 or 98 CRI Choice of light modules
- Tuneable white, RGBW, or single colour

MYTH MINI ACCESSORIES











Accessories

Honeycomb (MYMINHCL)

Spoot (MVMINSNO)

Wall washing ring (MYMINWWR)

MYTH MIDI

PRODUCT SPECIFICATION CODES










Luminaire part code









Myth is a digitally controlled, surface mounted track spot with fully integral driver and controls. MYTH MIDI delivers 1500 lumens at over 100 lumens per Watt and has outstanding flexibility with digital beam, colour and output control via Casambi wireless or Dali control, with a range of colour options from Tuneable White, to RGBW, or just single colour.

The product is designed for application into museums, high end hospitality and retail, allowing designers the option to create schemes with incredible flexibility. From all day dining, to museum exhibitions everything can be catered for, from high 98 CRI, to candle whiskey scene candle warmth, it can be delivered by the Myth family.

- Minimalist fully integrated Trackspot with multiple control options including casambi Digital Beam change technology with Genius light
- Delivering 1000 lumens at over 100 Lumens per Watt.
- Extra high CRI option at 98+ CRI.
- Part of the Myth trackspot family with higher and lower output options.

- Choice of aeros Light module with high efficiency, high CRI or ultra high CRI performance.
- Low voltage track option with remote digital control. Choice of static colour, tunebale white or RGBW.
- Choice of control options, including Casambi, Dali and Phase. Range of beam angles 15,24,36,50 or digital beam change
- Black, white and RAL paint finish options





Luminaire specification

| Mounting | 3 Circuit Mains Track/LV Track/Surface |
|---------------|--|
| Module Size | MIDI |
| Head Diameter | 75mm |
| Body Material | Extruded & Machined Aluminium |
| Finish | Matt Powder Coat |
| IP Rating | IP20 |
| Weight | 1kg |
| Warranty | 5 Years |

| 100 | | - |
|------|---------------|-------|
| m | | / 100 |
| m/X | | (X) w |
| m/7/ | | C Day |
| 10 | (*) | - |
| · tt | X/IX | J/# |
| = | $A \square P$ | O()# |
| 46 | AA | - 4 |

124 City Road, Islington, London EC1V 2NX | aeroslight.co.uk | +44 20 70 888 334



| Part | Finish | Code | Mounting | Code | | Notes | | | | | | |
|----------|-----------|----------|------------|----------|---|----------|----------------|----------------|--------------|---------------|-------------------|---------|
| MYMID | BLACK | BL | TRACK 230V | TK230 | | | | | | | | |
| | WHITE | WH | TRACK LV | TK48 | L | | | | | | | |
| | RAL | RA | SURFACE | SURF | - | | | | | | | |
| | | | | | | Module | part code | C. | | | | |
| | 1 | | | | | AIR+ | 90+ CRI / | 1100+ Lum | ens / 110 Lu | mens pw | | |
| | | | | | | Module | Colour Temp | Colour Code | Beam | Degres | Control | Code |
| | | | | | Г | AIP | 2700 | 27 | 15 | 15 | DALI | DA |
| | - | | | | | | 3000 | 30 | 24 | 24 | CASAMBI | CA |
| | | | | | | | 4000 | 4000 | 36 | 36 | BUBBLYNET | BN |
| | | | | | | | | | 50 | 50 | PHASE | PA |
| | | | | | L | | | | | | 1-10 VOLT | OT |
| | | | | | | AIR X | 98+ CRI / | 900+ Lume | ns / 90 Lum | nens pw | | |
| | | | | | | Module | Colour Temp | Colour | Beam | Degres | Control | Code |
| | | | | | Г | AIX | 2700 | 27 | 15 | 15 | Non | NC |
| | | | | | | | 3000 | 30 | 24 | 24 | DALI | DA |
| | | | | | | | 4000 | 4000 | 36 | 36 | CASAMBI | CA |
| | | | 1 | | | | | | 50 | 50 | BUBBLYNET | PA |
| | | | | | | | | | | | PHASE | BN |
| | | | | | | | | | | | 1-10 VOLT | ОТ |
| | | | | | | GENIUS | 90+ CRI / | 00+ Lume | ns / 100 Lui | mens pw / Dit | tgital beam conti | rol |
| | | | 4 | | | Module | Colour Temp | Colour Code | Beam | Degres | Control | Code |
| | | | | | Г | GNS | 2700 | | | | | |
| | | | | | | | 3000 | | 10-50 | LV10 | DALI | DX |
| | | | | | | | 4000 | | 15-35 | LV15 | CASAMBI | CA |
| | | | | | | | | | | | BUBBLYNET | BN |
| | | | | | | GENIUS+ | 90+ CRI /: | LOOO Lume | ns / 100 Lur | mens pw / Dit | gital beam contr | ol |
| | | | | | | Module | Colour Temp | Colour Code | Beam | Degres | Control | Code |
| | | | | | Г | GNP | RGBW (2700) | RGBW | 10-50 | LV10 | DALI | DA |
| | | | 100 | | | | 1800-3000 | TWW | 15-35 | LV15 | CASAMBI | CA |
| | | | | | | | 2200-5000 | TWW | | | BUBBLYNET | BN |
| | | | | | t | GENIUS X | 98+ CRI / 1 | .000 Lume | ns / 100 Lur | mens pw / Dit | gital beam contr | ol |
| | | | | | Г | Module | Colour Temp | Colour Code | Beam | Degres | Control | Code |
| | | | | | Т | GNX | 2700-5000 | TWW | 10-50 | LV15 | DALI | DA |
| | | | | | | | | | 25-40 | LV24 | CASAMBI | CA |
| | | 1 | | | | | | | | | BUBBLYNET | BN |
| /yth par | rt code g | eneratio | on | 1 | | | | | | | DOUBLINE | DIV. |
| | 1 | Finish | 1 | Mounting | 1 | Module | 1 | Colour Temp | 1 | Beam | 1 | Control |
| | 1 | BL | 1 | TK230 | 1 | GNX | 1 | 27 | 1 | 36 | 1 | DA |


Barn door (MYMIDBDO)

- 2000 Lumen Output at 100 Lumens per Watt
- Full Digital Control via Casambi or Dali controlling beam, output and colour
- Full integrated track spot with 240 Volt & LV Option
- 90 or 98 CRI Choice of light modules
- Tuneable white, RGBW, or single colour


MYTH MIDI ACCESSORIES












Honeycomb (MYMIDHCL) Snoot (MYMIDSNO)

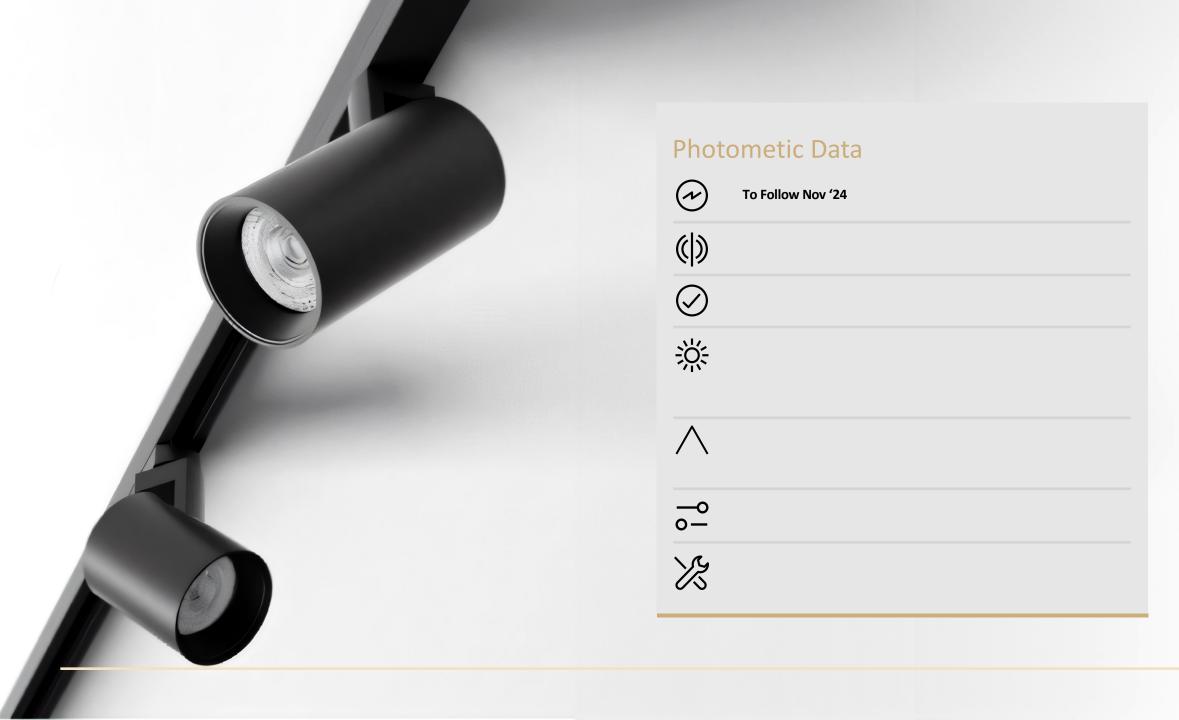



aeroslight.co.uk