




Dimension Drawings

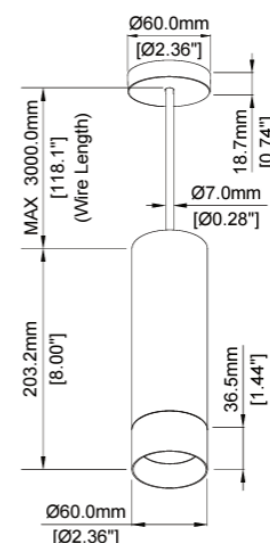

Overview

Pure is a digitally controlled, suspended pendant with fully integral driver and controls. PURE Midi delivers 2000 lumens at over 100 lumens per Watt and has outstanding flexibility with digital beam, colour and output control via Casambi wireless or Dali control, with a range of colour options from Tuneable White, to RGBW, or just single colour.

The product is designed for application into high end hospitality and retail, allowing designers the option to create schemes with incredible flexibility. From all day dining, to hotel receptions everything can be catered for, from high 98 CRI, to candle whiskey scene candle warmth, it can be delivered by the PURE family.

Features





- Minimalist fully integrated pendant with multiple control options including casambi
- Digital Beam change technology with Genius light module
- Delivering 2000 lumens at over 100 Lumens per Watt
- Part of the PURE Pendant family with higher and lower output options

Options

- Choice of aeros Light module with high efficiency & high CRI
- Choice of control options, including Casambi, Dali and Phase.
- Low voltage track option with remote digital control
- Range of beam angles 15,24,36,50 or digital beam change 10-50 or 15-35
- Choice of static colour, tuneable white or RGBW
- Black, white and RAL paint finish options

Luminaire specification

Mounting	Surface Suspended or Track Suspended
Module Size	MIDI
Head Diameter	75mm
Body Material	Extruded & Machined Aluminium
Finish	Matt Powder Coat
IP Rating	IP20
Weight	1kg
Warranty	5 Years



Luminaire part code

Part	Finish	Code	Mounting	Code	Cable Length (mm)	Notes						
MYMAX	BLACK	BL	TRACK 230V	TK230	600							
	WHITE	WH	TRACK LV	TK48								
	RAL	RA	SURFACE	SURF								
						Module part code						
						AIR+	98+ CRI / 2000+ Lumens / 90 Lumens pw					
						Module	Colour Temp	Colour Code	Beam	Degres	Control	Code
						AIP	2700	27	15	15	DALI	DA
			3000	30	24		24	CASAMBI	CA			
			4000	4000	36		36	BUBBLYNET	BN			
					50		50	PHASE	PA			
								1-10 VOLT	OT			
						AIR X	98+ CRI / 2000+ Lumens / 90 Lumens pw					
						Module	Colour Temp	Colour Code	Beam	Degres	Control	Code
						AIX	2700	27	15	15	Non	NC
			3000	30	24		24	DALI	DA			
			4000	4000	36		36	CASAMBI	CA			
					50		50	BUBBLYNET	PA			
								PHASE	BN			
								1-10 VOLT	OT			
						GENIUS	90+ CRI / 2000+ Lumens / 100 Lumens pw / Ditgital beam control					
						Module	Colour Temp	Colour Code	Beam	Degres	Control	Code
						GNS	2700	27				
			3000	30	10-50		LV10	DALI	DX			
			4000	40	15-35		LV15	CASAMBI	CA			
								BUBBLYNET	BN			
						GENIUS+	90+ CRI / 2000 Lumens / 100 Lumens pw / Ditgital beam control					
						Module	Colour Temp	Colour Code	Beam	Degres	Control	Code
						GNP	RGBW (3000)	RGBW	10-50	LV10	DALI	DA
			1800-4000	TWW	15-35		LV15	CASAMBI	CA			
								BUBBLYNET	BN			
												

Pure part code generation

	/	Finish	/	Mounting	/	Cable Length	/	Module	/	Colour Temp	/	Beam	/	Control
PURMID	/	BL	/	TK230	/	300	/	GNS	/	27	/	36	/	DA