




Dimension Drawings

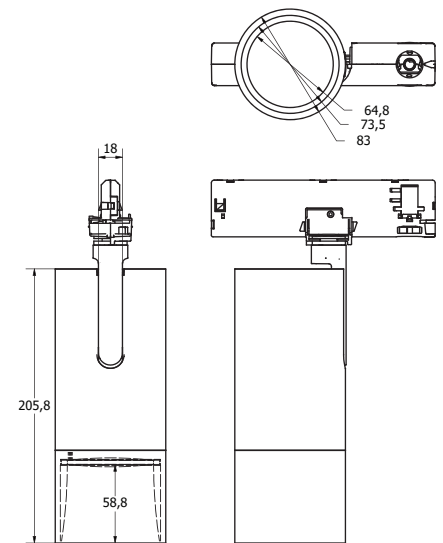

Overview

PURE is a beautifully sleek, digitally controlled, suspended pendant with remote driver and controls. PURE Micro delivers 600 lumens at over 100 lumens per Watt and has outstanding flexibility via Casambi wireless or Dali control, with a range of colour options from Tuneable White, to RGBW, or just single colour.

The product is designed for application into high end hospitality and retail, allowing designers the option to create schemes with incredible flexibility. From all day dining, to hotel receptions everything can be catered for, from bright cool white, to candle whiskey scene candle warmth, it can be delivered by the PURE family.

Features





- Minimalist fully integrated pendant with multiple control options including casambi
- Colour tunable white from 4000K to 1800K
- Delivering 600 lumens at over 100 Lumens per Watt
- Part of the PURE Pendant family with higher and lower output options

Options

- Choice of aeros Light module with high efficiency & high CRI
- Choice of control options, including Casambi, Dali and Phase.
- Low voltage track option with remote digital control
- Range of beam angles 15,24,36,50
- Choice of static colour, tuneable white or RGBW
- Black, white and RAL paint finish options

Luminaire specification

Mounting	Surface Suspended or Track Suspended
Module Size	MICRO
Head Diameter	35mm
Body Material	Extruded & Machined Aluminium
Finish	Matt Powder Coat
IP Rating	IP20
Weight	1kg
Warranty	5 Years

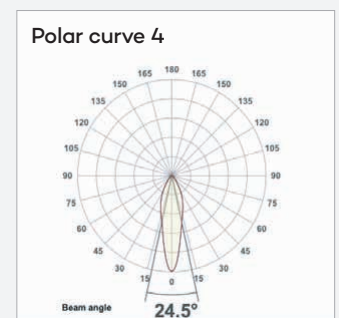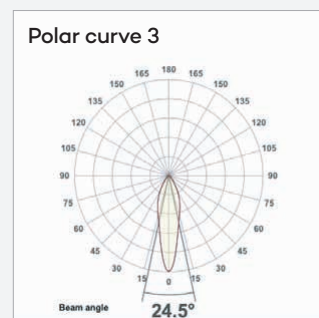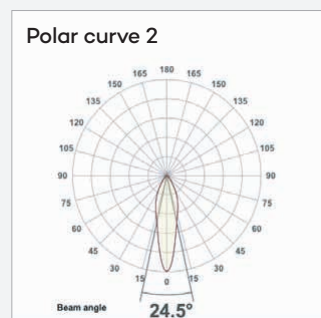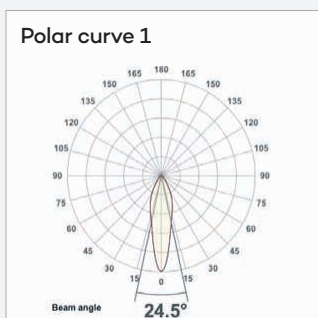

Luminaire part code

Part	Finish	Code	Mounting	Code	Cable Length (mm)	Luminaire Length (mm)	Notes						
MYMAX	BLACK	BL	TRACK 230V	TK230	300	300							
	WHITE	WH	TRACK LV	TK48	600	600							
	RAL	RA	SURFACE	SURF	???	???							
							Module part code						
							AIR+	90+ CRI / 3000+ Lumens / 110 Lumens pw					
							Module	Colour Temp	Colour Code	Beam	Degres	Control	Code
							AIP	2700	27	15	15	DALI	DA
								3000	30	24	24	CASAMBI	CA
								4000	4000	36	36	BUBBLYNET	BN
										50	50	PHASE	PA
												1-10 VOLT	OT
							AIR X	98+ CRI / 2000+ Lumens / 90 Lumens pw					
							Module	Colour Temp	Colour Code	Beam	Degres	Control	Code
							AIX	2700	27	15	15	Non	NC
								3000	30	24	24	DALI	DA
								4000	40	36	36	CASAMBI	CA
										50	50	BUBBLYNET	PA
												PHASE	BN
												1-10 VOLT	OT
							GENIUS	90+ CRI / 2000+ Lumens / 100 Lumens pw / Digtial beam control					
							Module	Colour Temp	Colour Code	Beam	Degres	Control	Code
							GNS	2700	27				
								3000	30	10-50	LV10	DALI	DX
								4000	40	15-35	LV15	CASAMBI	CA
								RGBW (3000)	RGBW			BUBBLYNET	BN
													
													

Pure part code generation

	/	Finish	/	Mounting	/	Luminaire Length	Cable Length	/	Module	/	Colour Temp	/	Beam	/	Control
PURMIC	/	BL	/	TK230	/	600	300	/	GNS	/	27	/	36	/	DA