




Dimension Drawings

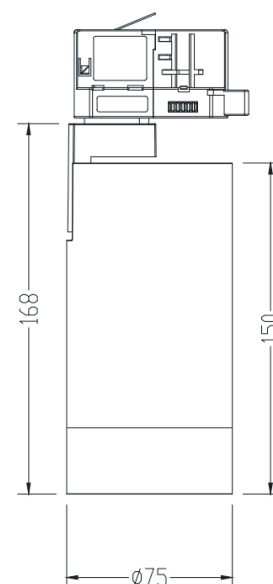

Overview

Myth is a digitally controlled, surface mounted track spot with fully integral driver and controls. MYTH MINI delivers over 1000 lumens at over 100 lumens per Watt and has outstanding flexibility with digital beam, colour and output control via Casambi wireless or Dali control, with a range of colour options from Tuneable White, to RGBW, or just single colour.

The product is designed for application into museums, high end hospitality and retail, allowing designers the option to create schemes with incredible flexibility. From all day dining, to museum exhibitions everything can be catered for, from high 98 CRI, to candle whiskey scene candle warmth, it can be delivered by the Myth family.

Features





- Minimalist fully integrated Trackspot with multiple control options including casambi Digital Beam change technology with Genius light module.
- Delivering over 1000 lumens at over 100 Lumens per Watt.
- Extra high CRI option at 98+ CRI.
- Part of the Myth trackspot family with higher and lower output options.

Options

- Choice of aeros Light module with high efficiency, high CRI or ultra high CRI performance.
- Low voltage track option with remote digital control.
- Choice of static colour, tuneable white or RGBW.
- Choice of control options, including Casambi, Dali and Phase.
- Range of beam angles 15,24,36,50 or digital beam change 10-50 or 15-35
- Black, white and RAL paint finish options.

Luminaire specification

Mounting	3 Circuit Mains Track/LV Track/Surface
Module Size	MINI
Head Diameter	75mm
Body Material	Extruded & Machined Aluminium
Finish	Matt Powder Coat
IP Rating	IP20
Weight	1kg
Warranty	5 Years



Luminaire part code

Part	Finish	Code	Mounting	Code	Notes							
MYMIN	BLACK	BL	TRACK 230V	TK230								
	WHITE	WH	TRACK LV	TK48								
	RAL	RA	SURFACE	SURF								
					Module part code							
					AIR+	90+ CRI / 1100+ Lumens / 110 Lumens pw						
					Module	Colour Temp	Colour Code	Beam	Degres	Control	Code	
					AIP	2700	27	15	15	DALI	DA	
						3000	30	24	24	CASAMBI	CA	
						4000	4000	36	36	BUBBLYNET	BN	
								50	50	PHASE	PA	
										1-10 VOLT	OT	
					AIR X	98+ CRI / 900+ Lumens / 90 Lumens pw						
					Module	Colour Temp	Colour Code	Beam	Degres	Control	Code	
					AIX	2700	27	15	15	Non	NC	
						3000	30	24	24	DALI	DA	
						4000	4000	36	36	CASAMBI	CA	
								50	50	BUBBLYNET	PA	
										PHASE	BN	
										1-10 VOLT	OT	
					GENIUS	90+ CRI / 900+ Lumens / 100 Lumens pw / Ditgital beam control						
					Module	Colour Temp	Colour Code	Beam	Degres	Control	Code	
					GNS	2700						
						3000		10-50	LV10	DALI	DX	
						4000		15-35	LV15	CASAMBI	CA	
										BUBBLYNET	BN	
					GENIUS+	90+ CRI / 91000 Lumens / 100 Lumens pw / Ditgital beam control						
					Module	Colour Temp	Colour Code	Beam	Degres	Control	Code	
					GNP	RGBW (2700)	RGBW	10-50	LV10	DALI	DA	
						1800-3000	TWW	15-35	LV15	CASAMBI	CA	
						2200-5000	TWW			BUBBLYNET	BN	
					GENIUS X	98+ CRI / 1000 Lumens / 100 Lumens pw / Ditgital beam control						
					Module	Colour Temp	Colour Code	Beam	Degres	Control	Code	
					GNX	2700-5000	TWW	10-50	LV15	DALI	DA	
								25-40	LV24	CASAMBI	CA	
										BUBBLYNET	BN	

Myth part code generation

	/	Finish	/	Mounting	/	Module	/	Colour Temp	/	Beam	/	Control
MYMIN	/	BL	/	TK230	/	GNX	/	27	/	36	/	DA

Accessories

- Honeycomb (MYMINHCL)
- Cross louver (MYMINCRL)
- Wall washing ring (MYMINWWR)
- Snoot (MYMINSNO)
- Barn door (MYMINBDO)