




Dimension Drawings

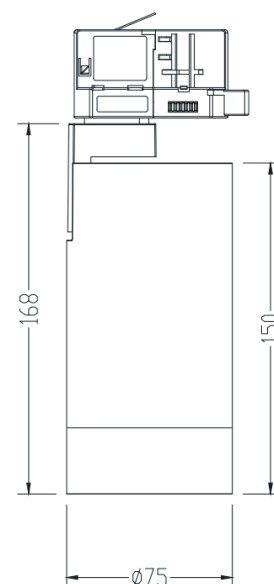

Overview

Myth is a digitally controlled, surface mounted track spot with fully integral driver and controls. MYTH MIDI delivers over 2000 lumens at over 100 lumens per Watt and has outstanding flexibility with digital beam, colour and output control via Casambi wireless or Dali control, with a range of colour options from Tuneable White, to RGBW, or just single colour.

The product is designed for application into museums, high end hospitality and retail, allowing designers the option to create schemes with incredible flexibility. From all day dining, to museum exhibitions everything can be catered for, from high 98 CRI, to candle whiskey scene candle warmth, it can be delivered by the Myth family.

Features





- Minimalist fully integrated Trackspot with multiple control options including casambi Digital Beam change technology with Genius light module.
- Delivering over 2000 lumens at over 100 Lumens per Watt.
- Extra high CRI option at 98+ CRI.
- Part of the Myth trackspot family with higher and lower output options.

Options

- Choice of aeros Light module with high efficiency, high CRI or ultra high CRI performance.
- Low voltage track option with remote digital control.
- Choice of static colour, tuneable white or RGBW.
- Choice of control options, including Casambi, Dali and Phase.
- Range of beam angles 15,24,36,50 or digital beam change 10-50 or 15-35
- Black, white and RAL paint finish options.

Luminaire specification

Mounting	3 Circuit Mains Track/LV Track/Surface
Module Size	MIDI
Head Diameter	75mm
Body Material	Extruded & Machined Aluminium
Finish	Matt Powder Coat
IP Rating	IP20
Weight	1kg
Warranty	5 Years



Luminaire part code

Part	Finish	Code	Mounting	Code	Notes
MYMID	BLACK	BL	TRACK 230V	TK230	
	WHITE	WH	TRACK LV	TK48	
	RAL	RA	SURFACE	SURF	
					Module part code
					AIR+ 90+ CRI / 2200+ Lumens / 110 Lumens pw
					Module Colour Temp Colour Code Beam Degres Control Code
				AIP	2700 27 15 15 DALI DA
					3000 30 24 24 CASAMBI CA
					4000 4000 36 36 BUBBLYNET BN
					50 50 PHASE PA
					1-10 VOLT OT
					AIR X 98+ CRI / 2000+ Lumens / 90 Lumens pw
					Module Colour Temp Colour Code Beam Degres Control Code
				AIX	2700 27 15 15 Non NC
					3000 30 24 24 DALI DA
					4000 4000 36 36 CASAMBI CA
					50 50 BUBBLYNET PA
					PHASE BN
					1-10 VOLT OT
					GENIUS 90+ CRI / 2000+ Lumens / 100 Lumens pw / Ditgital beam control
					Module Colour Temp Colour Code Beam Degres Control Code
				GNS	2700
					3000 10-50 LV10 DALI DX
					4000 15-35 LV15 CASAMBI CA
					BUBBLYNET BN
					GENIUS+ 90+ CRI / 2000 Lumens / 100 Lumens pw / Ditgital beam control
					Module Colour Temp Colour Code Beam Degres Control Code
				GNP	RGBW (2700) RGBW 10-50 LV10 DALI DA
					1800-3000 TWW 15-35 LV15 CASAMBI CA
					2200-5000 TWW BUBBLYNET BN
					GENIUS X 98+ CRI / 2000 Lumens / 100 Lumens pw / Ditgital beam control
					Module Colour Temp Colour Code Beam Degres Control Code
				GNX	2700-5000 TWW 10-50 LV15 DALI DA
					25-40 LV24 CASAMBI CA
					BUBBLYNET BN

Myth part code generation

	/	Finish	/	Mounting	/	Module	/	Colour Temp	/	Beam	/	Control
MYMID	/	BL	/	TK230	/	GNX	/	27	/	36	/	DA

Accessories

- Honeycomb (MYMIDHCL)
- Cross louver (MYMIDCRL)
- Wall washing ring (MYMIDWWR)
- Snoot (MYMIDSNO)
- Barn door (MYMIDBDO)