


# Artisan Spirit

METALLIC Shimmer

## Through the Lattice

by Patti Carey

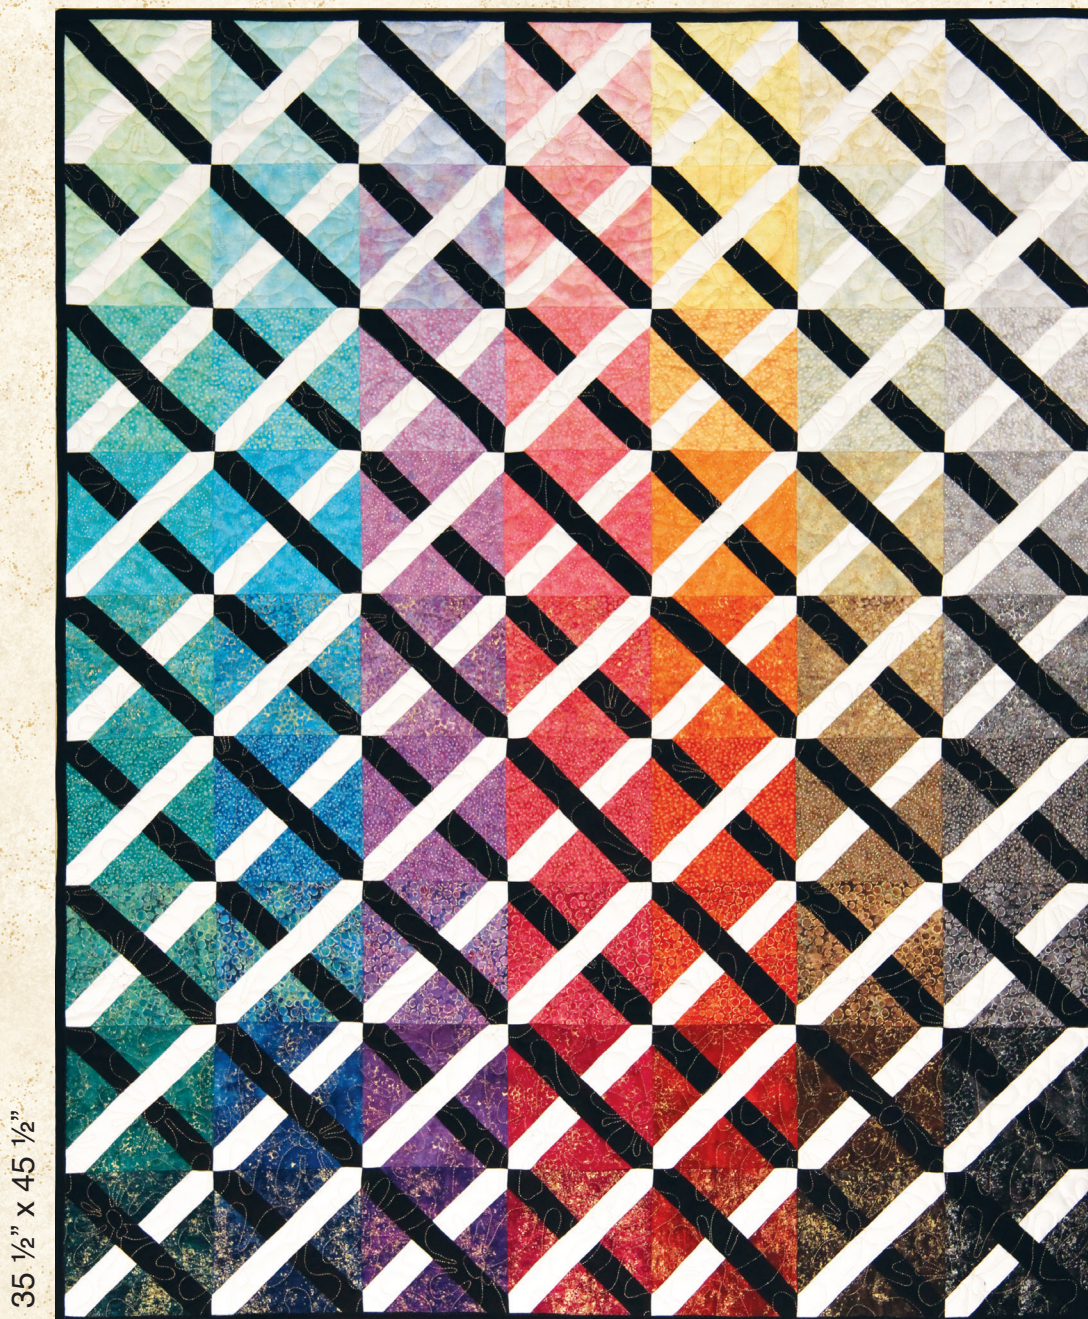

**Northcott USA**  
1099 Wall St. West, Suite 354  
Lyndhurst, NJ 07071  
1.800.223.6337

  
**NORTHCOTT**  
*Cottons that feel like silk*

**Northcott Canada**  
101 Courtland Avenue  
Vaughan, Ontario L4K 3T5  
1.800.268.1466



## *Through the Lattice*

**Finished Size:** 35½" x 45½"

**Number of Blocks & Finished Size:** (63) 5" blocks

**Skill level:** Confident beginner

Fabric Requirements	Yards	Cutting Instructions
CSHIMMER-10 Shimmer chip pack	1 pack	
ColorWorks #9000-99 black solid	¾yd	◊ Cut 5 strips 2" x wof; join end-to-end, press in half and reserve for binding. ◊ Cut 13 strips 1½" x wof; cut into (63) 8" pieces.
ColorWorks #9000-10 white solid	¾yds	◊ Cut 13 strips 1½" x wof; cut into (63) 8" pieces.
Backing	1½yds	
Batting	A piece 41" x 51"	

### **Piecing:**

1. Arrange the 63 chips of Shimmer in 7 columns of 9 shades, with the color in each column being the same, and the chips going from light (top) to dark (bottom).
2. Select the 1<sup>st</sup>, 3<sup>rd</sup>, 5<sup>th</sup>, 7<sup>th</sup> & 9<sup>th</sup> chips in the 1<sup>st</sup>, 3<sup>rd</sup>, 5<sup>th</sup> & 7<sup>th</sup> columns.
3. Cut each chip diagonally to make 2 triangles. Center a triangle on an 8" white piece; sew, pressing seam toward triangle.
4. Center the matching triangle on the other side of the white piece; check that it is aligned with the first triangle; sew, pressing seam toward triangle.
5. Cut each chip diagonally in the opposite direction to make 2 pieced triangles.
6. Center a triangle on an 8" black piece; sew, pressing seam toward black.
7. Center the matching pieced triangle on the other side of the black piece; check that the seams on the 2 triangles are aligned; sew, pressing seam toward black.
8. Trim each block to 5½", centering the white and black patches in the block. Place each block back into the arrangement of chips, aligning each block with the black strip going from upper left to lower right.
9. Select the 2<sup>nd</sup>, 4<sup>th</sup>, 6<sup>th</sup> & 8<sup>th</sup> chips in the 2<sup>nd</sup>, 4<sup>th</sup> & 6<sup>th</sup> columns. Repeat steps 3-8.
10. Select the remaining chips.
11. Cut each chip diagonally to make 2 triangles. Center a triangle on an 8" black piece; sew, pressing seam toward black.
12. Center the matching triangle on the other side of the black piece; check that it is aligned with the first triangle; sew, pressing seam toward black.
13. Cut each chip diagonally in the opposite direction to make 2 pieced triangles.
14. Center a triangle on an 8" white piece; sew, pressing seam toward triangle.
15. Center the matching pieced triangle on the other side of the white piece; check that the seams on the 2 triangles are aligned; sew, pressing seam toward the triangle.
16. Trim each block to 5½", centering the white and black patches in the block. Place each block back into the arrangement of chips, aligning each block with the black strip going from upper left to lower right.
17. Sew the blocks into rows, then sew the rows together.
18. Layer the backing, batting and quilt top. Baste and quilt as desired.
19. Trim edges even with quilt top. Sew the prepared binding to the edges, turn and stitch in place.

