




### ***ECO MS 1.5" Standing Seam***

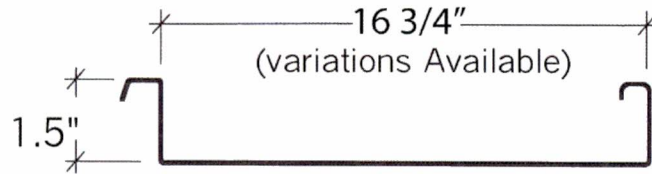

This ECO 1.5" MS Standing Seam is a mechanically field-seamed, standing seam roof system that requires a solid substrate for support, with 30# Felt or synthetic underlayment. Mechanical seamers and hand crimpers are available to rent through a 3rd Party. It has a 1 1/2" tall vertical seam and is available in a 16 3/4" standard width (variations available). All ECO MS panels are mechanically seamed. We also produce the trims for this system. It is available in 24 gauge and 26 gauge w/ a Kynar 500 Paint Finish (40 yr. crack, check, peel & 30 yr. prorated fade & chalk warranty), in a 26 ga. Siliconized Polyester paint in a smooth finish. We also have panels with a Textured paint finish and both have a (40 yr. crack, check, peel & 30 yr. prorated fade & chalk warranty), and Galvalume 24 gauge & 26 gauge. Seamer is available for rental through a 3<sup>rd</sup> party.

- Coverage Width - 16 3/4" Standard (variations available)
- Minimum Slope - 1:12
- Custom cut lengths 26" to ? (Sometimes we run on site, sometimes we crate)
- Panel Attachment - Low fixed or low floating clips are typical (clip varies by job)
- Gauge - 26 gauge ; 24 gauge
- Pan Conditions - Flat pan is typical, Striated available, ( Oil canning is NOT a cause for panel rejection )
- Finishes - Smooth, Textured
- Finishes - 26 ga. Smooth Siliconized polyester (40yr. crack, check peel warranty, 30yr prorated fade & Chalk)
- - 26ga. Textured (40yr. crack, check peel warranty, 30yr prorated fade & Chalk)
- - 26ga. & 24 ga. galvalume
- -26ga. & 24 ga. Kynar 500 Paint Finish (40 yr. crack, check, peel & 30 yr. prorated fade & chalk warranty)