


# Emergency Exit Sign Combo




## FEATURES

- Injection-molded thermoplastic ABS housing
- UL-94V-0 flame rating, fire-resistant
- Input Voltage: 120/277V
- Power consumption: 3.5W max.
- Output: 4W max.
- 3.6V Nickel Cadmium Battery
- Charging time: 24 hours
- Discharge time: 90 minutes
- Operating temperature: 0°C~40°C
- Dimension: 499\*183\*44.6mm

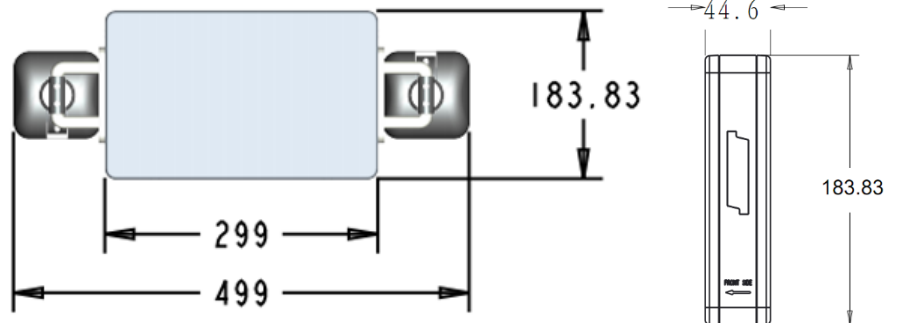

## PHOTOMETRIC

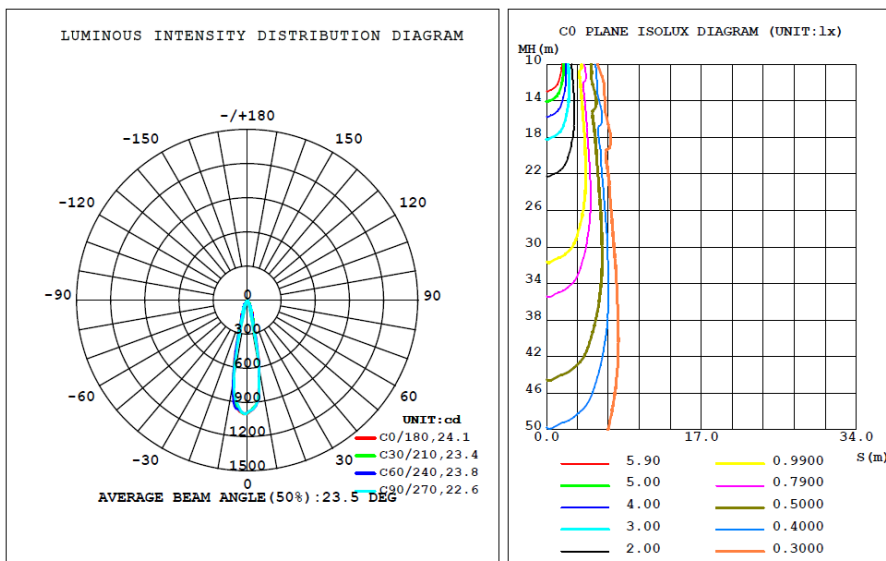

## ORDER INFORMATION

Model	Voltage	Color	Emergency Duration	Certificate
ALC-LS-ES082	120/277V	Red	90 minutes	UL
ALC-LS-7082G	120/277V	Green	90 minutes	UL