

ATTACHED GARAGE

Checklist

Roof:
 Type of roof shingles _____
 Type & thickness of roof sheathing _____
 Spacing of roof trusses _____
 Slope of roof _____
 Width of overhang _____

Exterior Wall:
 Type of siding _____
 Type of Bldg. Paper/House Wrap _____
 Type & thickness of wall sheathing _____
 Size and spacing of studs _____
 Height of wall _____
 Type, size and spacing of anchor bolts _____

Wall Between House and Garage: N/A
 Wall to be constructed as a vapour tight separation.
 No openable windows permitted.
 Construction must resist the passage of gas and exhaust fumes from entering the dwelling.

Slab:
 Thickness of slab _____
 Type of sub base _____
 Sloped outdoors _____
 Construction Joint between house and slab _____


CODE REQUIREMENTS

- Door into House:**
- Weather stripped
 - Self-closer
 - Deadbolt Lock
 - Blocked at lock-height to frame
 - Hinges secured to solid wood frame

Note: Air duct systems cannot be interconnected with other parts of the dwelling unit.

How are trusses constructed?

How are trusses attached to dwelling?

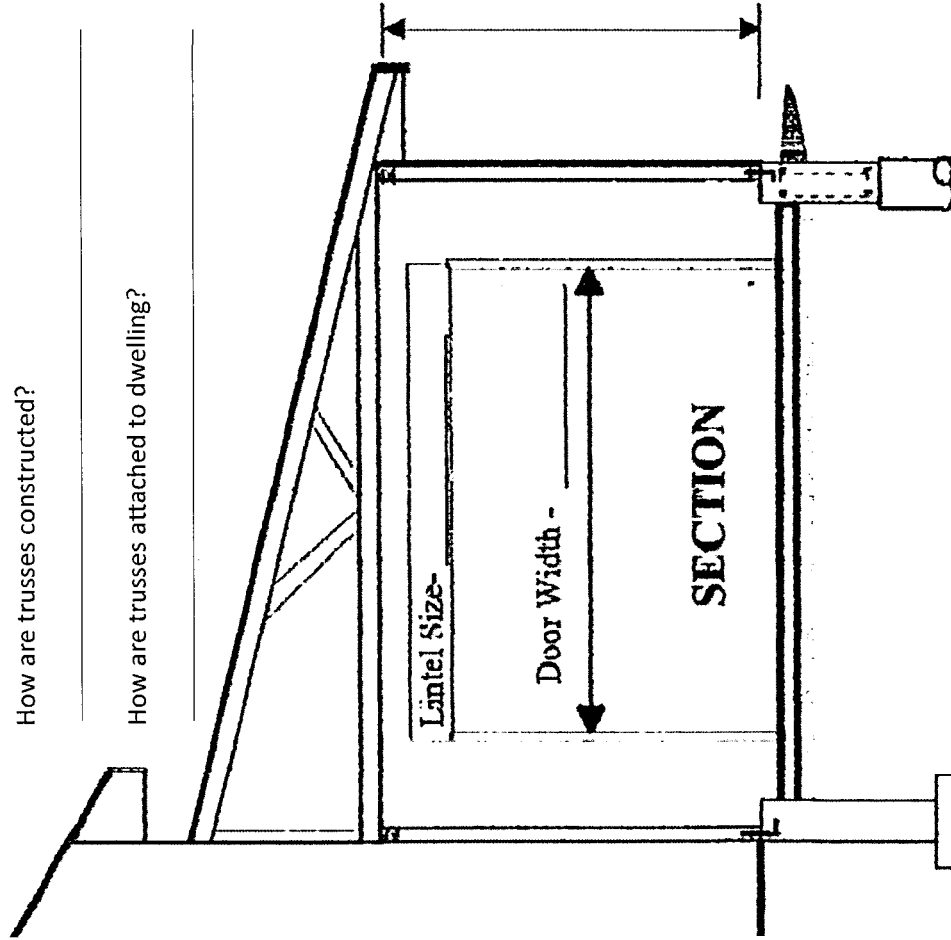

Foundation Wall

Foundation Height _____
 Wall Thickness _____
 Footing Size: Width _____
 Thickness _____

Grade Beam & Piles

Pile Diameter _____
 Pile Depth _____
 Beam Size: Width _____
 Height _____
 Rebar: In Pile _____
 In Beam _____
 Pile-to-Beam _____

Note: The foundation must extend to the same depth or greater than the house foundation.