


DECK WORKSHEET

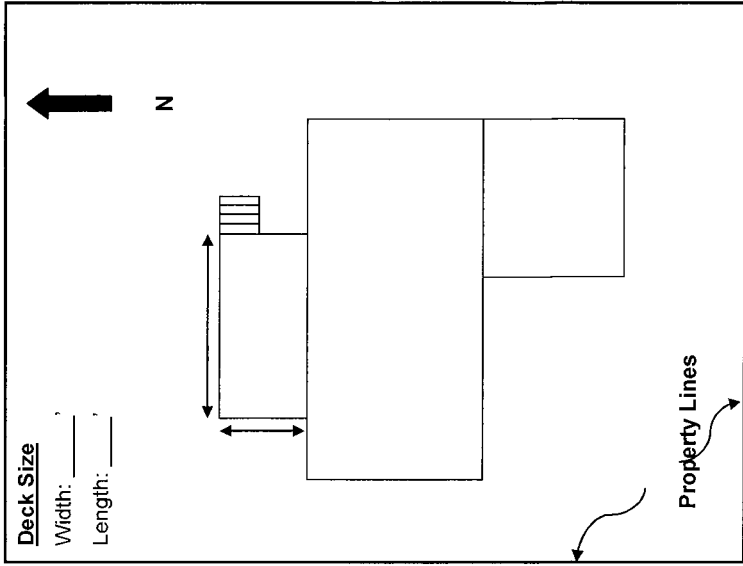

Permit Name: _____
Civic Address: _____

Complete the following:

Guards:
Height: _____"
(Minimum - 900 mm measured to nosing of stair.)

Spindle spacing: _____"
(Spaced not more than 100 mm.)

Stair Stringers

Material
PT Wood:
Metal:
Concrete:

Stairs

Width: _____"
Rise: _____"
Run: _____"


Cross Bracing

Required if deck more than 600 mm above finished grade.

Height of deck above grade / finished ground: _____"


NOTE

Permanent foundation (piles) are required if the deck joists are more than 600 mm (24") measured to the underside of the joists.

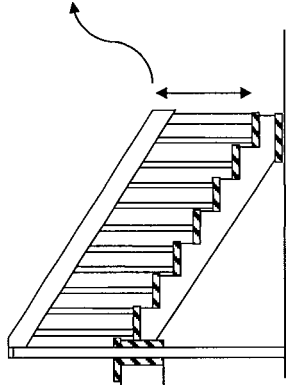

STAIR CROSS SECTION

COLUMN CROSS BRACING

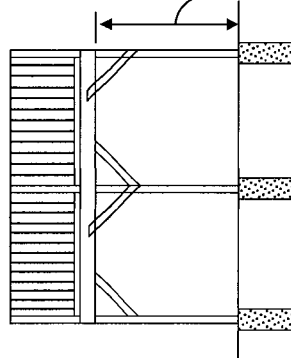

Complete the following:

Guards:
Height: _____"
(Minimum - 900 mm if deck 600 mm to 1800 mm above finished grade. 1070 mm if deck greater than 1800 mm above finished grade.)

Spindle spacing: _____"
(Spaced not more than 100 mm.)

Floor Framing


Joists size: 2 x _____"
Joists spacing: _____"
Beam size: 2 x _____"
Piles: 2 3 4
Column size:
4 x 4
4 x 6
6 x 6
Other _____"
Spacing: _____" o.c.

Foundation

Piles :
Diameter: _____" o.c.
Depth: _____"
Pier Blocks:
Screw Piles:
Concrete Pad:
Set in ground:

Joist Cantilever: _____"
(Maximums:
2 x 6 - 16"
2 x 8 - 24"
2 x 10 - 30")

Decking: _____
(2 x 4, 5/4 x 6, plywood, etc.)

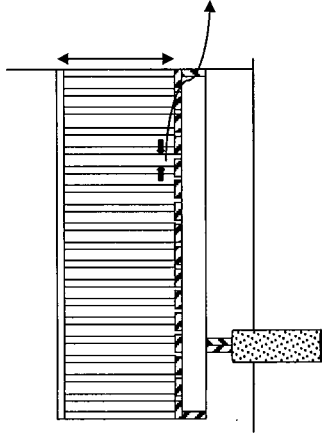

DECK CROSS SECTION

FLOOR FRAMING

