


	Catalog #:	Approved by:
Location:	Type:	Date:

LED TROFFER [MTS SERIES]

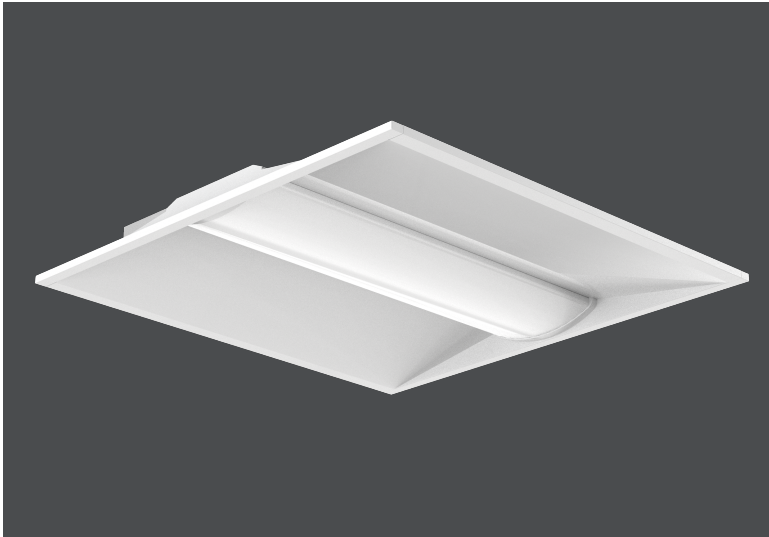

Features

- 9 in 1 (3CCTs and 3 wattages selectable), less SKU, less inventory managing cost.
- With PC lens, never turn yellowing. Uniformity light, low glare with high reliability.
- Multi-sizes, multi-lumen packages. Meet your various requests.
- Easy plug-in sensor, NLC 5.0 Listed, PIR/Microwave/Bluetooth Sensor optional.
- Ultra slim design, only 50mm height, loading qty and reduce shipping cost.
- Factory or Field Install EB available, 90 mins backup time, Integrated test button, easy installation

SPECIFICATION

CONSTRUCTION

- Housing: Galvanized sheet in white finish, can be stackable.

OPTICS

- PC diffuser
- SDCM < 4
- CCT : 3500K-4000K-5000K
- 120° Beam angle

ELECTRICAL

- 0-10VDC Dimming (5%-100%)
- 120-277VAC Input
- PF: > 0.9, THD: < 20%



WARRANTY

- 5 Years

INSTALLATION


- Recessed in T-bar grid ceiling with integral earthquake clips for secure attachment enclosure
- Surface mount kit accessories available

CERTIFICATIONS

- UL Listed for Damp Locations
- DLC PREMIUM & STANDARD



	Catalog #:	Approved by:
Location:	Type:	Date:

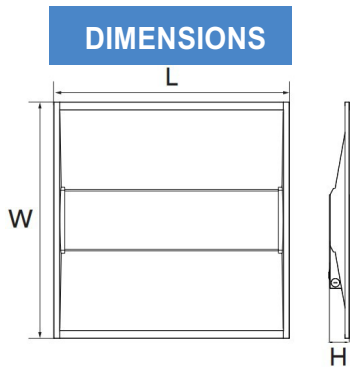

Size (FT)	LxWxH
2x2	23.74"x23.74"x1.97"
1x4	47.76"x11.93"x1.97"
2x4	47.76"x23.74"x1.97"

MADE-TO-ORDER

Example: (MTS-22-U-P-40-80)

PRODUCT SERIES	SIZE	VOLTAGE	EFFICACY	WATTAGE	CRI	SENSOR OPTION	EB DRIVER OPTION
MTS	22	U	P	40	80	Blank	Blank
MTS	22	U=120-277V	P=Premium (125lm/w)	40W (20/30/40W)	80	Blank=Without sensor P=with PIR Sensor M=with Motion Sensor B=with Bluetooth Sensor L=with Bluetooth+ PIR Sensor	Blank =without Emergency Backup
	14			40W (20/30/40W)			
	24			50W (30/40/50W)			EB=with Emergency Backup






	Catalog #:	Approved by:
Location:	Type:	Date:

PARAMETERS

MODEL NUMBER	SIZE (FT)	VOLTAGE (V)	WATTAGE (W)	EFFICACY (LPW)	LUMEN (LM)	CCT (K)	WEIGHT (lbs)
MTS-22-U-P-40-80-W-Y	2' x 2'	120-277V	20/30/40	125	2500/3750/5000	3500K 4000K 5000K	5.28
MTS-14-U-P-40-80-W-Y	1' x 4'		20/30/40	125	2500/3750/5000		6.27
MTS-24-U-P-50-80-W-Y	2' x 4'		30/40/50	125	3750/5000/6250		8.80


Note: W can be BLANK/P/M/B/L,Y can be BLANK/EB

PHOTOMETRY



MOUNTINGS/ACCESSORIES

SURFACE MOUNT KITS



DP-SMF-14-W 1x4 Surface Mount Kit, White

DP-SMF-24-W 2x4 Surface Mount Kit, White

DP-SMF-22-W 2x2 Surface Mount Kit, White