


LED BACKLIT PANEL



Project:	Catalog #: DPS 3C3W 5C5W Series	Approved by:
Location:	Type:	Date:

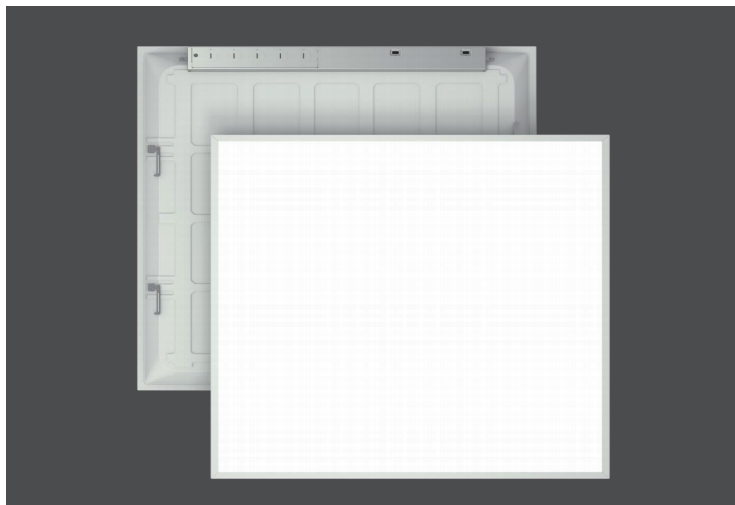

FEATURES

- 25 in 1 (5CCTs and 5 wattages selectable)
- Back-lit emitting, PMMA lens.
- Frame-less and screw-less. Cost-effective.
- Easy plug-in sensor, NLC 5.0 Listed, PIR/Microwave/Bluetooth Sensor optional.
- Integrated earthquake hook, recessed and suspension
- Factory or Field Install EB available, 90 mins backup

SPECIFICATION

CONSTRUCTION

- steel die-formed back-cover & frame, screwless.

OPTICS

- PMMA lenses over LEDs, PS diffuser.
- 3CCT : 3500K-4000K-5000K, SDCM < 5
- 5CCT : 3000K-3500K-4000K-5000K-6500K, SDCM < 5
- 120° Beam angle


ELECTRICAL

- 0-10VDC Dimming (5%-100%)
- 120-277VAC or 120-347VAC Input
- PF: > 0.9, THD: < 20%

NETWORKED LIGHTING CONTROLS

- QPL Name: Sharkward,
- Product ID: NSHRKWR20ZP

DIMENSIONS

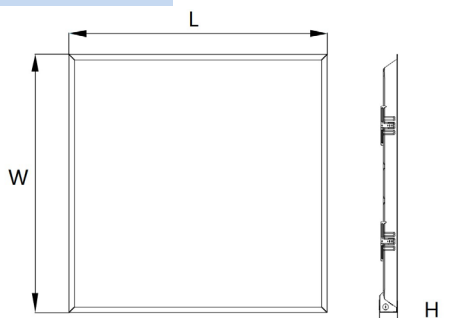

Size (FT)	
2x2	
1x4	
2x4	

WARRANTY

- 5 Years

INSTALLATION

- Recessed in T-bar grid ceiling with integral earthquake clips for secure attachment enclosure
- Surface mount and suspension mount cable kit accessories available

CERTIFICATIONS

- UL Listed for Damp Locations • DLC PREMIUM
- IC Rated for insulated ceilings • 0°C to 35°C (32°F to 95°F)
- RoHS, FCC





Project:	Catalog #: DPS 3C3W 5C5W Series	Approved by:
Location:	Type:	Date:

MADE-TO-ORDER

Example: DPS-22-U-P-40-80-EB-5C5W

PRODUCT SERIES	SIZE	VOLTAGE	EFFICACY	WATTAGE	CRI	SENSOR OPTION	EB DRIVER OPTION	5C5W
DPS	22	U	P	40	80	Blank	EB	5C5W
DPS	22	U=120-277V H=120-347V	P=Premium (125lm/w)	Rated:40W	80	Blank=Without sensor P=with PIR Sensor M=with Microwave Sensor B=with Bluetooth Sensor L=with Bluetooth+ PIR Sensor	Blank = without Emergency Backup EB=with Emergency Backup	Blank= 3 Power & 3 CCT Selectable 5C5W= 5 Power & 5 CCT Selectable
	14			Rated:40W	80			
				Rated:50W	80			
	24			Rated:65W	80			

PARAMETERS

MODEL NUMBER	SIZE (FT)	VOLTAGE (V)	WATTAGE (W)	EFFICACY (LPW)	LUMEN (LM)	CCT (K)	WEIGHT (lbs)
DPS-22-X-P-40-80-W-Y	2' x 2'	120-277V 120-347V	20/30/40	125	2500/3750/5000	3500K 4000K 5000K	
DPS-14-X-P-40-80-W-Y	1' x 4'		20/30/40	125	2500/3750/5000		
DPS-24-X-P-50-80-W-Y	2' x 4'		30/40/50	125	3750/5000/6250		
DPS-22-X-P-40-80-W-Y-5C5W	2' x 2'	120-277V 120-347V	20/25/30/35/40	125	2500/3125/3750/ 4375/5000	3000K	
DPS-14-X-P-40-80-W-Y - 5C5W	1' x 4'		20/25/30/35/40	125	2500/3125/3750/4375/5000	3500K 4000K	
DPS-24-X-P-50-80-W-Y - 5C5W	2' x 4'		30/35/40/45/50	125	3750/4375/5000/ 5625/6250	5000K	
DPS-24-X-P-65-80-W-Y -5C5W			30/40/50/60/65	125	3750/5000/6250/ 7500/8125	6500K	


Note: X can be U/H, W can be Blank/P/M/B/L, Y can be Blank/EB.






Project:	Catalog #: DPS 3C3W 5C5W Series	Approved by:
Location:	Type:	Date:

PHOTOMETRY



MOUNTINGS/ACCESSORIES

SURFACE MOUNT KITS

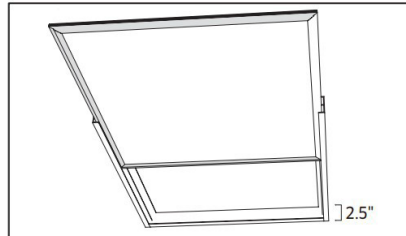

CP-SMF-14-W

1x4 Surface Mount Kit, White

CP-SMF-24-W

2x4 Surface Mount Kit, White

CP-SMF-22-W

2x2 Surface Mount Kit, White