



SMS 830[®]

SIGN MAKING SYSTEM

The BIG FOOT sign & labelling system!



A4 Size Labels

300 DPI resolution

Industrial Quality

Maintenance labels | Health and Safety | Traffic Management
Container labelling | Tanks and Vessels | GHS marking
Process marking | Public Information | Vehicle marking

SMS-830 - Big Messages – Delivered in-house, in minutes and in colour!

Designed to produce large, bold, long lasting heavy duty signs and labels. The SMS-830 is a solidly engineered printer, built for heavy industrial environments and high workloads. Complete with Microsoft® approved design software and an enormous library of industrial symbols and signs, the SMS-830 has an extensive range of high visibility, high durability materials. Multiple colour signs are easily created using our range of A4 and A5 die-cut pre-printed 'signs on a roll'.



With the SMS-830 you can easily create all of the labels below!



Material: HT-700 HighTack Vinyl

Rebo b.v. Sign & Label systemen
Beckerlinghstraat 21
3762 EV Soest
Tel. 0031 35-6016941
www.rebosystems.com

Installation ID number: A34
Delivery date: 15-12-2011
Type of coolant: R410A
Weight: 950 kg

INSTRUCTIONS

Installation

- Connect all HT and LT cables
- Pre-charge the pressure vessel.
- Run Set Up routine in Service mode.
- Turn all power switches to ON

Decommission.

- Disconnect all HT and LT power cables
- Discharge the Pressure Vessel.
- Run Shut Down in Service Mode
- Isolate Mains Feed.
- Set all power switches to OFF

Installation Data Log

14-08-2015				
------------	--	--	--	--

Log Book YES NO.

Print custom instruction labels with a Rebo Sign & Label system




Chromium Acid 5% 02B1-RB-R023B

R8, R25, R43, R49, R50/53
Stimulates the ignition of flammable substances
Toxic if swallowed
May cause sensitization by skin contact
May cause cancer by inhalation
Very toxic to aquatic organisms, may cause long-term damaging effects in the aquatic environment

S45, S53, S60, S61
In case of accident or if you feel unwell, seek medical advice immediately (show the label where possible)
Avoid exposure - obtain special instructions before use
This material and its container dispose as hazardous waste
Avoid release into the environment. Request special instructions / safety data

STANDARD TAPE QUALITIES:

- Industrial Vinyl (E300) Standard 3-5 year, perfect for most applications.
- Premium Vinyl (ST700) High quality 5-7 year, for higher durability.
- ★ High-Tack (HT700) High tack adhesive, ideal for difficult surfaces like wood, concrete, oil and low friction plastics.
- Polyester (PT700) High tack adhesive, high temperature, low halide - ideal for machine plates and pipes.
- 🔥 High Temperature Tape (H250) High tack adhesive and extra high temperature resistance.
- ❄️ Cold Weather Tape (CW200) Good adhesion to extremely cold surfaces.

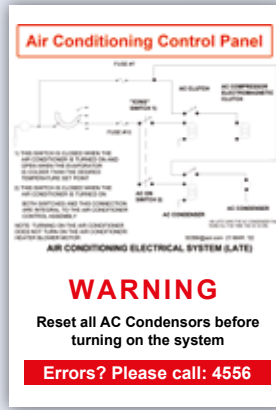

SPECIAL MATERIALS:

Removable Tape (M300) Removable tape for temporary signs.

Reflective Tape (RT500) Reflective tape for indoor and outdoor usage.

Fluorescent Tape (FL500) Fluorescent tape with a very high visibility.

Photolum. Tape (RG500) Glow-in-the-dark tape for signs that need to remain visible after a power cut.

Tags (T300) For Lock-out/Tag-out, in a large range of colours and sizes. Printable and extremely tough.

Pre-printed labels Perfect for multi-colour signs and logos.

Die-cut labels Durable industrial die-cuts. Available in several qualities, colours, shapes en sizes.

SMS-830 - For the BIG and IMPORTANT messages

The SMS-830 is the ideal solutions to 'on demand' sign and label requirements. Fast and easy to use, the SMS-830 helps you to get important safety messages and identification in place in minutes. The heavy duty print head, heavy duty cutter assembly and the large range of materials mean the SMS-830 is long lasting and a major advantage when big signs and labels are needed fast.

A dependable system, delivered with top class software!



- Professional software with extensive print & design capabilities
- Design and edit texts, barcodes, lines, shapes and images
- Comes with 'click and go' ready to use label templates – just add text and print
- Advanced functionality for multiple field linking
- Thousands of industrial symbols and icons in compliance with the latest regulations
- Advanced design tools like rich text, linestyles, group, textframes with automatic font size
- Connect data on your labels from data bases and spread sheets (Excel, Access)
- Microsoft® certified software

Printer specifications

Printer type	Direct Thermal & Thermal Transfer
Resolution	300dpi
Print speed	Max. 102mm/s (4inch/s)
Print length	Min. 25.4 mm (1inch) Max. 1,016 mm (40inch)
Print width	Max. 219.5mm (8.64inch)
Dimensions	L 221mm H 224mm W 431mm
Weight	11.7 Kg
Sensors	Adjustable reflective sensor and transmissive sensor, central aligned
Operating interface	3.2" touch screen 1 Power on/standby 1 FEED / PAUSE / CANCEL 1 Calibration
Connectivity	USB-A USB B RS-232 Ethernet port
Memory	128 MB Flash (60 MB for user storage) ; 32 MB SDRAM
Media Type	Roll-feed Die-cut Continuous Tags
Ribbon Type	Wax, Resin Wax/Resin
Agency Approvals	CE (EMC) FCC Class B CB UL cUL CCC UKCA

Visit our comprehensive website to review the large range of material available!

www.rebosystems.com



Rebo B.V.
Beckerijngstraat 21
3762 EV Soest
Netherlands

☎ +31 (0)35 - 601 69 41
@ info@rebosystems.com
🛒 sales@rebosystems.com
🌐 www.rebosystems.com