

T3MT

TYPE 3 MALFUNCTION TRAINER

Proudly Made in USA

Patent Pending



TYPE 3 MALFUNCTION TRAINER

This product is designed to be used by experienced gun handlers who are striving to perfect their firearms malfunction clearing response. Our **T3MT** devices are designed to create an intentional type 3 malfunction in your weapon under performance of fire. *There are certain scenarios when a T3MT can create a type 1 malfunction. This natural variability in the functionality of our devices is by design and intentionally done so you never know exactly what kind of malfunction will occur.*

Type 1 Malfunction: Failure to Fire


Type 2 Malfunction: Failure to Extract

Type 3 Malfunction: Jam or Double Feed

T3MT

Instructions

1. Place the T3MT round somewhere in your magazine with 2-3 live fire rounds on top.

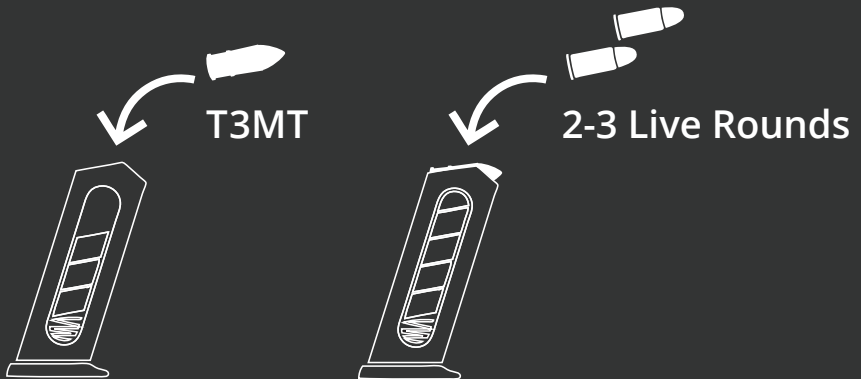

2. Insert the magazine in your gun.

3. Operate your gun. Clear the malfunction when it occurs.*

* See next page for instructions on how to clear malfunctions.



How to Clear Malfunctions

In the case of any firearms malfunction you perform Step 1 outlined below. This will clear type 1 & 2 malfunctions. If the malfunction does not clear after performing step 1, you have a type 3 malfunction; proceed to steps 2-4.

For Pistols

1. Tap Rack and Roll
2. Lock the slide to the rear. Rip the magazine. Run the action 3 times. (Lock, Rip, Run x3)
3. Insert a new magazine.
4. Run the action. Shoot.

For Carbines

1. Slap-Pull-Observe-Release-Tap-Shoot
2. Lock the bolt carrier to the rear. Strip the magazine. Run the action three times
3. Insert a new magazine
4. Tap the forward assist. Shoot.