



LET'S BUILD A BETTER FUTURE

## Window & door system **MB-86**

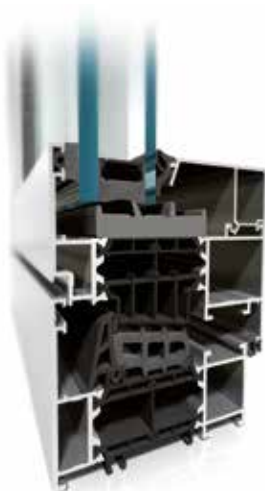
The new MB-86 window and door series have been designed to offer outstanding insulation properties. It meets the increasing requirements from the legislative and general market demands for the enhanced energy saving construction of new windows and doors. Offered in three varieties ST, SI and AERO it is the first aluminum system to employ silica aerogel. The nanoporous material has a very high proportion of free void volume compared to conventional solid materials. Its high pore volume, low solid content, and torturous path amorphous structure give rise to low values of thermal conductivity. Therefore the system features the industry leading thermal performance. In addition it also features exceptional rate of profiles inertia that allows for greater construction in size and weight. Version with concealed sash (MB-86US) is also available.



**U<sub>f</sub> from 0.57 W/(m<sup>2</sup>K)**

**innovative nanotechnology**

## WINDOWS MB-86



MB-86 SI



MB-86 Aero











MB-86US Aero



window MB-86 Casement

Examples of heat transfer coefficients  $U_w$

WINDOWS SCHEMES	SECTION A OR B	Value $U_w$ W/(m <sup>2</sup> K) for construction with double chamber glass and warm spacer	
		$U_g=0.5$	$U_g=0.7$
	MB-86 ST  K518612X	0.77	0.94
	 K518612X + K518702X	0.90	1.04
	MB-86 SI  K718612X	0.74	0.91
	 K718612X + K718702X	0.85	0.99
	MB-86 AERO  K818612X	0.72	0.88
	 K818612X + K818702X	0.80	0.93

## DOORS MB-86



MB-86 ST



MB-86 SI



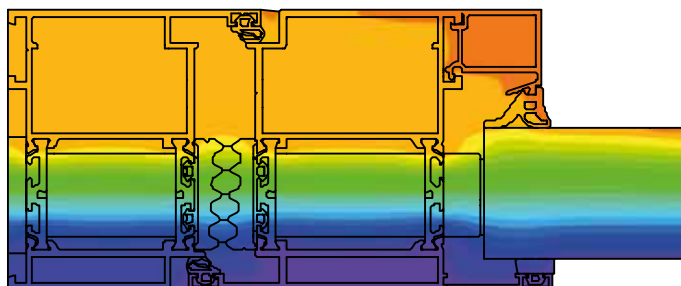
MB-86 Aero




MB-86, RC3

Examples of heat transfer coefficients  $U_D$

DOORS SCHEMES	SECTION A OR B	Value $U_D$ W/(m <sup>2</sup> K) for construction with double chamber glass and warm spacer	
		$U_g=0.5$	$U_g=0.7$
	MB-86 ST  K518731X+K518746X+K518770X	1.19	1.32
	MB-86 SI  K718731X+K718746X+K718770X	1.07	1.20
	MB-86 SI+  K718731X+K718746X+K718770X	0.98	1.11
	MB-86 AERO  K818731X+K818746X+K818770X	0.88	1.02



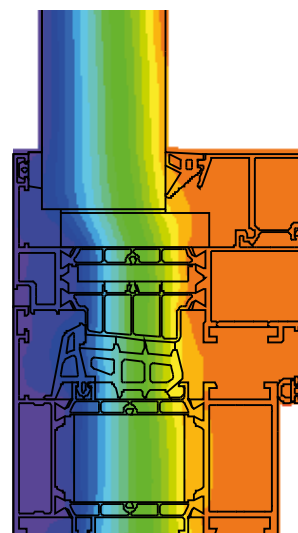Distribution of isotherms in **MB-86 AERO** door



Distribution of isotherms in **MB-86 AERO** window

## FEATURES AND AESTHETICS

- wide range of profiles guarantees the desired aesthetics and resistance
- with its new shape, wide thermal breaks allow the use of an additional barrier in the profiles' insulation zone
- two-component, central gasket seals perfectly and thermally insulates the space between the casement and the frame
- glazing strips with additional sealing, comes in three versions: Standard, Prestige and Style
- profiles' shapes are well adapted to numerous multi-point locking systems, including concealed hinges
- a wide range of glazing allows the use of all common types of windows triple glazing units, acoustic or security panes
- profiles' drainage functionality is available in two versions: traditional and concealed
- anti-burglary windows and doors up to RC3 class

TECHNICAL SPECIFICATION	MB-86 WINDOWS	MB-86 DOORS	MB-86US	MB-86 Casement
Frame depth	77 mm			
Casement depth	86 mm	77 mm	80,8 mm	77 mm
Glazing thickness	frame: 13,5 – 61,5 mm, vent: 21 – 70,5 mm	13,5 – 61,5 mm	frame: 7 – 52 mm, vent: 15 – 60 mm	frame: 13 – 61 mm, vent: 22 – 70 mm
Max. casement size (H×L)	H to 2800 mm, L to 1700 mm	H to 3000 mm, L to 1400 mm	H to 2500 mm, L to 1600 mm	window: H to 2500 mm L to 2400 mm / door: H to 2800 mm L to 1400 mm

PERFORMANCE	MB-86 WINDOWS	MB-86 DOORS	MB-86US	MB-86 Casement
Air permeability	class 4, EN 12207	class 4, EN 12207	class 4, EN 12207	class 4, EN 12207
Water tightness	class E 1500, EN 12208	class E 1350 Pa, EN 12208	class E 1350, EN 12208	E1950 Pa, EN 12208
Thermal insulation	MB-86 ST $U_f$ from 1.39 W/(m <sup>2</sup> K) MB-86 SI $U_f$ from 0.92 W/(m <sup>2</sup> K) MB-86 AERO $U_f$ from 0.57 W/(m <sup>2</sup> K) MB-86 AERO $U_w$ from 0.72 W/(m <sup>2</sup> K)*	MB-86 ST $U_f$ from 2.16 W/(m <sup>2</sup> K) MB-86 SI $U_f$ from 1.76 W/(m <sup>2</sup> K) MB-86 SI+ $U_f$ from 1.49 W/(m <sup>2</sup> K) MB-86 AERO $U_f$ from 1.22 W/(m <sup>2</sup> K)	MB-86US ST $U_f$ from 1.03 W/(m <sup>2</sup> K) MB-86US SI $U_f$ from 1.01 W/(m <sup>2</sup> K)  $U_f$ MB-86US AERO from 0.86 W/(m <sup>2</sup> K)	—
Windload resistance	class C5, EN 12210	class C1/B2, EN 12210	class C5, EN 12210	class C5, EN 12210
Impact resistance	—	class 3 / class 3	—	class 3 / class 3

\* -  $U_w$  for openable window MB-86 Aero 1700×2100 mm, glazing  $U_g=0.5$  W/(m<sup>2</sup>K) with spacer Chromatech Ultra