


Item Name	LED Video Bar
Document No.	VD-1604

Shenzhen Vividdots Technologies Co., LTD

LED Video Bar

-Your LED Sculpture!

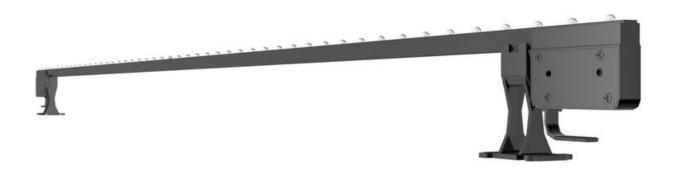

The LED video bar is designed for architectural integration, thanks to its slim surface, water-proof design and unique mechanical concept. Fast and easy fit-in fit-out. The bar can be easily fixed on building wall, ceiling, trade show, booth...

Architects, engineers and interiors designers can design and create new digital and innovative visual experiences with the innovative LED video bar.



Item Name	LED Video Bar
Document No.	VD-1605

Specifications

		[]	
Model No.	LVB15	LVB31	
Pixel pitch	15.625mm	31.25 mm	
Resolution	96*1/pc	48*1/pc	
Pixel density	96 pixels/pc	48 pixels/pc	
Brightness	3 cd/pixel; 5000 nit	3 cd/pixel; 3000 nit	
Power consumption	Avg. 4 W/pc; Max.12 W/pc	Avg. 0.8 W/pc; Max.3 W/pc	
IP rating	IP 65		
Refresh rate	1920 Hz		
Color depth	12 Bit		
Viewing angle	Horizontal 120°; Vertical 100°		
LED lifetime	50,000 hrs (50% brightness)		
Operational temperature	-30°C ~+45°C / -22°F ~+113°F		
Operational humidity	10%~90%		
Input voltage	100~240V / 50~60Hz		
Dimensions	1500*80*15 mm / 59.1*3.2*0.6 inch (W*H*D)		
Frame material	aluminium		
Weight	0.52 kg (1.15 lb)/pc	0.48 kg (1.06 lb)/pc	