

INNOVATION



Completely automated. When you turn on the tap or shower, the pump turns on. Similarly when the tap or shower is turned off, the pump will stop operating.



Dry-running protection, the pump will be automatically power off after 6 minutes, while there is no water detected in the pipeline.



Pump hot water up to 90°C with water temperature protection



Operating in significantly low noise 50dB≤ much quieter than most other self-priming pumps currently available in the market.



The microcomputer control system ensures that the pump can be used normally at a small flow rate, realizing the full lift operation of the pump & constant water supply.



The motor uses water cooling technology, which produces high output while being extremely silent.




Suitable for outdoor (IP55)



No rust

NOISE LEVEL

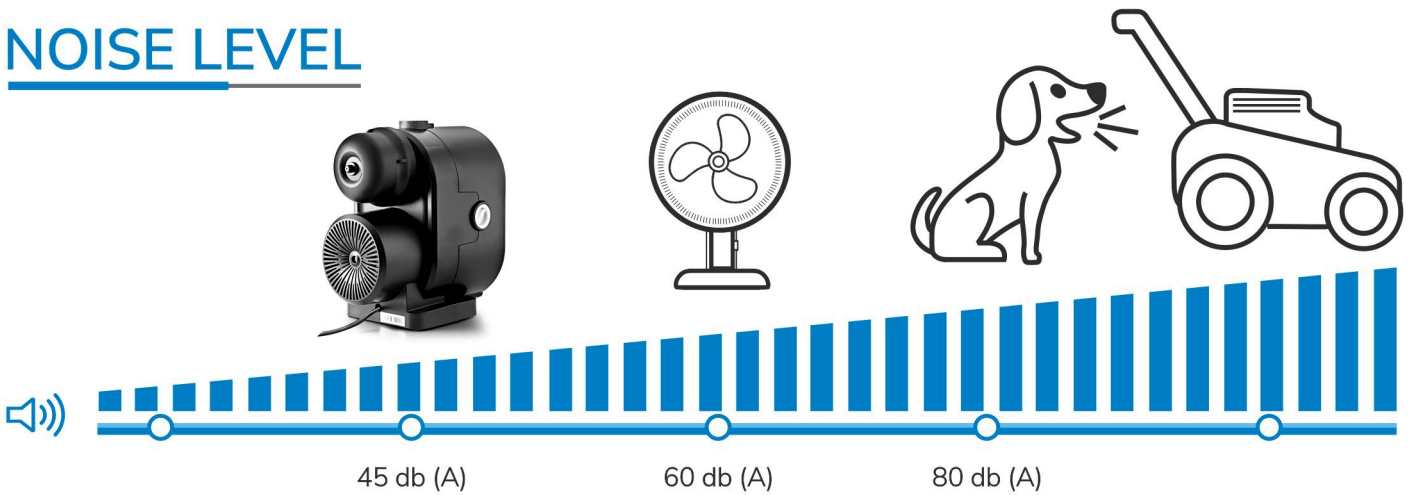

APPLICATION

G series is a new generation Pressure booster pump that can supply constant water in upto 3 bathrooms. The integrated pump includes motor, tank, pressure switch, flow sensor in one unit that is more reliable and easy to operate. It is suitable for both cold & hot water, can be widely used in household pressure boosting from above ground water tanks.

OPERATION CONDITIONS

Voltage : 220V / 50 Hz | Protection Class : IPX5 | Ambient Temperature : Max. +55 C
 PH : 6.5-8.5 | Solid Particles ≤ 0.2 mm; solid impurity volume ratio ≤ 0.1%

