A TRADITION OF QUALITY SINCE 1903

# Hallowell

COMPLETE STORAGE SOLUTIONS
FULL-LINE CATALOG

UPDATE CABINETS · GUARD RAIL · SHELVING · METAL LOCKERS · GATES · WORKBENCHES











#### THE INDUSTRY'S LARGEST INVENTORY

- Six fully-stocked regional distribution centers.
- Over 4,000 different skus to choose from in stock.
- · Large inventory covers of best solvers.



#### ALL LOCKERS & CABINETS ARE AVAILABLE TO SHIP KNOCK DOWN OR FULLY-ASSEMBLED

- Lockers and cabinets are assembled by trained and highly skilled trade professionals.
- Lockers and cabinets arrive ready to anchor, saving you time and money.

#### **OUR STEEL**

• Most of our steel is purchased directly from US mills and is made of 30% post consumer recycled content and 11.3% post industrial/pre-consumer content.



#### **OUR PAINT**

- Sherwin Williams powders are made in the USA insuring no harmful materials.
- Hammertone textured finishes are available for all 24 standard colors.
- Medsafe® antimicrobial finishes with Microban® are available for all 24 colors



#### WE ARE GREENGUARD GOLD CERTIFIED

- Hallowell is committed to minimizing environmental impact of our products and protecting indoor air quality
- GREENGUARD Gold Certification establishes strict chemical emission standards for products intended for use in environments where children and others work, play or reside.
- All metal products are GREENGUARD GOLD certified



#### **INDUSTRY-LEADING CUSTOMER SERVICE**

- A dedicated team of in-house trained professionals is ready to respond to inquiries related to product features, availability, specifications, order status and shipping information.
- All personnel are trained in every aspect of our Quick Ship program.

# Since 1903, every Hallowell component has been designed and manufactured with the concept that the highest quality product is crucial for success.

#### **OUR HISTORY**

Hallowell was acquired by List Industries Inc. in 1992. List Industries was founded in 1936 with the idea that customer satisfaction and product quality would be the basis for success. This philosophy has been maintained for over 80 years by the three Presidents of List Industries Inc.: founder Max H. List, his son Herb List and his grandson and current President, Herb List, Jr. As an innovator and industry leader in product design and development, List Industries Inc. has and will continue to uphold Hallowell's tradition of quality and exceptional customer service.



#### **MANUFACTURING**

Hallowell Products are fabricated in three state-of-the-art manufacturing facilities located



in Central and South Florida. Our Deerfield Beach corporate headquarters is a highly efficient manufacturing plant located in one of South Florida's premier office parks. Computer controlled fabrication and roll-forming equipment and the newest powder coating paint technology assure consistent quality workmanship. In addition to our primary manufacturing facility, we also have a second plant in a prestigious industrial park in Central Florida that more than doubles our manufacturing square footage. Our third Florida location, and newest addition, produces our new line of all-wood Recruiter sport lockers and wardrobe Club Lockers.

#### **MADE-TO-ORDER PRODUCTS**

In addition to Hallowell's industry leading variety of in-stock lockers, shelving and cabinets we also offer an extensive line of production items. Hallowell's complete line of production lockers (shown on pages 122 through 133) can be manufactured in short lead-times and painted in one of our 24 standard designer powder coat colors (see page 135). If a high-rise shelving system is what you require, our team of design engineers and sales professionals is eager to assist you.

### VISIT OUR WEBSITE: www.Hallowell-List.com FOR MORE INFORMATION

#### TABLE OF CONTENTS


- 2 Why Hallowell Company Spotlight
- 4 Quick-Ship Program & Distribution Centers

#### **SHELVING**

6	<b>Rivetwell Boltless</b>
	Shelving

- 7 Components
- 8 Unit Growth Chart
- 9 Single Rivet Units
- 10 Double Rivet Units
- 11 Record Storage Units
- 12 Automotive Storage Racks
- 13 Components
- 15 Decking
- 17 Technical Data
- 18 Rivetwell High Capacity Boltless Shelving
- 19 High Capacity Bolted Die Rack
- 20 Hi-Tech Clip Shelving
- 22 Open Units
- 23 Closed Units
- 24 Free Standing Open and Closed Units
- 25 Medsafe Antimicrobial Finish Shelving
- 26 Bin Units
- 27 Deep Bin Units
- 28 H-Post Shelving
- 32 DuraTech Pass-Thru Shelving
- 34 Components





**Shelving Systems** 

- 42 Growth & Technical Data
- 44 Bulk Rack
- 47 Reel Rack

48 Bin Shelving

**Portable Gates** 

50 Guardrail & Post Protectors

#### **CABINETS**

- 51 Slimline Cabinets
- 52 400-Series Commercial Grade Cabinets
- 54 **800-Series Industrial Grade Cabinets**
- 56 **DuraTough All-Welded Cabinets**

#### **WORKBENCHES**

- 60 Workbenches
- 61 Fort Knox Modular Storage System







#### CALL 866-566-0500

#### FOR MORE INFORMATION ON OUR QUICK-SHIP PROGRAM

#### **LOCKERS: QUICK-SHIP**

- 66 Premium Wardrobe Lockers
- 68 Premium Box Lockers
- 70 Ready-Built Lockers
- 72 Ready-Built II Lockers
- 74 Medsafe Antimicrobial Lockers
- 75 ValueMax Lockers
- 76 Maintenance-Free Quiet KD Lockers
- 78 DigiTech Electronic Day Use Lockers
- 80 Safety-View See-Thru Door Panels
- 81 Safety-View Plus See-Thru Doors
- 82 Digitech Safety-View Plus
- 84 Heavy-Duty Ventilated Lockers
- 86 Locker Accessories
- 88 Wood/Metal Hybrid Lockers
- 90 Wood Club Lockers
- 92 Recruiter Wood Sport Lockers
- 94 Galvanite Rust Resistant Lockers
- 96 Aguamax Solid Plastic Lockers
- 97 Medsafe Aquamax Antimicrobial Solid Plastic Lockers
- 98 Versamax Solid Phenolic Lockers
- 99 Stainless Steel Lockers
- 100 Kid Lockers
- 101 Home Team Lockers
- 102 Cubix Modular Box Lockers

- 103 Cell Phone/Tablet Lockers 104 Backpack/Laptop Lockers
- 106 Turn-out Gear Emergency Response Lockers
- 108 Uniform Exchange Lockers
- 110 MaxView Heavy Equipment Storage
- 111 All-Welded Single-Point All-Welded Ventilated
- 112 Task-Force XP Emergency Response Lockers
- 114 Rookie KD Gear Stock Lockers
- 115 TA-50 Military Gear Storage Lockers
- 116 SecurityMax All-Welded High Security Lockers
- 117 Black Tie Office Space Commercial Lockers
- 118 PE/Gym All-Welded Stock Lockers
- 120 24/7 Parcel Lockers
- 122 Bulk Storage Lockers (BSL)

#### LOCKERS: PRODUCTION (NON-STOCK)

- 124 Recruiter Custom Wood Lockers
- 126 Metal Cubbies
- 127 Open-Front All-Welded Gear Lockers
- 128 Unibody All-Welded Lockers
- 131 Equipment & Premium Lockers
- 132 Premium KD Box & Specialty Lockers
- 134 Heavy-Duty Corridor Lockers (HDC)
- 134 Heavy-Duty Ventilated Lockers (HDV)
- 135 Locker Accessories
- 136 Locks
- 137 Bench Tops & Pedestals
- 138 Phenolic & Plastic Color Chart
- 139 Color Selector for Production (non-stock) lockers






## ADVANTAGES OF SIX DISTRIBUTION CENTERS

REDUCES FREIGHT COST

**REDUCES TRANSIT TIME** 

MINIMIZES CARRIER HANDLING

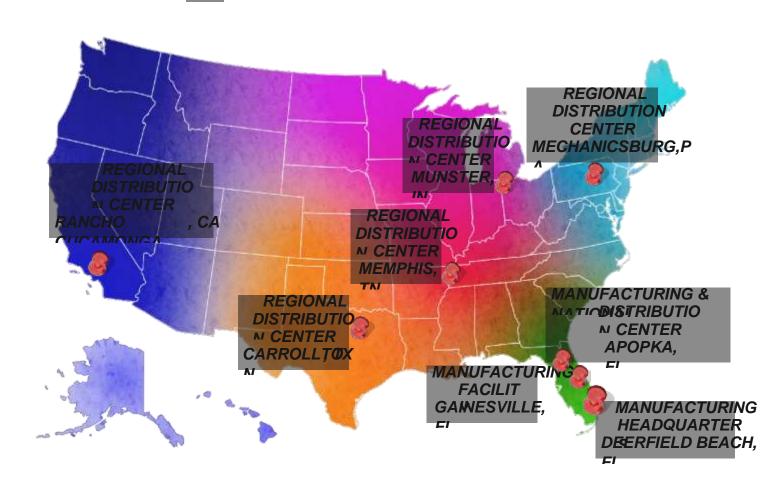



### **QUICK-SHIP BENEFITS**



NO SETUP CHARGES
NO MINIMUM ORDER QUANTITY
INDUSTRY'S BEST DISCOUNT

CALL 866-566-0500 FOR MORE INFORMATION ON OUR QUICK-SHIP PROGRAM



INDUSTRY LEADING PACKAGING



#### THE FASTEST SHIPPING WITH THE MOST SECURE PACKAGING



- 1. Pallet is sized to fit unit with no overhang and with bottom protection
- 2. Full height corner guards and Top cap are added.
- Outside faces are protected
- Extra packing is added to protect handles when projecting and the units are wrapped with poly wrap and double strapped in two directions to ensure stability.

#### **KNOCK-DOWN SHIPMENTS**

- All components are packaged in custom designed corrugated cartons
- Pallets are sized so that no material overhangs the pallet
- All cartons are securely strapped to pallets

#### **FULLY-ASSEMBLED SHIPMENTS**

- Pallets are sized so that no part of a unit overhangs the pallet
- When two units share a pallet, the inward facing locker fronts are separated by corrugated spacers
- Locker tops and bottoms are protected by specially designed capping cartons
- Outside corners are protected with heavy-duty full height corner guards
- Perimeter surfaces are protected with full height corrugated sheets
- Locker fronts always face the center of a pallet when possible
- Units are wrapped with Heavy-gauge clear poly wrap
- Units are double strapped in two directions to ensure maximum stability



Palletized Assembled Lockers



Palletized Assembled Cabinets



Palletized BSL



Palletized Knock-Down Lockers



Palletized Shelving (Stock)



In an industry where damage in transit can be difficult to prevent, Hallowell goes the extra mile to ensure your purchase is protected by providing the industry's best packaging materials and techniques.







### Boltless shelving is designed to maximize storage space and minimize installation set-up time.

All components are engineered to attach snugly to one another without the use of loose fasteners. This unique design has rivets which are factory attached to all left-to-right and front-to-back beams. The rivets align with keyhole slots in the vertical posts. Once tapped into place using a standard rubber mallet, the units are tightly assembled providing maximum strength.

Standard units consist of vertical angle posts at the corners, double rivet angle beams at the top and bottom perimeter and single rivet angle beams running left-to-right only at the intermediate levels. Shelves are of standard 5/8" particle board, EZ-Deck steel or wire decking and simply drop into place. Shelf strength can be increased by upgrading to heavy duty beams, adding single rivet beams running front-to-back at the intermediate levels, upgrading to double rivet beams at the full perimeter of the intermediate levels or upgrading all levels to our strongest double rivet channel beams. Optional center supports can be added using supplied hardware to increase decking capacity.

The versatility of our Rivetwell boltless shelving system allows you to mix and match components to meet your unique application. From standard storage applications, record storage to automotive tire racks, Rivetwell boltless shelving is your storage solution.





729 TAN (PT) 708 Black (ME)


- All units/components available in Tan
- Select units/components available in Black
- . See charts for stock availability of Tan or Black







# Hallowell-List.com

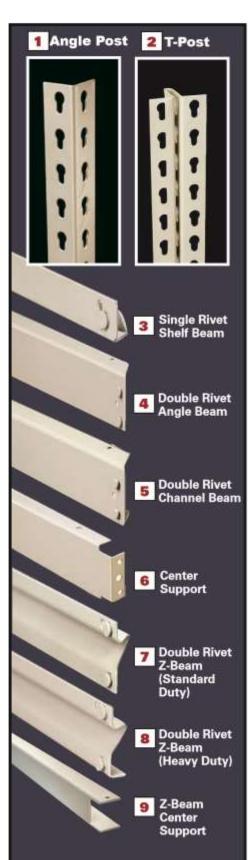

- Angle Post (Standard Duty): 1-1/2" x 1-1/2" x 14 gauge cold rolled steel corner post uprights. Perfect for standard load situations.
  - Angle Post (Heavy Duty): Shall be 1-7/8" x 1-7/8" x 14 gauge cold rolled steel uprights. The choice when heavy duty shelving is required. Perfect for multilevel installations.
- 2 T-Post (Standard Duty): 3" x 1-7/8" x 14 gauge cold rolled steel intermediate uprights.
  - T-Post (Heavy Duty): 3-3/4" x 1-7/8" x 14 gauge cold rolled steel intermediate uprights.
- 3 Single Rivet Shelf Beam (Standard Duty): This 14 gauge low profile standard intermediate level shelf beam is perfect when maximum clear opening is required between shelf levels.
  - Single Rivet Shelf Beam (Heavy Duty): An 11 gauge heavy duty version of our low profile intermediate shelf beam allowing maximum clear opening between shelf levels.
- **Double Rivet Angle Beam (Standard Duty):** This 16 gauge shelf beam is essential for stability of standard units; therefore, is used on all four sides at the top and bottom levels. Can also be used front and back or on all four sides of intermediate levels to increase unit stability and load capacity.
  - Double Rivet Angle Beam (Heavy Duty): An upgrade to our standard duty double rivet angle beams, our heavy duty double rivet angle beams provide additional unit rigidity and even higher shelf capacity.
- **5** Double Rivet Channel Beam: Maximized left-to-right shelf capacity is achieved using our 14 gauge double rivet channel beams in lieu of double rivet angle beams. These beams cannot be used at the bottom level.
- 6 Center Support: Used to provide additional shelf support front-toback by bolting between double rivet beams at pre-punched locations.
- Double Rivet Z-Beam (Standard Duty): For 12" thru 60"

  beams. Used in place of double rivet angle beams to add 1"
  additional clearance between shelf levels. Allows particle board decking to sit flush with beam. Protects decking edges. When used at bottom level of single rivet units, shelf clearance is increased by 1" at lower level. Standard Z beams are 14 gauge.
- 8 Double Rivet Z-Beam (Heavy Duty): For 69" and 72" beams.



Used in place of double rivet angle beams to add 1" additional clearance between shelf levels. Allows particle board decking to sit flush with beam. Protects decking edges. Heavy-Duty Z beams are 14 gauge

**9** Center Support for Z-Beam: Used with Z-Beams for front to back decking support. Fabricated of 11 gauge cold rolled steel.






#### **UNIT GROWTH CHART**

When designing a shelving layout. Unit growth must be considered. To determine the overall dimension of a continuous row of shelving employing T-Posts or Angle Posts with tie plates, refer to the table below.


J

.)

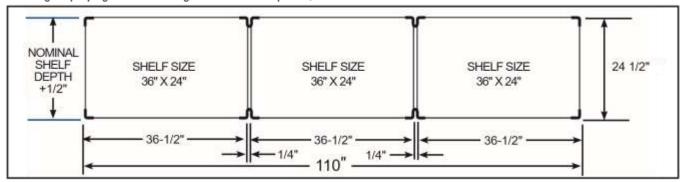

#### **Unit Clear Width**


Examples below are based on 36" wide shelf.

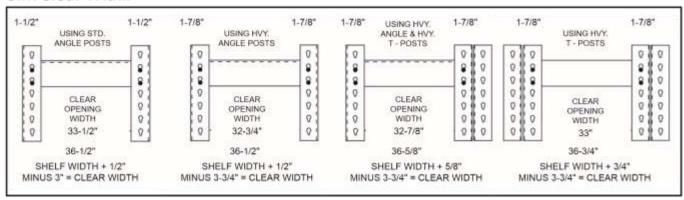


Vertical Shelf Clearance for Single Rivet Units Vertical Shelf Clearance for Double Rivet units



This chart depicts shelf clearances for Units with typical rivetwell shelving units with 1-1/2" vertical shelf adjustment

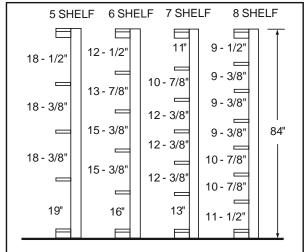

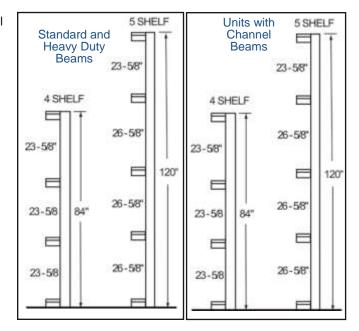



			SINC	GLE RIVET UNITS	S - 8	4" HIGH	I		
		36" Wi	de Units				48" Wide	Units	
	([	ecking not	included)				(Decking	not included)	
Levels	Depth	Shelf Capacity	Starter Model No.	Adder Model No.	С	Shelf Ipacity	Starter Model No.	Adder Model No.	Color Selection
5 Shelf5Units Shelf	12	350	SRS361284- 5S	SRS361284- 5A		250	SRS481284-5S	SRS481284-5A	PT
Units	18	350	SRS361884- 5S	SRS361884- 5A		250	SRS481884-5S	SRS481884-5A	PT
	24	350	SRS362484- 5S	SRS362484- 5A		250	SRS482484-5S	SRS482484-5A	PT
	30	350	SRS363084- 5S	SRS363084- 5A		250	SRS483084-5S	SRS483084-5A	PT
	36	350	SRS363684- 5S	SRS363684- 5A		250	SRS483684-5S	SRS483684-5A	PT
6 Shelf <sup>6</sup>	Shelf12	3 0	SRS361284- 6S	SRS361284- 6A		250	SRS481284-6S	SRS481284-6A	PT
Units 5	Shelf Units18	3 0	SRS361884- 6S	SRS361884- 6A		250	SRS481884-6S	SRS481884-6A	PT
	24	3 0	SRS362484- 6S	SRS362484- 6A		250	SRS482484-6S	SRS482484-6A	PT
	30	3 0	SRS363084- 6S	SRS363084- 6A		250	SRS483084-6S	SRS483084-6A	PT
	36	3 0	SRS363684- 6S	SRS363684- 6A		250	SRS483684-6S	SRS483684-6A	PT
f 77UnitsUnit Shel Shes f	Units12	helf30	SRS361284- 7S	SRS361284- 7A		250	SRS481284-7S	SRS481284-7A	PT



Unit	18	3 0	SRS361884- 7S	SRS361884- 7A	250	SRS481884-7S	SRS481884-7A	PT
	24	3 0	SRS362484- 7S	SRS362484- 7A	250	SRS482484-7S	SRS482484-7A	PT
	30	350	SRS363084- 7S	SRS363084- 7A	250	SRS483084-7S	SRS483084-7A	PT
	36	350	SRS363684- 7S	SRS363684- 7A	250	SRS483684-7S	SRS483684-7A	PT
88Units Shelf Shelf	12	350	SRS361284- 8S	SRS361284- 8A	250	SRS481284-8S	SRS481284-8A	PT
Unit	18	350	SRS361884- 8S	SRS361884- 8A	250	SRS481884-8S	SRS481884-8A	PT
	24	350	SRS362484- 8S	SRS362484- 8A	250	SRS482484-8S	SRS482484-8A	PT
	30	350	SRS363084- 8S	SRS363084- 8A	250	SRS483084-8S	SRS483084-8A	PT
	36	350	SRS363684- 8S	SRS363684- 8A	250	SRS483684-8S	SRS483684-8A	PT

**Starter units** consist of four standard angle posts, four left-to-right standard double rivet angle beams, four front-to-back standard double rivet angle beams, two left-to-right standard single rivet beams per intermediate level and two front-to-back standard single rivet beam at one intermediate level only (30" and 36" deep units include two front-to-back single rivet beams at each intermediate level).

Adder units consist of two

### Be sure to order one each of Wire or Particle board decking per level.

See page 15-16 for decking options (sold separately) EZ-Deck steel decking can NOT be used on single rivet units.

standard T-Posts, four left-to-right standard double rivet angle beams, two front-to-back standard double rivet angle beam, two left-to-right standard single rivet beam per intermediate level and one front-to-back standard single rivet beam at one intermediate level only (30" and 36" deep units include one front-to-back single rivet beam at each intermediate level).







Standard 5-shelf single rivet starter unit (order decking separately)






	DRH483084-4S	DRH4	DRH DRHC483084-4A
	DKI 1403004-43	83084	C483
		-4A	084- 4S
	DRH483684-4S	DRH4 83684 -4A	DRH C483 DRHC483684-4A 684-
	DRH484884-4S	DRH4 84884 -4A	4S DRH DRHC484884-4A C484 884-
	DRH601884-4S	DRH6 01884 -4A	4S DRH DRHC601884-4A C601 884-
	DRH602484-4 <b>S</b>	DRH6 02484 -4A	4S DRH DRHC602484-4A C602 484-
	DRH603084-4S	DRH6 03084 -4A	4S DRH C603 084- 4S DRHC603084-4A 4S
	DRH603684-4 <b>S</b>	DRH6 03684 -4A	DRH DRHC603684-4A C603 684- 4S
	DRH604884-4S	DRH6 04884 -4A	DRH DRHC604884-4A C604 884- 4S
			DRC DRCC601884-4A C601 884- 4S
Beam	-		DRC C602 DRCC602484-4A 484-4S
			DRC DRCC603084-4A C603 084- 4S
	-		DRC DRCC603684-4A C603 684- 4S
			4S DRC DRCC604884-4A C604 884- 4S
	DRH721884-4S	DRH7 21884 -4A	DRH DRHC721884-4A C721 884- 4S
Angle Beam	DRH722484-4S	DRH7 22484 -4A	DRH C722 DRHC722484-4A





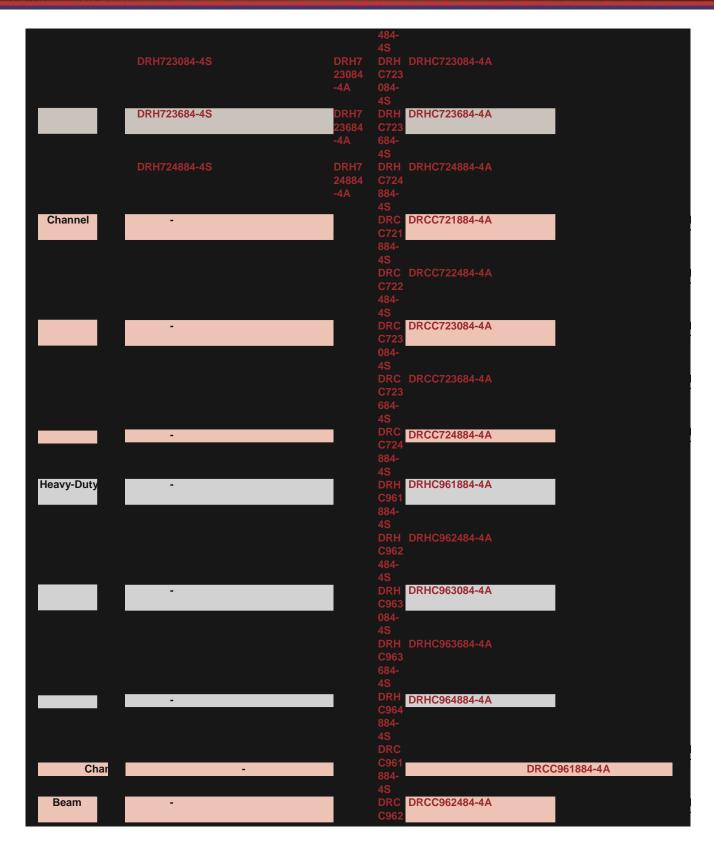









DRC DRCC9648120-5A C964 8120-5S

Starter units consist of four standard angle posts, two left-to-right standard double rivet angle/channel beams per level and two front-to-back standard double rivet angle beams per level.

Adder units consist of two standard T-Posts, two left-to-right standard double rivet angle/channel beams per level and two front-to-back standard double rivet angle beams per level. Channel beam units are provided with left-to-right double rivet angle beams at bottom level.

See pages 15-16 for decking options (sold separately)

#### **ECORD STORAGE UNITS** Adder Width \*No. of Starter boxes Model No. **Color Selection** Depth Height Levels Model No. 42" RS421560-3S RS421560-3A 15" 60" 3 18 PT PT 30" 60" 3 36 RS423060-3S RS423060-3A 69" 15" RS691560-3S RS691560-3A PT 60" 3 30 30" 60" 3 PT 60 RS693060-3S RS693060-3A 42" 15" 84" 4 24 RS421584-4S RS421584-4A PT 30" 84" 4 48 RS423084-4S RS423084-4A PT RS691584-4S 69" 15" 84" 4 40 RS691584-4A PT 30" 84" 4 80 RS693084-4S RS693084-4A PT 42" 15" RS4215108-5S RS4215108-5A РΤ 108" 5 30 30" 108" 5 60 RS4230108-5S RS4230108-5A PT 15" 69" 108" 5 50 RS6915108-5S RS6915108-5A PT 30" 108" 5 100 RS6930108-5S RS6930108-5A PT

Be sure to order one each of particle board or EZ-Deck steel decking per level.

See pages 15-16 for decking options (sold separately)

\*Box count based on standard record storage box dimensions:  $12 \times 10 \times 15$  Record storage boxes are not included

ACCESS UNIT FROM FRONT OR BACK!












		TIR	E STOR	AGE RAG	CKS		
Width	Depth	Height	Levels	*Tire Capacity	Starter Model No.	Adder Model No.	
	SINGLE ROW						
60"	21"	84"	3	24	TSS602184-3S	TSS602184-3A	
	21"	120"	4	32	TSS6021120-4S	TSS6021120-4A	
	21"	144"	5	40	TSS6021144-5S	TSS6021144-5A	
	21"	192"	6	48	TSS6021192-6S**	TSS6021192-6A**	
			DOU	BLE ROW			
60"	42"	84"	3	48	TSD602184-3S	TSD602184-3A	
	42"	120"	4	64	TSD6021120-4S	TSD6021120-4A	
	42"	144"	5	80	TSD6021144-5S	TSD6021144-5A	
	42"	192"	6	96	TSD6021192- 6S**	TSD6021192- 6A**	

<sup>(\*)</sup>Based on average passenger tire (\*\*) Supplied with heavy-duty posts

M	JFFLER	TORAGE	UNITS		
Width	Depth	Height	Levels	Starter Model No.	Adder Model No.
48"	36"	84"	5	MS483684-5S	MS483684-5A
96"	36"	84"	5	MS963684-5S	MS963684-5A


Tire Storage Rack



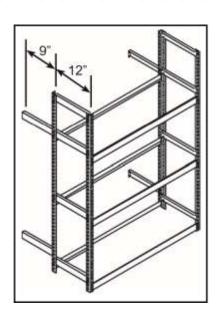

Be sure to order one each of particle board decking per level.

HANG	ING TA	ILPIPE R	ACK
Width	Depth	Height	Starter Model No.
48"	18"	120"	HTP4818120
96"	18"	120"	HTP9618120



Hanging Tailpipe Rack



Tire Rack



Muffler Storage Rack





729 TAN (PT)

**Denotes Stock Component** 



729





TAN (PT)



708





BLACK (ME)



PART DESCRIPTION	HEIGHT	STANDARD PART NO.	HEAVY-DUTY PART NO.
ANGLE POST		1-1/2"x 1-1/2" (14 ga)	1-7/8" x 1-7/8" (14 ga)
Punched for self	3'	APS03	-
adjustment on	4'	APS04	
1-1/2" centers	5'	<ul> <li>APS05</li> </ul>	
N /	6'	<ul> <li>APS06</li> </ul>	APH06
	7'	APS07	APH07
010	8'	<ul> <li>APS08</li> </ul>	APH08
0 0	9'	<ul> <li>APS09</li> </ul>	APH09
$ \Omega  \Omega $	10'	<ul> <li>APS10</li> </ul>	APH10
0 0	12'	APS12	APH12
$ \Omega  \Omega$	14'	APS14	APH14
	16'	APS16	APH16

Note: For requirements above 10'-0' high, multiple posts can be spliced using PS05 post splice without compromising capacity.

T-POST		3"x 1-7/8" (14 ga)	3-3/4" x 1-7/8" (14 ga)
Punched for self	3'	TPS03	TPH03
adjustment on	4'	TPS04	TPH04
1-1/2" centers	5'	<ul> <li>TPS05</li> </ul>	TPH05
a 1	6'	<ul> <li>TPS06</li> </ul>	TPH06
	7'	<ul> <li>TPS07</li> </ul>	TPH07
0 110	8'	<ul> <li>TPS08</li> </ul>	TPH08
	9'	<ul> <li>TPS09</li> </ul>	TPH09
8 8	10'	<ul> <li>TPS10</li> </ul>	TPH10
	12'	TPS12	TPH12
8   V	14'	TPS14	TPH14
	16'	TPS16	TPH16
8 0			
0		equirements above 10 e spliced using PS05	


PART DESCRIPTION	LENGTH	STANDARD PART NO.	HEAVY-DUTY PART NO.
DOUBLE RIVET ANGLE BEAM		2-3/4"x 1" (16 ga)	2-3/4" x 1" (14 ga)
For left to right and	12"	• ABS12	-
ront to back shelf	15"	<ul> <li>ABS15</li> </ul>	-
support.	18"	•• ABS18	-
	24"	• ABS24	-
	30"	ABS30	-
//	32"	ABS32	
// 6	36"	•• ABS36	-
//0 9	42"	<ul> <li>ABS42</li> </ul>	-
/ /	48"		•• ABH48
00	60"		. ABH60
8	69"		<ul> <li>ABH69</li> </ul>
0/	72"		•• ABH72
V	84"		ABH84
	96"		ABH96

• Denotes stock item in 729 Tan (PT)

PART Description	LENGTH	STANDARD PART NO.	HEAVY-DUTY PART NO.
DOUBLE RIVET CHANNEL BEAM			1" x 2-3/4" (14 ga)
For left to right shelf	48"		<ul> <li>CBH48</li> </ul>
support. Provides for	60"		<ul> <li>CBH60</li> </ul>
a higher capacity than	69"		<ul> <li>CBH69</li> </ul>
heavy-duty rivet	72"		<ul> <li>CBH72</li> </ul>
angle beams.	84"		<ul> <li>CBH84</li> </ul>
//9	96"		• CBH96
//0 9			
000		oottom shelf is requ l, use a Heavy-Dut	

• SRBS12 SRBS15	-
SRBS15	
	1.0
<ul> <li>SRBS18</li> </ul>	- 12
<ul> <li>SRBS24</li> </ul>	1
<ul> <li>SRBS30</li> </ul>	
<ul> <li>SRBS36</li> </ul>	SRBH36
<ul> <li>SRBS42</li> </ul>	SRBH42
<ul> <li>SRBS48</li> </ul>	SRBH48
	<ul><li>SRBS24</li><li>SRBS30</li><li>SRBS36</li><li>SRBS42</li></ul>

CENTER SUPPORT		2-3/4" x 1" x 1" (16 ga)	
Bolts to double rivet angle	12"	• CS12	-
or channel beams to add sup-	15"	• CS15	
port to decking and stabilize	18"	•• CS18	
beams. Supplied with nuts and bolts for fast assembly.	24"	•• CS24	
Use 1 per pair of beams up to	30"	•• CS30	
84", 2 per pair of 96" beams.	32"	CS32	
^ D	36"	•• CS36	
/ //	42"	CS42	-
	48"	•• CS48	

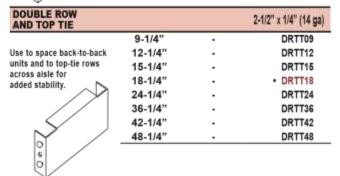





•• Denotes stock item in 729 Tan (PT) and 708 Black (ME)

### RIVETWELL SHELVING COMPONENTSWEIL

Hallowell-List.com

PART DESCRIPTION	LENGTH	STANDARD PART NO.	HEAVY-DUTY PART NO.
WALL TIE		2-1/2"x 1-1/4" (14 ga)	
Used to secure	9-1/4"	• WT09	-
units to wall and provide space between wall and unit (Hardware to attach to wall not included).		0.0	

FOOT PLATE	1-1/2"x 1-1/2" x 3" (14 ga)		
For use in anchoring angle and tee posts —	3"	• FPR100	-
to floor. (Hardware included for attaching posts-Hardware to anchor to the floor not included.) anchor holes are 3/8" diameter.			

POST SPLICE			
Used to extend post,	6"	• PS06	
attaches to outside of post. Order one per Angle Post, two per T-Post.		0 0 0 0 0 0 0	

TIE PLATE		3" x 3" (14 ga)	
Used for structural integrity of T-Post	NA	• TP1	
and to join Angle Post units side by side to insure proper row alignment.		000	

TIRE RACK BEAM		3" x 3" (14 ga)	
For left to right shelf support of tires. 9	48" 60"	TRB48 • TRB60	
degrees of angle on the supporting edge.		0.00	



729 TAN (PT)

708 Black (ME)

Denotes Stock Component

• Denotes stock item in 729 Tan (PT)

PART DESCRIPTION	LENGTH	STANDARD PART NO.	HEAVY-DUTY PART NO.
HANGER BAR		-114" x 1-114" x 1-114	" (14 ga)
For hanging items	36"	HB 36	× ×
between double rivet	42"	HB 42	7.5
beams. One or more	48"	HB 48	
may be used per level.	60"	HB 60	2



n		
	*	DOGS36
**	*0	DOGS48
**		DOGS60
or.		DOGS69
"		DOGS72
	n.	

DOWN AISLE GRATING SUPPORT		3-12" X 1-1	3/16" X 1-15/16" (11 g:
Attaches to unit front	36"		DAGS36
between rows to provide support for grating on 2-level rivetwell installa- tions. For maximum aisle width of 48". Use a	48"	¥2	DAGS48
	60"	**	DAGS60
	69"	į.	DAGS69
	72"	*	DAGS72
minimum of 3 screws per support. 9 degree angle on top edge.		1000	

PART DESCRIPTION	LENGTH	LEFT PART NO.	RIGHT PART NO.
BEAM CLEAT		1-1/2" x 1"-1/2	" x 3" (14 ga)
For hanging items between double rivet	3"	BC-L	BC-R
beams. One or more may be used per level.		0 0	000

SLOTTED ANGLE CLEAT		1-1/2" x 1"-1/2" x 3" (14 ga)		
For use where slotted angle pieces must be joined, such as special grating supports and top ties.	3"	SAC-L	SAC-R	



# Rivetwell Flat Wire Decking



PART DESCRIPTION	LENGTH	STANDARD PART NO.	HEAVY-DUTY PART NO.
DOUBLE RIVET Z-BEAM (STANDARD)		2-1/8"x 7/8" (14 ga)	
For front to back and left	12"	ZBS12	98
to right, allows particle	15"	ZBS15	2.5
board decking to sit flush	18"	ZBS18	
with top of beam.	24"	ZBS24	
	30"	ZBS30	88
	36"	ZBS36	200
	42"	ZBS42	
1	48"	ZBS48	
	60"	ZBS60	-28


DOUBLE RIVET Z-BEAM (HEAVY-DUTY)	2-1/8"x 7/8" (14 ga)	
		ZBH48
		ZBH60
		ZBH69
		ZBH72



CENTER SUPPORT FOR Z-BEAMS	1-3/16	)	
Use with Z-beams for	24"	ZCS24	84
additional decking	30"	ZCS30	35
support front	36"	ZCS36	12
		ZCS42	
		ZCS48	194

COAT ROD SUPPORT BEAM	2-3/4" X 1" (14 ga)		
For supporting	18"	ABH18CR	94
Rivetwell coat rods	24"	ABH24CR	22
- 1	30"	ABH30CR	
-0	36"	ABH36CR	-
	48"	ABH48CR	88

RIVETWELL COAT ROD	1'0		
For use with coat rods	36"	RCR36	8*
and support beams	48"	RCR48	8.5
	60"	RCR60	
	72"	RCR72	

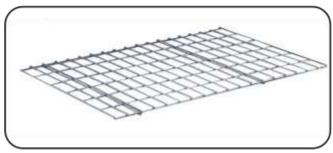

4 gauge wire in 2" x 4" pattern.

Part Number	Size (inches) W x D	Wire Supports	*Capacity (Lbs)
All decks are Po	wder Coated Gra	ау.	
HWD3618	36" x 18"	4	725
HWD3624	36" x 24"	4	605
HWD3630	36" x 30"	4	485
HWD3636	36" x 36"	4	455
HWD3648	36" x 48"	4	300
HWD4818	48" x 18"	5	725
HWD4824	48" x 24"	5	605
HWD4830	48" x 30"	5	485
HWD4836	48" x 36"	5	455
HWD4848	48" x 48"	5	300
HWD6018	60" x 18"	6	725
HWD6024	60" x 24"	6	605
HWD6030	60" x 30"	6	485
HWD6036	60" x 36"	6	455
HWD6048	60" x 48"	6	300

\*Capacities are based on evenly distributed loads and to sit flush 69" with top of beam.

**RED COLOR Denotes Stock Component** 



72" to back.

42" 48"

Include a 1.65 safety factor.



Recommended safe use load table for 5/8" particle board and EZ-Deck steel decking allowable uniformly distributed static live loads for deck material

			2 Sides S	2 Sides Supported		4 Sides Supported		4 Sides + Center		2 Center
			LOAD DEEL LOAD DEEL			Supp		Supported		
Size (inches) W x D	Particle Board Decking	EZ-Deck Steel Decking	LOAD (lbs.)	DEFL (ins)	LOAD (Lbs.)	DEFL (ins)	LOAD (Lbs.)	DEFL (ins)	LOAD (Lbs.)	DEFL (ins)
36x12	HPB3612	HEZD3612	425	0.06	675	0.08				
36x18	HPB3618	HEZD3618	400	0.17	550	0.18				
36x24	HPB3624	HEZD3624	305	0.30	435	0.23				
36x30	HPB3630	HEZD3630	250	0.47	385	0.32				






36x36	HPB3636	HEZD3636	150	0.50	180	0.39				
42x12	HPB4212	HEZD4212	490	0.06	755	0.08				
10.10	LIDD 4040	11575 4040	400	0.45		0.40				
42x18	HPB4218	HEZD4218	460	0.17	600	0.18				
42x24	HPB4224	HEZD4224	355	0.30	500	0.29				
12/12				0.00		0.20				
42x30	HPB4230	HEZD4230	300	0.47	410	0.36				
42x36	HPB4236	HEZD4236	175	0.50	385	0.45				
48x12	HPB4812	HEZD4812	560	0.06	850	0.08	1160	0.08		
40.112	HF D4012	HEZD4012	300	0.00	030	0.00	1100	0.00		
48x18	HPB4818	HEZD4818	525	0.17	635	0.18	770	0.10		
48x24	HPB4824	HEZD4824	405	0.30	530	0.30	700	0.11		
4000	LIDD 4000	11575 4000	005	0.47	440	0.40	705	0.40		
48x30	HPB4830	HEZD4830	325	0.47	440	0.40	705	0.12		
48x36	HPB4836	HEZD4836	200	0.50	400	0.50	755	0.12		
101100								• • • • • • • • • • • • • • • • • • • •		
48x48	HPB4848	HEZD4848	85	0.50	275	0.50	920	0.13		
60x18	HPB6018	HEZD6018	660	0.17	735	0.18	835	0.12	1140	0.08
60x24	HPB6024	HEZD6024	505	0.30	615	0.32	700	0.15	1180	0.10
60x30	HPB6030	HEZD6030	410	0.47	520	0.46	650	0.16	1324	0.11
60x36	HPB6036	HEZD6036	250	0.50	380	0.50	665	0.17	1520	0.12
60x48	HPB6048	HEZD6048	105	0.50	230	0.50	750	0.18	2000	0.14
69x15	HPB6915	HEZD6915	900	0.11	950	0.12	1150	0.12	1250	0.11
69x30	HPB6930	HEZD6930	470	0.50	600	0.50	670	0.20	1220	0.13
72x18	HPB7218	HEZD7218	800	0.17	850	0.17	1000	0.15	1200	0.10
72x24	HPB7224	HEZD7224	605	0.30	680	0.31	770	0.19	1135	0.12
72x30	HPB7230	HEZD7230	500	0.47	610	0.50	680	0.21	1200	0.14
72x36	HPB7236	HEZD7236	300	0.50	390	0.50	655	0.23	1325	0.16
72x48	HPB7248	HEZD7248	130	0.50	215	0.50	685	0.25	1670	0.18
84x24	HPB8424	HEZD8424	705	0.30	765	0.31	870	0.23	1150	0.15
84x30	HPB8430	HEZD8430	570	0.47	650	0.49	735	0.27	1150	0.18
84x36	HPB8436	HEZD8436	355	0.50	415	0.50	670	0.29	1210	0.20
84x48	HPB8448	HEZD8448	150	0.50	215	0.50	660	0.33	1460	0.23
96x18	HPB9618	HEZD9618	1050	0.17	1115	0.17	1300	0.18	1500	0.15
96x24	HPB9624	HEZD9624	810	0.30	850	0.31	1000	0.26	1200	0.18
96x30	HPB9630	HEZD9630	655	0.47	710	0.49	800	0.32	1180	0.20
96x36	HPB9636	HEZD9636	405	0.50	450	0.50	710	0.36	1150	0.24
96x48	HPB9648	HEZD9648	170	0.50	200	0.50	650	0.41	1325	0.28

NOTE: The above load chart refers to the deck materials only. Particle board decking is 5/8" industrial grade type 1-M-2. EZ-Deck steel decking is 22 gauge galvanized sheet steel fabricated in 6" deep channel planks (models listed above include multiple planks to meet unit depth). 15" deep Ez-Deck will be shipped in two (2) 7 1/2" deep planks. The allowable shelf load capacity may be reduced due to allowable post and / or beam capacities. Specific deflection limits may also reduce the shelf load capacity. NOTE: EZ-Deck must be center supported on units 48" wide and wider.



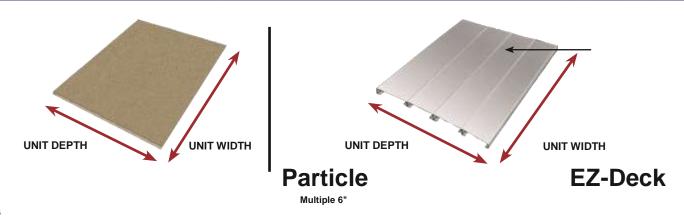

deep planks

# Board Steel form each level Decking Decking Two 7-1/2"

planks will be supplied on

15" deep units

NOTE: EZ-Deck steel decking is for use with double rivet units ONLY.

# **POST CAPACITY CHART**

Recommended safe loads (per post) for use only where seismic forces are not a factor

		<u> </u>
BEAM	STD. ANGLE	HEAVY ANGLE
SPACING	POST CAPACITY	POST CAPACITY
12"	1530	1735
18"	1520	1720
24"	1510	1695
30"	1490	1680
36"	1350	1660
42"	990	1560
48"	755	1195

BEAM SPACING	STANDARD/HEAVY-DUTY T-POST CAPACITY
12"	5045
18"	4965
24"	4850
30"	4705
36"	4525
42"	4315
48"	4075

Calculate needed post capacity by multiplying the number of shelves by the per shelf load then divide by 4 (Angle posts ), or by 2 (T-Posts ) then refer to the chart below for the approxamate post needed to meet your job requirement.

Post capacities are based on the maximum vertical distance between left-to-right beams or front-to-back beams, whichever is greater. In single rivet beam units, the vertical distance between front-to-back beams will usually govern. Tie plates must be spaced no more than 48 inches apart to insure structural stability when joining angle post together. All units require tie plates at top and bottom.

The above capacities are not intended for use when designing multi-level systems or for specific requirements where seismic forces are a factor. For specific multi-level or seismic requirements contact your Hallowell Sales Manager.

**BEAM LOAD TABLE (CAPACITY PER PAIR)** 





Recommended safe u	se allowable ι	uniformly distri	buted hand loade	d static beam	loads	DESIGN CRITERIA:
	WITHOU	T CENTER. S	SUPTS.(***)	WITH CENT	ER. SUPTS.(*)	All units must have a full perimeter
	LENGTH	CAPACITY	DEFLECTION	CAPACITY	DEFLECTION	of double rivet beams at the top and bottom to insure a stable and
	(IN.)	(LBS.)	(IN.)	(LBS.)	(IN.)	rigid unit. All units using single rivet
SINGLE RIVET SHELF BEAMS						beams 10'0" to 18"0" in height, require an additional double rivet
		0.70				perimeter beam level located
	36 42	350 300	0.25 0.30	-	-	approximately in the middle of the unit.
STANDARD BEAM	48	250	0.34	_	-	unit.
	36	600	0.25	_		All single rivet beam units must
HEAVY DUTY BEAM	42	550	0.30	-	-	have one (1) intermediate pair of front to back beams for 7'0" and
TILAVI DOTI BLAW	48	500	0.34	-	-	8'0" high units and (2) intermediate
DOUBLE RIVET ANGLE BEAMS						pair of front to back beams for 9'0"
						high units. For 10'0" to 18'0" high units refer to the above paragraph.
	36 42	1000 780	***	-	-	
STANDARD BEAM	48	750	***	1400**	0.16	DO NOT exceed 48" between front to back beams. Single Rivet and
	60	600	***	1200	0.16	Double Rivet Front-to-Back Beams
HEAVY DUTY BEAM	69	525	***	1050	0.23	may be common when using
HEAVY DOTT BEAM	72	500	***	1000	0.36	T-Posts on units up to 8' high.
	84	_	-	840	0.49	All intermediate single rivet levels
	96	_	-	620	0.53	over 24 inches deep must also have single rivet beams supporting the
DOUBLE RIVET CHANNEL BEA	IS					particle board front to back.
						All double rivet beam units must
	60	-	-	2240	0.23	have front to back beams at each
	72	-	-	1850	0.33	shelf level.
	84	-	-	600	0.45	(*) One (1) support per pair of
	96	-	-	1400	0.59	beams except 96" which have two
DOUBLE RIVET Z-BEAMS						(2) supports
	48	1250	-	1750	_	
	60	750	_	1000	-	
	69	600	_	1000	_	
	72	600	_	1000	-	
(**) Pafor to shalf load canacities for			5- 2011 2C11 4 4011			ل_

(\*\*) Refer to shelf load capacities for beam capacities when depth is 30", 36", and 48" (\*\*\*) Beam rotation is less than 5

degrees



Angle Post (Standard-Duty): Shall be 1-1/2" x 1-1/2" x 14

gauge cold rolled steel corner post uprights.

Double Rivet Angle Beam (Standard-Duty): Shall be







#### **FEATURES**:

- Shelves adjust in 1-1/2" increments
- 5 shelf levels
- · Easy assembly
- Holds up to 2,300 lb. per shelf (Based on evenly distributed loads)
- · Black powder coat finish
- Levels are center supported for increased capacity

#### **FEATURES:**

**Double Rivet Angle Beam (Heavy-Duty):** Shall be 2-3/4"  $\times$  1"  $\times$  14 gauge cold rolled steel. An upgrade to our standard duty double rivet angle beams, our heavy duty double rivet angle beams provide additional unit rigidity and even higher 2-3/4"  $\times$  1"  $\times$  16 gauge cold rolled steel. Typical for beams up to 36" in length. shelf capacity. Typical for beams 48" long and greater.



**Center Support:** Shall be 2-3/4" x 1" x 1" x 16 gauge cold rolled steel. Used to provide additional shelf support front-to-back by bolting between double rivet beams at prepunched locations.

**Steel Decking:** Shall be 14 gauge cold rolled sheet steel with flange formed at front and back designed to overhang left to right beams at front and back.







	Width BOLTLE	Depth SS SHEL		Catalog No.	Shelf Capacity
	36	18	84	HCR361884-5ME	2,300
-	48	18	84	HCR481884-5ME	2,200
-	48	24	84	HCR482484-5ME	2,000
(	60	24	84	HCR602484-5ME	2,000
	72	24	84	HCR722484-5ME	1,900
	72	36	84	HCR723684-5ME	1,900
9	96	24	84	HCR962484-5ME	1,900
	96	36	84	HCR963684-5ME	1,900
6" HIGH	BOLTLE	SS SHEL	VING		
;	36	18	96	HCR361896-5ME	2,300
-	48	18	96	HCR481896-5ME	2,200
	48	24	96	HCR482496-5ME	2,000
	60	24	96	HCR602496-5ME	2,000
	72	24	96	HCR722496-5ME	1,900
	72	36	96	HCR723696-5ME	1,900
,	96	24	96	HCR962496-5ME	1,900
	96	36	96	HCR963696-5ME	1,900

**RED COLOR Denotes Stock Component** 





### High Shelf Capacity 360°Access **Cross Braces**



#### **FEATURES:**

- Shelves adjust in 1" increments
- •5 shelf levels
- Nut and bolt assembly
- Holds up to 2,800 lb. per shelf (Based on evenly distributed loads)
- Dark Gray powder coat finish Shelves are reinforced to prevent deflection under heavy loading



#### **High Capacity Reinforced**

Angle Post: Are 13 gauge cold rolled steel 2" x 2" corner post uprights punched on 1" centers for adjusting shelves High Capacity Shelves: Are 14 gauge cold rolled steel and double flanged at all four sides. All four corners are punched to allow shelves to be securely bolted to angle posts. Minimum four nuts and bolts per corner.



Cross-section view shows Individual reinforced shelf for bolted die shelving.





**Shelf Stiffener:** An 18 gauge hat channel shape

stiffener is welded to the underside of the shelf

running left to right increasing capacity and

preventing deflection under heavy loading.

**Bolted Shelving** 



	Width	Depth	Height	Catalog No.	Shelf Capacity				
84" HIGH BOLTED SHELVING									
	36	18	84	HCS361884-5HG	2,800				
	48	18	84	HCS481884-5HG	2,600				
	48	24	84	HCS482484-5HG	2,500				
	60	24	84	HCS602484-5HG	2,300				
	72	24	84	HCS722484-5HG	2,000				











**Hi-Tech shelving** has the strength needed to handle most industrial applications and versatility for today's modern facilities. Every shelving unit is designed and engineered to meet the highest standards.

A full complement of accessories including full dividers, partial dividers, label holders, swinging doors, post splices for multilevel systems and foot plates are available to complete your system.

3 DAY
SHIPPING
ON ALL IN-STOCK
Hi-Tech SHELVING



725 Dark Gray (HG




QUICKSHIP









- Exclusive triple bend side flanges for added strength
- Lapped and welded corners

BOX FORMED SHELVES

• Top of shelf is punched to accept shelf dividers

#### **ANGLE BACK POSTS & T-POSTS**

- Roll formed into a unique angle shape for maximum strength
- The long leg is punched on 1-1/2" centers to allow independent shelf adjustment
- Angle Posts can be used in place of Beaded Front Posts if desired



- Beaded for strength
- Flush to permit straight-in/straight-out shelf installation, shelf changing and full use of shelf width
- Punched on 1-1/2" centers to allow independent shelf adjustment



- Designed for high-density applications
- More than twice the capacity of standard posts
- Used at front and back
- Used with standard Hi-Tech components



#### **ONE PIECE SHELF CLIP**

- Four sturdy and compact clips per shelf
- Keys firmly into post slots to hold shelves securely in place
- Fits Beaded Front, Angle Back Posts and T-Posts
- Non-Intrusive clip sits flush with inside edge of front posts







**Base Strips**Close bottom to prevent debris
accumulation

#### **ACCESSORIES**



Allow cabinet-style storage



**Shelf Dividers**For organized storage





hitech open shelving units







DARK GRAY (HG)









ADDER UNIT



5 SHELF UNIT



6 SHELF UNIT



	_	_				-50771 - 5007.3005	
				5-Shelf Unit	6-Shelf Unit	8-Shelf Unit	Shelf
W	D	н		Cat No.	Cat No.	Cat No.	Capa ity*
Medio Duty	um						
36	12	87	Starter	4510-12	4511-12	4513-12	500*
36	12	87	Adder	A4510-12	A4511-12	A4513-12	500*
36	18	87	Starter	4510-18	4511-18	4513-18	500*
36	18	87	Adder	A4510-18	A4511-18	A4513-18	500*
36 36	24 24	87 87	Starter Adder	4510-24 A4510-24	4511-24 A4511-24	4513-24 A4513-24	500* 500*
30	27	O1	Addel	A+310-24	A4011-24	A+313-24	300
48	12	87	Starter	4710-12	4711-12	4713-12	375*
48	12	87	Adder	A4710-12	A4711-12	A4713-12	375*
48 48	18	87 87	Starter	4710-18 A4710-18	4711-18	4713-18	375*
48	18	87	Adder	A4710-18	A4711-18	A4713-18	375
48	24	87	Starter	4710-24	4711-24	4713-24	350*
48	24	87	Adder	A4710-24	A4711-24	A4713-24	350*
Heavy-							
20	12	87	Starter	FF40.42	5511-12	5513-12	800*
36 36	12	87	Adder	5510-12 A5510-12	A5511-12	A5513-12	800*
36	18	87	Starter	5510-18	5511-18	5513-12	800*
36	18	87	Adder	A5510-18	A5511-18	A5513-18	800*
36	24	87	Starter	5510-24	5511-24	5513-24	800*
36	24	87	Adder	A5510-24	A5511-24	A5513-24	800*
48	12	87	Starter	5710-12	5711-12	5713-12	400*
48	12	87	Adder	A5710-12	A5711-12	A5713-12	400*
48	18	87	Starter	5710-18	5711-18	5713-18	450*
48	18	87	Adder	A5710-18	A5711-18	A5713-18	450 450*
48	24	87	Starter	5710-24	5711-24	5713-24	500*
48	24	87	Adder	A5710-24	A5711-24	A5713-24	500*
Extra H	ea						
36	12	87	Starter	7510-12	7511-12	7513-12	110 0*
36	12	87	Adder	A7510-12	A7511-12	A7513-12	1100*
36	18	87	Starter	7510-18	7511-18	7513-18	120 0*
36 36	18 24	87 87	Adder Starter	A7510-18 7510-24	A7511-18 7511-24	A7513-18 7513-24	120 0* 125 0*
36	24	87	Adder	A7510-24	A7511-24	A7513-24	1250*
48	12	87 87	Starter	7710-12	7711-12	7713-12	750*
48	12	87	Adder	A7710-12	A7711-12	A7713-12	750
48	18	87	Starter	7710-18	7711-18	7713-18	900*
48 48	18 24	87 87	Adder Starter	A7710-18 7710-24	A7711-18 7711-24	A7713-18 7713-24	900* 900*
48	24	87	Adder	A7710-24	A7711-24	A7713-24	900*
,—							





Add	itional Shelves		Medium-Duty	Heavy-Duty	Extra Heavy-Duty		
		Cat No	Cat No.	Cat No.			
36	12		5135-3612	5138-3612	5139-3612	See	
36	18		5135-3618	5138-3618	Above		
36	24		5135-3624	5138-3624	5139-3618	See	
					Above		
					5139-3624	Se	
					Above		
48	12		5135-4812	5138-4812	5139-4812	See	
48	18		5135-4818	5138-4818	Above		
48	24		5135-4824	5138-4824	5139-4818	See	
					Above		
					5139-4824	Se	
					Above		

<sup>\*</sup> Shelf capacity based on a factor of 1.65

Color for all components 725 Dark Gray. Optional colors are available at a nominal charge, additional lead times apply.

8 SHELF

UNIT

**Open units:** Starter units include two beaded front posts, two angle back posts, one pair back sway braces, two pair side sway braces and 5-8 shelves. Adder units include one beaded front post, two angle back posts, one pair back sway braces, one pair side sway braces and 5-8 shelves. Starter/Adder units 10'-3" include two pairs back sway braces









w	D	н	_			nelf Unit at No.	6-Shelf Unit Cat No.		8-Shelf Unit Cat No.	Shelf Capacity*	
Med	ium-D	uty									
36	12	87		Starter	4	520-12	4	521-12	4523-12	500*	
36	12	87		Adder	A4520-12			521-12	A4523-12	500*	
36	18	87		Starter		520-18		521-18	4523-18	500*	
36	18	87		Adder		520-18		521-18	A4523-18	500*	
36	24	87		Starter		520-24		521-24	4523-24	500*	
36	24	87		Adder	A4:	520-24	A4	521-24	A4523-24	500*	
48	12	87		Starter	4	720-12	4	721-12	4723-12	375*	
48	12	87		Adder	A4 <sup>-</sup>	720-12	Α4	721-12	A4723-12	375*	
48	18	87		Starter	4	720-18	4	721-18	4723-18	375*	
48	18	87		Adder	<b>A4</b>	720-18		A4721-18	A4723-18	375*	
48	24		87	Starter	Adder	4720-24		4721-24	4723-24	350*	
48	24		87			A4720-24		A4721-24	A4723-24	350*	
He Duty											
36	12		87	Starter	Adder	5520-12		5521-12	5523-12	800*	
36	12		87			A5520-12		A5521-12	A5523-12	800*	
36	18		87	Starter	Adder	5520-18		5521-18	5523-18	800*	
36	18		87			A5520-18		A5521-18	A5523-18	800*	
36	24		87	Starter	Adder	5520-24		5521-24	5523-24	800*	
36	24		87			A5520-24		A5521-24	A5523-24	800*	
48	12		87	Starter	Adder	5720-12		5721-12	5723-12	400*	
48	12		87			A5720-12		A5721-12	A5723-12	400*	
48	18		87	Starter	Adder	5720-18		5721-18	5723-18	450*	
48	18		87			A5720-18		A5721-18	A5723-18	450*	
48	24		87	Starter	Adder	5720-24		5721-24	5723-24	500*	
48	24		87			A5720-24		A5721-24	A5723-24	500*	
	Heav	y-Duty									
36	12		87	Starter	Adder	7520-12		7521-12	7523-12	1100*	
36	12		87			A7520-12		A7521-12	A7523-12	1100*	
36	18		87	Starter	Adder	7520-18		7521-18	7523-18	1200*	
36	18		87			A7520-18		A7521-18	A7523-18	1200*	
36	24		87	Starter	Adder	7520-24		7521-24	7523-24	1250*	
36	24		87			A7520-24		A7521-24	A7523-24	1250*	
				_					7723-12	750*	
48	12		87	Starter	Adder	7720-12		7721-12			
48	12		87					A7721-12	A7723-12	750*	
						A7720-12					
48	18	87		Starter	7	720-18	7	721-18	7723-18	900*	
48	18	87		Adder		720-18		721-18	A7723-18	900*	
48	24	87		Starter	7	720-24	7	721-24	7723-24	900*	
48	24	87		Adder	A7	720-24	<b>A7</b>	721-24	A7723-24	900*	



UNIT



UNIT



**5 SHELF** UNIT



6 SHELF UNIT









Addit	ional Shelves	O-CN-	Medium-Duty	Heavy-Duty	Extra Heavy-Duty	
		Cat No.	Cat No.	Cat N	0.	
36	12		5135-3612	5138-3612	5139-3612	See
Above	e					
36	18		5135-3618	5138-3618	5139-3618	See
Above	9					
36	24		5135-3624	5138-3624	5139-3624	See
Above	9					
48	12		5135-4812	5138-4812	5139-4812	See
Above	9					
48	18		5135-4818	5138-4818	5139-4818	See
Above	Э					
48	24		5135-4824	5138-4824	5139-4824	See
Above	e					

<sup>\*</sup> Shelf capacity based on a factor of 1.65

Color for all components 725 Dark Gray. Optional colors are available at a nominal charge, additional lead times apply.

**Closed units:** Starter units include two beaded front posts, two angle back posts, one back panel assembly, two side panel assemblies and 5-8 shelves. Adder units include one beaded front post, two angle back posts, one back panel assembly, one side panel

8 SHELF

and 5-8 shelves

sembly and 5-8	3 shelves.						UNIT
w	D	н		5-Shelf Unit Cat No.	6-Shelf Unit Cat No.	8-Shelf Unit Cat No.	Shelf Capacity
MEDIUM-DI	JTY						
36	12	87	Open	F4510-12	F4511-12	F4513-12	500*
36	12	87	Closed	F4520-12	F4521-12	F4523-12	500*
36	18	87	Open	F4510-18	F4511-18	F4513-18	500*
36	18	87	Closed	F4520-18	F4521-18	F4523-18	500*
36	24	87	Open	F4510-24	F4511-24	F4513-24	500*
36	24	87	Closed	F4520-24	F4521-24	F4523-24	500*
48	12	87	Open	F4710-12	F4711-12	F4713-12	375*
48	12	87	Closed	F4720-12	F4721-12	F4723-12	375*
48	18	87	Open	F4710-18	F4711-18	F4713-18	375*
48	18	87	Closed	F4720-18	F4721-18	F4723-18	375*
48	24	87	Open	F4710-24	F4711-24	F4713-24	350*
48	24	87	Closed	F4720-24	F4721-24	F4723-24	350*
HEAVY-DU	ΤΥ						
36	12	87	Open	F5510-12	F5511-12	F5513-12	800*
36	12	87	Closed	F5520-12	F5521-12	F5523-12	800*
36	18	87	Open	F5510-18	F5511-18	F5513-18	800*
36	18	87	Closed	F5520-18	F5521-18	F5523-18	800*
36	24	87	Open	F5510-24	F5511-24	F5513-24	800*
36	24	87	Closed	F5520-24	F5521-24	F5523-24	800*
48	12	87	Open	F5710-12	F5711-12	F5713-12	400*
48	12	87	Closed	F5720-12	F5721-12	F5723-12	400*
48	18	87	Open	F5710-18	F5711-18	F5713-18	450*
48	18	87	Closed	F5720-18	F5721-18	F5723-18	450*
48	24	87	Open	F5710-24	F5711-24	F5713-24	500*
48	24	87	Closed	F5720-24	F5721-24	F5723-24	500*
EXTRA HEA	AVY-DUTY						
36	12	87	Open	F7510-12	F7511-12	F7513-12	1100*





36	12	87	Closed	F7520-12	F7521-12	F7523-12	1100*
36	18	87	Open	F7510-18	F7511-18	F7513-18	1200*
36	18	87	Closed	F7520-18	F7521-18	F7523-18	1200*
36	24	87	Open	F7510-24	F7511-24	F7513-24	1250*
36	24	87	Closed	F7520-24	F7521-24	F7523-24	1250*
48	12	87	Open	F7710-12	F7711-12	F7713-12	750*
48	12	87	Closed	F7720-12	F7721-12	F7723-12	750*
48	18	87	Open	F7710-18	F7711-18	F7713-18	900*
48	18	87	Closed	F7720-18	F7721-18	F7723-18	900*
48	24	87	Open	F7710-24	F7711-24	F7713-24	900*
48	24	87	Closed	F7720-24	F7721-24	F7723-24	900*
Addition	al Shelves			Medium-Duty	Heavy-Duty	Extra Heavy-Di	uty
				Cat No.	Cat No.	Cat No.	
36	12			5135-3612	5138-3612	5139-3612	See Above
36	18			5135-3618	5138-3618	5139-3618	See Above
36	24			5135-3624	5138-3624	5139-3624	See Above
48	12			5135-4812	5138-4812	5139-4812	See Above
48	18			5135-4818	5138-4818	5139-4818	See Above
48 48	18 24			5135-4818 5135-4824	5138-4818 5138-4824	5139-4818 5139-4824	See Above

<sup>\*</sup> Shelf capacity based on a factor of 1.65







Color for all times apply.

DARK GRAY

(HG)

components 725 Dark Gray. Optional colors are available at a nominal charge, additional lead





5 SHELF OPEN UNIT



6 SHELF CLOSED UNIT



8 SHELF OPEN UNIT

**Open units:** Units include four angle posts, one pair back sway braces, two pair side sway braces and 5-8 shelves. **Closed units:** Units include four angle posts, two side panel assemblies, one back panel assembly and 5-8 shelves.





## **OPEN UNITS**

# \*\*MED SAFE"



w	D	н		8-Shelf Unit Cat. No.	11-Shelf Unit Cat. No.	Shelf Capacity*
36	12	87	Starter	4513-12PL-AM	451C-12PL-AM	500
36	12	87	Adder	A4513-12PL-AM	A451C-12PL-AM	500
36	18	87	Starter	4513-18PL-AM	451C-18PL-AM	500
36	18	87	Adder	A4513-18PL-AM	A451C-18PL-AM	500
36	24	87	Starter	4513-24PL-AM	451C-24PL-AM	500
36	24	87	Adder	A4513-24PL-AM	A451C-24PL-AM	500
48	12	87	Starter	4713-12PL-AM	471C-12PL-AM	375
48	12	87	Adder	A4713-12PL-AM	A471C-12PL-AM	375
48	18	87	Starter	4713-18PL-AM	471C-18PL-AM	375
48	18	87	Adder	A4713-18PL-AM	A471C-18PL-AM	375
48	24	87	Starter	4713-24PL-AM	471C-24PL-AM	350
48	24	87	Adder	A4713-24PL-AM	A471C-24PL-AM	350



8 SHELF OPEN ADDER UNIT



11 SHELF OPEN STARTER UNIT

#### Open Units:

Starter units include two beaded front posts, two angle back posts, one pair back sway braces, two pair side sway braces and 5-8 shelves. Adder units include one beaded front post, two angle back posts, one pair back sway braces, one pair side sway braces and 5-8 shelves.

w	D	н		8-Shelf Unit Cat. No.	11-Shelf Unit Cat. No.	Shelf Capacity*
36	12	87	Starter	4523-12PL-AM	452C-12PL-AM	500
36	12	87	Adder	A4523-12PL-AM	A452C-12PL-AM	500
36	18	87	Starter	4523-18PL-AM	452C-18PL-AM	500
36	18	87	Adder	A4523-18PL-AM	A452C-18PL-AM	500
36	24	87	Starter	4523-24PL-AM	452C-24PL-AM	500
36	24	87	Adder	A4523-24PL-AM	A452C-24PL-AM	500
48	12	87	Starter	4723-12PL-AM	472C-12PL-AM	375
48	12	87	Adder	A4723-12PL-AM	A472C-12PL-AM	375
48	18	87	Starter	4723-18PL-AM	472C-18PL-AM	375
48	18	87	Adder	A4723-18PL-AM	A472C-18PL-AM	375
48	24	87	Starter	4723-24PL-AM	472C-24PL-AM	350
48	24	87	Adder	A4723-24PL-AM	A472C-24PL-AM	350


<sup>\*</sup> Shelf capacity based on a uniformly distributed load and a safety factor of 1.65

#### **Closed Units**

Starter units include two beaded front posts, two angle back posts, one back panel assembly, two side panel assemblies and 5-8 shelves. Adder units include one beaded front post, two angle back posts, one back panel assembly, one side panel assembly and 5-8 shelves.








<sup>\*</sup> Shelf capacity based on a uniformly distributed load and a safety factor of 1.65





#### 8 SHELF CLOSED ADDER UNIT

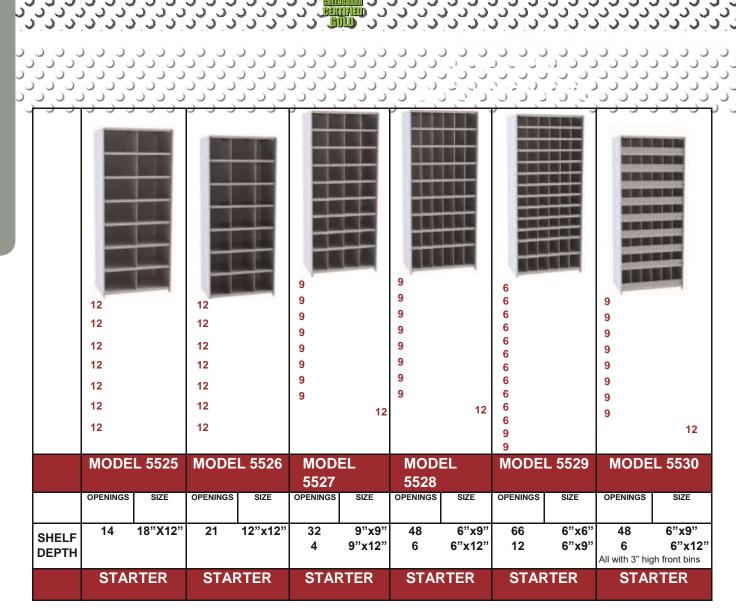



12"	552	5-12	552	6-12	552	7-12	552	8-12	5529	9-12	553	0-12
18"		5-18		6-18		7-18		8-18	5529			0-18
24"		5-24		6-24		7-24		8-24	5529	-		0-24
	ADI	DER	ADDER		ADI	DER	ADDER		ADDER		ADI	DER
12"	A552	25-12	Λ <i>5</i> 51	26-12	<b>A55</b>	27-12	Λ <i>5</i> 51	28-12	A552	0_12	A553	30-12
18"		25-12 25-18		26-12 26-18		27-12 27-18		28-12 28-18	A552	-		30-12 30-18
24"		25-16 25-24		26-24		27-16 27-24		28-16 28-24	A552			30-18 30-24
24	A332	LJ-24	A332	20-24	AJJ	27-24	A332	20-24	AJJZ	.5-24	A330	00-24
		9 9 9 9 12 12 12		9 9 9 9 12 12 12 12	12 12 12 12 12 12 12			1 2 1 2 1 2 1 2 1 2 1 2 1 2 1 2 1 2 1 2	9 9 9 6 6 6	12 12 18	12 12 12 12 12 12 12 12	
								1 2				
	MODE	L 5531	MODE	L 5532	MOD 5533	EL	MOD 5534	EL	MODE	L 5535	MODE	L 5536
	OPENINGS	SIZE	OPENINGS	SIZE	OPENINGS	SIZE	OPENINGS	SIZE	OPENINGS	SIZE	OPENINGS	SIZE
							6	6"x12"	12	9"x9"	21	12"x12"
SHELF	16	9"x9"	12	12"x9"	9	12"x12"	4	9"x12"	6	6"x9"	All with 3" hi	gh front bins
DEPTH	4	9"x12"	3	12"x12"	6	18"x12"		2"x12" 2	12	6"x6"		
DEF III	9	12"x12"	6	18"x12"	1	36"x12"	18"x	12"	6	12"x12"		
									2	18"x12"		
	STAF	RTER	STAF	RTER	STAI	RTER	STAF	RTER	STAF	RTER	STAF	RTER
12"	553	1-12	553	2-12	553	3-12	553	4-12	553	5-12	553	6-12
18"		1-18		2-18		3-18		4-18	553			6-18
24"		1-24		2-24		3-24		4-24	553			6-24
		DER		DER		DER		DER	ADE			DER
	– ADI	JLK	– ADI	JLK	– ADI	JLK	– ADI	JLK	ADL	LIN	ADI	JLN





12"	A5531-12	A5532-12	A5533-12	A5534-12	A5535-12	A5536-12
18"	A5531-18	A5532-18	A5533-18	A5534-18	A5535-18	A5536-18
24"	A5531-24	A5532-24	A5533-24	A5534-24	A5535-24	A5536-24

NOTES: • Starter & adder units are made up of the same components as shown on page 23 and include metal dividers to create each specific configuration and base strips.

• All units shown are 36" wide x 87" high. 48" wide units are also available.

STOC COLO

725 DARK GRAY (HG)

• Size of openings is indicated by width x height

# **HPOST**

#### **HEAVY-DUTY INDUSTRIAL DEEP BIN SHELVING UNITS FEATURE:**

- H-Post Horizontal stabilizer beams prevent sway creating
- Heavy-duty Hi-Tech box formed shelves rigid frame.
- Vertical dividers bolt in for added strength & durability
- 3/4" Plywood back painted Marine Blue [MB] to absorb impact

Ideal for storing long items such as tubing, re-bar, florescent lights, hinges, etc.









• 18 gauge side panels



18 BIN UNIT

28 BIN UNIT

**50 BIN UNIT** 

96 BIN UNIT

Total # of	# Bins Wide	# Bins	Nominal Bin Dimensions			Starter	Adder	
Bins		High	W	D	Н	Catalog No.	Catalog No.	
18	3	6	12	48	10-1/2	HDB18-48	AHDB18-48	
18	3	6	12	72	10-1/2	HDB18-72	AHDB18-72	





18	3	6	12	96	10-1/2	HDB18-96	AHDB18-96
28	4	7	9	48	9	HDB28-48	AHDB28-48
28	4	7	9	72	9	HDB28-72	AHDB28-72
28	4	7	9	96	9	HDB28-96	AHDB28-96
50	5	10	7	48	6	HDB50-48	AHDB50-48
50	5	10	7	72	6	HDB50-72	AHDB50-72
50	5	10	7	96	6	HDB50-96	AHDB50-96
96	8	12	4-1/2	48	4-1/2	HDB96-48	AHDB96-48
96	8	12	4-1/2	72	4-1/2	HDB96-72	AHDB96-72
96	8	12	4-1/2	96	4-1/2	HDB96-96	AHDB96-96

Notes: • Sides are H-Post with nut/bolt side panel assembly.



707
MARINE BLUE
(MB)
711
LIGHT GRAY
(PL)

<sup>•</sup> Stock Colors - Marine Blue [MB] sides with Light Gray [PL] shelves and dividers.



ALL POSTS SIDE SWAY BRACES SIDE PANELS



707 MARINE BLUE (MB)

ALL SHELVES BACK SWAY BRACES BACK PANELS





711 LIGHT GRAY (PL)





#### PROVIDES TWICE THE CAPACITY OF STANDARD POST SHELVING

H-Post High capacity Shelving is ideal when additional strength is required for any shelving installation. It is also recommended for multi-level high-rise applications.

H-Posts are fabricated from 14 gauge cold rolled steel and formed into a unique tubular design to provide more than twice the load capacity compared to standard posts.















#### H-POST

- Designed for high-density applications
- More than twice the capacity of standard posts
- Used at front and back
- Used with standard Hi-Tech components




#### **BOX FORMED SHELVES**

- Tubular welded box beam front and rear for maximum strength
- Exclusive triple bend side flanges for added strength
- Lapped and welded corners
- Top of shelf is punched to accept shelf dividers



#### ONE PIECE SHELF CLIP

- Each shelf requires four of these sturdy and compact clips
- Clips key firmly into post slots to hold shelves securely in place
- Also fits Beaded Front, Angle Back Posts and T-Posts
- Provides independent shelf positioning on 1-1/2" centers
- Non-Intrusive clip sits flush with inside edge of front posts



#### **BACK AND SIDE SWAY BRACES**

- Standard for open units only
- 11 gauge back and side sway braces create a rigid structure
- Special triple point brace clip provides a strong rigid anchor point for back sway braces



#### **BACK AND SIDE PANELS**

- Standard for closed units only
- Standard stock models include heavy 18 gauge back and side panels for a strong and durable structure
- Multiple panels are used to create full panel height



#### **FOOT PLATES**

- Standard stock units include #5025 standard duty foot plates
- Provide a strong and secure anchoring point





#### **COMBINE WITH STANDARD HI-TECH SHELVING COMPONENTS**





# **AVAILABLE IN 7' AND 10' HIGH UNITS**

232

3333

333

3

ALL SHELVES BACK SWAY BRACES BACK PANELS ALL POSTS SIDE SWAY BRACES SIDE PANELS





711 LIGHT GRAY (PL) **707 MARINE BLUE (MB)** 







UNIT

5 SHELF

UNIT



UNIT



w	D	н		5-Shelf Unit Cat No.	6-Shelf Unit Cat No.	8-Shelf Unit Cat No.	Shelf Capa <sub>ity</sub> *
Heavy-							
36	18	87	Starter	H5510-1807	H5511-1807	H5513-1807	800*
36	18	87	Adder	AH5510-1807	AH5511-1807	AH5513-1807	800*
36	24	87	Starter	H5510-2407	H5511-2407	H5513-2407	800*
36	24	87	Adder	AH5510-2407	AH5511-2407	AH5513-2407	800*
		123	Starter	H5510-1810	H5511-1810	H5513-1810	800*
36	18	123	Adder	AH5510-1810	AH5511-1810	AH5513-1810	800*
36	18	123	Starter	H5510-2410	H5511-2410	H5513-2410	800*
36	24	123	Adder	AH5510-2410	AH5511-2410	AH5513-2410	800*
36	24						
48	18	87	Starter				
48	18	87	Adder				
48	24	87	Starter	H5710-1807	H5711-1807	H5713-1807	450*
48	24	87	Adder	AH5710-1807	AH5711-1807	AH5713-1807	450*
				H5710-2407	H5711-2407	H5713-2407	500*
				AH5710-2407	AH5711-2407	AH5713-2407	500*
		123	Starter	H5710-1810	H5711-1810	H5713-1810	450*
48	18	123	Adder	AH5710-1810	AH5711-1810	AH5713-1810	450*
48	18	123	Starter	H5710-2410	H5711-2410	H5713-2410	500*
48	24	123	Adder	AH5710-2410	AH5711-2410	AH5713-2410	500*
48	24						
	/y-Duty	Duty					
36	18	87	Starter	H7510-1807	H7511-1807	H7513-1807	1200*
36	18	87	Adder	AH7510-1807	AH7511-1807	AH7513-1807	1200*
36	24	87	Starter	H7510-2407	H7511-2407	H7513-2407	1250*
36	24	87	Adder	AH7510-2407	AH7511-2407	AH7513-2407	1250*

36 18 123 Starter H7510-1810 H7511-1810 H7513-1810 1200\* 36 18 123 Adder AH7510-1810 AH7511-1810 AH7513-1810 1200\* 36 24 123 Starter H7510-2410 H7511-2410 H7513-2410 1250\* 36 24 123 Adder AH7510-2410 AH7511-2410 AH7513-2410 1250\*

48 18 87 Starter H7710-1807 H7711-1807 H7713-1807 900\* 48 18 87 Adder AH7710-1807 AH7711-1807 AH7713-1807 900\* 48 24 87 Starter H7710-2407 H7711-2407 H7713-2407 900\* 48 24 87 Adder AH7710-2407 AH7711-2407 AH7713-2407 900\*

48	18	123	Starter	H7710-1810	H7711-1810	H7713-1810	900*
48	18	123	Adder	AH7710-1810	AH7711-1810	AH7713-1810	900*
48	24	123	Starter	H7710-2410	H7711-2410	H7713-2410	900*
48	24	123	Adder	AH7710-2410	AH7711-2410	AH7713-2410	900*

Additional Shelves **Heavy-Duty** Cat No.

Cat No.

**Heavy-Duty** 

Extra



36	18	5138-3618PL 5139-3618PL	See Above
36	24	5138-3624PL 5139-3624PL	See Above
48	18	5138-4818PL 5139-4818PL	See Above
48	24	5138-4824PL 5139-4824PL	See Above

<sup>\*</sup> Shelf capacity based on a factor of 1.65

Color: All posts, side sway braces, side panels are 707 Marine Blue.

All shelves, back sway braces, back panels are 711 Light Gray

OPEN UNITS: Starter units include four posts, one back sway brace assembly, two side sway brace assemblies, foot plates and 5-8 shelves.

8 SHELF

Adder units include two posts, one back sway brace assembly, one side sway brace assembly, foot plates and 5-8 shelves. UNIT





## **AVAILABLE IN 7' AND 10' HIGH UNITS**



W	D	н		5-Shelf Unit Cat No.		8-Shelf Unit Cat No.	Shelf Capa ity
Heavy-							
36	18	87	Starter	H5520-1807	H5521-1807	H5523-1807	800*
36	18	87	Adder	AH5520-1807	AH5521-1807	AH5523-1807	800*
36	24	87	Starter	H5520-2407	H5521-2407	H5523-2407	800*
36	24	87	Adder	AH5520-2407	AH5521-2407	AH5523-2407	800*
		123	Starter	H5520-1810	H5521-1810	H5523-1810	800*
36	18	123	Adder	AH5520-1810	AH5521-1810	AH5523-1810	800*
36	18	123	Starter	H5520-2410	H5521-2410	H5523-2410	800*
36	24	123	Adder	AH5520-2410	AH5521-2410	AH5523-2410	800*
36	24						
48	18	87	Starter		•		
48	18	87	Adder				
48	24	87	Starter	H5720-1807	H5721-1807	H5723-1807	450*
48	24	87	Adder	AH5720-1807	AH5721-1807	AH5723-1807	450*
				H5720-2407	H5721-2407	H5723-2407	500*
				AH5720-2407	AH5721-2407	AH5723-2407	500*
		123	Starter	H5720-1810	H5721-1810	H5723-1810	450*
48	18	123	Adder	AH5720-1810	AH5721-1810	AH5723-1810	450*
48	18	123	Starter	H5720-2410	H5721-2410	H5723-2410	500*
48	24	123	Adder	AH5720-2410	AH5721-2410	AH5723-2410	500*
48	24						- 1
	/y-Duty	Duty					
36	18	87	Starter	H7520-1807	H7521-1807	H7523-1807	1200*
36	18	87	Adder	AH7520-1807	AH7521-1807	AH7523-1807	1200*
36	24	87	Starter	H7520-2407	H7521-1607	H7523-1607	1250*
36	24	87	Adder	AH7520-2407	AH7521-2407	AH7523-2407	1250*

36 18 123 Starter H7520-1810 H7521-1810 H7523-1810 1200\* 36 18 123 Adder AH7520-1810 AH7521-1810 AH7523-1810 1200\* 36 24 123 Starter H7520-2410 H7521-2410 H7523-2410 1250\* 36 24 123 Adder AH7520-2410 AH7521-2410 AH7523-2410 1250\*

48 18 87 Starter H7720-1807 H7721-1807 H7723-1807 900\* 48 18 87 Adder AH7720-1807 AH7721-1807 AH7723-1807 900\* 48 24 87 Starter H7720-2407 H7721-2407 H7723-2407 900\* 48 24 87 Adder AH7720-2407 AH7721-2407 AH7723-2407 900\*

48 18 123 Starter H7720-1810 H7721-1810 H7723-1810 900\* 48 18 123 Adder AH7720-1810 AH7721-1810 AH7723-1810 900\* 48 24 123 Starter H7720-2410 H7721-2410 H7723-2410 900\* 48 24 123 Adder AH7720-2410 AH7721-2410 AH7723-2410 900\*

<b>Additional Shelves</b>		Heavy-Duty	Extra	
Heavy-Duty				
Cot No	Cot No			





ADDER UNIT



UNIT



6 SHELF



8 SHELF UNIT







36	18	5138-3618PL 5139-3618PL	See Above
36	24	5138-3624PL 5139-3624PL	See Above
48	18	5138-4818PL 5139-4818PL	See Above
48	24	5138-4824PL 5139-4824PL	See Above

<sup>\*</sup> Shelf capacity based on a factor of 1.65

Color: All posts, side sway braces, side panels are 707 Marine Blue.
All shelves, back sway braces, back panels are 711 Light Gray

**CLOSED UNITS:** Starter units include four posts, one back panel assembly, two side panel assemblies, foot plates and 5-8 shelves. Adder units include two posts, one back panel assembly, one side panel assembly, foot plates and 5-8 shelves.

<u> </u>	
ALL SHELVES	ALL POSTS
BACK SWAY	SIDE SWAY
BRACES BACK	BRACES SIDE
PANELS	PANELS
711	707 MARINE
LIGHT GRAY (PL)	BLUE (MB)





DuraTech is Hallowell's newest line of pass-thru steel shelving requiring no cross braces allowing access from all sides while providing the maximum strength, durability and stability needed to handle most industrial applications. DuraTech offers versatility and durability for today's modern facilities.

Our complete line of shelving is designed and engineered to the highest standards.



**V** No Cross Braces **V** 360 °Access



### A MORE EFFICIENT STORAGE SYSTEM!

- Access from all 4 sides
- Top and bottom firmly attached with steel-grip nuts for superior strength
- Available in 5, 7 and 8 shelf models



• Four Angle Posts are used per section allowing units to be individually located, bolted side-by-side or bolted back-to-back.

**OUR UNIQUE GRIP NUT DESIGN** 

**CREATES A VERY STRONG AND RIGID STRUCTURE** 









- Each intermediate shelf uses four sturdy and compact clips
- Clips key firmly into post slots to hold shelves securely in place
- Provides independent positioning of intermediate shelves on 1-1/2" centers
- Bottom shelf is positioned to prevent debris from












collecting beneath unit Top and bottom shelves attach with holts at each corner providing



Angle posts are roll formed into a unique angle shape for maximum strength. Leg is punched on 1-1/2" centers to allow independent Bottom shelf is positioned to prevent debris from collecting beneath unit





Intermediate shelves have a tubular flange at the front and rear, and exclusive triple bend sides for added strength.



Top and bottom shelves are triple flanged at all four sides and bolted to angle posts at all four corners for maximum rigidity, durability and stability.





intermediate shelves

Compression Shelf Clip for intermediate shelf adjustment

Fully Adjustable Intermediate
Shelves with fixed top and
bottom for a strong unit that
DOES NOT require CROSS Braces







5-SHELF UNIT
3-ADJUSTABLE SHELVES

7-SHELF UNIT 5-ADJUSTABLE SHELVES

8-SHELF UNIT 6-ADJUSTABLE SHELVES

W	D	н	* Capacity Per Shelf	5-Shelf Catalog No.	7-Shelf Catalog No.	8-Shelf Catalog No.	
36" W	IDE UNI	TS					
36	12	87	800	DT5510-12	DT5512-12	DT5513-12	
36	18	87	800	DT5510-18	DT5512-18	DT5513-18	
36	24	87	800	DT5510-24	DT5512-24	DT5513-24	
48" W	48" WIDE UNITS						
48	12	87	400	DT5710-12	DT5712-12	DT5713-12	
48	18	87	450	DT5710-18	DT5712-18	DT5713-18	
48	24	87	500	DT5710-24	DT5712-24	DT5713-24	

All Units Include: Four angle posts, two DuraTech bolt-in shelves to be used at unit top and bottom and intermediate adjustable shelves with shelf clips applicable to unit ordered. All DuraTech shelving units are free standing and can be joined end-to-end or back-to-back.



725 DARK GRAY













### **BEADED FRONT POSTS**

True flush construction. Slotted on 1-1/2" centers to permit easy shelf adjustment. Multiple posts can be spliced for added height.



Part No. W D H Stock Color 5002-3W 11/16" 2-9/16" 3'-3" - - -5002-6W 11/16" 2-9/16" 6'-3" - - -

5002-7W 11/16" 2-9/16" 7'-3" HG -5002-8W 11/16" 2-9/16" 8'-3" - - - 5002-10W 11/16" 2-9/16" 10'-3" HG - - 5002-12W 11/16" 2-9/16" 12'-3" - - -

### **ANGLE BACK POSTS**

Angles for single or end units. Slotted on 1-1/2" centers to

permit easy shelf adjustment. Multiple posts can be spliced for added height.



Part No. W D H Stock Color

5004-3 1-3/16" 2-5/16" 3'-3" - 
5004-6 1-3/16" 2-5/16" 6'-3" - - 
5004-7 1
3/16" 2-5/16" 7'-3" HG - 
5004-10 1-3/16" 2-5/16"

10'-3" HG - 
5004-12 1-3/16" 2-5/16" 12'
3" - - -

### **SHELVES**

Roll formed rectangular tubular shaped front and rear edges

with return flanges welded on 3" centers to underside of shelf. Sides are triple flanged. All four corners are lapped and welded. Top pierced to accept dividers.

### **POST SPLICE CHANNELS**

A channel formed internal splice. Used to splice beaded Front posts for added height.



Also, to splice back posts and T-posts

Part No. W D H Stock Color

5009 - - Plated

NOTE: For requirements above 16'-3" high, multiple posts can be spliced using

5009 post splice channels without compromising capacity. See page 42-43 for unit load and sway brace information.

### **Red Part Number Denotes Stock Component**

**Quick-Ship Color Availability As Noted For Each Component** 

### MEDIUM-DUTY BOX BEAM SHELVES

### SHELF CLIP



against side of posts to		shelves in nistogaur
required per shelf.	HOIC	Color
5135-3612 36" 12"	-	500 HG
5135-3618 36" 18" Fart No. 5135-3624 36" 24"	Ď	F <sup>00</sup> Stock Color 500 HG
5405 4040 40H 40H		07F UO
5133 -	-	- Plated
0100-4010 40 10	-	3/3 NG
5135-4824 48" 24"	-	350 HG

Part No.	W	D	Н	Stock Co	lor
5342-44	36"	-	-	HG PL	-
5342-55	42"/48"	-	-	HG PL	-

### **SIDE SWAY BRACES**

1" x 11 ga. steel strip with safety edges. One pair of braces are bolted together at the center to form an "X". Ends are rounded and pierced for attaching to front and rear posts in the side position. See technical data on page 42-43 for bracing information.



5344-15	_	15"	_		_	_
5344-18	*	18"	*	HG		
5344-24		24"		HG		
5344-30	-	30"	-	_		-
Part No. W	DΗ	ł Stock C	olor	5344-	12 -	- 12"
- HG						

5344-36 - 36" - -

### **T-POSTS**



Constructed by spot welding two back posts together. For use when adjoining models are added to form a continuous row. Multiple posts can be spliced for added height.

Part No. W D H Stock Color 5006-3 2-3/8" 2-5/16" 3'-3" - - - 5006-6 2-3/8" 2-5/16" 6'-3" - - - 5006-7 2-3/8" 2-5/16" 7'-3" HG - - 5006-10 2-3/8" 2-5/16" 10'-3" HG - - 5006-12 2-3/8" 2-5/16" 12'-3"









725 Dark Gray (HG) 711 LIGHT GRAY (PL) 707 Marine Blue (MB)

	HEAVY-DUTY BOX BEA	M	BACK PANELS 18 GAUGE
	Part No. W D F	I (	Two piece sections punched on 1" centers at vertical edges and center for mounting on back of posts and shelves in models up to
Color			48" wide.
	5138-3612 36" 12" -		Part No. W D H Stock Color
	5138-3615 36" 15" -		5110-3603-18 36" 3'-3" - PL -
	5138-3618 36" 18" -		5110-3607-18 36" 7'-3" - PL -
	5138-3624 36" 24" -		5110-4803-18 48" 3'-3" - PL -





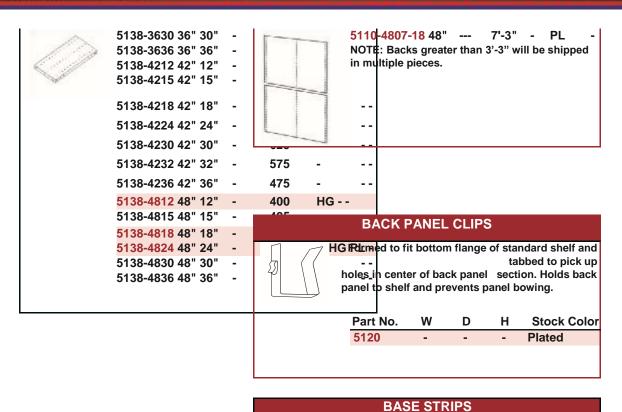

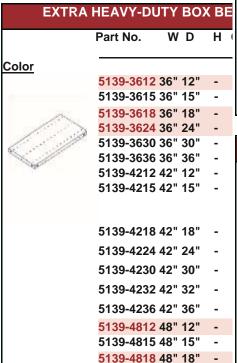

5139-4824 48" 24"

# Shaped to fit directly between bottom shelf and floor. 2-15/16" high giving an overall base height including bottom shelf of 3". Part No. W D H Stock Color 5233-36 36" - - HG - 5233-42 42" - - - - 5233-48 48" - HG - -

SIDE PANELS

Two piece panels are bolted to standard

Beaded, Angle and Tee Posts when solid sides are required.						
Part No.	W		D	Н	Stock Co	lor
5093-1203	-		12"	3'-3"	HG -	-
5093-1206		-	12"	6'-	HG -	-
				3"		
5093-1207		-	12"	7'-	HG -	-
				3"		
5093-1507		-	15"	7'-		-
				3"		
5093-1803		-	18"	3'-	HG -	-
				3"		



5139-4830 48" 30"	-
5139-4836 48" 36"	-

5093-1806	-	18"	6'- 3"	HG -	
5093-1807	-	18"	7'- 3"	HG -	-
5093-2403	-	24"	3'- 3"	HG -	-
5093-2406	-	24"	6'- 3"	HG -	-
5093-2407	-	24"	7'- 3"	HG -	-
5093-3007	-	30"	7'-3"		-
5093-3607	-	36"	7'-3"		-
	5093-1807 5093-2403 5093-2406 5093-2407 5093-3007	5093-1807 - 5093-2403 - 5093-2406 - 5093-2407 -	5093-1807 - 18" 5093-2403 - 24" 5093-2406 - 24" 5093-2407 - 24" 5093-3007 - 30"	5093-1807 - 18" 7'- 3" 5093-2403 - 24" 3'- 3" 5093-2406 - 24" 6'- 3" 5093-2407 - 24" 7'- 3" 5093-3007 - 30" 7'-3"	5093-1807 - 18" 7'- HG - 3" 5093-2403 - 24" 3'- HG - 3" 5093-2406 - 24" 6'- HG - 3" 5093-2407 - 24" 7'- HG - 3" 5093-3007 - 30" 7'-3"



### **BACK PANELS 24 GAUGE**

Two piece sections punched on 1" centers at vertical edges and center for mounting on back of posts and shelves in models up to 48" wide.

of posts and shelves in models up to 48" wide.								
Part No.	W	D	Н	Stock	Color			
5110-360	3 36"	-	3'-3"	HG -	-			
5110-	36"	-	6'-3"	HG -	-			
3606								
5110-	36"	-	7'-3"	HG -	-			
3607								
5110-	42"	-	3'-3"		-			
4203								
5110-	42"	-	6'-3"		-			
4206								
5110-	42"	-	7'-3"		-			
4207								
5110-	48"	-	3'-3"	HG -	-			
4803								
5110-	48"	-	6'-3"	HG -	-			
4806								
5110-	48"	-	7'-3"	HG -	-			
4807								
NOTE: Back multiple pied	-	han 3'-3	" will be	shipped ir	1			

**Red Part Number Denotes Stock Component** 

Quick-Ship Color Availability As Noted For



HER I FLED

HI-TECH™ SHELVING

### **SWINGING DOORS (WITH L**



Reinforced door / frame attac posts and opens quietly to a finished handle with built-in ç cylinder lock. Positive 3-poin clips (Part No. 5315) are requ on beaded front posts.

Part No.	W	D
5300-3684	1 36"	-

### **WELDED T-PANELS**

Sections consisting of beaded front post, back T-Post and onepiece side panel. For use when adjoining models are added to form a continuous shelving row. Factory welded.

Part No. W D H Stock Color

### **UNIVERSAL CLIP TO MOUNT**

Available in sets of 6. One s mount swinging doors to be posts.


Part No.	W	D
5315	-	-



### WELDED END PANELS

Sections consisting of beade back post and one-piece side individual models or starting models in a continuous shell welded.

Part No.	W	D	
5092-1203	W -	12"	3
5092-1206	W -	12"	E
5092-1207	W -	12"	7
5092-1208	W - 12	2" 8'-3"	
- 12" 10'-3'	' !	5092-15	07
-			
5092-1803			
5092-1806			
5092-1807	W -	18"	7
5092-1808	W - 18	8" 8'-3"	
- 18" 10'-3'	' !	5092-24	03
-			
5092-2406	W -	24"	E
5092-2407	W -	24"	7
5092-2408	W - 24	4" 8'-3"	
- 24" 10'-3'	' !	5092-30	07
-			
5092-3607	W -	36"	7



5094-1203W -	12"	3'-3"	-	-	-
5094-1206W -	12"	6'-3"	-	-	-
5094-1207W -	12"	7'-3"	-	-	-
5094-1208W - 1	2" 8'-3"	50	94-	1210	w
- 12" 10'-3"	5094-1	507W -	15"	7'-3'	' -
5094-1803W -	18"	3'-3"	-	-	-
5094-1806W -	18"	6'-3"	-	-	-
5094-1807W -	18"	7'-3"	-	-	-
5094-1808W - 1	8" 8'-3"	50	)94-	1810	w
- 18" 10'-3"	5094-2	403W -	24"	3'-3'	' -
5094-2406W -	24"	6'-3"	-	-	-
5094-2407W -	24"	7'-3"	-	-	-
5094-2408W - 2	4" 8'-3"	50	)94-	2410	W
- 24" 10'-3"	5094-3	007W -	30"	7'-3'	' -
5094-3607W -	36"	7'-3"	-	-	-

### **BIN FRONTS**

Offset type	with be	ad at top	and	triple flange at			
bottom to telescope over shelf flange.							
Part No.	W	D	Н	Stock Color			
E220 260	1 26"		4"				

5220-3601 36"	-	1"	-	-	-
5220-3603 36"	-	3"	-	-	-
5220-4203 42"	-	3"	-	-	-
5220-4803 48"	-	3"	-	-	-

### **PARTIAL DIVIDERS**

Offset type with bead at top and triple flange at bottom to telescope over shelf flange.

Part No.	W	D	Н	Stoc	k Co	olor
5250-1202	-	12"	2"	-	-	-
5250-1204	-	12"	4"	-	-	-
5250-1802	-	18"	2"	-	-	-
5250-1804	-	18"	4"	-	-	-

### LABEL HOLDERS

Pierced for attaching to front with top and bottom edges for accommodate labels approxi

Part No.	W	D
5370-3601	36"	-
-	- 53	370-4201 4
	-	-
5370-4801	48"	_

### **FULL DIVIDERS**

Front edge beaded. Top, bottom and rear are flanged. Part No. W D H Stock Color



5240-1206 -	12"	6"	HG -	-
5240-1209 -	12"	9"	HG -	-
5240-1212 -	12"	12"	HG -	-
5240-1806 -	18"	6"	HG -	-
5240-1809 -	18"	9"	HG -	-
5240-1812 -	18"	12"	HG -	-
5240-2406 -	24"	6"	HG PL	-
5240-2407.5 -	24"	7.5"	- PL	-
5240-2409 -	24"	9"	HG -	-





	5240-2410.5 5240-2412			







**Red Part Number Denotes Stock Component** 

**Quick-Ship Color Availability As Noted For Each Component** 





### **NYLON BUTTONS**



Available in sets of 6. One set required to mount swinging doors to beaded front posts.

Part No.	W	D	Н	Stoc	k Co	lo
5260	-	-	-	-	-	

### DOWN AISLE SUPPORTS FOR BEADED POSTS & H-POSTS



Part No.	W	D	Н	Stoc	k Co	loi
5905-36	35 3/4"	1-7/8"	4"	-	-	-
5905-48	47 3/4"	1-7/8"	4"	_	_	

### **H-POSTS**




Used for high-density shelving requirements. Used with standard Hi-Tech shelving components side sway braces (5341) .

Order H-Posts front and back. Minimum order 100 posts.

Part No.	VV	<u> </u>	<u> </u>	Stoci	<u>( Co</u>	<u>lor</u>
5003-7	1-1/2"	2-15/16"	7'-3"	-	-	MB
5003-8 1-	1/2" 2-	15/16" 8'-	3"	- 500	3-10	<b>)</b> 1-
1/2" 2-15/	16" 10	'-3" ME	3			
5003-12	1-1/2'	2-15/16"	12'-3	3" -	-	_

### **DOWN AISLE SUPPORT BRACKETS**



	COMBINAT	TION (	CLIPS		
e D e	Part No.	W	D	<u>H</u>	Stock Color
	5027				Plated

### **H-POST SPLICES**




Used to splice H-posts for added height requirements Part No. W D H Stock Color

5010 - - Plated

H-POST S BRACES	SIDE S	WAY			
Used with H-	Posts	only.		Stoc	<u>k</u>
Part No.	W	D	<u>H</u>	Colo	r
5341-12	-	12"	-	-	-
5341-15	-	15"	-	-	-

### **SIDE PANELS 24 GAUGE FOR H-POST**




Fabricated from 24 gauge cold rolled sheet steel, field bolted to front and back posts. Provide at all side locations for closed shelving sections. For heights greater than 3'-3", multiple sections will be provided to achieve height.


Part No.	W	D	Н	Sto	ck Co	olor
5091-1207		12"	7'-3"	-	-	-
5091-1507		15"	7'-3"	-	-	-
5091-1803		18"	3'-3"	-	-	-
5091-1806		18"	6'-3"	-	-	-
5091-1807		18"	7'-3"	-	-	-
5091-2403		24"	3'-3"	-	-	-
5091-2406		24"	6'-3"	-	-	-
5091-2407		24"	7'-3"	-	-	-
5091-3007		30"	7'-3"	-	-	-
5091-3607		36"	7'-3"	-	-	-

SIDE PANELS 18 GAUGE FOR H-POST





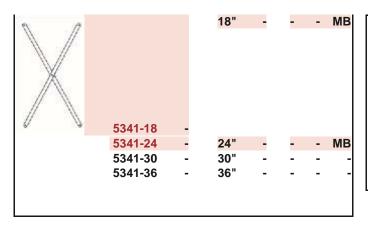

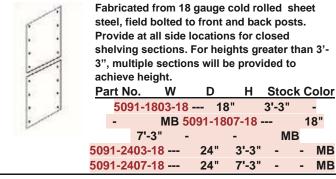


### **CROSS AISLE SUPPORTS FOR BEADED POSTS**

Part No.	W	D	Н	Sto	ck Co	lor
CAS-36	40"	1-7/8"	4"	-	-	-
CAS-48	52"	1-7/8"	4"	-	-	-

### **CROSS AISLE SUPPORTS FOR H-POSTS**

Part No.	W	D	<u>H</u>	Stoc	k Co	lor
5910-36	35 7/8"	1-7/8"	4"	-	-	-
5910-48	47 7/8"	1-7/8"	4"	-	-	-
	5910-36	5910-36 35 7/8"	5910-36 35 7/8" 1-7/8" 5910-48 47 7/8" 1-7/8"	5910-36 35 7/8" 1-7/8" 4"	5910-36 35 7/8" 1-7/8" 4" -	5910-36 35 7/8" 1-7/8" 4"

### **CROSS AISLE SUPPORT BRACKETS**



Part No.	W	D	Н	Sto	ck
5914	3 1/2"			3" <u>Co</u> l	or
				-	-

**Red Part Number Denotes Stock Component** 

**Quick-Ship Color Availability As Noted For Each Component** 

• •	Part No.	W	D	Н	Sto	ck C	oloi
	5114-39	2"		38-5/8'	' -	PL	
••	5114-42	2"		41-5/8	١ -	PL	
	5114-45	2"	_	44-5/5"		PL	
	5114-51	2"	_	50-5/8"	-	-	-
••	5114-63	2"		62-5/8'	٠ -	-	
	5114-75	2"		74-5/8	' -	-	







5115-39 3" ---- 38-5/8" - PL -5115-42 3" ---- 41-5/8" - PL -5115-45 3" ---- 44-5/5" - PL - 5115-51 3" ---- 50-5/8" - - -5115-63 3" ---- 62-5/8" - -

... 5115-75 3" ---- 74-5/8" -

### H-POST FOOT PLATE-MEDIUM/LIGHT DUTY

Part No. W D H Stock Color

5025 3-1/2" 2-1/4" 1/8" Plated

### FOOT PLATES FOR BEADED, ANGLE, AND T-POSTS



11 gauge with 14 gauge mounting bracket welded to top for bolting to post. Has 7/16" diameter. Hole for floor anchor bolts.

Part No. W D H Stock Color 5050 3-1/2" 2-1/4" 1/8" Plated


### SHIM PLATES-MEDIUM/LIGHT DUTY

Part No. W D H Color

5026 3-1/2" 2-1/4" 1/16" Plated

### FOOT PLATES FOR BEADED, ANGLE, AND T-POSTS

### **EXTRA HEAVY-DUTY**



Part No. W D H Stock Color 5033 5-1/2" 2-3/8" 1/16" Plated Mounting bracket welded to top for bolting inside

H-Posts.

Part No. W D H Stock Color 5015 4" 3-1/2 3/8" Plated

### H-POST SHIM PLATE

Fits under foot plate (Part no. 5015) for leveling.

Part No. W D H Stock Color

5016 4" 3-1/2 1/16" Plated

### COMPONENT SPECIFICATION

### **Beaded Front Posts:**

Fabricated from 14 gauge cold rolled steel and roll formed into an 11/16" wide x 2-9/16" deep tubular section. Rear flanges are welded on 6" centers to provide maximum strength. Sides of the post are punched 1-1/2" on center with 3/8" x 7/8" rectangular slots to receive shelf clip. Rear flanges of the post have holes punched on 3" centers for the attachment of side sway braces or field attached solid side panels. Provide (1) Beaded Front Post between each adjoining section and at row ends.

### Angle Back Posts:

Fabricated of 14 gauge cold rolled steel and roll formed into a modified unequal angle shape. The long leg shall have holes punched on 1-1/2" centers with 3/8" x 7/8" rectangular slots to receive shelf clip. The leading edge shall have holes punched on 3" centers for the attachment of side sway braces. The short leg shall have holes punched on 3" centers for the attachment of back sway braces or back panels. Provide (1) Angle Back Post at each row end for open-type shelving applications.

### T-Posts:

Shall be fabricated of two angle back posts. The posts are welded together backto-back to form a "T". Welds are on 6" centers for maximum strength. Posts are used for intermediate back post applications. Provide (1) T Post between each adjoining section for open-type shelving applications.

### Post Splice Channels:

(For Beaded Front Posts, Angle Posts, and T-Posts) Fabricated from 16 gauge cold rolled steel and formed into a 11/32" x 1-1/8" x 11/32" channel. 1-1/8" flange is punched with four holes for assembling to upper and lower posts. Provide at all post splices when additional height is required.

### H-Posts:

Fabricated from 14 gauge cold rolled steel and roll formed into an 1-1/2" wide x 2-15/16" deep tubular section. Rear flanges are welded on 6" centers to provide maximum strength. Sides of the post are punched 1-1/2" on center with 3/8" x 7/8" rectangular slots to receive shelf clip. Rear flanges of the post have holes punched on 3" centers for the attachment of side sway braces or field attached solid side panels. Post front is slotted on 3" centers for beam connection and combination clip attachment and is punched on 3" centers for field attached back connector strips. Provide (2) H-Posts between each adjoining section and at row ends.





### **H-Post Splice:**

Fabricated from two pieces of 16 gauge cold rolled steel formed into two special channel shapes that are spot welded together to form a 9-3/4" long connector.

Splice inserts into post and include 6 holes for bolting to posts.

### **Side Sway Braces:**

1" x 11 gauge cold rolled steel strip with safety edges to eliminate sharpness. The center of two identical pieces shall be punched to be bolted together forming an "X". Ends shall be rounded and punched for attaching to front and back posts. Provide between adjoining sections and at row ends for open-type shelving applications.

1" x 11 gauge cold rolled steel strip with safety edges to eliminate sharpness. The center of two identical pieces shall be punched to be bolted together forming an "X". Ends shall be rounded and punched for attaching to two back posts. Provide at back of all open-type shelving applications.

### **Back Panels:**

Fabricated from 24 gauge cold rolled sheet steel. The two outer edges and the center shall be punched with 5/16" diameter holes on 1" centers running vertically for assembling to back posts. The center row is used to attach to rear of shelf using Back Clips. Provide at back of closed-type shelving sections. For heights greater than 3'-3", multiple sections will be provided to achieve height.

(HG)





### **Red Part Number Denotes Stock Component**

Quick-Ship Color Availability As Noted For **Each Component** 

### Hi-Tech/H-Post Foot Plate Shim Medium/Light Duty #5026

3-1/2" x 2-1/4" x 16 gauge cold rolled sheet steel. Fabricated to fit under the foot plate. One end is embossed to fit into the embossment hole in the foot plate to keep them properly aligned. The other end shall have a 7/16" diameter hole to allow floor anchoring. Provide as required when shimming is required for a level installation.

### Hi-Tech Foot Plate Extra Heavy Duty #5032

5-1/2" x 2-3/8" x 7 gauge steel plate with angle bracket welded on top. The angle bracket is punched for fastening to front and back posts. The plate shall have a 7/16" diameter hole punched in both ends for floor anchoring. Provide as required for floor anchoring or when shimming is required for a level installation.

### Hi-Tech Foot Plate Shim Extra Heavy Duty #5033

5-1/2" x 2-3/8" x 16 gauge cold rolled sheet steel. Fabricated to fit under the Foot Plate. One end is embossed to fit into the embossment in the Foot Plate to keep them properly aligned. The other end shall have a 7/16" diameter hole to allow floor anchoring. Provide as required when shimming is required for a level installation.

### H-Post Foot Plates Medium/Light Duty #5025

3-1/2" x 2-1/4" x 11 gauge steel plate with U-bracket welded on top. The bracket is punched for fastening to H- posts. The plate shall have a 7/16" diameter hole punched on one end for floor anchoring and a 3/8" diameter hole on the other end for shim plate alignment. Provide as required for floor anchoring or when shimming is required for a level installation.

### H-Post Foot Plate Heavy Duty #5015

x 3-1/2" x 3/8" steel plate with U-bracket welded on top. The bracket is MARINE punched for fastening to H- posts. The plate shall have 7/16" diameter holes punched for floor. Provide as required for floor anchoring or when shimming is required for a level installation.

### Heavy Duty H-Post Foot Plate Shim #5016

4" x 3-1/2" x 16 gauge cold rolled sheet steel. Fabricated to fit under the foot plate. Shall have a 7/16" diameter holes to allow floor anchoring and one emboss for alignment. Provide as required when shimming is required for a level

### **Side Panels:**

Fabricated from 24 gauge cold rolled sheet steel, field bolted to front and back posts. Provide at all side locations for closed shelving sections. For heights greater than 3'-3", multiple sections will be provided to achieve height.

### **End Panels:**

Fabricated from 24 gauge cold rolled sheet steel, factory bolted to a Beaded Front Post and an Angle Back Post. Provide at row ends of closed-type shelving applications or where closed ends are desired on open-type shelving applications. For heights greater than 3'-3", multiple sections will be provided to achieve height.

### T-Panels:

Fabricated from 24 gauge cold rolled sheet steel factory bolted to a Beaded Front Post and two angle back Posts. Provide between sections of closedtype shelving applications. For heights greater than 3'-3", multiple sections will be provided to achieve height.

### Hi-Tech Foot Plate for Beaded, Angle and T-posts #5050

3-1/2" x 2-1/4" x 12 gauge steel plate with angle bracket welded on top. The angle bracket is punched for fastening to front and back posts. The plate shall have a 7/16" diameter hole punched on one end for floor anchoring and a 3/8" diameter hole on the other end for shim plate alignment. Provide as required for floor anchoring or when shimming is required for a level installation

### installation.

### **Shelves - Medium Duty:**

Formed with two ribs along the horizontal front and rear edge and are stamped on the top left corner for identification. Class 0 shelves are fabricated from cold rolled steel and have roll formed rectangular tubular shaped front and rear edges with return bends resistance welded to the under side of shelf. Welds are spaced 3" on center to provide maximum strength. Sides are triple flanged to form a channel. All four corners are lapped and resistance welded to provide a rigid corner and add extra strength to the shelf. Top surface shall be punched for attaching Shelf Dividers From left to right on 1-1/2" centers, front and back, for 36" wide x 12", 15", 18" and 24" deep shelves. All other sizes are punched on 3" centers. Front and rear surfaces are punched for attaching accessories. Tubular front edge is designed to protect against impact loads. Used for uniformly distributed loads up to 500 pounds.

### **Shelves - Heavy Duty:**

Formed with two ribs along the horizontal front and rear edge and are stamped on the top left corner for identification. Class 1 shelves are fabricated from heavy gauge cold rolled steel and have roll formed rectangular tubular shaped front and rear edges with return bends resistance welded to the under side of shelf. Welds are spaced 3" on center to provide maximum strength. Sides are triple flanged to form a channel. All four corners are lapped and resistance welded to provide a rigid corner and add extra strength to the shelf. Top surface shall be punched for attaching Shelf Dividers from left to right on 1-1/2" centers, front and back, for 36" wide x 12", 15", 18" and 24" deep shelves. All other sizes are punched on 3" centers. Front and rear surfaces are punched for attaching accessories. Tubular





front edge is designed to protect against impact loads. Used for uniformly distributed loads up to 800 pounds.

### **Shelves - Extra Heavy Duty:**

Formed with two ribs along the horizontal front and rear edge and are stamped on the top left corner for identification. Class 2 shelves are fabricated from extra heavy gauge cold rolled steel and have roll formed rectangular tubular shaped front and rear edges with return bends resistance welded to the under side of shelf. Welds are spaced 3" on center to provide maximum strength. Sides are triple flanged to form a channel. All four corners are lapped and resistance welded to provide a rigid corner and add extra strength to the shelf. Top surface shall be punched for attaching Shelf Dividers from left to right on 1-1/2" centers, front and back, for 36" wide x 12", 15", 18" and 24" deep shelves. All other sizes are punched on 3" centers. Front and rear surfaces are punched for attaching accessories. Tubular front edge is designed to protect against impact loads. Used for uniformly distributed loads up to 1,200 pounds.

### **Shelf Clips:**

Shall be a one piece compression clip drawn from 13 gauge cold rolled steel and zinc plated. Fits snugly against side of post to hold shelves in place. Provide four per shelf.

### **Base Strip:**

Made from 22 gauge cold rolled steel offset at top to fit behind the front flange of shelf. Punched for bolting to holes in the front flange of shelf. Bottom is flanged to resist bending.

### **Label Holders:**

Made from 22 gauge cold rolled steel. Punched on ends and center for attaching to the front edge of shelves with top and bottom edges folded over to accommodate labels approximately 1" high.

### **Bin Fronts**

Fabricated from 18 gauge cold rolled steel. The top edge is formed into a bead. The bottom shall be triple flanged to telescope over shelf flange and punched to provide a means of attaching to shelf.

### **Full Dividers**:

Fabricated from 24 gauge cold rolled steel. The front edge is beaded. Top and bottom shall be flanged and punched to provide a means of attaching to shelves. The back edge is flanged to provide rigidity. Dividers are installed using snap-in nylon fasteners.

### Partial Dividers

Fabricated from 22 gauge cold rolled steel. The top corners are rounded for increased safety. The bottom flange is punched to provide a means of attaching to shelf. Dividers are installed using snap-in nylon fasteners.

### **Swinging Doors:**

Fabricated from 20 gauge cold rolled steel with box flanges on all four edges.

Swinging doors shall be reinforced with a steel pan type panel inside the door. Doors are bolted to a welded door frame consisting of top and bottom channels and angles at the sides. The door frame side angles are punched on 1" centers for attachment. Universal Clips shall be supplied to attach door & frame assembly to the Beaded Front Posts. One chrome finished turn handle with built-in cylinder key lock shall be included providing three point positive locking.

### **Universal Clip:**

Fabricated from 16 gauge cold rolled steel formed into an angle with three slotted holes on one flange and one long slot in the other flange, which is also offset to fit in Beaded Front Post. Provide when Swinging Doors are required.





# MULTI-LEVEL HIGH-RISE SHELVING SYSTEMS

Complete high-rise modular systems make it easy to create that perfect shelving solution to maximize space in any facility.

# Shelving Supported Mezzanines (Deck-over shelving)



Save space by going up instead of out! Maximize your warehouse efficiency by using it's full capacity wall-to-wall and floor-to-ceiling. By using our Hi-Tech, Rivetwell, Bulk Rack and H-Post shelving Systems, we are able to double and or even triple your usable square footage instantly.

# Multi-level shelving (Cat Walk System)

Using pre-engineered components, we can create a customized multi-level shelving system to meet your specific needs at a fraction of the cost of constructing a conventional mezzanine.









### **Multiple Products for Multiple Applications**



- ✓ High Bay Storage Systems
- ✓ Shelving Supported Pick Modules
- Shelving Supported Catwalk Systems
- Safety Guard Rail Systems


Hi-Tech shelving is a complete shelving line with the strength needpartial ed to handle most industrial applications and versatility for today's multilevel modern facilities. Every shelving unit is designed and engineered to your system. meet the highest standards.


A full complement of accessories including full dividers, dividers, label holders, swinging doors, post splices for systems and foot plates are available to complete

### Hi Tech H-Post Shelving (Floor + 2 Catwalk System)





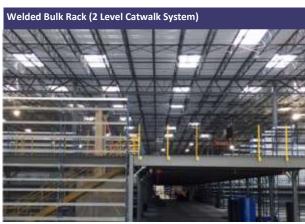

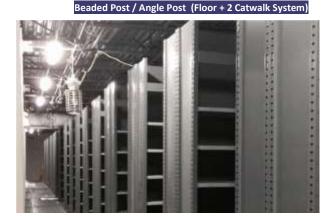

**Challenge Us To Meet Your Storage Goals!** 



**Efficient Cost Effective Designs...** 

**Experienced Sales Engineering Surveys...** 

Local Sales Support Across the Country... Stock Products in 6

**Distribution Centers Nationwide** 

Call 866-566-0500 or Email info@Hallowell-List.com




### HETECH & HEPOST

### LAYOUT AND GROWTH INFORMATION

### **SYSTEM LAYOUT INFORMATION**

### **Standard Shelving with Hi-Tech Shelves**

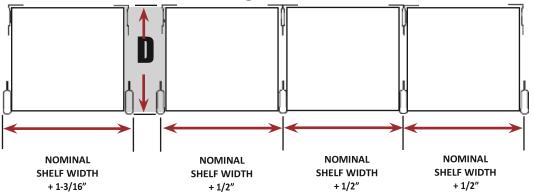

PLUS ADD 3/4" PER ROW


FOR "D" - SINGLE FACE ADD 3/16" TO NOMINAL SHELF DEPTH





### FOR "D" - DOUBLE FACE ADD 3/8" TO NOMINAL SHELF DEPTH

### **H-Post Shelving with Hi-Tech Shelves**

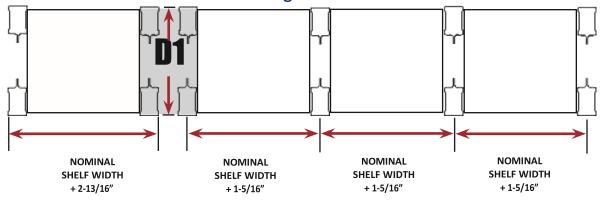

PLUS ADD 1-1/2" PER ROW

FOR "D1" - SINGLE FACE ADD 5/16" TO NOMINAL SHELF DEPTH

FOR "D1" - DOUBLE FACE CLOSED MODELS ADD 13/16" TO NOMINAL SHELF DEPTH

FOR "D1" - DOUBLE FACE OPEN MODELS ADD 29/32" TO NOMINAL SHELF DEPTH NOTE:

**ACTUAL SHELF WIDTH IS 5/16" UNDER NOMINAL NOTES:** 

- 1. Width of posts should be added to the nominal shelf width in any floor plan to determine the overall shelving width.
- 2. Check "D" and "D1" dimensions for depth/creepage.



(Part No. 5341–High-Density Shelving)




### HI-TECH & H-POST TECHNICAL DATA



Hallowell-List.com

### **UNIT LOAD CAPACITY INFORMATION - 1.92 SAFETY FACTOR**



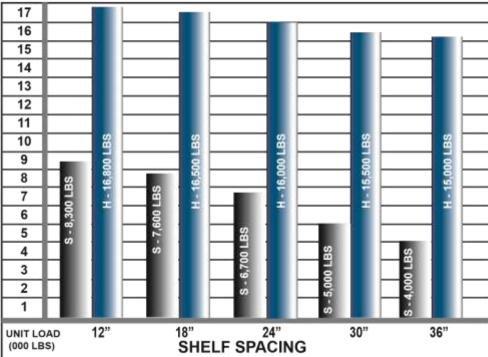

Before selecting type of post, consideration should be given to loads to be carried. Use the formula below to get unit load, then select post type from table.

(B-2) x A = Unit Load

A = Shelf Load (See note 2)

B = Shelves per unit (includes top and bottom shelves)

### WARNING:


Use H-Posts for:


- High-rise applications
- Pass-through applications regardless of load
- High-density, multi-level applications



### TYPICAL SWAY BRACE INSTALLATIONS FOR SEISMIC ZONE NO. 0 & 1

Standard Shelving (Beaded Front Posts) High-Density Shelving (H-Posts)







Use of Side Sway Braces

Use of Back Sway Braces (Part No. 5342) for

NOTES: 1-When splicing posts faping reased heights or for shulting yel shelving, use the proper number of braces required for the height of the posts being added.



Example: a 10'-3" model increased another 10'-3" in height would require 4 sets of side sway braces and 4 sets of back braces. 2-For additional bracing requirements in Seismic Zones No. 2, 3 and 4, consult the Hallowell Applications Engineering Department.



# STOCK COLORS




3 shelf levels per unit adjust on 3" centers



Welded uprights consist of 14 gauge channel bracing welded to H-Post vertical members



14 gauge steel step beams with 10 gauge brackets



14 gauge front-to-back formed angle bracing supports





Choice of optional particle board, waterfall wire and steel shelf decking

















w	D	*Capacity	Starter	87" High	123" High
VV		Сараспу	Adder	Cat. No.	Cat. No.
48	24	3,800	Starter	HBR482487-3S	HBR4824123-3S
48	24	3,800	Adder	HBR482487-3A	HBR4824123-3A
48	36	3,800	Starter	HBR483687-3S	HBR4836123-3S
48	36	3,800	Adder	HBR483687-3A	HBR4836123-3A
48	48	3,800	Starter	HBR484887-3S	HBR4848123-3S
48	48	3,800	Adder	HBR484887-3A	HBR4848123-3A
60	24	3,500	Starter	HBR602487-3S	HBR6024123-3S
60	24	3,500	Adder	HBR602487-3A	HBR6024123-3A
60	36	3,500	Starter	HBR603687-3S	HBR6036123-3S
60	36	3,500	Adder	HBR603687-3A	HBR6036123-3A
60	48	3,500	Starter	HBR604887-3S	HBR6048123-3S
60	48	3,500	Adder	HBR604887-3A	HBR6048123-3A
72	24	3,500	Starter	HBR722487-3S	HBR7224123-3S
72	24	3,500	Adder	HBR722487-3A	HBR7224123-3A
72	36	3,500	Starter	HBR723687-3S	HBR7236123-3S
72	36	3,500	Adder	HBR723687-3A	HBR7236123-3A
72	48	3,500	Starter	HBR724887-3S	HBR7248123-3S
72	48	3,500	Adder	HBR724887-3A	HBR7248123-3A
96	24	3,000	Starter	HBR962487-3S	HBR9624123-3S
96	24	3,000	Adder	HBR962487-3A	HBR9624123-3A
96	36	3,000	Starter	HBR963687-3S	HBR9636123-3S
96	36	3,000	Adder	HBR963687-3A	HBR9636123-3A
96	48	3,000	Starter	HBR964887-3S	HBR9648123-3S
96	48	3,000	Adder	HBR964887-3A	HBR9648123-3A
EXTRA					
LEVELS					
48	24	3,800	Level	HBRL4824	
48	36	3,800	Level	HBRL4836	
40	40	0.000		UDDI 4040	
48	48	3,800	Level	HBRL4848	
60	24	3,500	Level	HBRL6024	
	24	3,300	LCVCI	TIBINE0024	
60	36	3,500	Level	HBRL6036	
	00	0,000	2010.	1151(2000)	
60	48	3,500	Level	HBRL6048	
		,,,,,,,			
72	24	3,500	Level	HBRL7224	
72	36	3,500	Level	HBRL7236	
72	48	3,500	Level	HBRL7248	
96	24	3,000	Level	HBRL9624	
96	36	3,000	Level	HBRL9636	



96 48 3,000 Level HBRL9648

### \* Capacity is beam pair capacity and is based on a uniformly distributed load. Includes a 1.65 safety factor

### **UNIT COMPONENTS:**

Starter units include 2 upright frames; add-on units include 1 upright frame.

Units with steel deck, wire deck and no deck include 1 front to back support for 48" and 60" wide and 2 for 72" and 96" wide.

Units with particle board deck include 2 front to back supports for 48" and 60" wide and 3 for 72" wide and 4 for 96" wide.







BEAMS & STEEL DECKING

711 LIGHT GRAY (PL) POSTS & UPRIGHTS

707 MARINE BLUE (MB)









Bulk Rack	Catalog	w	D	н	Stock
Components	No.	VV			Color
BULK RACK WELDED UPR	IGHTS				
	5031-2407		24"	87"	MB
	5031-3007		30"	87"	
	5031-3607		36"	87"	МВ
	5031-4207		42"	87"	
	5031-4807		48"	87"	MB
	5031-2408		24"	99"	
	5031-3008		30"	99"	
	5031-3608		36"	99"	
	5031-4208		42"	99"	
	5031-4808		48"	99"	
	5031-2410		24"	123"	MB
	5031-3010		30"	123"	
	5031-3610		36"	123"	MB
	5031-4210		42"	123"	
	5031-4810		48"	123"	MB
	5031-2412		24"	147"	
	5031-3012		30"	147"	
	5031-3612		36"	147"	



5031-4212 ---- 42" 147"



	5031-4812		48"	147"			
BULK RACK BEAMS							
	5029-48	48"		3-1/2"	PL		
	5029-60	60"		3-1/2"	PL		
	5029-72	72"		3-1/2"	PL		
Contract of the Contract of th	5029-84	84"		3-1/2"			
	5029-96	96"		3-1/2"	PL		
BULK RACK FRONT TO BACK SUPPORTS							
	5030-24	1"	24"	1"	PL		
	5030-30	1"	30"	1"			
	5030-36	1"	36"	1"	PL		
	5030-42	1"	42"	1"			
	5030-48	1"	48"	1"	PL		



\* Capacity is based on a uniformly distributed load



and includes a 1.65 safety factor

4-AXLE
UNIT ADJUST ON 3" CENTERS

- $\bullet \text{Axle position adjusts in 3" increments to accommodate a variety of spool diameters on the same rack } \\$
- Steel frame construction is designed to support 2,000-lbs per axle evenly distributed

Catalog No.	w	D	*Capacity	
PARTICLE BO	ARD DE	CKIN	G	i
HPB4824	48"	24"	530	٦
HPB4830	48"	30"	440	
HPB4836	48"	36"	400	١
HPB4842	48"	42"	300	ı
HPB4848	48"	48"	275	ı
HPB6024	60"	24"	615	ı
HPB6030	60"	30"	520	ı
HPB6036	60"	36"	380	ı
HPB6042	60"	42"	305	ı
HPB6048	60"	48"	230	
HPB7224	72"	24"	770	١
HPB7230	72"	30"	680	ı
HPB7236	72"	36"	655	ı
HPB7242	72"	42"	670	ı
HPB7248	72"	48"	685	
HPB9624	96"	24"	1,200	ı
HPB9630	96"	30"	1,180	ı
HPB9636	96"	36"	1,150	ı
HPB9642	96"	42"	1,110	ı
HPB9648	96"	48"	960	4
WATERFALL				
HWDW3024	30"	24"	605	ı
HWDW3030	30"		30"	ı
455 F 36"	WDW3		30" W3042	ı
30"	450 42"		300	ı
30 HWDW3048	30"	48"	300	ı
HWDW3624	36"		24"	ı
	IWDW3		36"	ı
30"			W3636	١
36"	36"		455	
HWDW3642 300	36"		42"	
HWDW3648	36"	48"	300	
HWDW4824	48"	24"	605	1
HWDW4830	48"		30"	1

30	70,	3 11110	113030	
36"	36'	" .	455	
HWDW3642	36'	" ,	42"	
300				
HWDW3648	36"	48"	300	
HWDW4824	48"	24"	605	
HWDW4830	48'	" ;	30"	
455 H	WDW4	836	48"	
36"	45	5 HWD\	N4842	
48"	42'	" ;	300	
HWDW4848	48"	48"	300	
- For 60" wide, us	se 2 30" w	ide per le	evel.	
- For 72" wide, us	se 2 36" w	ide per le	evel.	
- For 96" wide, us	se 2 48" w	ide per le	evel.	
- For 96" wide, us			evel.	
			605	
STEEL SHELF	DECK	ING		
STEEL SHELF HSSD4824	DECK 48"	ING 24"	605	
STEEL SHELF HSSD4824 HSSD4830	48" 48"	24" 30"	605 455	
STEEL SHELF HSSD4824 HSSD4830 HSSD4836	48" 48" 48" 48"	24" 30" 36"	605 455 455	
STEEL SHELF HSSD4824 HSSD4830 HSSD4836 HSSD4842	48" 48" 48" 48" 48"	24" 30" 36" 42"	605 455 455 305	
STEEL SHELF HSSD4824 HSSD4830 HSSD4836 HSSD4842 HSSD4848	48" 48" 48" 48" 48" 48"	24" 30" 36" 42" 48"	605 455 455 305 305	
STEEL SHELF HSSD4824 HSSD4830 HSSD4836 HSSD4842 HSSD4848 HSSD6024	48" 48" 48" 48" 48" 48" 60"	24" 30" 36" 42" 48" 24"	605 455 455 305 305 1210	
STEEL SHELF HSSD4824 HSSD4830 HSSD4836 HSSD4842 HSSD4848 HSSD6024 HSSD6030	48" 48" 48" 48" 48" 60" 60"	24" 30" 36" 42" 48" 24" 30"	605 455 455 305 305 1210 910	
STEEL SHELF HSSD4824 HSSD4830 HSSD4836 HSSD4842 HSSD4848 HSSD6024 HSSD6030 HSSD6036	48" 48" 48" 48" 48" 60" 60"	24" 30" 36" 42" 48" 24" 30" 36"	605 455 455 305 305 1210 910 910	
STEEL SHELF HSSD4824 HSSD4830 HSSD4836 HSSD4842 HSSD4848 HSSD6024 HSSD6030 HSSD6036 HSSD6042	48" 48" 48" 48" 48" 60" 60" 60"	24" 30" 36" 42" 48" 24" 30" 36" 42"	605 455 455 305 305 1210 910 910 610	

36"

42"

48"

24"

30"

36"

42"

48"

910

610

610

1210

910

910

610

610

72"

72"

72"

96"

96"

96"

96"

96"

HSSD7236

HSSD7242

HSSD7248

HSSD9624

HSSD9630

HSSD9636

HSSD9642

HSSD9648








With Hallowell's H-Post as the vertical members of this unique storage rack, our Reel Storage Rack provides the strength and adjustability to store and dispense a wide variety of cable, rope and wire or any other spooled material.











**HEAVY-DUTY AXLE SUPPORTS** 



Bracket  48" 36" 99" (3) 2-3/8" O.D. Axles, 3 Pairs Ax Bracket  36" 36" 123" (4) 2-3/8" O.D. Axles, 4 Pairs Ax Bracket  48" 36" 123" (4) 2-3/8" O.D. Axles, 4 Pairs Ax	W	D	н	Includes
Bracket  48" 36" 99" (3) 2-3/8" O.D. Axles, 3 Pairs Ax Bracket  36" 36" 123" (4) 2-3/8" O.D. Axles, 4 Pairs Ax Bracket  48" 36" 123" (4) 2-3/8" O.D. Axles, 4 Pairs Ax		STORA	GE	
Bracket  36" 36" 123" (4) 2-3/8" O.D. Axles, 4 Pairs Ax Bracket  48" 36" 123" (4) 2-3/8" O.D. Axles, 4 Pairs Ax	36"	36"	99"	(3) 2-3/8" O.D. Axles, 3 Pairs Ax Bracket
Bracket 48" 36" 123" (4) 2-3/8" O.D. Axles, 4 Pairs Ax	48"	36"	99"	(3) 2-3/8" O.D. Axles, 3 Pairs Axl Bracket
( ,	36"	36"	123"	(4) 2-3/8" O.D. Axles, 4 Pairs Ax Bracket
5.donot	48"	36"	123"	(4) 2-3/8" O.D. Axles, 4 Pairs Ax Bracket



**Starter Unit:** Consists of 4 H-posts 2 base channels, 3 stabilizing beams, 2 sets of sway braces/gussets and the applicable number of axles and axle bracket pairs.

**Adder Unit:** Consists of 2 H-posts, 1 base channels, 3 stabilizing beams, 1 set of sway braces/gussets and the applicable number of axles and axle bracket pairs.







# BHY<sup>ING</sup> Shel

Hallowell bin shelving is a great way to organize and manage your parts department. Easily configurable with your favorite bin size, color and style. Each shelving unit is complete with (4) posts, shelves, side and back sway bracing and hardware for easy assembly.

- Shelves adjust in 1" increments
- Many shelf combinations available - see chart below
- Easy assembly
- Sway Braces for added stability
- Durable powder coat finish
- Nut & bolt assembly

#### **FEATURES:**

Angle Post (Standard-Duty): 1-1/8" x 1-5/8", 16 gauge cold rolled steel corner post uprights, 4 per unit. Shelves:

22 gauge cold rolled steel,Triple flanged, adjust 1" on center. **Sway** 


Braces:

1" wide 14 ga. Steel braces are bolted together at center to form an "X". Ends are rounded and pierced for mounting to

5 SHELF

rear and side posts.



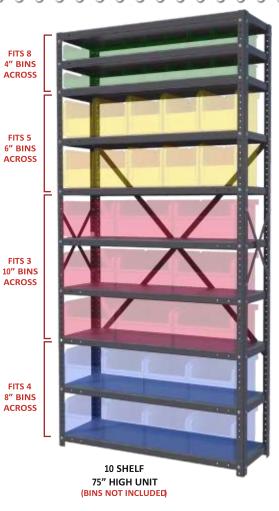

39" HIGH UNIT







(BINS NOT INCLUDED)

#### \*PLASTIC BINS NOT INCLUDED

\*RECOMMENDED \*RECOMMENDED

WIDTH DEPTH HEIGHT NUMBER OF CATALOG LOAD COLOR BIN WIDTH BIN HEIGHT NO.



				SHELVES		CAPACITY		QTY. PE	R SHI	ELF RANGE	
				·				4" 6"	8" 10	0"	
39 INC	H HIG	H UNI	TS								
	36 39 12 36 39 36 39 18 36 39		12 36 39 12 18 36 39 18	4 5 6	HUBS629-4 HUBS629-5 HUBS629-6 HUBS689-4 HUBS689-5 HUBS689-6	400 lbs 400 lbs 400 lbs 400 lbs 400 lbs 400 lbs	UG UG UG UG	8 5 8 5 8 5 8 5 8 5 8 5	4 3	4"- 5" 3 7"- 8" 5"- 6"	
200		40	75		LIUDOCOE C			_			
36 6 6	3 3 3	12 12 12 12 12	75 75 75 75 75 75	6 7 8 10 13	HUBS625-6 HUBS625-7 HUBS625-8 HUBS625-10 HUBS625-13	400 lbs 400 lbs 400 lbs	UG UG UG	8 5 8 5 8 5	4 3 4 3 4 3		
6	3	40	75		LIUDOCCE C	400 lbs 400 lbs	UG UG	8 5 8 5	4 :	5 7/8"- 6" 3 3"- 4"	
6	3	18 18 18 18	75 75 75 75	6 7 8 10	HUBS685-6 HUBS685-7 HUBS685-8 HUBS685-10	400 lbs 400 lbs 400 lbs 400 lbs	UG UG UG UG	8 5 8 5 8 5 8 5	4 3 4 3	3 10"-11" 3 8"- 9" 3 7"- 8"	
6	3	18	75	13	HUBS685-13	400 lbs	UG	8 <sup>5</sup>	4 ;	3 5 7/8"- 6" 3"-4"	
6	3										





## THE PERFECT TRAFFIC SOLUTION SECURITY • TRAFFIC CONTROL • PORTABILITY

- In Stock for shipment within 5 days of receipt of order
- Quick and easy installation. Install between two walls instantly without anchors to walls or floor
- Simplified, patented pressure lock system
- Floor anchors are not required but are available for special installations
- Compact, fold-up size and heavy duty swivel casters make moving and storage easy
- Plated finish
- Padlock hasp is standard
- Cylinder locks are available for additional security
- •Two or more gates can be joined together for large expanse

#### Here's how the exclusive Superior® Pressure Lock System works:

- 1. Raise unit retainer channel to vertical position and secure
- 2. Extend gate until rubber bumpers touch both walls
- 3. Lower the male lock channel (with pin) until it rests on carriage channels within guides and locking bracket.
- 4. Lower female lock channel (with adjustment holes) until it rests within the male lock channel with pin. Pin need not engage a hole in female lock channel.
- 5. Raise both channels until pin engages the hole immediately to the right. Applying moderate pressure, push both channels down until they rest within guides and locking bracket. Lock in position.

# Superior° Portable Gates are ideal for: Schools Shopping Malls Recreation Centers Factories Libraries Hospitals Office Buildings Financial Institutions Theaters Museums





#### Five sizes to accommodate 3'-6" wide to 18'-0" wide conditions.

Connect multiple gates together for wider applications.

Model	For Openings Collapsed Size		Height	Weight (lbs)
P601-06	3'-6" to 6'-0"	19" x 30"	6'-6-1/2"	193
P601-09	6'-0" to 9'-0"	19" x 30"	6'-6-1/2"	197
P601-12	7'-0" to 12'-0"	24" x 30"	6'-6-1/2"	254
P601-15	11'-0" to 15'-0"	30" x 30"	6'-6-1/2"	311
P601-18	13'-0" to 18'-0"	30" x 30"	6'-6-1/2"	374
PG-CL	Cylinder Locks			
PG-FAA	Floor Anchors			
PG-A	Additional Anchors			







#### **GUARDRAIL**






Hallowell guardrail is designed, engineered, and manufactured to the highest industry standards, using heavy gauge steel, and a unique integrated fastening system. This integrated system incorporates the fastening hardware as part of the column design so there will be no "stripped" out connections. A properly installed and anchored guardrail system is designed to safeguard people, property and facility assets from accidents involving material handling equipment.



Steel post cap snaps on providing a durable finished installation

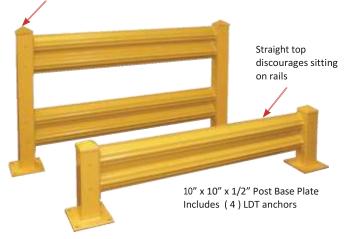

Each Hallowell Guardrail system is designed for your specific safety application. It is recommended to use 18" high for impact protection of facility assets including office in-plants, conveyor systems, mezzanines, shelving and racking systems. The use of the 42" double rail system is recommended when protecting and separating pedestrians and personnel from your material handling equipment. These areas include walkways, bathrooms, entry and exit points, electrical panels, break areas, and exposed

Guardrail components have an industry approved, safety-yellow powder-coated finish. All guardrail sections are shipped with the required fasteners and other necessary hardware to properly





Grade 5 hex nuts are welded inside posts providing maximum bolt grip for superior installation

work stations. install and anchor into your

concrete floor.





Lift-out rail adapter allows for access when needed



SAFETY YELLOW


\* Required to install /anchor posts

#### **HALLOWELL POST PROTECTORS**

Designed to protect your investment, Hallowell Post Protectors are fabricated of extra heavy-duty steel and are available in three heights to meet your specific requirements. Anchor plates are 1/4" steel that is welded to 3/8" formed steel uprights and finished in a bright safety-yellow powder coat.

#### **AVAILABLE IN THREE HEIGHTS.**

Description Height	Catalog	, No.
Post Protector	12"	PP070712SY
	18"	PP070718SY
Post Protector	24"	PP070724SY





7" x 7" x 1/4" Base Plate with the industry's widest throat increasing space between rack post and protector allowing protector to absorb impact without hitting the

Description	Nom. Length	Height	Weight	Catalog Number
	(Ft.)	(in.)	(Lbs.)	
Rail	3'		22	GR-03
Rail	4'		26	GR-04
Rail	5'		35	GR-05
Rail	6'		41	GR-06
Rail	7'		46	GR-07
Rail	8'		53	GR-08
Rail	9'		60	GR-09
Rail	10'		65	GR-10
Post		18"	33	GRPA18-1
Post		42"	51	GRPA42-2
Lift-out rail Ada			12	LOA
45 Degree Angl	e Bracket		6	45-BRACKET
*Drill Bit	-	-	0.1	17mm-Drill-Bit



# SPACE SAVING CABINETS







#### **Features:**

- All components precision engineered with no bolt heads showing on front and side panels.
- Storage 3 adjustable full-width shelves
   2 shelves in 42" high
- 2-1/2" 5-knuckle hinges
- 22-ga. Steel Construction
- Double door design, Single Door for 18" wide
- Flush mounted, recessed, squeeze latch handle
- Includes lock with 2 keys
- 16-ga. Frame





- Shelf capacity up to 150 lbs
- Shelves adjust on 2" centers
- Durable Powder-coated finish

Description	Width	Depth	Height	Knock-Down Cat No.	Assembl ed Cat No.	Color Selecti on
SLIMLINE SOLID DO	OR CABINETS					
Slimline, Storage	18	18	66	610S181866	610S181866 A	HG,PL,ME
Slimline, Storage	24	18	66	610S241866	610S241866 A	HG,PL,ME
Slimline, Storage	30	15	66	610S301566	610S301566 A	HG,PL,ME



725
DARK GRAY
(HG)

711	
LIGHT GRA	Ŋ
(PL)	

708 Black (ME)









#### COMMERCIAL KD CABINETS Features:

- All components precision engineered with no bolt heads showing on front and side panels
- Body and shelves fabricated from 22 gauge steel
- Shelves easily adjust up or down in 2" increments Triple flanged shelf front for added strength (capacity up to 200 lbs)
- Reinforced doors swing a full 180°
- Doors are factory-hung in 16 gauge frames ensuring proper performance

#### **Configurations:**

- Storage (includes 4 adjustable shelves
- Wardrobe (includes 1 shelf and coat rod
- Combination (includes 1 full width shelf,

3 half width shelves and a half width coat rod

- •16 gauge continuous hinges
- Corner foot gussets provide added rigidity and stability (replaced by mounting plates on mobile units)
- Positive three-point locking (top, center and bottom) for secure locking
- Plated locking handle has built-in cylinder key lock (keys included)
- Mobile units include four heavy-duty locking swivel casters.

24" Deep Storage Cabinets are available in stationary and mobile versions.

#### **Door Options:**

- Solid
- Safety-View (includes polycarbonate panels in door)











**BLACK** 

#### DARK GRAY SAFETY-VIEW DOORS









729 TAN (PT)

#### **FUNCTIONAL • DURABLE • ADAPTABLE**







**MOBILE STORAGE** 

STATIONARY WARDROBE

STATIONARY COMBINATION

Description Width Depth Height Knock-Down Assembled Colors Cat No. Cat No. Standard Finish





SOLID DOOR CABINETS,	400 SEI	RIES				
Stationary, Storage	36	18	72	415S18	415S18A	ME, HG, PT
Stationary, Storage	36	24	72	415S24	415S24A	ME, HG, PT
Stationary, Storage	48	18	72	425S18	425S18A	ME, HG
Stationary, Storage	48	24	72	425S24	425S24A	ME, HG, PT
Stationary, Wardrobe	36	18	72	435W18	435W18A	ME, HG, PT
Stationary, Wardrobe	36	24	72	435W24	435W24A	ME, HG, PT
Stationary, Wardrobe	48	18	72	445W18	445W18A	ME, HG
Stationary, Wardrobe	48	24	72	445W24	445W24A	ME, HG, PT
Stationary, Combination	36	18	72	455C18	455C18A	ME, HG, PT
Stationary, Combination	36	24	72	455C24	455C24A	ME, HG, PT
Stationary, Combination	48	18	72	465C18	465C18A	ME, HG
Stationary, Combination	48	24	72	465C24	465C24A	ME, HG, PT
Mobile, Storage	36	24	72	415S24M	415S24MA	ME, HG, PT
Mobile, Storage	48	24	72	425S24M	425S24MA	ME, HG, PT
SAFETY VIEW DOOR CAE	BINETS,	400 SERIE	S			
Stationary, Storage	36	18	72	415S18SV	415S18SVA	ME, HG
Stationary, Storage	36	24	72	415S24SV	415S24SVA	ME
Stationary, Wardrobe	36	18	72	435W18SV	435W18SVA	ME, HG
Stationary, Wardrobe	36	24	72	435W24SV	435W24SVA	ME
Stationary, Combination	36	18	72	455C18SV	455C18SVA	ME, HG
Stationary, Combination	36	24	72	455C24SV	455C24SVA	ME
Mobile, Storage	36	24	72	415S24SVM	415S24SVMA	ME







#### INDUSTRIAL KD CABINETS



Provides maximum protection to tools, dies, delicate instruments, supplies, and personal belongings. Neat and attractive in appearance. Designed to meet government requirements.

#### Features:

- All components precision engineered with no bolt heads showing on front and side panels.
- 20 gauge body and 22 gauge shelves provide strength and durability.
- Shelves easily adjust up or down in 2" increments. Triple flanged shelf front for added strength (capacity up to 250 lbs).
- Reinforced doors swing a full 180°.
- Doors are factory-hung in 16 gauge frames ensuring proper performance.

#### Configurations:

- Storage (includes 4 adjustable shelves)
- · Wardrobe (includes 1 shelf and coat rod)
- Combination (includes 1 full width shelf, 3 half width shelves and a half width coat rod)

- . 16 gauge continuous hinges.
- Corner foot gussets provide added rigidity and stability (replaced by mounting plates on mobile units).
- Positive three-point locking (top, center and bottom) for secure locking.
- Plated locking handle has built-in cylinder key lock (keys included).
- Mobile units include four heavy-duty locking swivel casters.

24" Deep Storage Cabinets are available in stationary and mobile versions.









STOCK COLORS



729 TAN (PT) 725 Dark Gray Ingi



Order your cabinets in our specially formulated Light Gray Antimicrobial powder coat finish that protects against bacteria, mold & yeast for up to 20 years!

ANTIMICROBIAL





STEEL CABINETS











STATIONARY WARDROBE





Description	Width	Dept	h Height	Knock-Down Cat No.	Assembled Cat No.	Colors Standard Finish	Light Gray Antimicrobal Finish
SOLID DOOR CABINETS	, 800 SERI	IES		_	_	_	
Stationary, Storage	36	18	78	815S18	815S18A	ME, PT, HG	PL-AM
Stationary, Storage	36	24	78	815S24	815S24A	ME, PT, HG	
Stationary, Storage	48	18	78	825S18	825S18A	ME	
Stationary, Storage	48	24	78	825S24	825S24A	ME, PT	
Stationary, Wardrobe	36	18	78	835W18	835W18A	ME, PT, HG	PL-AM
Stationary, Wardrobe	36	24	78	835W24	835W24A	ME, PT, HG	
Stationary, Wardrobe	48	18	78	845W18	845W18A	ME	
Stationary, Wardrobe	48	24	78	845W24	845W24A	ME, PT	
Stationary, Combination	36	18	78	855C18	855C18A	ME, PT, HG	PL-AM
Stationary, Combination	36	24	78	855C24	855C24A	ME, PT, HG	
Stationary, Combination	48	18	78	865C18	865C18A	ME	
Stationary, Combination	48	24	78	865C24	865C24A	ME, PT	
Mobile, Storage	36	24	78	815S24M	815S24MA	ME, PT, HG	
Mobile, Storage	48	24	78	825S24M	825S24MA	ME, PT	







# Classic and Galvanite Series All-Welded Cabinets



**Safety-View Door Cabinet** 



**Ventilated Cabinet** 



**Solid Cabinet** 















#### **DURATOUGH™ CABINETS**

Classic Series cabinets are fabricated from prime grade cold rolled sheet steel.



Galvanite Series cabinets are fabricated from galvannealed sheet steel which has a zinc-iron alloy coating that is applied at the mill providing protection against high-humidity and moist environments. This coating also prevents corrosion from spreading when the paint and/or coating Storage Cabinet is scratched away.

Heavy-Duty cabinets are fabricated from 16 gauge sheet steel and are fullywelded creating a rigid, durable unit.

Extra Heavy-Duty cabinets are fabricated from 14 gauge steel which is 25% thicker than 16 gauge providing MAXIMUM durability.

Safety-View® Series cabinets incorporate polycarbonate panels in both doors of our extra heavy-duty Classic Series cabinets allowing contents to be visible without compromising security.

Ventilated Series cabinets are fabricated to the same rugged standards as our extra heavy-duty Classic Series cabinets with the added benefit of being fully ventilated with diamond perforated doors and sides and a 13 gauge flattened expanded metal back.




**Combination Cabinet** 



18-gauge full-height handle with provides maximum



Heavy-Duty 3/16" thick door stiffener



steel



1/8" thick latch and 3/8" diameter lock rods

insure maximum security rigidity to both doors padlock hasp.





### STANDARD FEATURES FOR ALL DURATOUGH™ CLASSIC AND GALVANITE™ SERIES CABINETS

- All-welded construction
- Double door design
- Solid doors are reinforced with an 18 gauge full-height door stiffener providing a rigid torque-free door.
- 3-point turn handle locking using 3/8" diameter locking rods operated by a 3/16" gauge steel handle. Handle is painted to match cabinet.
- Heavy-duty 13 gauge 7-knuckle 3-1/2" butt hinges welded to door and securely riveted to frame.
- Solid sides are formed to be integral with vertical door frame. - Top is formed to be integral with horizontal top door frame.
- Bottom is formed to be integral with horizontal bottom door frame and includes double return bends at all four sides maximizing unit rigidity.

DURATOUGH™ CABINET LEG KITS					
Catalog Number	Туре	Width (In)	Depth (In)	Height (In)	Legs Per Kit
HWC4LK-1G-HG	Leg Kit	4	21	4	2
HWC4LK-4G-HG	Leg Kit	4	24	4	2



- Back is welded to cabinet top, bottom and sides
- Shelves are formed to provide maximum capacity and are adjustable on 3" centers. Shelves bolt to shelf support channels which are welded to sides.
- 78" high storage cabinets include 4-adjustable shelves
- 60" high storage cabinets include 3-adjustable shelves
- 42" high storage cabinets include 2-adjustable shelves



- 78" high combination cabinets include one full-width upper shelf, a center partition, 3 partial-width shelves and one partialwidth coat rod
- Optional leg kits are available and can be bolted on to all DuraTough cabinets.
- •Color: 738 Charcoal

FKSCD36-2CL	2 Drawer	36	24	7.5
FKSCD48-2CL	2 Drawer	48	24	7.5
FKSCD36-3CL	3 Drawer	36	24	5
FKSCD48-3CL	3 D	rawer	48	24
5				
Note: Drawer units	should always be	installed in	nto the lower por	tion of

Note: Drawer units should always be installed into the lower portion o the cabinets to insure stability when opening the drawers. Only one drawer should be opened at a time.





DURATOUGH'	™ CABIN	IET DRAW	VERS	
Catalog Number	Туре	Width (In)	Depth (In)	Drawer Height







DUI	RATOUGH™	CLASSI	C SE	RIES	
Catalog Number	Type \ ShelvesNo. of	Vidth (In)[	Depth	(In)Heig	jht
(In)					
HEAVY-DUTY-16					
HW6SC6142-2	Storage	36	21	42	2
HW6SC6160-3	Storage	36	21	60	3
HW6SC6178-4	Storage	36	21	78	4
HW6SC6478-4	Storage	36	24	78	4
HW6SC8460-3	Storage	48	24	60	3
HW6SC8478-4	Storage	48	24	78	4
HW6SC0478-4	Storage 60	24		78	4
HW6CC6478-4	Combination	36		24	78
4 HW6C	C8478-4 Com	bination		48	24
78	4				
HW6CC0478-4	Combination	60	24	78	4
ADDITIONAL SH	ELVES, HEAVY	-DUTY-16	GAU	<u>GE</u>	
HW6SCS61	Shelf	36	21		1
HW6SCS64	Shelf	36	24		1
HW6SCS84	Shelf	48	24		1
EXTRA HEAVY-D	UTY-14 GAUGE	<b>E</b>			
HW4SC6142-2	Storage	36	21	42	2
HW4SC6160-3	Storage	36	21	60	3
HW4SC6178-4	Storage	36	21	78	4
HW4SC6478-4	Storage	36	24	78	4
HW4SC8460-3	Storage	48	24	60	3
HW4SC8478-4	Storage	48	24	78	4
HW4SC0478-4	Storage 60	24		78	4
HW4CC6478-4	Combination	36		24	78
4 HW4C	C8478-4 Com	bination		48	24
78	4				
HW4CC0478-4	Combination	60	24	78	4
ADDITIONAL SH	ELVES, HEAVY	-DUTY-14	GAU	<u>GE</u>	
HW6SCS61	Shelf	36	21		1
HW6SCS64	Shelf	36	24		1
HW6SCS84	Shelf	48	24		1
		HWG4CC	6/79 <sub>-</sub>	4 Con	bination
		11440400	J+1 O-	- COII	ibiliation

VG4CC6478-4 Combination 36 24 78 4 HWG4CC8478-4 Combination 48 24 78 4

DURATOUGH'<sup>™</sup> **CORROSION RESISTANT GALVANITE SERIES DURATOUGH™ GALVANITE SERIES** atalog Number Width (In)Depth (In)Height ShelvesNo. of (In) **HEAVY-DUTY-16 GAUGE** HWG6SC6142-2 36 21 42 2 Storage HWG6SC6160-3 Storage 36 21 60 3 HWG6SC6178-4 Storage 36 21 78 4 HWG6SC6478-4 36 78 4 Storage 24 48 HWG6SC8460-3 Storage 24 60 3 HWG6SC8478-4 48 78 Storage 24 4 HWG6SC0478-4 60 24 78 Storage VG6CC6478-4 Combination 36 78 78 48 24 4 HWG6CC0478-4 Combination 24 78 60 4 ADDITIONAL SHELVES, HEAVY-DUTY-16 GAUGE HWG6SCS61 21 1 Shelf 36 ---HWG6SCS64 Shelf 36 24 1 HWG6SCS84 Shelf 48 24 1 **EXTRA HEAVY-DUTY-14 GAUGE** 21 42 HWG4SC6142-2 Storage 36 2 HWG4SC6160-3 Storage 36 21 60 3 HWG4SC6178-4 Storage 36 21 78 4 HWG4SC6478-4 36 24 78 4 Storage HWG4SC8460-3 Storage 48 60 3 HWG4SC8478-4 48 24 78 4 Storage HWG4SC0478-4 60 24 78 4 Storage **DURATOUGH™ SAFETY-VIEW®** Width (In)Depth (In)Height Catalog Number Type ShelvesNo. of (In)

36

48

Storage

Storage

HWG4CC0478-4 Combination

24

24

78

78

78

24

4

4

ADDITIONAL SHELVES, HEAVY-DUTY-14 GAUGE

HW4SVSC6478-4

4SVSC8478-4



#### 1-3/4" WORK SURFACES



#### **Steel Top**

Heavy 12 gauge steel with no holes on the work surface withstands hard shop use for years. Will not crack, splinter, gouge, or absorb oil.



Shop Top

Shop Top's layered high density particleboard offers superior screw holding characteristics.

The top and bottom layers are seal to resist conventional spills. The non-conductive, splinter-proof top is 30 percent harder than maple.



#### **Laminated Hardwood Top**

Thoroughly seasoned, kiln dried hardwood, face-glued to provide an extremely durable, attractive and long lasting work surface.

#### Work Top Capacity:

200 lbs/sq ft evenly distributed over the entire surface.



Wire harness includes (a) duplex outlet an on/ off switch with (b) wire managment system and

HWG6SCS61	Shelf	36	21	 1
HWG6SCS64	Shelf	36	24	 1
HWG6SCS84	Shelf	48	24	 1

DU	IRATOUGI	H <sup>™</sup> VEN	TILATE	D	
Catalog Number (In)	Type ShelvesNo.	Width (Ir of	)Depth (	(In)Heigh	t
HW4VSC6478-4	Storage	36	24	78	4
HW4VSC8478-4	Storage	48	24	78	4



738 CHARCOAL

# PRACTICAL, COMPACT AND DURABLE WORKBENCHES

Hallowell Workbenches are constructed of only the finest materials and represent the pinnacle in quality, strength, and stability. Our industrial workbenches are designed to withstand the harshest work environments year-in and year-out. With the flexible selection of standard and cost-effective components, these highly efficient units insure maximum productivity in the workplace.

#### Drawer

Riser

24" deep x 18" wide x 6" high. Easily







installation into leg knockouts





Width	Depth	Н	eight*	Тор	Catalog	No.
Color	(in.)	(in.)	(in.)			
Work	oenches (	includ	les legs, to	p and s	stringer)	
48	30	34	Shop Top	)	HWB4830E-ME	ME
60	30	34	Shop Top	)	HWB6030E-ME	ME
72	30	34	Shop Top	)	HWB7230E-ME	ME
72	36	34	Shop Top	)	HWB7236E-ME	ME
48	30 ME	34	Laminated	Hardwo	ood HWB4830M-MI	E
60	30 ME	34	Laminated	Hardwo	ood HWB6030M-MI	E
72	30 ME	34	Laminated	Hardwo	ood HWB7230M-MI	E
72	36 ME	34	Laminated	Hardwo	ood HWB7236M-MI	E
48	30	34	12 gauge	Steel	HWB4830S-ME	ME
60	30	34	12 gauge	Steel	HWB6030S-ME	ME
72	30	34	12 gauge	Steel	HWB7230S-ME	ME

<sup>\*</sup>Actual top height is 28-1/4" x 34-1/4" with standard legs

Width No.		h He Ior	ight Item	Catalog	
(in.)	(in.)	(iı	n.)		
Workben	ches A	dd-on A	Accessories		
18	24	6	Drawer	HWB-BD-1824ME	ME
48	30	4- 1/2	Back & End Stop 4830ME	p Kit HWB-BES-	ME
60	30	4- 1/2	Back & End Stop 6030ME	p Kit HWB-BES-	ME
72	30	4- 1/2	Back & End Stop 7230ME	p Kit HWB-BES-	ME
72	36	4- 1/2	Back & End Stop 7236ME	p Kit HWB-BES-	ME
48	10	12	Riser	HWB-BR-48-ME	ME
60	10	12	Riser	HWB-BR-60-ME	ME
72	10	12	Riser	HWB-BR-72-ME	ME
48	14		Lower Shelf	HWB-LS-48-ME	ME
60	14		Lower Shelf	HWB-LS-60-ME	ME
72	14		Lower Shelf	HWB-LS-72-ME	ME
	24		Leg Extension	HWB-LE-24-ME	ME
-	-	-	Caster Kit 30"	HWB-CK30	ME
-	-	-	Caster Kit 36"	HWB-CK36	ME
-	-	-	Wiring Kit	HWB-WK	ME







The Fort Knox Modular Utility

(shown with optional drawers)



#### **MODULAR UTILITY STORAGE AND WORKBENCH SYSTEM**

#### THE PERFECT WORKSPACE SOLUTION



By combining our adjustable Rivetwell Shelving, Heavy-Duty All-Welded Cabinets, Workbenches and Locker/Drawer units we created a uniquely functional, yet durable modular system.

Storage & Workbench System provides everything you need to create your own perfect workspace solution.

Cabinet Cabinet Cabinet Storage Cabinet



Fabricated from heavy gauge steel and coated with a unique textured two-tone powder coat finish, the Fort Knox system will stand up to the most demanding users.

Our intelligent design allows each major component to be utilized stand alone or in conjunction with any of the other major components.

#### PRE-CONFIGURED UNITS



Catalog No.		Тор	W (in.)	D (in.)	H (in.)	Wt. (Lbs.)
BASIC SYSTEM						
FKBASIC-SM-M	Small	Wood	60	24	78	449
FKBASIC-SM-S		Steel	60	24	78	410
FKBASIC-LG-M	Large	Wood	72	24	78	657
FKBASIC-LG-S		Steel	72	24	78	609



Catalog No.		Тор	W (in.)	D (in.)	H (in.)	Wt. (Lbs.
OPEN STORAGE	SYSTEM					
FKOPENSTOR-SM-M	Small	Wood	132	24	78	711
FKOPENSTOR-SM-S		Steel	132	24	78	645
FKOPENSTOR-LG-M	Large	Wood	168	24	78	999
FKOPENSTOR-LG-S		Steel	168	24	78	909



Catalog No.		Тор	W (in.)	D (in.)	H (in.)	Wt. (Lbs.)			
SECURE STORAGE SYSTEM									
FKSECURESTOR-SM-M	Small	Wood	132	24	78	1386			
FKSECURESTOR-SM-S	rv-	Steel	132	24	78	1347			
FKSECURESTOR-LG-M	Large	Wood	168	24	78	1666			
FKSECURESTOR-LG-S		Steel	168	24	78	1618			



Catalog No.		Тор	W (in.)	D (in.)	H (in.)	Wt. (Lbs.)			
MIXED STORAGE SYSTEM									
FKMIXEDSTOR-SM-M	Small	Wood	132	24	78	975			
FKMIXEDSTOR-SM-S	100	Steel	132	24	78	923			
FKMIXEDSTOR-LG-M	Large	Wood	168	24	78	1296			
FKMIXEDSTOR-LG-S		Steel	168	24	78	1227			



Catalog No.		Тор	W (in.)	D (in.)	H (in.)	Wt. (Lbs.)		
COMPLETE SYSTEM								
FKCOMPLETE-SM-M	Small	Wood	168	24	78	1388		
FKCOMPLETE-SM-S		Steel	168	24	78	1336		
FKCOMPLETE-LG-M	Large	Wood	210	24	78	1770		
FKCOMPLETE-LG-S	10-15-20	Steel	210	24	78	1701		







# A WORK AND STORAGE SYSTEM THAT ALLOWS YOU TO CUSTOM DESIGN YOUR OWN WORKPLACE

DepthUnit	WidthUni	t	Unit Height	Catalog No.					
Cabinets - Inclushelves	de 4 full w	idth							
	36	24	78	FKSC6478-4BR-HT					
	48	24	78	FKSC8478-4BR-HT					
Cabinet Drawer	Kits								
2 Drawer	36	24	15	FKSCD36-2RR-HT					
	48	24	15	FKSCD48-2RR-HT					
3 Drawer	36	24	15	FKSCD36-3RR-HT					
	48	24	15	FKSCD48-3RR-HT					
Workbench ped	estals								
3-Drawer	18	24	32	FKWP8432-3D-BR-HT					
	24	24	32	FKWP4432-3D-BR-HT					
6-Drawer	18	24	32	FKWP8432-6D-BR-HT					
	24	24	32	FKWP4432-6D-BR-HT					
Double Door	18	24	32	FKWP8432-1BR-HT					
	24	24	32	FKWP4432-1BR-HT					
Workbench top	S								
Shop Top	60	24	1-3/4	FKWT6024E					
	72	24	1-3/4	FKWT7224E					
Laminated	60	24	1-3/4	FKWT6024M					
Hardwood	72	24	1-3/4	FKWT7224M					
Steel	60	24	1-3/4	FKWT6024S					
	72	24	1-3/4	FKWT7224S					
Lower Pedestal	Shelf								
	24	8	1	FKWPS24ME-HT					
	30	8	1	FKWPS24ME-HT					
	36	8	1	FKWPS36ME-HT					
Side & Back Rail Kits									
	60	24	4	FKSBRK6024RR-HT					
	72	24	4	FKSBRK7224RR-HT					

		Unit Unit Height	Width	Catalog No.
Workbench Powe	r Strips	;		
	48	3		FKWEP48
	60	3		FKWEP60
	72	3		FKWEP72
Light Kit				
	22	3	6	FKWLK22
Pegboard Kits Ea	ach Kit	Includes (2	2) pcs	
	22	3/4	44-1/4	FKWBP22RR-HT
	30	3/4	44-1/4	FKWBP60RR-HT
	36	3/4	44-1/4	FKWBP72RR-HT
Pegboard Shelves	S			
	20	5	1	FKWS22ME-HT
	28	5	1	FKWS30ME-HT
	34	5	1	FKWBP72RR-HT
Lockers				
Single Door	18	24	78	FKL8478-1BR-HT
Lockers	24	24	78	FKL4478-1BR-HT
3-Drawers	18	24	78	FKL8478-3D-BR-HT
	24	24	78	FKL4478-3D-BR-HT
6-Drawers	18	24	78	FKL8478-6D-BR-HT
	24	24	78	FKL4478-6D-BR-HT
Shelving Units				
With Particle Board	36	24	78	FKR362478-5S-W-BR- HT
Decking	48	24	78	FKR482478-5S-W-BR- HT
With EZ-Deck Steel	36	24	78	FKR362478-5S-E-BR-HT
Decking	48	24	78	FKR482478-5S-E-BR-HT
With Featherdeck	36	24	78	FKR362478-5S-F-BR-HT
Decking	48	24	78	FKR482478-5S-F-BR-HT
Extra Shelf Level				



With Particle Board	36	24	3-1/2	FKRL3624W-RR-HT
Decking	48	24	3-1/2	FKRL4824W-RR-HT
With EZ-Deck Steel	36	24	3-1/2	FKRL3624E-RR-HT
Decking	48	24	3-1/2	FKRL4824E-RR-HT
With Featherdeck	36	24	3-1/2	FKRL3624F-RR-HT
Decking	48	24	3-1/2	FKRL4824F-RR-HT

# CUSTOM TEXTURED FINISH HAMMERTONE

721 708
RELAY RED BLACK
(RR) (ME)



Specially formulated with a unique hammer texture that is tough, highly durable and provides long lasting protection.







Versatile quick assembly Rivetwell shelving provides heavy-duty storage while allowing four sided access by eliminating the need for anti-sway bracing. Four-sided beam design provides maximum decking capacity. Each unit includes 5 shelf levels including top and bottom and is available in choice of 36" and 48" wide units. Order additional levels as needed. The unique color combination of black uprights and red beams provides an attractive appearance and allows perfect integration into your custom configured system. We offer two decking choices. Order particle board or EZ-Deck steel decking for maximum capacity.

# FORT KNOX SHELF OPTIONS





EZ-DECK

**PARTICLE BOARD** 

If additional levels are needed for your setup, shelf levels can be ordered in each of the two available deckings to meet your specific requirements.

## **FORT KNOX CABINETS**



Fabricated of extra heavy-duty 14 gauge steel, reinforced doors and 1,450 lb. capacity adjustable shelves, durability is an understatement. Best-in-class super-duty 13 gauge full height hinge and 3/16" ergonomically engineered cremone turn-handle insure proper door alignment and operation for a lifetime of use. Each cabinet includes 4 full-width shelves.

Doors are secured in the closed position with our high-security 3-point locking system which includes 3/8" diameter round locking rods that are held securely in place by welded-in pry-resistant retainers. These rods engage both the top and bottom of the cabinet door frame when the door is closed which the center latch rotates behind the slave door. Handle includes provisions for a padlock (locks not included).

Shelves are fully adjustable on 3" centers allowing you to maximize the cabinet's interior space. Cabinets are available in 36" and 48" widths and can accommodate our modular cabinet drawer units. With durable textured powder coat finish presented in an attractive two-tone color combining a black body with red door, you can be sure our system will be the highlight of your workspace environment.

# **FORT KNOX OPTIONAL DRAWER KITS**





# CHOOSE FROM 2 OR 3 DRAWER INSERTS

Each modular drawer unit is 15" high and is available in a 2-drawer or 3-drawer version. Drawers allow maximum weight bearing capacity by combining heavy 14 gauge construction with super-strength 500 lb. capacity full-extension glides. The full extension allows full use of each drawer.

Drawer units can be easily added to any Fort Knox and DuraTough All-Welded Cabinet allowing you to custom configure your cabinets to your specific needs.



Note: Drawer units should always be installed into the lower portion of the cabinets to insure stability when opening the drawers. Only one drawer should be opened at a time.

## **FORT KNOX PEDESTAL UNITS**



Perfect as stand-alone units or as supports for workbenches. These versatile all-welded heavy-duty modules are available in multiple sizes and configurations and provide ample storage for tools.

Double Door Workbench Pedestals are perfect for storage of larger items. Our high security 3-point latching system is pad-lockable (locks not included).

engineered for years of smooth operation while the **PEDESTAL** allow full use of drawer

6 DRAWERDOUBLE DOOR Drawer Workbench Pedestals are

PEDESTAL PEDESTAL ergonomic handles add style. Full-extension drawer glides

space. Available in both 6-drawer and 3-drawer models.

**3 DRAWER** 

## FORT KNOX WORKBENCH TOPS

FORT KNOX WORKBENCH ACCESSORIES






Choose from rugged steel, laminated hardwood and composite core resin board workbench tops. Each is 1-3/4" thick and provides a perfect working surface.

WORKBENCH STEEL TOP





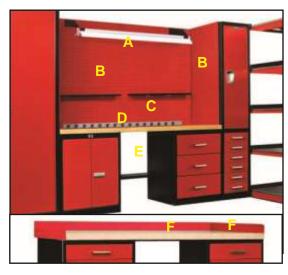

- LIGHT KITS provide a convenient way to illuminate your work surface. Each light
  kit easily attaches to our steel pegboards allowing you to mount is where light is
  needed most.
- **B** STEEL PEGBOARD PANELS are engineered in three convenient sizes to fit perfectly into our Fort Knox System. Out unique design allows panels to be wall mounted or attached to the sides of our Fort Knox lockers and cabinets. Heavy-gauge design is perfect for industrial applications.
- **C** PEGBOARD SHELVES mount to the pegboard providing shelf space exactly where you need it. Available in three sizes.
- D ELECTRICAL POWER BAR provides additional power when needed.

  Available to match both 60" and 72" wide workbenches.
- **E** LOWER PEDESTAL SHELF mounts between two bench pedestals to provide out of the way storage. Available in three lengths to work with most pedestal configurations.
- F SIDE AND BACK RAIL KITS provide edging to your workbench surface to prevent items from sliding and/or rolling off. Perfect when workbenches and being used stand alone.

## **FORT KNOX LOCKERS/CABINETS**



All-welded heavy-duty Fort Knox lockers are available in multiple sizes and configurations allowing maximum versatility.

All doors include a stainless steel recessed handle with padlock hasp (locks not included).

# CUSTOM TEXTURED FINISH HAMMERTONE





FULL DOOR

**CABINET** includes an upper fixed shelf with four adjustable stainless steel shelves.

**COMBINATION CABINET** include three stainless steel adjustable shelves with choice of 3 or 6 lower drawers. Drawers are interchangeable with our pedestal drawer units.

Specially formulated with a unique hammer texture that is tough, highly durable and provides long lasting protection.

assembly at destination.



- Order 3-wide units for best value. Order 1-wide units to complete quantity needed for each continuous row.
- Lockers can be ordered in combination with Premium box lockers.
- All items shown are available for shipment within 5 business days of receipt of order.
- Aluminum number plates (#1-up) with mounting hardware are included. Number plate face is black with silver etched numerals.
   If a special numbering sequence is required, please specify when ordering. Number sequence must be consecutive numbers equal to the number of openings (doors) ordered.





# PREMIUM ALL-PURPOSE WARDROBE LOCKERS

### FEATURES:

**BODY CONSTRUCTION:** Knock-down, 24 gauge **BODY STYLES:** Single, double and triple tier **DOOR:** 16 gauge louvered for added ventilation

**HINGES:** Continuous piano type

**HANDLE:** Stainless steel recessed handle with multi-point gravity lift-type latching for a modern look and added safety. Recessed handle protects finish from being marred by padlock.

**HOOKS:** One double prong ceiling hook and two single hooks per single and double tier opening. One double prong ceiling hook for triple tier.

COAT ROD: Available for single tier at a nominal cost SHELVES: Hat shelf is included in single tier lockers.

**LEGS:** 6" high legs are standard. Lockers without legs are available for a nominal charge.

**APPEARANCE:** All lockers include matching body colors. Order Finished End Panels for exposed row ends if desired. Finished End Panels install over top of universal side panels adding strength and rigidity at exposed row ends and can be ordered to match locker door/frame color.

# 2 YEAR WARRANTY





Single Tier, 1 wide, 1 opening Tan



Double Tier, 1 wide, 2 openings Marine Blue



Triple Tier, 1 wide, 3 openings Dark Gray

#### **GENERAL FEATURES:**

Lockers can be ordered fully-assembled or knock-down for



# UPGRADED Antimicrobial Recessed Handle Finger Lift Cover

All gravity lift-type latching lockers that include recessed handles include our Antimicrobial Recessed Handle Finger Lift Cover for protection against the growth of molds and bacteria



Deep drawn stainless steel recessed handle with gravity lift-type latching for doors 20" high and higher



Single Tier, 3 wide, 3 openings



Double Tier, 3 wide, 6 openings Black





**Light Gray** 





# COMPETITIVELY PRICED

	•	Opening F	rame (	Openir	igs	Kr	nock-Down	Color	
Width	Depth	Height H	eight	Tier	Grouping Per	r Group	Cat No.	Cat No.	Selection
	E TIER								
12	12	60	66	1	1-wide	1	U1226-1	U1226-1A	PT, HG
12	12	60	66	1	3-wide	3	U3226-1	U3226-1A	PT, HG





12	15	60	66	1	1-wide	1	U1256-1	U1256-1A	PT, HG	
12	15	60	66	1	3-wide	3	U3256-1	U3256-1A	PT, HG	
12	18	60	66	1	1-wide	1	U1286-1	U1286-1A	PT, HG	
12	18	60	66	1	3-wide	3	U3286-1	U3286-1A	PT, HG	
12	12	72	78	1	1-wide	1	U1228-1	U1228-1A	PT, HG, MB, ME, PL	
12	12	72	78	1	3-wide	3	U3228-1	U3228-1A	PT, HG, MB, ME, PL	
12	15	72	78	1	1-wide	1	U1258-1	U1258-1A	PT, HG, MB, ME, PL	
12	15	72	78	1	3-wide	3	U3258-1	U3258-1A	PT, HG, MB, ME, PL	
12	18	72	78	1	1-wide	1	U1288-1	U1288-1A	PT, HG, MB, ME, PL	
12	18	72	78	1	3-wide	3	U3288-1	U3288-1A	PT, HG, MB, ME, PL	
15	15	72	78	1	1-wide	1	U1558-1	U1558-1A	PT, HG	
15	15	72	78	1	3-wide	3	U3558-1	U3558-1A	PT, HG	
15	18	72	78	1	1-wide	1	U1588-1	U1588-1A	PT, HG	
15	18	72	78	1	3-wide	3	U3588-1	U3588-1A	PT, HG	
15	21	72	78	1	1-wide	1	U1518-1	U1518-1A	PT, HG	
15	21	72	78	1	3-wide	3	U3518-1	U3518-1A	PT, HG	
15	24	72	78	1	1-wide	1	U1548-1	U1548-1A	PT, HG	←NEW
15	24	72	78	1	3-wide	3	U3548-1	U3548-1A	PT, HG	←NEW
18	18	72	78	1	1-wide	1	U1888-1	U1888-1A	PT, HG	
18	18	72	78	1	3-wide	3	U3888-1	U3888-1A	PT, HG	
18	21	72	78	1	1-wide	1	U1818-1	U1818-1A	PT, HG	
18	21	72	78	1	3-wide	3	U3818-1	U3818-1A	PT, HG	
18	24	72	78	1	1-wide	1	U1848-1	U1848-1A	PT, HG	←NEW
18	24	72	78	1	3-wide	3	U3848-1	U3848-1A	PT, HG	←NEW
DOUB	LE TIER									





12	12	30	66	2	1-wide	2	U1226-2	U1226-2A	PT, H	
12	12	30	66	2	3-wide	6	U3226-2	U3226-2A	PT, HG	
12	15	30	66	2	1-wide	2	U1256-2	U1256-2A	PT, HG	
12	15	30	66	2	3-wide	6	U3256-2	U3256-2A	PT, HG	
12	18	30	66	2	1-wide	2	U1286-2	U1286-2A	PT, HG	
12	18	30	66	2	3-wide	6	U3286-2	U3286-2A	PT, HG	
12	12	36	78	2	1-wide	2	U1228-2	U1228-2A	PT, HG, MB, ME, PL	
12	12	36	78	2	3-wide	6	U3228-2	U3228-2A	PT, HG, MB, ME, PL	
12	15	36	78	2	1-wide	2	U1258-2	U1258-2A	PT, HG, MB, ME, PL	
12	15	36	78	2	3-wide	6	U3258-2	U3258-2A	PT, HG, MB, ME, PL	
12	18	36	78	2	1-wide	2	U1288-2	U1288-2A	PT, HG, MB, ME, PL	
12	18	36	78	2	3-wide	6	U3288-2	U3288-2A	PT, HG, MB, ME, PL	
15	15	36	78	2	1-wide	2	U1558-2	U1558-2A	PT, HG	
15	15	36	78	2	3-wide	6	U3558-2	U3558-2A	PT, HG	
15	18	36	78	2	1-wide	2	U1588-2	U1588-2A	PT, HG	
15	18	36	78	2	3-wide	6	U3588-2	U3588-2A	PT, HG	
15	21	36	78	2	1-wide	2	U1518-2	U1518-2A	PT, HG	
15	21	36	78	2	3-wide	6	U3518-2	U3518-2A	PT, HG	
15	24	36	78	2	1-wide	2	U1548-2	U1548-2A	PT, HG	←NEW
15	24	36	78	2	3-wide	6	U3548-2	U3548-2A	PT, HG	←NEW
18	18	36	78	2	1-wide	2	U1888-2	U1888-2A	PT, HG	←NEW
18	18	36	78	2	3-wide	6	U3888-2	U3888-2A	PT, HG	←NEW
18	21	36	78	2	1-wide	2	U1818-2	U1588-2A	PT, HG	←NEW
18	21	36	78	2	3-wide	6	U3818-2	U3818-2A	PT, HG	←NEW
18	24	36	78	2	1-wide	2	U1848-2	U1848-2A	PT, HG	<b>←</b> NEW





18	24	36	78	2	3-wide	6	U3848-2	U3848-2A	PT, HG	←NEW
TRIPL	E-Tier									
12	12	24	78	3	1-wide	3	U1228-3	U1228-3A	PT, HG, MB, ME, PL	
12	12	24	78	3	3-wide	9	U3228-3	U3228-3A	PT, HG, MB, ME, PL	
12	15	24	78	3	1-wide	3	U1258-3	U1258-3A	PT, HG, MB, ME, PL	
12	15	24	78	3	3-wide	9	U3258-3	U3258-3A	PT, HG, MB, ME, PL	
12	18	24	78	3	1-wide	3	U1288-3	U1288-3A	PT, HG, MB, ME, PL	
12	18	24	78	3	3-wide	9	U3288-3	U3288-3A	PT, HG, MB, ME, PL	



725 DARK GRAY (HG) 729 TAN (PT) 707 MARINE BLUE (MB) NEW 708 Black (ME)

NEW
711
LIGHT GRAY
(PL)









# **4-Wide Wall Mount Lockers**







Single-point thru-the-door friction catch door pull designed for use with a padlock or built-in lock. Shown with optional strike plate which protects door from being marred by padlock and standard piano hinge.

# **Sixteen-Person Lockers**







15

# HALLOWELL PREMIUM BOX LOCKERS INCLUDE LOUVERED DOORS AND ARE PERFECT FOR STORING PERSONAL ITEMS.

### **FEATURES:**

BODY CONSTRUCTION: Knock-down, 24 gauge

BODY STYLES: Four, five, six tier, 16 Person and wall mount

DOOR: 18 gauge, Louvered for added ventilation

HINGES: Continuous piano type

**HANDLE:** Single-point projecting friction catch door pull prepared for both padlock or built-in lock. No moving parts insures quiet maintenance-free operation.

**HOOKS:** None

COAT ROD: None, standard on the 16 person

SHELVES: None

**LEGS:** 6" high legs are standard. Lockers without legs are

available for a nominal charge.

**APPEARANCE:** All lockers include matching body colors.

Order Finished End Panels for exposed row ends if desired.

Finished

End Panels install over top of universal side panels adding

exposed row ends and can be ordered to

match locker door/frame color.

# **GENERAL FEATURES:**

- Lockers can be ordered fully-assembled or knock-down for assembly at destination.
- Order 3-wide units for best value. Order 1-wide units to complete quantity needed for each continuous row.
- Lockers can be ordered in combination with Premium wardrobe lockers
- All items shown are available for shipment within 5 business days of receipt of order.
- Aluminum number plates (#1-up) with mounting hardware are included. Number plate face is black with silver etched numerals. If a special numbering sequence is required, please specify when ordering. Number sequence must be consecutive numbers equal to the number of openings (doors) ordered.
- Locks are not included.



strength and rigidity at





**UPGRADED Antimicrobial** 

# **Box Door Finger Pulls**

All box door finger pulls are made of a super tough nylon material which includes an Antimicrobial agent offering protection against the growth of molds and bacteria.

		Openii	ng Fran	ne Ope	nings		Knock- Down	Fully-Assembled	Color
Width	Depth	Height Group	_	t Tier	Group	ing Per	Cat No.	Cat No.	Selection
FIVE T	IER								
12	12	12	66	5	1-wide	5	U1226-5	U1226-5A	PT, HG
12	12	12	66	5	3-wide	15	U3226-5	U3226-5A	PT, HG
12	15	12	66	5	1-wide	5	U1256-5	U1256-5A	PT, HG
12	15	12	66	5	3-wide	15	U3256-5	U3256-5A	PT, HG
12	18	12	66	5	1-wide	5	U1286-5	U1286-5A	PT, HG
12	18	12	66	5	3-wide	15	U3286-5	U3286-5A	PT, HG





SIX TI	SIX TIER											
12	12	12	78	6	1-wide	6	U1228-6	U1228-6A	PT, HG, MB, ME, PL			
12	12	12	78	6	3-wide	18	U3228-6	U3228-6A	PT, HG, MB, ME, PL			
12	15	12	78	6	1-wide	6	U1258-6	U1258-6A	PT, HG, MB, ME, PL			
12	15	12	78	6	3-wide	18	U3258-6	U3258-6A	PT, HG, MB, ME, PL			
12	18	12	78	6	1-wide	6	U1288-6	U1288-6A	PT, HG, MB, ME, PL			
12	18	12	78	6	3-wide	18	U3288-6	U3288-6A	PT, HG, MB, ME, PL			
4-WID	4-WIDE WALL MOUNT											
48 18 1	2	14-3/4		4-Wide	Wall Mour	nt 4	U1482- 4WM	U1482-4WM-A	PT, HG			
16-PERSON												
72	18	12	78	16	-Person U	nit 16	U1788- 16	U1788-16A	PT, HG			

OLORS LOCKER

725 Dark Gray (HG) 729 Tan (PT) 707 MARINE BLUE (MB) NEW 708 Black (ME) NEW
711
LIGHT GRAY
(PL)







# Ready-Built Lockers Include:

**Assembly** 

Padlocks

Padlock Strike Plates

# **READY-TO-USE!**







Locks and Padlock Strike **Plates** For Box

Locker







725 DARK GRAY (HG) 729 Tan (PT)

707 Marine Blue (MB) NEW 708 Black (ME) NEW 711 Light Gray (PL)



# **FEATURES:**

**BODY CONSTRUCTION:** Knock-down, 24 gauge **BODY STYLES:** Single, double, triple and six tier **DOOR:** 16 gauge, 18 gauge for box doors



**HINGES:** Continuous piano type **HANDLE** (wardrobe):

Stainless steel recessed handle with multi-point gravity lift-type latching. Recessed handle protects finish from being marred by padlock.

HANDLE (box): Box lockers include a projecting singlepoint friction catch door pull. No moving parts insures quiet maintenance-free operation.

HOOKS: One double prong ceiling hook and two singleANTIMICROBIAL hooks per single and double tier opening. One double PROTECTION ceiling hook for triple tier. No hooks for box lockers.

**COAT RODS:** Available for single tier at a nominal charge

SHELVES: Hat shelf is included in single tier lockers.

LEGS: 6" high legs are standard. Lockers without legs are available for a nominal charge.






#### **GENERAL FEATURES:**

· Available in single, double, triple and six tier models





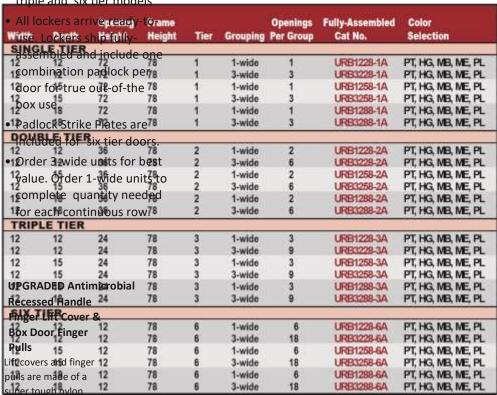

material which includes an Antimicrobial agent offering protection against the growth of molds and bacteria.







**Slope Tops** Provide a more finished appearance and prevent items from being placed or stored on locker tops.



NEW

NEW





708 Black (ME) 711 LIGHT GRAY (PL)







DARK GRAY (HG) TAN (PT) MARINE BLUE (MB)





# Ready-Built II Lockers Include:

Assembly **Padlocks** 

Padlock Strike Plates

Slope Tops

6" High Metal Bases



Single Tier, 1 wide, STOCK



Triple Tier, 1 wide, 3 openings



Double Tier, 1 wide, 2 openings



Padlocks Are included





for each door. 3-number combinations provide for maximum security. No need to go out an buy locks allowing immediate use of lockers upon arrival. Locks are master keyed.

Strike Plates Aluminum plates are riveted to door to prevent padlocks from marring painted door finish on six tier lockers.

### **Closed Metal Base**

Front and side bases close off area below lockers at 6" legs to prevent collection of debris.

### **FEATURES:**

BODY CONSTRUCTION: Knock-down, 24 gauge BODY STYLES: Single, double, triple and six tier DOOR: 16 gauge, 18 gauge for box doors, louvered for added ventilation HINGES: Continuous piano type

**HANDLE (wardrobe):** Stainless steel recessed handle with multi-point gravity lift-type latching. Recessed handle protects finish from being marred by padlock.

# **GENERAL FEATURES:**



HANDLE (box): Box lockers include a

- · All lockers arrive ready-to-use. Lockers ship fully-assembled and include one combination padlock per door for true out-of-the box use.
- . Sloping top reduces dust accumulation and prevents item storage on locker tops.
- · Closed metal bases provide a more finished appearance and eliminates the need to clean beneath lockers.
- · Padlock Strike Plates are included for six tier doors.
- . Order 3-wide units for best value. Order 1-wide units to complete quantity needed for each continuous row.



**UPGRADED Antimicrobial** Recessed Handle Finger Lift Cover & Box Door Finger Pulls

Lift covers and finger pulls are made of a super tough nylon material which includes an Antimicrobial agent offering protection against the growth of molds and bacteria.










Width	Depth	Opening Height	Frame Height	Tier	Grouping I	Openings Per Group	Fully-Assembled Cat No.	Color Selection
SING	LE TIER		-	10000		111101111111111111111111111111111111111		
12	12	72	78	1	1-wide	1	URB1228-1ASB	PT, HG, MB, ME, PL
12	12	72	78	1	3-wide	3	URB3228-1ASB	PT, HG, MB, ME, PL
12	15	72	78	1	1-wide	1	URB1258-1ASB	PT, HG, MB, ME, PL
12	15	72	78	1	3-wide	3	URB3258-1ASB	PT, HG, MB, ME, PL
12	18	72	78	1	1-wide	1	URB1288-1ASB	PT, HG, MB, ME, PL
12	18	72	78	1	3-wide	3	URB3288-1ASB	PT, HG, MB, ME, PL
DOUE	BLE TIEF	1						
12	12	36	78	2	1-wide	2	URB1228-2ASB	PT, HG, MB, ME, PL
12	12	36	78	2	3-wide	6	URB3228-2ASB	PT, HG, MB, ME, PL
12	15	36	78	2	1-wide	2	URB1258-2ASB	PT, HG, MB, ME, PL
12	15	36	78	2	3-wide	6	URB3258-2ASB	PT, HG, MB, ME, PL
12	18	36	78	2	1-wide	2	URB1288-2ASB	PT, HG, MB, ME, PL
12	18	36	78	2	3-wide	6	URB3288-2ASB	PT, HG, MB, ME, PL
TRIP	LE TIER							11-2- 71-38
12	12	24	78	3	1-wide	3	URB1228-3ASB	PT, HG, MB, ME, PL
12	12	24	78	3	3-wide	9	URB3228-3ASB	PT, HG, MB, ME, PL
12	15	24	78	3	1-wide	3	URB1258-3ASB	PT, HG, MB, ME, PL
12	15	24	78	3	3-wide	9	URB3258-3ASB	PT, HG, MB, ME, PL
12	18	24	78	3	1-wide	3	URB1288-3ASB	PT, HG, MB, ME, PL
12	18	24	78	3	3-wide	9	URB3288-3ASB	PT, HG, MB, ME, PL
SIX T	IER							
12	12	12	78	6	1-wide	6	URB1228-6ASB	PT, HG, MB, ME, PL
12	12	12	78	6	3-wide	18	URB3228-6ASB	PT, HG, MB, ME, PL
12	15	12	78	6	1-wide	6	URB1258-6ASB	PT, HG, MB, ME, PL
12	15	12	78	6	3-wide	18	URB3258-6ASB	PT, HG, MB, ME, PL
12	18	12	78	6	1-wide	6	URB1288-6ASB	PT, HG, MB, ME, PL
12	18	12	78	6	3-wide	18	URB3288-6ASB	PT, HG, MB, ME, PL

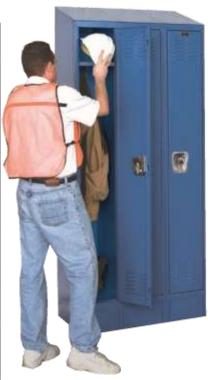

G





projecting single-point friction catch door pull. No moving parts insures quiet maintenancefree operation.

**HOOKS:** One double prong ceiling hook and two single hooks per single and double tier opening. One double ceiling hook for triple tier. No hooks for six-tier lockers

**COAT RODS:** Available for single tier at a nominal charge

**SHELVES:** Hat shelf is included in single tier lockers.

**LEGS:** 6" high legs are standard. Lockers without legs are available for a nominal charge







711 Antimicrobial Light Gray (PL-AM)

		Opening	Frame	•	Color	Openings	Knock-Dowr	n Fully-Asse	embled
Width	Depth	Height	Height Tier		Grouping	Per Group	Cat No.	Cat No.	Selection
SINGLE	TIER								
12	18	72	78	1	1-wide	1	UMS1288-1	UMS1288- 1A	PL
12	18	72	78	1	3-wide	3	UMS3288-1	UMS3288- 1A	PL
15	18	72	78	1	1-wide	1	UMS1588-1	UMS1588- 1A	PL
15	18	72	78	1	3-wide	3	UMS3588-1	UMS3588- 1A	PL
18	18	72	78	1	1-wide	1	UMS1888-1	UMS1888- 1A	PL
18	18	72	78	1	3-wide	3	UMS3888-1	UMS3888- 1A	PL
DOUBL	E TIER								
12	18	36	78	2	1-wide	2	UMS1288-2	UMS1288- 2A	PL
12	18	36	78	2	3-wide	6	UMS3288-2	UMS3288- 2A	PL
15	18	36	78	2	1-wide	2	UMS1588-2	UMS1588- 2A	PL
15	18	36	78	2	3-wide	6	UMS3588-2	UMS3588- 2A	PL





# + MED SAFE







# ANTIMICROBIAL HEALTH CARE LOCKERS

Specially formulated powder coat finish protects against bacteria, mold, yeast & mildew for up to 20 years!



### **FEATURES:**

BODY CONSTRUCTION: Knock-down, 24 gauge

BODY STYLES: Single and double tier **CUSTOM FEATURES:** Antimicrobial finish DOOR: 16 gauge, louvered for added ventilation,

**HINGES:** Continuous piano type

HANDLE: Stainless steel recessed handle with multi-point gravity lift-type latching. Recessed handle protects finish from being marred by padlock.

HOOKS: One double prong ceiling hook and two single hooks per single and double tier opening.

COAT RODS: Available for single tier at a nominal cost SHELVES: Hat shelf is included in single tier lockers. LEGS: All stock lockers are standard with 6" high legs. Lockers without legs are available for a nominal charge.



# **UPGRADED Antimicrobial** Recessed Handle Finger Lift Cover

All gravity lift-type latching lockers that include recessed handles include our Antimicrobial Recessed Handle Finger Lift Cover for protection against the growth of molds and bacteria











ValueMax lockers offer exceptional value, quality and finish at an affordable price.

ValueMax lockers are the perfect solution for limited budget projects.

### **FEATURES:**

BODY CONSTRUCTION: Knock-down, 24 gauge BODY STYLES: Single, double and triple tier

DOOR: 16 gauge, louvered for added ventilation

**HINGES:** Continuous piano type

HANDLE: Single-point thru-the-door friction catch door pull designed for use with a padlock

HOOKS: One double prong ceiling hook and two single hooks per single and double tier opening. One double ceiling hook for triple tier.

COAT RODS: Available for single tier at a nominal cost

SHELVES: Hat shelf is included in single tier lockers.

LEGS: 6" high legs are standard. Lockers without legs are available for a nominal charge.









All box door finger pulls are made of a super tough nylon material which includes an Antimicrobial agent offering protection against the growth of molds and bacteria.

6 openings



R





			Opening	Frame		Color	Openings	Knock-Down	Fully-Asse	mbled
	Width	Depth	Height	Height Tier			Per Group	Cat No.	Cat No.	Selection
	SINGLE	TIER		Hei						
	12	12	72	78	1	1-wide	1	UH1228-1	UH1228-1A	PT, HG
į,	12	12	72	78	1	3-wide	3	UH3228-1	UH3228-1A	PT, HG
) [	12	15	72	78	1	1-wide	1	UH1258-1	UH1258-1A	PT, HG
,	12	15	72	78	1	3-wide	3	UH3258-1	UH3258-1A	PT, HG
)	12	18	72	78	1	1-wide	1	UH1288-1	UH1288-1A	PT, HG
ď	12	18	72	78	1	3-wide	3	UH3288-1	UH3288-1A	PT, HG
	DOUBL	E TIER								
	12	12	36	78	2	1-wide	2	UH1228-2	UH1228-2A	PT, HG
	12	12	36	78	2	3-wide	6	UH3228-2	UH3228-2A	PT, HG
	12	15	36	78	2	1-wide	2	UH1258-2	UH1258-2A	PT, HG
	12	15	36	78	2	3-wide	6	UH3258-2	UH3258-2A	PT, HG
	12	18	36	78	2	1-wide	2	UH1288-2	UH1288-2A	PT, HG
	12	18	36	78	2	3-wide	6	UH3288-2	UH3288-2A	PT, HG
	TRIPLE	TIER								
	12	12	24	78	3	1-wide	3	UH1228-3	UH1228-3A	PT, HG
	12	12	24	78	3	3-wide	9	UH3228-3	UH3228-3A	PT, HG
	12	15	24	78	3	1-wide	3	UH1258-3	UH1258-3A	PT, HG
	12	15	24	78	3	3-wide	9	UH3258-3	UH3258-3A	PT, HG
	12	18	24	78	3	1-wide	3	UH1288-3	UH1288-3A	PT, HG
	12	18	24	78	3	3-wide	9	UH3288-3	UH3288-3A	PT, HG

TAN (PT)

T25
DARK GRAY
(HG)

LOCKER

ACCESSORIES
PAGES 86-87

Modern flush door design with safety-minded recessed handle and reinforced door make our Maintenance-Free™ Quiet KD stock lockers the smart choice.

**HOOKS:** One double prong ceiling hook and two single hooks per single and double tier opening. One double ceiling hook for triple tier. **COAT RODS:** Available for single tier at a nominal cost **SHELVES:** Hat shelf is included in single tier lockers.







**FEATURES** 

**BODY CONSTRUCTION:**Knock-down, 24 gauge

BODY STYLES: Single, double and triple tier

DOOR: 16 gauge, solid with welded in door stiffener

HINGES: Continuous piano type

**HANDLE:** Deep drawn stainless steel recessed handle with single-point latching. Recessed handle protects finish from being marred

by padlock.



2 openings

**LEGS:** 6" high legs are standard. Lockers without legs are available for a nominal charge



Maintenance-Free Quiet Lockers include a 3" wide 18 gauge full height door stiffener spot welded to the inner door face and MIG welded to the hinge side as well as to the top and bottom door flanges providing a rigid torque-free door.



**Deep-drawn 401 stainless steel** recessed handle with single-point latching



2 YEAK WAR ANTY Single Tier, 3 wide, 3 openings



PIANO HINGI STANDARD

Triple Tier, 3 wide, 9 openings

R

1 opening

3 openings





		Opening	Frame			Openings	Knock-Down	Fully-Assembled		
			Trame		Color					
Width	Depth	Height	Height	Tier	Grouping	Per Group	Cat No.	Cat No.	Selection	
SINGLE	TIER									
							UY1228-1	UY1228-1A	PT, HG	
12	12	72 72	78 70	1	1-wide	1	HV2220 4	11V2220 4 A	DT UC	
12	12	72	78	1	3-wide	3	UY3228-1	UY3228-1A	PI, HG	
12	15	72	78	1	1-wide	1	UY1258-1	UY1258-1A	PT, HG	
12	15	72	78	1	3-wide	3	UY3258-1	UY3258-1A	DT UC	
12	15	12	70	1	3-wide	3	U13230-1	U13230-1A	PI, NG	
12	18	72	78	1	1-wide	1	UY1288-1	UY1288-1A	PT, HG	
12	18	72	78	1	3-wide	3	UY3288-1	UY3288-1A	PT, HG	
15	15	72	78	1	1-wide	1	UY1558-1	UY1558-1A	PT, HG	
15	15	72	78	1	3-wide	3	UY3558-1	UY3558-1A	PT HG	
.,				-					,	
15	18	72	78	1	1-wide	1	UY1588-1	UY1588-1A	PT, HG	
15	18	72	78	1	3-wide	3	UY3588-1	UY3588-1A	PT, HG	
15	21	72	78	1	1-wide	1	UY1518-1	UY1518-1A	PT, HG	€N
45	04	70	70		0!	•	UV2540.4	11V2540 4 A	DT UC	€NI
15	21	72	78	1	3-wide	3	UY3518-1	UY3518-1A	PI, HG	-10
15	24	72	78	1	1-wide	1	UY1548-1	UY1548-1A	PT, HG	€N
15	24	72	78	1	3-wide	3	UY3548-1	UY3548-1A	PT, HG	€NI
18	18	72	78	1	1-wide	1	UY1888-1	UY1888-1A	PT HG	





										_	
18	18	72	78	1	3-wide	3	UY3888-1	UY3888-1A	PT, HG		
18	21	72	78	1	1-wide	1	UY1818-1	UY1818-1A	PT, HG		
18	21	72	78	1	3-wide	3	UY3818-1	UY3818-1A	PT, HG		
18	24	72	78	1	1-wide	1	UY1848-1	UY1848-1A	PT, HG	<b>←</b> NEW	
18	24	72	78	1	3-wide	3	UY3848-1	UY3848-1A	PT, HG	←NEW	
DOUBLE TIER											
12	12	36	78	2	1-wide	2	UY1228-2	UY1228-2A	PT, HG		
12	12	36	78	2	3-wide	6	UY3228-2	UY3228-2A	PT, HG		
12	15	36	78	2	1-wide	2	UY1258-2	UY1258-2A	PT, HG		
12	15	36	78	2	3-wide	6	UY3258-2	UY3258-2A	PT, HG		
12	18	36	78	2	1-wide	2	UY1288-2	UY1288-2A	PT, HG		
12	18	36	78	2	3-wide	6	UY3288-2	UY3288-2A	PT, HG		
15	15	36	78	2	1-wide	2	UY1558-2	UY1558-2A	PT, HG		
15	15	36	78	2	3-wide	6	UY3558-2	UY3558-2A	PT, HG		
15	18	36	78	2	1-wide	2	UY1588-2	UY1588-2A	PT, HG		
15	18	36	78	2	3-wide	6	UY3588-2	UY3588-2A	PT, HG		
15	21	36	78	2	1-wide	2	UY1518-2	UY1518-2A	PT, HG	<b>←</b> NEW	
15	21	36	78	2	3-wide	6	UY3518-2	UY3518-2A	PT, HG	←NEW	
15	24	36	78	2	1-wide	2	UY1548-2	UY1548-2A	PT, HG	←NEW	
15	24	36	78	2	3-wide	6	UY3548-2	UY3548-2A	PT, HG	←NEW	
40	40	20	70		4 milete		11V4000.0	11V4000 0 A	DT UC		
18	18	36	78	2	1-wide	2	UY1888-2	UY1888-2A			
18	18	36	78	2	3-wide	6	UY3888-2	UY3888-2A	PT, HG		





_										_
18	21	36	78	2	1-wide	2	UY1818-2	UY1818-2A	PT, HG	
18	21	36	78	2	3-wide	6	UY3818-2	UY3818-2A	PT, HG	
18	24	36	78	2	1-wide	2	UY1848-2	UY1848-2A	PT, HG	<b>←</b> NEW
18	24	36	78	2	3-wide	6	UY3848-2	UY3848-2A	PT, HG	<b>←</b> NEW
TRIPI	E TIER									
12	12	24	78	3	1-wide	3	UY1228-3	UY1228-3A		
12	12	24	78	3	3-wide	9	UY3228-3	UY3228-3A	PT, HG	
12	15	24	78	3	1-wide	3	UY1258-3	UY1258-3A	PT, HG	
12	15	24	78	3	3-wide	9	UY3258-3	UY3258-3A	PT, HG	
12	18	24	78	3	1-wide	3	UY1288-3	UY1288-3A	PT, HG	
12	18	24	78	3	3-wide	9	UY3288-3	UY3288-3A	PT, HG	





729 Tan (PT) 725 DARK GRAY (HG)



**BODY CONSTRUCTION:** Knock-down, 24 gauge **BODY STYLES:** Single, double, triple and six tier **DOOR:** 16 gauge, louvered type, 18 gauge for box doors

**FEATURES:** 









Six Tier,



#### **LOCK FEATURES:**

- Powered by 1 CR123 batteries which provide in
- 1 CR123 battery is included.
- LED's flash to indicate low battery level.
- Locker can be opened when batteries are low or dead by using the Master Key override.
- 8-digit master and sub-master codes for two levels of management security.

#### **DAY-USE MODE:**

- User can lock and unlock any available locker door with a user selected 4-digit code.
- Upon returning, user enters the 4-digit code to unlock the door. Code is erased and the locker is available
- User enters a pre-programmed 4-digit code to unlock and use locker repeatedly.
- Lock does not require a code to re-lock door.







excess of 10,000 uses.

for the next user.

#### PERMANENT MODE:






		Opening	Frame			Openings	Knock-Down Color	Fully-Asse	mbled
Width	Depth	Height	Height Tier		Grouping Selection	Per Group			Cat No.
SINGL	E TIER		TICI		ocicolio II				
12	12	72	78	1	1-wide	1	UEL1228-1	UEL1228- 1A	PT
12	12	72	78	1	3-wide	3	UEL3228-1	UEL3228-	PT
12	15	72	78	1	1-wide	1	UEL1258-1	1A UEL1258- 1A	PT
12	15	72	78	1	3-wide	3	UEL3258-1	UEL3258- 1A	PT
12	18	72	78	1	1-wide	1	UEL1288-1	UEL1288- 1A	PT
12	18	72	78	1	3-wide	3	UEL3288-1	UEL3288- 1A	PT
DOUBI	E TIER								
12	12	36	78	2	1-wide	2	UEL1228-2	UEL1228- 2A	PT
12	12	36	78	2	3-wide	6	UEL3228-2	UEL3228- 2A	PT
12	15	36	78	2	1-wide	2	UEL1258-2	UEL1258- 2A	PT
12	15	36	78	2	3-wide	6	UEL3258-2	UEL3258- 2A	PT
12	18	36	78	2	1-wide	2	UEL1288-2	UEL1288- 2A	PT
12	18	36	78	2	3-wide	6	UEL3288-2	UEL3288- 2A	PT
TRIPLE	ETIER								
12	12	24	78	3	1-wide	3	UEL1228-3	UEL1228- 3A	PT
12	12	24	78	3	3-wide	9	UEL3228-3	UEL3228- 3A	PT
12	15	24	78	3	1-wide	3	UEL1258-3	UEL1258- 3A	PT
12	15	24	78	3	3-wide	9	UEL3258-3	UEL3258- 3A	PT
12	18	24	78	3	1-wide	3	UEL1288-3	UEL1288- 3A	PT
12	18	24	78	3	3-wide	9	UEL3288-3	UEL3288- 3A	PT
SIX TIE	R								
12	12	12	78	6	1-wide	6	UEL1228-6	UEL1228- 6A	PT
12	12	12	78	6	3-wide	18	UEL3228-6	UEL3228- 6A	PT
12	15	12	78	6	1-wide	6	UEL1258-6	UEL1258- 6A	PT
12	15	12	78	6	3-wide	18	UEL3258-6	UEL3258- 6A	PT
12	18	12	78	6	1-wide	6	UEL1288-6	UEL1288- 6A	PT
12	18	12	78	6	3-wide	18	UEL3288-6	UEL3288- 6A	PT







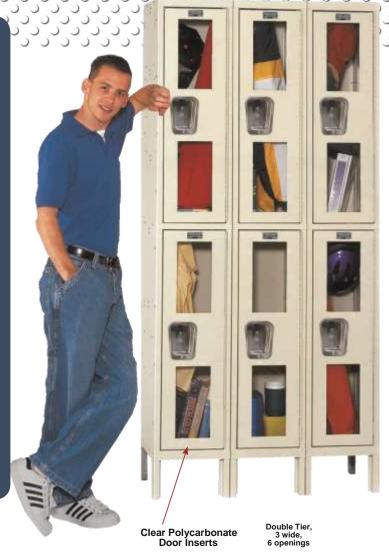

# KD WARDROBE LOCKERS

#### **WARDROBE LOCKER FEATURES:**

**BODY CONSTRUCTION:**Knock-down, 24 gauge

BODY STYLES: Single, double and triple tier

**DOOR:** 16 gauge steel with two high strength injection molded polycarbonate panels per door for easy content viewing

**HINGES:** Continuous piano type

**HANDLE:** Stainless steel recessed handle with multi-point gravity lift-type latching. Recessed handle protects finish from being marred by padlock.

**HOOKS:** One double prong ceiling hook and two single hooks per single and double tier opening. One double ceiling hook for triple tier

**COAT RODS:** Available for single tier at a nominal cost

**SHELVES:** Hat shelf is included in single tier lockers

**LEGS:** 6" high legs are standard. Lockers without legs are available for a nominal charge.



### **UPGRADED Antimicrobial Recessed Handle Finger Lift Cover**

All gravity lift-type latching lockers that include recessed handles include our Antimicrobial Recessed Handle Finger Lift Cover for protection against the growth of molds and bacteria













729 TAN (PT)

LOCKER ACCESSORIES PAGES 86-87

		Opening	Frame		Color	Openings	Knock-Down	Fully-Asse	embled
Width	Depth	Height	Height Tier		Grouping	Per Group	Cat No.	Cat No.	Selection
SINGLE	TIER								
12	12	72	78	1	1-wide	1	USV1228- 1	USV1228- 1A	PT
12	12	72	78	1	3-wide	3	USV3228- 1	USV3228- 1A	PT
12	15	72	78	1	1-wide	1	USV1258- 1	USV1258- 1A	PT
12	15	72	78	1	3-wide	3	USV3258- 1	USV3258- 1A	PT
12	18	72	78	1	1-wide	1	USV1288- 1	USV1288- 1A	PT
12	18	72	78	1	3-wide	3	USV3288- 1	USV3288- 1A	PT
DOUBL	E TIER								
12	12	36	78	2	1-wide	2	USV1228- 2	USV1228- 2A	PT
12	12	36	78	2	3-wide	6	USV3228- 2	USV3228- 2A	PT
12	15	36	78	2	1-wide	2	USV1258- 2	USV1258- 2A	PT
12	15	36	78	2	3-wide	6	USV3258- 2	USV3258- 2A	PT
12	18	36	78	2	1-wide	2	USV1288- 2	USV1288- 2A	PT
12	18	36	78	2	3-wide	6	USV3288- 2	USV3288- 2A	PT
TRIPLE	TIER								
12	12	24	78	3	1-wide	3	USV1228- 3	USV1228- 3A	PT
12	12	24	78	3	3-wide	9	USV3228- 3	USV3228- 3A	PT
12	15	24	78	3	1-wide	3	USV1258- 3	USV1258- 3A	PT
12	15	24	78	3	3-wide	9	USV3258- 3	USV3258- 3A	PT
12	18	24	78	3	1-wide	3	USV1288- 3	USV1288- 3A	PT
12	18	24	78	3	3-wide	9	USV3288- 3	USV3288- 3A	PT





#### **KD BOX LOCKERS**



#### **BOX LOCKER FEATURES:**

**BODY CONSTRUCTION**: Knock-down, 24 gauge

**BODY STYLES:** Four tier, six tier, sixteen person and wall mount **DOOR:** High strength injection molded clear polycarbonate doors for unobstructed content viewing **HINGES:** Continuous piano type

**HANDLE:** Single-point projecting friction catch door pull prepared for both padlock or built-in lock

**COAT RODS:** Standard on Sixteen person

**LEGS:** 6" high legs are standard. Lockers without legs are available for a nominal charge

#### **GENERAL FEATURES:**

- Aluminum number plates (#1-up) with mounting hardware are included.
- · Locks are not included.
- Safety-View plus doors provide an unobstructed view of locker contents
- Can be ordered fully-assembled or knock-down for assembly at destination
- Order 3-wide units for best value. Order 1-wide units to complete quantity needed for each continuous row

#### **UPGRADED Antimicrobial Box Door Finger Pulls**

All box door finger pulls are made of a super tough nylon material which includes an Antimicrobial agent offering protection against the growth of



molds and

bacteria. Doors Six-tier,



3 wide,

		Opening	Frame		Color	Openings	Knock-Do	wn Fully-Asse	mbled
Width	Depth	Height	Height Tier		Grouping	Per Grou	ıp Cat No	. Cat No.	Selection
FOUR 1	TER								
12	12	18	78	4	1-wide	4	USVP1228-4	USVP1228-4A	PT
12	12	18	78	4	3-wide	12	USVP3228-4	USVP3228-4A	PT
12	15	18	78	4	1-wide	4	USVP1258-4	USVP1258-4A	PT
12	15	18	78	4	3-wide	12	USVP3258-4	USVP3258-4A	PT
12	18	18	78	4	1-wide	4	USVP1288-4	USVP1288-4A	PT
12	18	18	78	4	3-wide	12	USVP3288-4	USVP3288-4A	PT





FIVE '	TIER					
12	12	12	66	5 1-wide	5	USVP1226-5 USVP1226-5A PT
12	12	12	66	5 3-wide	15	USVP3226-5 USVP3226-5A PT
12	15	12	66	5 1-wide	5	USVP1256-5 USVP1256-5A PT
12	15	12	66	5 3-wide	15	USVP3256-5 USVP3256-5A PT
12	18	12	66	5 1-wide	5	USVP1286-5 USVP1286-5A PT
12	18	12	66	5 3-wide	15	USVP3286-5 USVP3286-5A PT
SIX T				O WIGO		5011 5255 5
SIX II	IER					
12	12	12	78	6 1-wide	6	USVP1228-6 USVP1228-6A PT
12	12	12	78	6 3-wide	18	USVP3228-6 USVP3228-6A PT
12	15	12	78	6 1-wide	6	USVP1258-6 USVP1258-6A PT
12	15	12	78	6 3-wide	18	USVP3258-6 USVP3258-6A PT
12	18	12	78	6 1-wide	6	USVP1288-6 USVP1288-6A PT
12	18	12	78	6 3-wide	18	USVP3288-6 USVP3288-6A PT
4-WII	DE WALL N	MOUNT				
48	18	12	14-3/4	4-Wide Wall Mount	4	USVP1482-4WM USVP1482-4WMA PT
16-PI	ERSON					
72	18	12	78	16-Person Unit	16	USVP1788-16 USVP1788-16A PT

18 openings



729 TAN (PT)

















#### **BOX LOCKER FEATURES:**

BODY CONSTRUCTION: Knock-down, 24 gauge

BODY STYLES: Four tier, six tier, sixteen person and wall mount

**DOOR:** High strength injection molded clear polycarbonate doors for unobstructed content viewing

HINGES: Continuous piano type

**HANDLE:** Digitech lock serves as door pull when in the open position

**HOOKS:** None

**COAT RODS:** Standard on Sixteen person

SHELVES: None

LEGS: 6" high legs are standard. Lockers without legs are available for a

nominal charge

#### **GENERAL FEATURES:**

- Safety-View plus doors provide an unobstructed view of locker contents
- Can be ordered fully-assembled or knock-down for assembly at destination

#### **DigiTech Safety-View Plus Box Lockers**





Available for immediate shipping





- Aluminum number plates (#1-up) with mounting hardware are included
- Digitech Locks and 1 CR123 batteries included



12 openings

• Order 3-wide units for

best value. Order 1-wide units to complete quantity

needed for each continuous row

Clear Polycarbonate Doors Provide View of

**Locker Contents** 









		Opening	Frame			Openings	Knock-Down	Fully-Assembled	Color
Nidth	Depth	Height	Height	Tier	Grouping	Per Group	Cat No.	Cat No.	Selection
FOUR	TIER								
12	12	18	78	4	1-wide	4	UESVP1228-4	UESVP1228-4A	PT
12	12	18	78	4	3-wide	12	UESVP3228-4	UESVP3228-4A	PT
12	15	18	78	4	1-wide	4	UESVP1258-4	UESVP1258-4A	PT
12	15	18	78	4	3-wide	12	UESVP3258-4	UESVP3258-4A	PT
12	18	18	78	4	1-wide	4	UESVP1288-4	UESVP1288-4A	PT
12	18	18	78	4	3-wide	12	UESVP1288-4	UESVP1288-4A	PT
SIX TI	ER								
12	12	12	78	6	1-wide	6	UESVP1228-6	UESVP1228-6A	PT
12	12	12	78	6	3-wide	18	UESVP3228-6	UESVP3228-6A	PT
12	15	12	78	6	1-wide	6	UESVP1258-6	UESVP1258-6A	PT
12	15	12	78	6	3-wide	18	UESVP3258-6	UESVP3258-6A	PT
12	18	12	78	6	1-wide	6	UESVP1288-6	UESVP1288-6A	PT
12	18	12	78	6	3-wide	18	UESVP1288-6	UESVP1288-6A	PT
4-WID	E WALL	MOUNT							
8	18	12	14-3/4	-	Wide Wall ount	4	UESVP1482-4WM	UESVP1482- 4WMA	PT
16-PE	RSON U	NIT							
2	18	12	78	16	-Person Uni	t 16	UESVP1788-16	UESVP1788-16A	PT







#### LOCK FEATURES:

- Powered by 1 CR123 batteries which provide in excess of 10,000 uses.
- · 1 CR123 batteries are included.
- . LED's flash to indicate low battery level.
- Locker can be opened when batteries are low or dead by using the Master Key override.
- 8-digit master and sub-master codes for two levels of management security.

#### DAY-USE MODE:

- User can lock and unlock any available locker door with a user selected 4-digit code.
- Upon returning, user enters the 4-digit code to unlock the door.
   Code is erased and the locker is available for the next user.

#### PERMANENT MODE:

- User enters a pre-programmed 4-digit code to unlock and use locker repeatedly.
- Lock does not require a code to re-lock door.





Digitech Electronic Access Lock







729 TAN (PT)







ၟႜႜႜၛၔႜႜၜၭၯၟႜၟၣႜႋ႞ၯၟၟၛၮႜ႞႞ႜႜၣႜၔၛၟၛႜၯၟႜၯၟႜၟၟႜၹၟႜၛႜၟၜၛႜၛႜၟၟၣ



Agatilated gladiz and sides 

Heavy gauge door and body

Large capacity sizes available

Strength and ventilation in one practical locker

### 3X MORE STEEL

THAN CONVENTIONAL LOCKERS



Double Tier, 1 wide. 2 openings





Six Tier, 1 wide, 6 openings



ann

Six Tier, 3 wide, 18 openings



**UPGRADED Antimicrobial** Recessed Handle Finger Lift Cover & Box Door Finger Pulls

Lift covers and finger pulls are made of a super tough nylon material which includes an Antimicrobial agent offering protection against the growth of molds and bacteria.







Single Tier, 1 wide,

Six Tier, 1 wide, 6 openings

Double Tier, 3 wide, 6 opening











#### **FEATURES:**

**BODY CONSTRUCTION:** Knock-down, 16 gauge body with 18 gauge back. Sides are diamond perforated for maximum ventilation BODY STYLES: Single, double and six tier DOOR: 14 gauge, diamond perforated for maximum ventilation

HINGES: Continuous piano type HANDLE (wardrobe): Stainless steel recessed handle with multi-point gravity lift-type latching. Recessed handle protects finish from being marred by padlock.

HANDLE (box): Box lockers include a projecting single-point friction catch door pull prepared for both padlock or built-in lock. No moving parts insures quiet maintenance-free operation.

**HOOKS:** One double prong ceiling hook and two single hooks per single and double tier opening. One double ceiling hook for triple tier.

COAT RODS: Available for single tier at a nominal cost

**SHELVES:** Hat shelf is included in single tier lockers. LEGS: 6" high legs are standard. Lockers without legs are available for a nominal charge.



TS





			Opening		Frame	Openings	Knock-down	Fully- Assembled	Color
Width	Depth	Height	Height	Tier	Grouping	Per Group	Cat No.	Cat No.	Selection
SIN	IGLE TI	ER							
12	12	72	78	1	1-wide	1	U1228-1HDV	U1228-1HV-A	PT, HG
12	12	72	78	1	3-wide	3	U3228-1HDV	U3228-1HV-A	PT, HG
12	15	72	78	1	1-wide	1	U1258-1HDV	U1258-1HV-A	PT, HG
12	15	72	78	1	3-wide	3	U3258-1HDV	U3258-1HV-A	PT, HG
12	18	72	78	1	1-wide	1	U1288-1HDV	U1288-1HV-A	PT, HG
12	18	72	78	1	3-wide	3	U3288-1HDV	U3288-1HV-A	PT, HG
15	15	72	78	1	1-wide	1	U1558-1HDV	U1558-1HV-A	PT, HG
15	15	72	78	1	3-wide	3	U3558-1HDV	U3558-1HV-A	PT, HG
15	18	72	78	1	1-wide	1	U1588-1HDV	U1588-1HV-A	PT, HG
15	18	72	78	1	3-wide	3	U3588-1HDV	U3588-1HV-A	PT, HG
15	21	72	78	1	1-wide	1	U1518-1HDV	U1518-1HV-A	PT, HG
15	21	72	78	1	3-wide	3	U3518-1HDV	U3518-1HV-A	PT, HG
18	18	72	78	1	1-wide	1	U1888-1HDV	U1888-1HV-A	PT, HG
18	18	72	78	1	3-wide	3	U3888-1HDV	U3888-1HV-A	PT, HG
18	21	72	78	1	1-wide	1	U1818-1HDV	U1818-1HV-A	PT, HG
18	21	72	78	1	3-wide	3	U3818-1HDV	U3818-1HV-A	PT, HG
DOUE	BLE TIE	R							
12	12	36	78	2	1-wide	2	U1228-2HDV	U1228-2HV-A	PT, HG
12	12	36	78	2	3-wide	6	U3228-2HDV	U3228-2HV-A	PT, HG
12	15	36	78	2	1-wide	2	U1258-2HDV	U1258-2HV-A	PT, HG
12	15	36	78	2	3-wide	6	U3258-2HDV	U3258-2HV-A	PT, HG
12	18	36	78	2	1-wide	2	U1288-2HDV	U1288-2HV-A	PT, HG
12	18	36	78	2	3-wide	6	U3288-2HDV	U3288-2HV-A	PT, HG
15	15	36	78	2	1-wide	2	U1558-2HDV	U1558-2HV-A	PT, HG
15	15	36	78	2	3-wide	6	U3558-2HDV	U3558-2HV-A	PT, HG
15	18	36	78	2	1-wide	2	U1588-2HDV	U1588-2HV-A	PT, HG
15	18	36	78	2	3-wide	6	U3588-2HDV	U3588-2HV-A	PT, HG
15	21	36	78	2	1-wide	2	U1518-2HDV	U1518-2HV-A	PT, HG
15	21	36	78	2	3-wide	6	U3518-2HDV	U3518-2HV-A	PT, HG
18	18	36	78	2	1-wide	2	U1888-2HDV	U1888-2HV-A	PT, HG
18	18	36	78	2	3-wide	6	U3888-2HDV	U3888-2HV-A	PT, HG
18	21	36	78	2	1-wide	2	U1818-2HDV	U1818-2HV-A	PT, HG
18	21	36	78	2	3-wide	6	U3818-2HDV	U3818-2HV-A	PT, HG
SIX T	IEK								
12	12	12	78	6	1-wide	6	U1228-6HDV	U1228-6HV-A	PT, HG
12	12	12	78	6	3-wide	18	U3228-6HDV	U3228-6HV-A	PT, HG
12	15	12	78	6	1-wide	6	U1258-6HDV	U1258-6HV-A	PT, HG
12	15	12	78	6	3-wide	18	U3258-6HDV	U3258-6HV-A	PT, HG
12	18	12	78	6	1-wide	6	U1288-6HDV	U1288-6HV-A	PT, HG
12	18	12	78	6	3-wide	18	U3288-6HDV	U3288-6HV-A	PT, HG

LOCKER

ACCESSORIES PAGES 86-87









729 MARINE 725 708 711


TAN (PT)

BLUE (MB)


DARK Gray (HG)

BLACK (ME)


LIGHT GRAY (PL)




**INDIVIDUAL SLOPE TOPS** 



END CLOSURES FOR INDIVIDUAL SLOPE TOPS



SLOPE TOP FILLER



**CLOSED FRONT AND SIDE BASE** 


Width De	epth Heigh	t	Cat No.	Color Selection	
INDIVID	UAL SLOPE	TOPS			
12	12	4	KISTT1212	PT, HG, MB, ME, PL	
12	15	5	KISTT1215	PT, HG, MB, ME, PL	








12	18	6	KISTT1218	PT, HG, MB, ME, PL
15	15	5	KISTT1515	PT, HG
15	18	6	KISTT1518	PT, HG
15	21	7	KISTT1521	PT
18	18	6	KISTT1818	PT, HG
18	21	7	KISTT1821	PT, HG
18	24	8	KISTT1824	PT
END CLO			DUAL SLOPE TOP	
	12	4	KISE12	PT, HG, MB, ME, PL
	15	5	KISE15	PT, HG, MB, ME, PL
	18	6	KISE18	PT, HG, MB, ME, PL
	21	7	KISE21	PT, HG
	24	8	KISE24	PT
SLOPE TO			IVIDUAL SLOPE T	
6	12	4	KSTF0612	PT, HG, MB, ME, PL
6	15	5	KSTF0615	PT, HG, MB, ME, PL
6	18	6	KSTF0618	PT, HG, MB, ME, PL
12	12	4	KSTF1212	PT, HG, MB, ME, PL
12	15	5	KSTF1215	PT, HG, MB, ME, PL
12	18	6	KSTF1218	PT, HG, MB, ME, PL
CONTINU	IOUS SLO	OPE TOP		
72	12	4	CST1272	PT, HG, MB, ME, PL
72	15	5	CST1572	PT, HG, MB, ME, PL
72	18	6	CST1872	PT, HG, MB, ME, PL
END CLO	SURES (I	FOR CONTI	NUOUS SLOPE TO	
	12	4	WCSE12	PT, HG, MB, ME, PL
	15	5	WCSE15	PT, HG, MB, ME, PL
	18	6	WCSE18	PT, HG, MB, ME, PL
SLOPE T	OP CORI	NER		
	12	12	STC12	PT, HG, MB, ME, PL
	15	15	STC15	PT, HG, MB, ME, PL
	18	18	STC18	PT, HG, MB, ME, PL
CLOSED	FRONT E	BASE		
12		6	KCFB12	PT, HG, MB, ME, PL
15		6	KCFB15	PT, HG
18		6	KCFB18	PT, HG
CLOSED	SIDE BA	SE		
12		6	KCSB12	PT, HG, MB, ME, PL
15		6	KCSB15	PT, HG, MB, ME, PL
18		6	KCSB18	PT, HG, MB, ME, PL
21		6	KCSB21	PT, HG
24		6	KCSB24	PT







END CLOSURES FOR CONTINUOUS SLOPE TOPS



SLOPE TOP CORNER

Accessories work with lockers shown on pages 66-73 and 75-85. Not compatible with 16-person or 4 wide wall-mount lockers.










Width Depth	Height	Cat. No.	Color Selection
Z-BASE FRONT			
70	4	KZBF-N	DT HC MP ME DI
72	4	KZBF-N	PT, HG, MB, ME, PL
Z-BASE ENDS			
12	4	KZBE12-N	PT, HG, MB, ME, PL
15	4	KZBE15-N	PT, HG, MB, ME, PL
18	4	KZBE18-N	PT, HG, MB, ME, PL
Z-BASE SPLICE			
3		KZBS-N	PT
TOP RECESSED	TRIM		
72	3	KRT-T	PT, HG, MB, ME, PL
TOP RECESSED			,,,,
. J. KLOLOGEI	- Italii Oi Liol		
3	3	KRT-SC	PT, HG, MB, ME, PL
SIDE RECESS T			
3	63	KRT60L	PT
3	63	KRT60L KRT60R	PT
3	75	KRT72L	PT, HG, MB, ME, PL
3	75	KRT72E	PT, HG, MB, ME, PL
COAT RODS		RICITZIC	11,110, 110, 1112, 112
12		KCR12	Plated
15		KCR12	Plated
18		KCR18	Plated
21		KCR21	Plated
24		KCR24	Plated
7.5 (For Duple)	x and Two-Per	son KCR15L	Plated
only)			
7.5 (For Duple)	x and Two-Per	son KCR15R	Plated
only)			
FRONT FILLERS	5		
6	66	KFSF0666	PT
12	66	KFSF1266	PT
6	78	KFSF0678	PT, HG, MB, ME, PL
12	78	KFSF1278	PT, HG, MB, ME, PL
FILLER SLIP JO	INIS		
	66	KG66	PT
	78	KG78	PT, HG, MB, ME, PL
UNIVERSAL AN	GLE		
1 2	72	AF010272	PT
FLAT TOP FILLI	ERS		
6 12		KFTF0612	PT, HG, MB, ME, PL
6 15		KFTF0615	PT, HG, MB, ME, PL
6 18		KFTF0618	PT, HG, MB, ME, PL
12 12		KFTF1212	PT, HG, MB, ME, PL
12 15		KFTF1215	PT, HG, MB, ME, PL
12 18		KFTF1218	PT, HG, MB, ME, PL







FLAT T	OP CORNE	R		
12	12		FTC12	PT, HG, MB, ME, PL
15	15		FTC15	PT, HG, MB, ME, PL
18	18		FTC18	PT, HG, MB, ME, PL
UNIVE	RSAL END	PANELS		
	12	60	KMP1260	PT, HG
	15	60	KMP1560	PT, HG
	18	60	KMP1860	PT, HG
	12	72	KMP1272	PT, HG, MB, ME, PL
	15	72	KMP1572	PT, HG, MB, ME, PL
	18	72	KMP1872	PT, HG, MB, ME, PL
	21	72	KMP2172	PT, HG
	24	72	KMP2472	PT









COAT RODS W/ HOLDERS

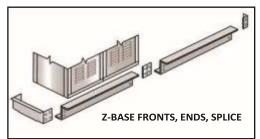


RECESSED TRIM




FRONT FILLER AND SLIPJOINT



FLAT TOP FILLER



**FLAT TOP CORNER** 





FINISHED END PANEL

*20* 





# HUBPID LOCKERS WOOD/METAL

#### **FEATURES:**

**BODY CONSTRUCTION:** Knock-down, 24 gauge sheet steel

BODY STYLES: Single, double and triple tier

**DOOR:** Furniture grade red oak plywood, finished with 2 coats of lacquer

HINGES: Continuous piano type

**HOOKS:** Two single hooks per single and double tier opening. One double prong ceiling hook for triple tier.

**COAT RODS:** Standard for single and double tier

**SHELVES:** Hat shelf in single tier lockers only.

 $\textbf{LEGS:} \ 6" \ high \ legs \ are \ standard. \ Lockers \ without \ legs \ are$ 

available at a nominal charge legs appearance:

COLOR: black frame with red oak door

**NOTE:** Other optional locking methods also available



Single tier, 1 wide











#### **GENERAL FEATURES:**

- Lockers can be ordered fully-assembled or knock-down for assembly at destination.
- Order 3-wide units for best value. Order 1-wide units to complete quantity needed for each continuous row.
- Aluminum number plates (#1-up) with mounting hardware are included. Number plate face is black with silver etched numerals. If a special numbering sequence is required, please specify when ordering. Number sequence must be consecutive numbers equal to the number of openings (doors) ordered.
- Built-in key locks are included.







Red Oak Doors and Steel Frame & Body
All lockers shown with optional closed metal base





Opening Frame Openings
Width Depth Height Height Tier Grouping Per Group





SIN	GLE TIER							
12	18	72	78	1	1-wide	1	U 1	1288-1A-MEW Wood
12	18	72	78	1	3-wide	3	U 1 708 BI	3288-1A-MEW AGK Wood
15	18	72	78	1	1-wide	1	U 1	1588-1A-MEW Wood
15	18	72	78	1	3-wide	3	UW3588- 1MEW	UW3588-1A-MEW ME/Wood
DOL	JBLE TIER							
12	18	36	78	2	1-wide	2	UW1288- 2MEW	UW1288-2A-MEW ME/Wood
12	18	36	78	2	3-wide	6	UW3288- 2MEW	UW3288-2A-MEW ME/Wood
15	18	36	78	2	1-wide	2	UW1588- 2MEW	UW1588-2A-MEW ME/Wood
15	18	36	78	2	3-wide	6	UW3588- 2MEW	UW3588-2A-MEW ME/Wood
TRIE	PLE TIER							
12	18	24	78	3	1-wide	3	UW1288- 3MEW	UW1288-3A-MEW ME/Wood
12	18	24	78	3	3-wide	9	UW3288- 3MEW	UW3288-3A-MEW ME/Wood





Accessories CLOSED FRONT BASES			
12 15	6 6	KCFB12ME KCFB15ME	ME ME
CLOSED SIDE BASES			
18	6	KCSB18ME	ME



**LOCKER** 

#### **ACCESSORIES PAGES 86-87**

## CLUB WARDROBHHAILOWEIL STOCK WOOD LOCKERS

## Club **£** Lockers

#### **FEATURES:**

**BODY CONSTRUCTION:** Wood lockers shall be fabricated from ¾" plain sliced red oak plywood throughout including sides, backs and hat shelves.

BODY STYLES: Single, double and triple tier

FINISH: All interior/front faces to be finished with a three coat catalyzed clear cabinet lacquer or equivalent.

**DOOR:** Furniture grade red oak plywood, finished with 3 coats of lacquer

**HINGES:** Concealed European-style cabinet hinges

**HOOKS:** Two single hooks per single and double tier opening. One double prong ceiling hook for triple tier.

COAT RODS: Standard for single and double tier

SHELVES: Hat shelf is included in single tier lockers.

LEGS: No legs

APPEARANCE: Natural red oak

NOTE: Other optional locking methods also available





Available optional decorative crown molding and base in red oak finish



Concealed European style cabinet door hinges



Single tier, 1 wide Shown with optional finished end panels



Key locks are standard



1 wide Shown with optional finished end panels, base and crown molding













Single tier, 3 wide, 3 openings Shown with optional finished end panels, base and decorative crown molding



Double tier, 3 wide, 6 openings Shown with optional finished end panels, base and decorative crown molding



Triple tier, 3 wide, 9 openings Shown with optional finished end panels, base and decorative crown molding







	Openi	na	Frame		Openings		Fully- Assembled	Color
Vidth	n Depti	_	Heiaht	Tier	Grouping		Cat No.	Selection
		ght			Group			
SING	LE TIE	R						
12	18	72	72	1	1-wide	1	UW1282-1A- W	Red Oak
12	18	72	72	1	3-wide	3	UW3282-1A- W	Red Oak
15	18	72	72	1	1-wide	1	UW1582-1A- W	Red Oak
15	18	72	72	1	3-wide	3	UW3582-1A- W	Red Oak
TIER	JBLE							
12	18	36	72	2	1-wide	2	UW1282-2A- W	Red Oak
12		36	72	2	3-wide	6	UW3282-2A- W	Red Oak
15		36	72	2	1-wide	2	UW1582-2A- W	
15		36	72	2	3-wide	6	UW3582-2A- W	Red Oak
TRII	PLE TII	ΞR						
12	18	24	72	3	1-wide	3	UW1282-3A- W	
12		24	72	3	3-wide	9	UW3282-3A- W	
15		24	72	3	1-wide	3	UW1582-3A- W	
15	18	24	72	3	3-wide	9	UW3588-3A- W	Red Oak
Acce	ssories							Color
Widt		epth	На	ight			Catalog No.	Selection
BAS		epu	. 110	gnit			Jakarog No.	- Ocicotion
12	18		4				WCB128W	Red Oak
36	18		4				WCB328W	Red Oak
15	18		4				WCB158W WCB358W	Red Oak
FINIS	18 SHED I	END	BASE				VVCB338VV	Red Oak



18	72	WCEP1872W	Red Oak							
FRONT	CROWN MOLDING									
12	4	WCM12W	Red Oak							
15	4	WCM15W	Red Oak							
36	4	WCM36W	Red Oak							
45	4	WCM45W	Red Oak							
END CR	END CROWN MOLDING									
18	4	WCME18W	Red Oak							

#### **GREAT STANDARD FEATURES**

 Furniture Grade Red Oak Hardwood with Two
 Stainless Steel Coat Rod Coats of Formaldehyde-Free Catalyzed Conversion
 Three Stainless Steel Hooks

Varnish for Excellent Moisture Resistance

- Starter/Adder Unit Configurations
- Modern Contour Edges with Wood Edge Banding
- 24" x 24" x 84" and \*30" x 24" x 84"
- Security Box with European Soft Close Hinges
- Ships Fully-Assembled
- Three Lock Options Available
- Includes Toe Kick Material
- Lower Foot Locker/Seat
- 2 x 4 Sub-Base By Others

## ADDITIONAL QUICK-SHIP ACCESSORIES

(ADDITIONAL LEAD-TIME APPLY)

- Logo UV Full Color Print Box Door, RLDOORLOGO
- End Filler 15", RLEF1584
- Corner Filler 15" x 15", RLCF151584

Starter units include (2) finished end panels to be used at row ends Adder units do not include finished end panels Order (1) Starter unit for each straight run of lockers and Adder units to fill out the run







#### Get Your Team GAME READY!

Introducing our New Recruiter™ Set-Back QUICK-SHIP Design

Recruiter lockers are crafted of furniture grade red oak and finished using two coats of high grade cabinet lacquer. Red oak is naturally moisture and mildew resistant so you can be sure to benefit from your investment for years to come. Recruiter lockers are virtually unaffected by normal locker room conditions and are designed to stand up to daily use by today's athletes!

In addition to our standard stock designs and sizes, our engineers are readily available to assist you in custom designing a locker to meet your specific needs. Be it a fitness center, team locker room, country club or resort health spa, we stand behind our product with a full one year warranty that covers defects in materials and workmanship.



**OPTIONAL ADD ON ACCESSORIES** 





Seat Cushion (Black) SC2424BK SC3024BK



Name Plate Holder NPH-0212S (12" wide) NPH-0218S (18" wide)



Shoulder Pad Rack SPHR14R



Shoulder Pad & Helmet RackUSB Outlet in Security Box
SPHR18R USB-4
USB-4-110





These lockers are high quality fine furniture. We take special pride in ensuring that each locker is a true work of art. All are made in our own manufacturing plant and shipped directly to you.

#### 24" & \*30" Wide Models Available From Quick-Ship



### QUICK-SHIP LOCK OPTIONS



Standard Padlock Cam Hasp



Built In Combination Lock Master Lock #1655



DigiTech-H1™ Electronic Lock





Width	Depth	Height	Starter Cat. No.	Adder Cat. No.
Recru	iter 2 Wi	th Combinat	tion Lock Hasp	
24	24	84	R2SBS242484BNPLFSGRO-S	R2SBS242484BNPLFSGRO-A
Recrui	ter 2 Wit	h Built In Co	ombination Lock	
24	24	84	R2SBS242484BNBCFSGRO-S	R2SBS242484BNBCFSGRO-A
Recruit	er 2 With	n Digitech™	H1 Electronic Lock	
24	24	84	R2SBS242484BNDTFSGRO-S	R2SBS242484BNDTFSGRO-A
End Fi	ller Pane	ls		
15	*	84	RLEF1584	
Corne	Fillers			
24	24	84	RLCF242484	
36	36	84	RLCF363684	



SEE PAGE 122 FOR CUSTOM OPTIONS FROM PRODUCTION





### GALVANITĖ IM RUST RĖSISTANT

### STOCK KD LOCKERS

Hallowell-List.com

#### Galvanite™ Rust Resistant Lockers

Galvanite lockers are fabricated from prime galvannealed (hot-dipped zinc coated, annealed) sheet steel, then finished with an electrostatically applied high grade powder coat finish providing double protection against corrosion.

#### **FEATURES:**

**BODY CONSTRUCTION: 24 gauge,** galvannealed corrosion resistant sheet steel BODY STYLES: Single, double, triple and six tier DOOR: 16 gauge, galvannealed corrosion resistant sheet steel louvered for added ventilation, 18 gauge for box doors **HINGES:** Continuous piano type **HANDLE** (wardrobe): Stainless steel recessed handle with multi-point gravity lift-type latching. Recessed handle protects finish from being marred by padlock.

**HANDLE** 

(box): Box lockers include a projecting single-point friction catch door pull prepared for both padlock or built-in lock. No moving parts insures quiet maintenancefree

#### operation. **HOOKS:**

One double prong ceiling hook and two single hooks per single and double tier opening. One double

ceiling hook for triple tier. No hooks for six tier lockers.

**COAT RODS:** Available for single tier at a nominal cost

SHELVES: Hat shelf is included in single tier lockers.





#### LEGS: 6" high legs are standard. Lockers







Six Tier, 3 wide, 18 openings

& Box Door Finger Pulls
Lift covers and finger pulls are made of a
super tough nylon material which includes
an Antimicrobial agent offering protection

2 YEAR WARRANTY



without **UPGRADED Antimicrobial** legs are available for a nominal charge. **Recessed Handle Finger Lift Cover** 



# PRONE AREAS



Hallowell-List.com

GALVANITE™ CORROSION Ideal for use in high door locations, near

**RESISTANT SHEET STEEL** 

PREVENTS RUST AND CORROSION

humidity areas, out-

Galvanite<sup>™</sup>, is List Industries' trade marked name for **shower or pool areas** lockers and cabinets manufactured with

galvannealed and food industry sheet steel components and finished with an

facilities. electrostatically

applied high-grade powder coat finish. Galvanite™ cold rolled sheet steel Galvanneal and powder coat offer exceptional double with our powder coat protection against corrosion, even under the most finish after a 336 hour salt adverse conditions. Tests indicate that galvanneal spray test. increases the estimated life-cycle threefold.

#### WHAT IS GALVANNEAL?

Galvanneal is the result of the combined processes galvanizing (hot-dipped zinc coating) and anneal-**On** treatment). Galvanneal does not flake when **locker** stamped. The very fine matte finish acts

like a primer that easily adheres to paint. as an



Common cold rolled sheet steel after a option

sterisean be ordered of any Production ing (heat or calrinet formed or

336 hour salt

These characteristics make galvannealed sheet steel ideal for steel lockers in high humidity, corrosion *spray test.* 

prone areas.

729 TAN (PT)

		Opening	Frame			Openings	Knock-down	Fully-Assemble	d Color
Width	Depth	Height	Height	Tier	Grouping	Per Group	Cat No.	Cat No.	Selection
SII	NGLE T	IER							
12	12	72	78	1	1-wide	1	U1228-1G	U1228-1GA	PT
12	12	72	78	1	3-wide	3	U3228-1G	U3228-1GA	PT
12	15	72	78	1	1-wide	1	U1258-1G	U1258-1GA	PT
12	15	72	78	1	3-wide	3	U3258-1G	U3258-1GA	PT
12	18	72	78	1	1-wide	1	U1288-1G	U1288-1GA	PT
12	18	72	78	1	3-wide	3	U3288-1G	U3288-1GA	PT
DOU	BLE TIE	R							
12	12	36	78	2	1-wide	2	U1228-2G	U1228-2GA	PT
12	12	36	78	2	3-wide	6	U3228-2G	U3228-2GA	PT
12	15	36	78	2	1-wide	2	U1258-2G	U1258-2GA	PT
12	15	36	78	2	3-wide	6	U3258-2G	U3258-2GA	PT
12	18	36	78	2	1-wide	2	U1288-2G	U1288-2GA	PT
12	18	36	78	2	3-wide	6	U3288-2G	U3288-2GA	PT
TRIPL	LE TIER								
12	12	24	78	3	1-wide	3	U1228-3G	U1228-3GA	PT
12	12	24	78	3	3-wide	9	U3228-3G	U3228-3GA	PT
12	15	24	78	3	1-wide	3	U1258-3G	U1258-3GA	PT
12	15	24	78	3	3-wide	9	U3258-3G	U3258-3GA	PT
12	18	24	78	3	1-wide	3	U1288-3G	U1288-3GA	PT
12	18	24	78	3	3-wide	9	U3288-3G	U3288-3GA	PT
SIX T									
12	12	12	78	6	1-wide	6	U1228-6G	U1228-6GA	PT
12	12	12	78	6	3-wide	18	U3228-6G	U3228-6GA	PT
12	15	12	78	6	1-wide	6	U1258-6G	U1258-6GA	PT
12	15	12	78	6	3-wide	18	U3258-6G	U3258-6GA	PT
12	18	12	78	6	1-wide	6	U1288-6G	U1288-6GA	PT
12	18	12	78	6	3-wide	18	U3288-6G	U3288-6GA	PT





## LOCKER ACCESSORIES PAGES 86-87

S PAGES 86-87
Wardrobe Doors:









# PROVIDES MAXIMUM CORROSION RESISTANCE





Aquamax Solid Plastic Lockers are Ideal for applications where high humidity, moisture and water are present. Plastic lockers are fabricated from solid high density polyethylene panels (HDPE) for maximum strength and durability while providing corrosion resistance to most common chemicals.

#### **FEATURES:**

**BODY CONSTRUCTION:** Corrosion Proof High Density Polyethylene (HDPE), with 3/8" thick body panels

BODY STYLES: Single, double, triple, six tier and z-tier

HINGES: heavy-duty continuous full height extruded aluminum with a powder-coat finish to match color of door

**HANDLE (Wardrobe):** Projecting solid plastic handle with lift-type latching **HANDLE (Box):** Single-point thru-the-door padlock hasp with projecting door pull

SHELVES: Hat shelf is included in single tier lockers

**HOOKS:** 2 single-prong hooks in single and double tier lockers



Bax Locker Doors: Single-point thru-the-door

#### ADVANTAGES:

- Scratch Resistant
- Corrosion Resistant
- . Mildew and odor resistant
- Graffiti resistant
- · Impact and dent resistant
- Chemical Resistant

20 YEAR WARRANTY



Projecting solid plastic han-dle with lift-type latching • Easy to clean

projecting friction catch door pull with padlock hasp



		Opening	Overall			Openings	Taupe	Blue/Taupe
Width	Depth	Height	Height	Tier ( Grou	Groupin p	g Per	Cat No.	Cat No.
SING	LE TIE	R						
12	18	72	72	1	1- wide	1	HPL1282-1A-TE	HPL1282-1A-TB
12	18	72	72	1	3- wide	3	HPL3282-1A-TE	HPL1382-1A-TB
DOU	BLE TIE	ER						
12	18	36	72	2	1- wide	2	HPL1282-2A-TE	HPL1282-2A-TB
12	18	36	72	2	3- wide	6	HPL3282-2A-TE	HPL3282-2A-TB
TRIP	LE TIEF	₹						
12	18	24	72	3	1- wide	3	HPL1282-3A-TE	HPL1282-3A-TB
12	18	24	72	3	3- wide	9	HPL3282-3A-TE	HPL3282-3A-TB
SIX T	TER							
12	18	12	72	6	1- wide	6	HPL1282-6A-TE	HPL1282-6A-TB
12	18	12	72	6	3- wide	18	HPL3282-6A-TE	HPL3282-6A-TB
Z-ST	YLE							
12	18	48	72	Z	1- wide	2	HPL1282-ZA-TE	HPL1282-ZA-TE
12	18	48	72	Z	3- wide	6	HPL3282-ZA-TE	HPL3282-ZA-TE





MedSafe AquaMax lockers are manufactured with with padlock hasp

high density polyethylene (HDPE) that contains a **SHELVES**: Hat shelf is included in single tier lockers formulated ANTIMICROBIAL agent that **HOOKS**: 2 single-prong hooks in single and double tier lockers permanently resists the growth of bacteria, mold, yeast

and mildew. This special feature combined with all the great features of our AquaMax lockers make these

• ADVANTAGES: Permanent antimicrobial protection - kills microbes (yeast, lockers ideal for use in medical, educational, retail and bacteria, mold, mildew) manufacturing environments.





## ANTIMICROBIAL & CORROSION RESISTANT PLASTIC LOCKERS





#### **FEATURES:**

**BODY CONSTRUCTION:** Corrosion Proof High Density Polyethylene (HDPE), with 3/8" thick body panels

BODY STYLES: Single, double, triple, six tier and z-tier

HINGES: heavy-duty continuous full height extruded aluminum with a powder-coat finish to match color of door

HANDLE (Wardrobe): Projecting solid plastic handle with lift-type latching

HANDLE (Box): Single-point thru-the-door projecting friction catch door pull





2-Tier, 3 wide, 6 openings

• Scratch Resistant



Z-Tier, 3 wide, 6 openings



1-Tier, 3 wide.







- Corrosion Resistant
  - Impact and dent resistant
    - Easy to clean
  - Mildew and odor resistant
    - Graffiti resistant

(pencil, pen, paint and most common markers)

Chemical Resistant

		Opening	Overall		Frame	Openir
Width	Depth	Height	Height		er Grouping oup	Per
SING	LE TIER					
12	18	72	72	1	1-wide	1
12	18	72	72	1	3-wide	3
DOU	BLE TIE	R				
12	18	36	72	2	1-wide	2
12	18	36	72	2	3-wide	6
Z-ST	YLE					
12	18	48	72	Z	1-wide	2
12	18	48	72	Z	3-wide	6

WHITE	
TAUPE	1
HANDLES	١

#### **FEATURES:**

**BODY CONSTRUCTION:** Phenolic construction, Sides and backs are 5/16" thick.

Tops, bottoms and shelves are 3/8" thick.







VersaMax Phenolic Lockers are the most durable lockers available. The unique non-porous surface of phenolic material eliminates the ability for mold, mildew and bacteria to grow making these lockers ideal for wet or damp areas. In addition to this primary benefit, the surface of VersaMax Phenolic Lockers are also water proof and graffiti and scratch resistant.





**BODY STYLES:** Single tier, double tier, six tier and z-tier

**DOORS:** 1/2" thick solid phenolic with perimeter ventilation

HINGES: 5-knuckle "hospital" type 14 gauge 304 stainless steel, black

powder coat finish, exposed, doors open 180°

HANDLE (Padlock Ready): 11 gauge finger-pull 304 stainless steel hasp,

prepared for padlock

HANDLE (Electronic Lock): Built-in Digitech H1 Lock serves as handle

HANDLE (Key Cam Lock): Built-in key cam lock serves as handle

SHELVES: Hat shelf is included in single tier lockers

**HOOKS:** 2 single-prong hooks in single and double tier lockers

**COLOR:** Figured Annigre **WARRANTY:** 20 years

#### **ADVANTAGES:**

- Phenolic's unique non-porous surface eliminates the ability for mold, bacteria and mildew to grow making it ideal for wet areas.
- Corrosion Resistant
- Impact and dent resistant
- · Easy to clean
- Fungus and odor resistant
- Graffiti resistant (pencil, pen, paint and most common markers)

### AVAILABLE FROM STOCK WITH 3 DIFFERENT LOCK CHOICES



**Padlock Hasp** 



DigiTech™ H1 Electronic Locks



Built-In Key Cam Locks







7284-58 Figured Annigr

							(Padlocks	With DigiTech™	With Key
	(	Opening	Overall		Frame	Openings	sold separately)	Electronic Access I	ocks Cam Lock
	Depth		Height		r Grouping oup	) Per	Cat No.	Cat No.	Cat No.
SING	LE TIER	l							
12	18	72	72	1	1-wide	1	PHL1282-1A-FA	PHL1282-1A-E-FA	PHL1282-1A-K- FA
12	18	72	72	1	3-wide	3	PHL3282-1A-FA	PHL3282-1A-E-FA	PHL3282-1A-K- FA
DOU	BLE TIE	R							
12	18	36	72	2	1-wide	2	PHL1282-2A-FA	PHL1282-2A-E-FA	PHL1282-2A-K- FA
12	18	36	72	2	3-wide	6	PHL3282-2A-FA	PHL3282-2A-E-FA	PHL3282-2A-K- FA
SIX T	TER								
12	18	12	72	6	1-wide	6	PHL1282-6A-FA	PHL1282-6A-E-FA	PHL1282-6A-K- FA
12	18	12	72	6	3-wide	18	PHL3282-6A-FA	PHL3282-6A-E-FA	PHL3282-6A-K- FA
Z-ST	YLE								
12	18	42	72	Z	1-wide	2	PHL1282-ZA-FA	PHL1282-ZA-E-FA	PHL1282-ZA-K- FA
12	18	42	72	Z	3-wide	6	PHL3282-ZA-FA	PHL3282-ZA-E-FA	PHL3282-ZA-K- FA





		Opening	Overall		Frame	Openings	Knock-Down	Fully-Assembled
Width	Depth	Height	Height	Tier C Grou		Per	Cat No.	Cat No.
SING	LE TIE	R						
12	18	72	78	1	1- wide	1	USS1288-1	USS1288-1A
12	18	72	78	1	3-wide	3	USS3288-1	USS3288-1A
18	18	72	78	1	1-wide	1	USS1888-1	USS1888-1A
18	18	72	78	1	3- wide	3	USS3888-1	USS3888-1A
DOUI	BLE TII	ER						
12	18	36	78	2	1- wide	2	USS1288-2	USS1288-2A
12	18	36	78	2	3- wide	6	USS3288-2	USS3288-2A
18	18	36	78	2	1- wide	2	USS1888-2	USS1888-2A
18	18	36	78	2	3- wide	6	USS3888-2	USS3888-2A
SIX	ΓIER							
12	18	12	78	6	1- wide	6	USS1288-6	USS1288-6A
12	18	12	78	6	3- wide	18	USS3288-6	USS3288-6A
18	18	12	78	6	1- wide	6	USS1888-6	USS1888-6A
18	18	12	78	6	3-wide	18	USS3888-6	USS3888-6A





## UPGRADED Antimicrobial Recessed Handle Finger Lift Cover & Box Door Finger Pulls

Lift covers and finger pulls are made of a super tough nylon material which includes an Antimicrobial agent offering protection against the growth of molds and bacteria.





## 304 Stainless Steel



Single-Tier, 1 wide, 1 opening



Double-Tier, 3 wide, 6 openings



The rich appearance and durable surface of Hallowell 304 Stainless Steel Lockers make them the perfect locker solution for areas prone to rust and sanitation concerns and are ideal for food industry, pool area and outdoor.

#### **FEATURES:**

**BODY CONSTRUCTION:** knock-down 24 gauge **BODY STYLES:** Single, double, and six tier

**DOORS:** Louvered. 16 gauge for single and double tier lockers. 18 gauge for 6-tier box lockers

LATCHING: Single and double tier use gravity-lift and six-tier uses single-point, through the door finger pull

**HINGES:** 2-1/2" 5-knuckle hinges. 3 hinges for single tier and 2 hinges for double & six tier

**HANDLE:** Single and double tier lockers have a deep drawn stainless steel recessed handle with multi-point gravity lift-type latching. Six tier lockers have a finger pull handle

COAT RODS: Available for single tier at a nominal cost

SHELVES: Hat shelf is included in single tier lockers

**HOOKS:** One double prong ceiling hook and three single hooks per single and double tier opening. No hooks for six tier

COLOR: Stainless steel WARRANTY: 2 years









	Width	Depth	Height	Cat No.
ACCESSORIES				
Individual Slope Top	12	18	6	KISTT1218SS
	12	18	6	KISTT1818SS
Slope Top End Closure	-	18	6	KISE18SS
Closed Front Base	12	-	6	KCFB12SS
	18	-	6	KCFB18SS
Closed Side Base	-	18	6	KCSB18SS
Coat Rod Assembly	12	-	-	KCR12SS
	18	-	-	KCR18SS



LOCKER ACCESSORIES PAGES 86-87







7 Bright Kid Friendly Colors!!!

### **GREAT for:**

- √ Kid's Bedrooms
- √ Garages

- √ Playroom lockers
- **✓ Mudroom lockers**



#### **FEATURES:**

**BODY CONSTRUCTION:** knock-down (KD) 24 gauge solid body components, 20 gauge top

**BODY STYLES**: Teen, Kid **FRAME**: 16 gauge frame

SHELVES: Teen Locker has 1 fixed hat shelf,

Kid locker has no shelves

**HOOKS:** Teen locker shall include one double hook and two single hooks attached to hat shelf. No hooks for Kid Locker

**DOORS:** 16 gauge louvered doors **LATCHING:** Gravity lift type latching **HANDLE:** Recessed stainless steel

HINGES: 16 gauge continuous piano hinge



720 PEP RALLY (PR) 721 RELAY RED (RR) 739 Bubble Gum (BG)

1134 Sour Apple (SA) 717 GRAND SLAM (GS) 728 HOOP (HP) 723 Trophy (Ty)





**COLOR: 7** bright kid-friendly colors



#### ANTIMICROBIAL UPGRADED Antimicrobial Recessed Handle Finger Lift Cover

All gravity lift-type latching lockers that include recessed handles include our  $\mbox{\sc Antimicrobial}$ 



Recessed Handle Finger Lift Cover for protection against the growth of molds and bacteria

Width	n Depth	Opening Height F	rame Heig	ht Tier	Grouping Group	Openings Per	Knock-Down Cat No.	Color Selection
KID	LOCKER							
15	15	24	24	1	1-wide	1	HKL1515(24)-1	BG, GS, HP, PR, RR, SA, TY
TEE	N LOCKE	R						
15	15	48	48	1	1-wide	1	HKL151548-1	BG, GS, HP, PR, RR, SA, TY

**SHELVES:** 1 fixed hat shelf

LATCHING: Gravity lift type latching







### 5 color combinations & 3 New solid colors

Home Team Lockers are 48 inch high wardrobe lockers with fixed upper hat shelf and hooks. All lockers are standard with diamond perforated doors and without legs



#### **FEATURES:**

BODY CONSTRUCTION: knock-down (KD) 24 gauge body 20 gauge top

FRAME: 16 gauge frame DOORS: 16 gauge louvered doors

HOOKS: Home Team locker includes one double hook and two single hooks HANDLE: Recessed

stainless steel





#### **UPGRADED Antimicrobial Recessed Handle Finger Lift Cover**

All gravity lift-type latching lockers that include recessed handles include our Antimicrobial



DARK BLUE Body/Frame Orange MT BLACK Body/Frame YELLOW GR BLUE Body/Frame RED RS RED Body/Frame WHITE

Door

JP
DARK BLUE
Body/Frame
LIGHT GRAY

GS 717GRAND SLAM

HINGES: 16 gauge continuous piano hinge

BG 739BUBBLE GUM RR 721RELAY RED





Recessed Handle Finger Lift Cover for protection against the growth of molds and bacteria

Wid	th Depth	Opening Height	Frame Heigh	nt Tier	Grouping	Openings Per Group	Knock-Down Cat No.	Color Selection
НО	ME TEAM	LOCKER						
15	15	48	48	1	1-wide	1	HTL151548-1	JH, MT, GR, RS, JP, GS, BG, RR





Stack Cubix lockers and easily attach adjacent units with pre-punched holes on top, sides and bottom. Or use the keyhole punched back for wall mounting.





Ventilated Diamond Perforated Door Padlock Hasp Light Gray



Safety-View™ Door Key Lock Marine Blue



Plain Locker Door Key Lock Black



Wall Mounting





BODY CONSTRUCTION: Knock-down, 16 gauge

HINGES: 16 gauge continuous piano hinge

DOORS: 18 gauge Solid (non-vented), Diamond

Perforated, or Safety-View (clear)

HANDLE/LOCKS: Finger pull latch prepared for padlock (sold separately), or Built-in key lock

COLOR: Marine Blue, Black, Light Gray

WARRANTY: 2 years



Above or Below a Workbench









#### **UPGRADED Antimicrobial Box Door Finger Pulls**

All box door finger pulls are made of a super tough nylon material which includes an

Antimicrobial agent offering protection against the growth of molds and bacteria.

Description tion	Overall Width	Overall Height	Overall Depth	Catalog No.	Color Selec-
PREPARED FOR	PADLOCI	K (not inclu	ded)		
Ventilated Door	11-5/16	12-11/16	12	HC121212-1DP	MB, ME, PL
Solid Door	11-5/16	12-11/16	12	HC121212-1PL	MB, ME, PL
Safety-View Plus Door	11-5/16	12-11/16	12	HC121212-15VP	MB, ME, PL
WITH BUILT-IN	KEY LOCI	K (included)	Ti .		
Ventilated Door	11-5/16	12-11/16	12	HC121212-1DP-K	MB, ME, PL
Solid Door	11-5/16	12-11/16	12	HC121212-1PL-K	MB, ME, PL
Safety-View Plus Door	11-5/16	12-11/16	12	HC121212-1SVP-K	MB, ME, PL



**Desk Mounting** 

Closet Mounting





















Clear	Clear	Clear				
Opening	Opening	Opening				
Width	Height	Depth				
Mobile Device Lockers						
7 1/2	5 1/2	11				



- PP





#### LIGHT GRAY (PL)

Overall					Padlock Ready	With DigiTech™			
Width	Height	Depth	Grouping	Openings	(Padlocks sold	Electronic Access	With Key		
				Per Group	separately)	Locks	Cam Lock	Color	
					Cat No.	Cat No.	Cat No.	Selection	
MOBILE DEVICE LOCKERS									
9	30 1/2	12	1-wide	5	UCTL192(30)-5A	UCTL192(30)-5A-E	UCTL192(30)-5A-K	PL	
27	30 1/2	12	3-wide	15	UCTL392(30)-5A	UCTL392(30)-5A-E	UCTL392(30)-5A-K	PL	







Ideal for use in government buildings, schools, health clubs or any location where personal items, cell phones and tablets need to be securely stored.

#### **FEATURES:**

BODY CONSTRUCTION: 20 gauge cold rolled steel

HINGES: 16 gauge continuous piano hinge DOORS: 20 gauge solid (non-vented)

HANDLE/LOCKS: Locks serve as door handle/pull PADLOCK: hasp cam lock for padlocks by others

**KEY LOCK:** Cylinder cam locks control keyed to one system **DIGITECH LOCK:** Electronic access lock in temporary-use mode that can be programmed for permanent use

COLOR: Light Gray WARRANTY: 2 year





EASILY STORE AND PROTECT PERSONAL BELONGINGS.



Shown With Digitech Electronic Access Lock

#### CHOOSE FROM 3 DIFFERENT LOCK OPTIONS.



PREPARED FOR PADLOCK



DIGITECH ELECTRONIC ACCESS LOCK



KEY CAM LOCK













## **BACKPACK / LAPTOP LOCKERS**

- Electronic access door keeps items secure
- One shelf per opening
- Prepared for after market wiring to allow charging
- Side ventilation allows maximum airflow for cooling while maintaining security



Built-in Hallowell Electronic Access Digitech lock - also acts as locker handle






12 OPENINGS











**WIRE CHASE** 





Each locker has built-in channel for concealed after-market wiring to convert lockers to charging stations.

VENTILATED Diamond perforations in locker sides promote continuous air flow to cool chargers and components while keeping your items secure.

#### **LOCK FEATURES:**

• Powered by 1 CR123 battery which provide in excess

of 10,000 uses.LED INDICATORS

- 1 CR123 battery is included.
- LED's flash to indicate low battery level. **Digitech**
- Locker can be opened when batteries are low or 8-digit master and master codes for two levels dead by using the Master Key override.

#### **Electronic AccessLock**

of management security.

#### **DAY-USE MODE:**

• User can lock and unlock any available locker door with a user selected code.









• Upon returning, user enters the 4-digit code to unlock ROTATE TO OPEN the door. Code is erased and the locker is available **OVERRIDE KEY** for the next user.

#### **PERMANENT MODE:**

• User enters a pre-programmed 4-digit code to unlock and use locker repeatedly.

• Lock does not require a code to re-lock door.

#### **FEATURES:**

**BODY CONSTRUCTION: 16 gauge** sheet steel with sides diamond

perforated BODY STYLES: 3-tier, 4-

tier

FRAME: 16 gauge welded frame

**DOORS:** 14 gauge solid sheet steel HINGES: 16 gauge continuous piano hinge WARRANTY: 2 years

**HANDLE:** Hallowell DigiTech™

electronic, code access lock serves as

handle

SHELVES: 1 fixed hat shelf

HOOKS: none

COLOR: 711 Light Gray

#### **SPECIAL FEATURES:**

• Each locker has built-in channel for concealing after-market wiring to convert lockers to charging stations.

Width	Depth	Heigh	t Grouping	Openings Per Group	Unassembl Cat No.
TRIPL	E TIER				
15	18	78	1-wide	3	UELBP1588-3
45	18	78	3-wide	9	UELBP3588-3
15	21	78	1-wide	3	UELBP1518-3





PIANO STAND	HINGE
STAND	ARD

2 YEAR WARRANTY



45	21	78	3-wide	9	UELBP3518-3
18	18	78	1-wide	3	UELBP1888-3
54	18	78	3-wide	9	UELBP3888-3
18	21	78	1-wide	3	UELBP1818-3
54	21	78	3-wide	9	UELBP3818-3
FOUR	TIER				
15	18	78	1-wide	4	UELBP1588 4PL
45	18	78	3-wide	12	UELBP3588 4PL
15	21	78	1-wide	4	UELBP1518-
45	21	78	3-wide	12	UELBP3518-
18	18	78	1-wide	4	UELBP1888-
54	18	78	3-wide	12	UELBP3888-
18	21	78	1-wide	4	UELBP1818-
54	21	78	3-wide	12	UELBP3818-

 Channel shall include knock-outs for electrical outlet in each opening. 711 LIGHT GRAY (PL)





### Turnout Gear/Firefighter Lockers





EXPANDED METAL SIDES FOR MAXIMUM VENTILATION

#### **FEATURES:**

**BODY CONSTRUCTION:**13 gauge 1/2" flattened expanded metal

FRAME: 16 gauge Hollow "T" tubular frame

DOOR (Security Box):14 gauge cold rolled sheet-steel

HINGES (Security Box):Two heavy-duty 13 gauge 7-knuckle 3-1/2"

HANDLE (Security Box):Projecting combination spring-bolt/padlock hasp door pull

SHELVES: One Galvanneal hat/intermediate shelf and 1 fixed hat shelf.

**HOOKS:** Two single prong hooks at back and two hooks at coat rod ends.

WARRANTY:Lifetime











All box door finger pulls are made of a super tough nylon material which includes an Antimicrobial agent offering protection against the growth of molds and bacteria.

#### Choose from 4 Models -



Base Model Without Base



Base Model With Base



With Upper Security Box Without Base



With Upper Security Box With Base





DESIGNED FOR





- Fully-framed, all welded, rugged construction.
- Maximum ventilation with expanded metal sides.
- Upper shelf provides storage for helmets and head gear.
- Without base models include ventilated bottom.
- Open-front provides quick access to gear and clothing.
- 721 Relay Red hammertone textured powder coat finish.





OPTIONAL SECURITY BOX USES TWO HEAVY-DUTY 13 GAUGE 7-KNUCKLE 3-1/2" HINGES
AND A FINGER PULL PADLOCK HASP



FIXED HAT SHELF AND
STAINLESS STEEL COAT-ROD WITH 2 SINGLE
PRONG HOOKS



MODELS WITHOUT BASE HAVE
VENTILATED BOTTOM PLATE AND ARE
DESIGNED TO BE INSTALLED ON THE WALL WITH



MODELS WITH BASE ARE DESIGNED TO BE INSTALLED ON THE FLOOR

THE WALL MOUNTING ANGLE





Description	Width	Depth	Height
BASE MODEL			
Without Base	24-3/4	22	84
With Base	24-3/4	22	86-1/4
WITH UPPER SE	CURITY BO	Х	
Without Base	24-3/4	22	84
With Base	24-3/4	22	86-1/4
WALL MOUNTIN	G ANGLE F	OR MODELS V	WITHOUT BASE
	72	3	3



521 RELAY RED HAMMERTONE (RR-HT)





Five distinct models to choose, Specifically designed for the uniform use industry.



The Industry Standard in the Uniform Distribution System.







9 Person Uniform Exchange Locker Model HUE454-9P






















#### **FEATURES:**

- ✓ Master door with H-1 industry standard lock and key
- Padlock attachment (padlock not included)
- Ships fully assembled
- Perforated backs for ample ventilation
- ✓ Galvanized locker bottoms with return flanges
- ✓ Color selection: Dark Gray
- Full 1 year warranty







User doors re-inforced at latches



Heavy-duty padlock handles (locks not included)





**Exchange Locker** 





#### Model HUE614-1



Main door latch hooks welded to frame

STOCK COLOR 725 Dark Gray (HG)

	(	Opening	Fram	ie		Opening	s Fully- Assembled	Color
Width I	Depth	Height	Heigh	t Tier	Grouping	Per Group	Cat. No.	Selection
8 PERSON UNI	FORM	EXCHAN	GE LC	CKER				
32 9/16	21	38 3/4	84	8	1-wide	8	HUE214-8P	HG
9 PERSON UNI	FORM	EXCHAN	GE LC	CKER				
24	15	8 3/4	84	9	1-wide	9	HUE454-9P	HG
SOILED UNIFO	RM EX	KCHANGE	LOCK	KER				
26	21	70 3/4	84	1	1-wide	1	HUE614-SC	HG
HALF OR FILL	HEIGH	IT HANGI	NG UN	IIFORM	LOCKER			
32 9/16	21	81	84	1	1-wide	1	HUE214-1	HG
32 9/16	21	40	84	1	1-wide	2	HUE214-2	HG









		Openin	g Frame		Openings	Fully-Assemb	ed Color	
Width I	Depth	Height	Height	Tier	Grouping	Per Group	Cat No.	Selection
SINGL	E TIER							
18-3/4	18	72	74-3/4	1	1-wide	1	HLV882-1PL	PL





#### **ALL-WELDED HEAVY-DUTY CORROSION RESISTANT**

#### ALL-WELDED LOCKERS





#### Hallowell All-Welded MaxView lockers are perfect for tool, equipment and gear storage.

#### **FEATURES:**

BODY CONSTRUCTION: All-welded 16 gauge heavy-duty tubular frame construction from galvannealed sheet steel, sides and back are 1/2" 13 gauge flattened expanded metal. Top and bottom are heavy-duty galvannealed corrosion resistant sheet steel, fully-assembled

**BODY STYLES:** Single tier


DOOR: 14 gauge door is diamond perforated for maximum visibility and ventilation. Includes a welded-in full height door stiffener




HANDLE: Single-point projecting friction catch door pull prepared for both padlock or built-in lock.

SHELVES: Four 16 gauge sheet steel welded-in fixed shelves are fabricated from galvanneal corrosion resistant sheet steel add additional rigidity to the unit.


























#### UPGRADED Antimicrobial Finger Pulls

Door finger pull is made of a super tough nylon material which includes an Antimicrobial agent offering protection against the growth of molds and bacteria.



Heavy gauge tubular frame. Bottom shelf of locker sits a full 2-3/4" above finished floor protecting locker contents from water damage.





Double Tier,







#### Welded Single-Point Ventilated Lockers

#### **FEATURES:**

BODY CONSTRUCTION: All-welded,

fully-assembled

BODY STYLES: Single and double tier custom

FEATURES: 16 gauge continuous top for added rigidity, 11 gauge MIG welded latch, continuous door strike at hinge and latch side

**D00R:** 14 gauge door is diamond perforated for added visibility and ventilation and includes a welded-in full height door stiffener



HINGES: Continuous piano type

**HANDLE:** Deep-drawn seamless stainless steel recessed handle with single-point thru-the-handle maintenance-free quiet latching system

SHELVES: Hat shelf for single tier

Single-point maintenance-free quiet latching system with recessed handle



Lockers include a 3\* wide 18 gauge full height door stiffener spot welded to the inner door face and MIG welded to the hinge side as well as to the top and bottom door flanges providing a rigid torque-free door.





Single Tier, 1 wide, 1 opening

Width	Depth	Opening Height	Frame Height	Tier	Grouping	Openings Per Group	Fully-Assembled Cat No.	Color Selection
SING	LE TIE	R	10010					
12	12	72	72	1	1-wide	1	HMBA212-1	HG
12	12	72	72	1	3-wide	3	HWBA212-111	HG
12	18	72	72	1	1-wide	1	HMBA282-1	HG
12	18	72	72	1	3-wide	3	HWBA282-111	HG
18	18	72	72	1	1-wide	1	HMBA882-1	HG
18	18	72	72	1	3-wide	3	HWBA882-111	HG
DOU	BLE TI	ER						
12	12	36	72	2	1-wide	2	HWBA212-2	HG
12	12	36	72	2	3-wide	6	HWBA212-222	HG
12	18	36	72	2	1-wide	2	HMBA282-2	HG
12	18	36	72	2	3-wide	6	HWBA282-222	HG
18	18	36	72	2	1-wide	2	HWBA882-2	HG
18	18	36	72	2	3-wide	6	HWBA882-222	HG









6 openings









Perfect For Swat, Police, Fire & Emergency Response Teams

#### **FEATURES:**

**BODY CONSTRUCTION:** 16 gauge, Unibody allwelded, galvannealed corrosion resistant sheet steel. Back is 18 gauge

**BODY STYLES:** Single tier, custom designed for specialized use

**DOOR:** 14 gauge louvered double doors with full-height welded in stiffener

HINGES: Continuous piano type

**HANDLE:** 3-point high-security turn handle latching handle

**HOOKS:** Two single wall hooks in wardrobe area, single hook in opening below security box, single hook on door.

COAT RODS: One at vertical wardrobe section

SHELVES: Two full-width at top, one partial shelf above security box

**LOCKS**: Includes built in key lock for main and security box

SIZE: Wardrobe locker 24" x 24" x 72"

OPTIONAL: Base/drawer unit 24" x 36" x 18"



Standard electrical knockout at locker top right rear corner

- Utility belt hook
- Security box
- One side pocket shelf for a 1" thick clipboard
- Full height piano hinge
- Finish is standard Powder-coat
- ✓ Full height door stiffeners
- Lower storage area with pull-out drawer
- Auto-Locking drawer is activated by upper doors
- Electrical Knockout in locker top - outlet and wiring by others

#### STANDARD UPPER UNIT SIZES

Widths: 24", 30", 36" Depths: 18", 24" Height: 72"

#### STANDARD BASE UNIT SIZES

Widths: 24", 30", 36" Depths: 30" 36" Height: 18"

#### **OPTIONS**

- PEGBOARD DOOR STIFFENER
- BOOT TRAY
- BODY ARMOR DRYING RACK
- PERSONAL ITEMS ACCESSORY TRAY
- LOUVERED DRAWER FRONT
- PERFORATED TOP
- AIRFLOW GAP SHELVES SPACED AWAY FROM BACK FOR ADDED AIRFLOW







#### **ENGINEERED TO LAST A LIFETIME**





TASK FORCE XP PERFORMANCE LOCKERS



Large lockable storage compartment doubles as a seat finished in laminated maple wood.



Available with and without base storage compartment and seat

SINGLE TII	Width	Depth	Opening Height		Tier	Grouping	Openings Per Group	Fully-Assembled Cat No.	Color Selection
Without base	200	24	72	72	1	1-wide	1	HERL442-1SL-G	HG
With base	24	24/36	72	90	1	1-wide	1	HERL442-15L-B-0	HG

















#### **FEATURES:**

**BODY COMPONENTS:** 16 ga. tubular vertical frame **BASE:** 14 ga. Channel Base at both front and back

members, 16 gauge body with 18 gauge back SIDES: 13 ga. 1/2" flattened expanded

TOP/BOTTOM/HAT SHELF 16 ga. metal fully-framed on all four sides solid cold rolled

sheet steel ACCESSORIES: Includes 1/2" diameter

**OPTIONS** coat rod, and 2 Coat hooks

SECURITY BOX DOOR: 14 gauge steel with





a thru-the-door friction catch door pull, padlock hasp and a 16 gauge continuous piano hinge FOOT LOCKER: 14 gauge steel with stiffener

sections and padlock loop.

STOCK COLOR

All box door finger pulls are made of a super tough









	Width	Depth	Height	Grouping	Catalog #	
	BASE N	<b>IODEL</b>				7
	24"	18"	74-3/4"	1-wide	WSNN482-1C	
	24"	24"	74-3/4"	1-wide	WSNN422-1C	7
	WITH O	PTIONAL	<b>UPPER SE</b>	<b>ECURITY BOX</b>	(	
	24"	18"	74-3/4"	1-wide	WSBN482-1C	
	24"	24"	74-3/4"	1-wide	WSBN422-1C	
	WITH O	PTIONAL	LOWER F	OOT LOCKER	₹	
	24"	18"	74-3/4"	1-wide	WSNF482-1C	
1	24"	24"	74-3/4"	1-wide	WSNF422-1C	
	WITH O	PTIONAL	SECURITY	BOX AND F	OOT LOCKER	
	24"	18"	74-3/4"	1-wide	WSBF482-1C	
	24"	24"	74-3/4"	1-wide	WSBF422-1C	

nylon material which includes an Antimicrobial agent offering

protection against the growth of molds and bacteria.



717 Grand Slam (GS)







#### Rough, Tough and Ready to Go!

#### MILITARY SPEC TA-50 FULLY-FRAMED ALL-WELDED LOCKERS

Manufactured with top quality steel and built to strict specifications, our TA-50 Military Grade Locker is the solution to all your storage challenges.

Secure, durable and guaranteed to last a lifetime.







Rugged 3/16" Steel Handle is prepared for use with a padlock. Doors are pre-punched to accommodate a built-in combination or key lock if desired. Locks are available at an additional cost

#### **FEATURES:**

BODY CONSTRUCTION: Fully-framed allwelded construction with 3/4" flattened expanded metal sides, 16 gauge solid top & bottom and 18 gauge solid back. Base is heavy 14 gauge on all four sides. High grade custom blend powder coat finish.

**DOORS:** Heavy-duty 14 gauge diamond perforated doors are standard.



**DOOR HINGES:** Heavy-duty 13 gauge 7-knuckle 3-1/2" butt hinges.

**HANDLE:** 3-point turn-handle latching with 3/8" diameter locking rods for maximum security.

SHELF: 16 gauge solid upper shelf.

**EQUIPPED:** 1 Coat rod and 3 rear hooks are located under upper shelf.





725 DARK GRAY (HG)

		Opening	Frame		Openings	Fully-Assemb	led Color
Width	Depth	Height	Height	Grouping	Per Group	Cat No.	Selection
TA-50							
42	24	84	84	1-wide	1	TA50-422484-	1 HG





# SEELINITY







VENTILATED MODEL SOLID MODEL

**FEATURES:** 

Hallowell SecurityMax heavy-duty all-welded lockers offer the highest available security by incorporating an extra heavy-duty three point turn-handle locking mechanism and the versatility of adjustable interior shelves. Available in ventilated and solid locker versions.

SecurityMax lockers are ideal where heavy-duty and versatile storage is needed for tools, gear, sports equipment, uniforms and clothing.





**BODY CONSTRUCTION:** All-welded construction, **DOOR:** 14 gauge door with a full height welded in

16 gauge heavy-duty body and 18 gauge back, Sides formed to be integral with front vertical frame and are reinforced using two front-to-back channel stiffeners welded to the underside. **BODY STYLES:** One tier, one wide. Available in solid or ventilated versions

**HANDLE:** Cremone 3-point high-security turn handle latching with heavy-duty 3/8" lock rods which engage the top and bottom locker

BODY CONSTRUCTION: Knock-down, 24 gauge

frames while the cam engages the frame at the door jamb near the handle

door stiffener

**HINGES:** Continuous piano type **SHELVES:**Upper welded hat shelf. Additional shelves can be ordered and are adjustable on 3" centers. coat rod: 3/8" diameter rod is welded to

underside of upper shelf HOOKS: Two single back hooks

3 POINT HIGH SECURITY TURN HANDLE LATCHING

**HOOKS:** Single and double tier models include two single prong



		Opening				Included	Fully- Assembled	Color	STOCK COLOR DOOR: Wardrobe
	h Depth			Tier	Grouping	Shelves	Cat No.	Selection	LIGHT GRAY doors are 16 gauge,
VEN	TILATED	MODELS							box doors are 18 hooks.
18	22	72	72	1	1-wide	1	HTA822AS1	PL	gauge.
24	22	72	72	1	1-wide	1	HTA422AS1	PL	Triple tier includes one double prong
SOL	ID MODEL	_S							hook.
18	22	72	72	1	1-wide	1	HTC822AS1	PL	No hooks
24	22	72	72	1	1-wide	1	HTC422AS1	PL	Louvered for ventilation
ADD	ITIONAL S	SHELVES	3						at six tier.
18	22						HTAS1822	PL	HINGES: Continuous piano type
24	22						HTAS2422	PL	<b>COAT RODS:</b> One at vertical wardrobe section.

HANDLE: Stainless steel recessed handle with multi-point gravity SHELVES: Single tier model includes a hat shelf.







- 16-Ga. Continuous Hinges
- Powder-Coated Finish
- Black Body And Frame

All the features of Hallowell Premium wardrobe and box lockers with the added benefit of a stylish black body and frame and the choice of black, red or light gray doors.









3 OPENINGS

#### **UPGRADED Antimicrobial Recessed Handle Finger Lift Cover**

All gravity lift-type latching lockers that include recessed handles include our Antimicrobial Recessed Handle Finger Lift Cover for protection against the growth of molds and bacteria

#### **FEATURES:**

finger pull handle.

lift-type latching for wardrobe doors. Box doors have friction catch







Overall  Dimensions (in.) Door Color UNAS  W H D Item N	BODY / FRAME DOOR COLOR CHOICES  SSEMBLED ASSEMBLED No. Item No.
W H D Item N	
SINGLE-TIER WARDROBE	
· · · · · · · · · · · · · · · · · · ·	BLACK
1 wide 1 opening 12 72 18 Black U1282	1ME 111292 1A ME
3 wide 3 openings 36 72 18 Black U3282	
1 wide 1 opening 12 72 18 Light Gray U1282	2-1MP U1282-1A-MP
3 wide 3 openings 36 72 18 Light Gray U3282	2-1MP U3282-1A-MP [M]
1 wide 1 opening 12 72 18 Red U1282	2-1MR U1282-1A-MR <b>721</b>
3 wide 3 openings 36 72 18 Red U3282	
DOUBLE-TIER WARDROBE	(RR)
1 wide 2 openings 12 72 18 Black U1282	2-2ME U1282-2AME
3 wide 6 openings 36 72 18 Black U3282	2-2ME U3282-2AME 711
1 wide 2 openings 12 72 18 Light Gray U1282	
3 wide 6 openings 36 72 18 Light Gray U3282	2-2MP U3282-2AMP
1 wide 2 openings 12 72 18 Red U1282	2-2MR U1282-2AMR — — LIGHT GRAY
3 wide 6 openings 36 72 18 Red U3282	2-2MR U3282-2AMP [PLP[]]
TRIPLE-TIER WARDROBE	
1 wide 3 openings 12 72 18 Black U1282	2-3ME U1282-3AME
3 wide 9 openings 36 72 18 Black U3282	2-3ME U3282-3AME
1 wide 2 openings 12 72 18 Light Gray U1282	2-3MP U1282-3AMP
3 wide 9 openings 36 72 18 Light Gray U3282	2-3MP U3282-3AMP
1 wide 3 openings 12 72 18 Red U1282	2-3MR U1282-3AMR
3 wide 9 openings 36 72 18 Red U3282	2-3MR U3282-3AMR
SIX-TIER BOX	
1 wide 6 openings 12 72 18 Black U1282	2-6ME U1282-6AME
3 wide 18 openings 36 72 18 Black U3282	2-6ME U3282-6AME
1 wide 6 openings 12 72 18 Light Gray U1282	2-6MP U1282-6AMP
3 wide 18 openings 36 72 18 Light Gray U3282	2-6MP U3282-6AMP
1 wide 6 openings 12 72 18 Red U1282	2-6MR U1282-6AMR
3 wide 18 openings 36 72 18 Red U3282	2-6MR U3282-6AMR



# PE/GYM. LOCKERS

Tried and tested by students in thousands of middle and high schools nationwide, these all-welded athletic lockers are ideal for use in institutional, industrial, fitness, manufacturing and distribution sectors.

#### **FEATURES:**

**BODY CONSTRUCTION:** All-welded construction, 16 gauge body, 18 gauge back. Sides are diamond perforated

DOOR: 14 gauge, diamond perforated

for ventilation

HINGES: Continuous piano type

**HANDLE:** Stainless steel recessed handle with multi-point gravity lift-type latching for wardrobe doors. Box doors have friction catch finger pull handle.

**HOOKS:** Single and double tier models include two single prong hooks . Triple tier includes one double prong hook. No hooks at six tier.







**Lift Cover** 

All gravity lift-type latching lockers that include recessed handles include our Antimicrobial

#### SHELVES:

Single tier model includes a hat shelf.

UPGRADED Antimicrobial Recessed Handle Finger







Recessed Handle Finger Lift Cover for protection against the growth of molds and bacteria

1 wide
1 opening

Single Tier, Single Tier, 3 wide 3 opening





708

BLACK BODY

(ME )

721

RELAY RED
DOOR







		(	Overal							
		Dime	ension	s (in.)	Item No.					
		W	Н	D						
SINGLI	E-TIER WARD	ROBE								
1 wide	1 opening	12	72	18	AWA282-1MR					
3 wide	3 openings	36	72	18	AWA282-111MR					
DOUBLE-TIER WARDROBE										
1 wide	2 openings	12	72	18	AWA282-2MR					
3 wide	6 openings	36	72	18	AWA282-222MR					
COMB	COMBO UNIT									
3 wide	14 openings	36	72	18	AWA282-626MR					











# 24/7 PARCEL

#### **Easily Manage Tenant Package**

#### **Delivery**

HALLOWELL® 24/7 PARCEL LOCKER LETS YOU RECEIVE AND PICK UP ANYTIME.

Note No. 1. Deceives package for tenant

- 2. Places package in locker
- 3. Locks door using 4-digit PIN
- 4. Texts or emails Locker Number and PIN to Tenant

#### TENANT, AT HIS/HER CONVENIENCE...

- 1.Enters PIN into lock of appropriate locker
- 2. Removes package
- 3. Closes door of now empty locker, PIN is erased
- 4.Locker is ready for the next package

**FEATURES:** HEPL842-99

BODY 18-DOOR PARCEL LOCKER 36" x 24" x 72" Unit

(18) 18" x 8" Doors

HEPL842-77

14-DOOR PARCEL LOCKER 36" x 24" x 72" Unit (12) 18" x 8" Doors (2) 18" x 24" Doors

**CONSTRUCTION:** All-welded

construction, 16 gauge body, 18 gauge back.

DOOR: 14 gauge solid door with electronic lock HINGES: Continuous

piano type

**SHIPS FULLY-ASSEMBLED** 











HEPL842-55

LOCKER

36" x 24" x 72" Unit

(6) 18" x 8" Doors

(4) 18" x 24" Doors

HEPL842-33

Width	Depth	Height	Doors	Openings sizes	Assembled Cat No.	Color
PARC	EL LO	CKERS				
36	24	72	18	(18) 18" x 8"	HEPL842- 99	PL
36	24	72	14	(12) 18" x 8" & (2) 18" x 24"	HEPL842- 77	PL
36	24	72	10	(6) 18" x 8" & (4) 18" x 24"	HEPL842- 55	PL
36	24	72	6	(6) 18" x 24"	HEPL842- 33	PL
36	24	72	4	(4) 18" x 36"	HEPL842- 22	PL
36	24	72	2	(2) 18" x 72"	HEPL842- 11	PL





## The locker features the NEW Hallowell DIGITECH™ H1 digital lock, a slimline ultra modern look and simple to operate.

#### **LOCKER FEATURES**

- All-Welded Unibody
- DigiTech H1 electronic
- 1 Gauge solid steel doors with \$Bips fully-Gauge piano

• 1 Gauge solid steel body & 18 Gauge steel





#### DIGITECH H1 ELECTRONIC LOCKS

#### SECURITY CODE LOCK FEATURES

\*8-digit master and sub-master codes two levels of management



#### **CR123 LITHIUM BATTERY (INCLUDED)**


- \*Provides over 10,000 normal
- \*LED's Flash to indicate low battery

#### MASTER KEY

\*Locker can be opened with master if batteries are

#### **PERMANENT MODE TOO**

\*User enters a pre-programmed 4code to unlock and use locker



Green indicator ring





6-DOOR PARCEL LOCKER 36" x 24" x 72" Unit (6) 18" x 24" Doors HEPL842-22 4-DOOR PARCEL LOCKER 36" x 24" x 72" Unit (4) 18" x 36"Doors







2-DOOR PARCEL LOCKER 36" x 24" x 72" Unit

HEPL842-11



(2) 18" x 72" Doors










# Hallowell® Bulk Storage Lockers are the ideal solution for condos and any facility that requires additional secure storage capability.

Hallowell\* Bulk Storage Lockers are the most economical way to provide safe and secure storage in virtually any facility. Cost effectiveness and ease of installation make Bulk Storage Lockers the perfect choice when additional storage is needed. Choose from in-stock or custom sizes to fit your needs.

The use of Hallowell® Bulk Storage Lockers creates an esthetically appealing installation that when properly promoted can be a tremendous asset to the building and of great value to the users.

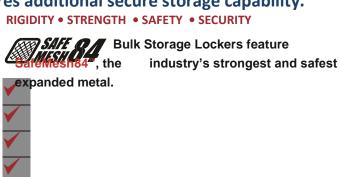

84% MORE STEEL THAN 3/4" MESH

#### **WE USE**

84% MORE STEEL = MORE RIGID UNIT1/2" MESH 16 GAUGE





• SINGLE & DOUBLE TIER MODELS INSTALLATION

- ECONOMICAL
- LOW LIFE-CYCLE COST SECURE
- DURABLE


- USER FRIENDLY
- FAST & EASY

ATTRACTIVE

FLATTENED EXPANDED

1/2" MESH KEEPS FINGERS OUT METAL

REDUCES RISK OF LOSS, THEFT **THEY USE**AND CONTENT DAMAGE3/4" MESH 16 GAUGE
FLATTENED EXPANDED
METAL



13" transom

Heavy-duty 2-knuckle \_ lift off hinge


Welded door brace for added rigidity

Welded padlock hasp and ergonomic welded-on door pull

1/2" 16 gauge flattened expanded metal doors and sides

Heavy-gauge vertical frame channels and

**Horizontal frame angles** 

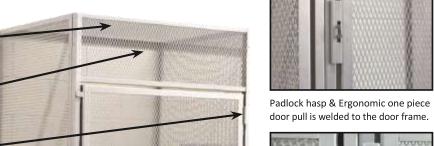



Heavy-Duty 2-knuckle lift off hinges and door stops are welded to the frame for extra strength and security for a more finished and attractive appearance.

Optional 16 gauge 1/2" expanded metal top makes for security & rigidity for a higher level of protection from theft



SINGLE TIER STARTER UNIT





725 DARK GRAY (HG)


## Easy Custom Installations

Hallowell® Bulk Storage Lockers' unique construction provides for a simple, easy way of handling interference from overhead pipes and/or ducts.







ACCESSORIES FOR BULK STORAGE LOCKERS					
w	D	н	Part No.		
TOP PA	NELS				
36	36		4803636HG		
36	48		4803648HG		
36	60		4803660HG		
48	36		4804836HG		
48	48		4804848HG		
48	60		4804860HG		
FRONT	EXTEN	SION PA	ANELS		
6		90	4600690HG		
12		90	4601290HG		
18		90	4601890HG		
24		90	4602490HG		
BACK F	PANELS				
36		90	4703690HG		
48		90	4704890HG		
REPAIR	ANGLI	ES			
36			20100HG		



SHOWING CUT OUT (WITH REPAIR ANGLES) TO ALLOW FOR INTERFERING DUCT.



VIEW OF PIPE THROUGH TRANSOM (OR DIVIDER) WITH REPAIR ANGLE.



**REPAIR ANGLES** 

w		STARTER UN		R UNITS	ADDE	ADDER UNITS	
	D	н	Part No. Right Hinged)	Part No. (Left Hinged)	Part No. Right Hinged)	Part No. (Left Hinged)	
SINGLE	TIER			(_oreningen,		(	
36	36	90	BSL363690-R-1S-HG	BSL363690-L-1S-HG	BSL363690-R-1A-HG	BSL363690-L-1A-HG	
36	48	90	BSL364890-R-1S-HG	BSL364890-L-1S-HG	BSL364890-R-1A-HG	BSL364890-L-1A-HG	
36	60	90	BSL366090-R-1S-HG	BSL366090-L-1S-HG	BSL366090-R-1A-HG	BSL366090-L-1A-HG	
48	36	90	BSL483690-R-1S-HG	BSL483690-L-1S-HG	BSL483690-R-1A-HG	BSL483690-L-1A-HG	
48	48	90	BSL484890-R-1S-HG	BSL484890-L-1S-HG	BSL484890-R-1A-HG	BSL484890-L-1A-HG	
48	60	90	BSL486090-R-1S-HG	BSL486090-L-1S-HG	BSL486090-R-1A-HG	BSL486090-L-1A-HG	
DOUBL	E TIER						
36	36	45	BSL363690-R-2S-HG	BSL363690-L-2S-HG	BSL363690-R-2A-HG	BSL363690-L-2A-HG	
36	48	45	BSL364890-R-2S-HG	BSL364890-L-2S-HG	BSL364890-R-2A-HG	BSL364890-L-2A-HG	
36	60	45	BSL366090-R-2S-HG	BSL366090-L-2S-HG	BSL366090-R-2A-HG	BSL366090-L-2A-HG	
48	36	45	BSL483690-R-2S-HG	BSL483690-L-2S-HG	BSL483690-R-2A-HG	BSL483690-L-2A-HG	
48	48	45	BSL484890-R-2S-HG	BSL484890-L-2S-HG	BSL484890-R-2A-HG	BSL484890-L-2A-HG	
48	60	45	BSL486090-R-2S-HG	BSL486090-L-2S-HG	BSL486090-R-2A-HG	BSL486090-L-2A-HG	

Repair Angle 16 gauge 36" long repair angle is pre-punched on 2" centers to "heal" cuts in dividers or transom. Two bolts and clips are included with each angle. RED denotes stock sizes. Custom sizes are also available.

Tops are recommended for situations where the ceiling height is 8'-6" or more when using standard 7'-6" high component modules.

Shelves are used as dividers between top and bottom openings of double tier lockers. May also be used in single tier lockers for additional floor space and may be shorter than depth of locker to provide space for long items.

Backs are required for back-to-back installations or where a single row is set away from a wall.

Bottoms are recommended for use on all single or double tier lockers if dampness prevails.

UNITS AVAILABLE RIGHT-HAND OR LEFT-HAND HINGED

• SINGLE TIER: • DOUBLE TIER:

OVERALL HEIGHT 90" OVERALL HEIGHT 90"



OPENING HEIGHT: 75-1/2" UPPER OPENING HEIGHT: 31-1/2" LOWER OPENING HEIGHT: 42"

Note: In the interest of safety, all lockers must be securely anchored to the floor and/or wall.

#### STORAGE LOCKER STOCK SIZES

Standard Sizes available in single & double tier configuration.

Width 3'-0", 4'-0"
Depths 3'-0", 4'-0", 5'-0"

Height 7'-6"





## STEP UP YOUR RECRUITING GAME!



## Reinforce your commitment to your players!

Equip them with the industry's finest all-wood sport lockers. Recruiter™ custom wood sport lockers are made to order, and offer a variety of different options allowing you to tailor your locker room to your team's specific requirements.

## **Optional Features**



Optional LED Lighting under locker top and/or under shelf



Optional USB & 110 power outlet inside upper security box



Optional duel fan ventilation system for forced air ventilation of foot locker







BASKETBALL



**FOOTBALL** 



HOCKEY





covers defects in materials and workmanship.

## **Five Side Options**



## **Optional Features**

locker to meet your specific needs. Be it a fitness center,













Name plate holders



Shoulder pad rack



Shoulder pad & Helmet rack



**Foot locker front** panel mesh insert



**UV Full Color Print on** security box door



**Padded Seat Cushion** 



Expanded metal side inserts Optional Bat / Lacrosse Stick for additional ventilation



Caddy

**LOCK OPTIONS: • PADLOCK** 

• BUILT IN COMBINATION LOCK • MECHANICAL LOCK • ELECTRONIC LOCK









Hallowell Cubbie Locker line is designed to meet the needs of early childhood and elementary school classrooms. Combining our unibody all-welded locker construction and the added safety features required for this specialized market, we offer four distinct models designed to meet any child's personal storage needs. Hallowell Cubbies are backed by our written lifetime Warranty.

4 MODELS &










HEMMED AND BEADED EDGES ELIMINATE SHARP EDGES



NUMBER PLATE IN BOTTOM OF CUBBIE SO CHILDREN CAN EASILY IDENTIFY THEIR CUBBIE SPACE.

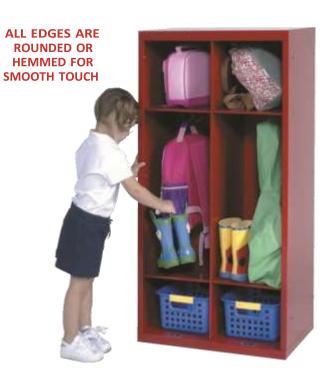













Primary Cubbie

Primary II Cubbie

Primary Jr. Cubbie

Backpack Cubbie

#### MODEL SIZES WIDTH DEPTH HEIGHT

PRIMARY CUBBIE	12", 15"	12", 16"	48"
PRIMARY II CUBBIE	12", 15"	12", 16"	48"
PRIMARY JR. CUBBIE	12", 15"	12", 16"	24"
BACKPACK CUBBIE	15". 18"	12". 16"	48"

#### **FEATURES**

**BODY CONSTRUCTION:** Unibody all-welded 16 gauge steel construction, backs are 18 gauge, bottom is galvanneal sheet steel for maximum corrosion resistance, hemmed and beaded edges are safe to the touch

BODY STYLES: Open design, 4 body styles

**SHELVES:** 16 gauge welded to body for added rigidity with a beaded leading edge for added safety

**NOTES:** Easily secures to wall and floor for added safety, Low installation costs, reduced installation time, low maintenance, low life-cycle cost, lifetime warranty, insect and termite proof. All welded cubbies will ship in



multiple column units up to 60" wide to meet individual job site conditions.

These lockers feature our unique Unibody Design

which provides unsurpassed strength and durability.

**HSL-OO Open Front Gear Lockers** 

Our complete line-up of open-front gear lockers are specifically engineered





for High School, Collegiate and Professional team organizations who demand high performance equipment storage solutions.







SHOWN WITH OPTIONAL

The all-welded Open Front Gear lockers are designed to accommodate a wide variety of equipment and apparel while allowing maximum ventilation.

The base model includes one upper hat shelf with a compliment of coat hooks. You can add a choice from three upper security compartments for personal storage: a small wallet security box, a 12" wide side hinged security box or the full width top hinged security compartment.

In the lower area, you can add a shelf/seat or opt for the foot locker/seat for a lockable equipment storage area. You can finish off your sport locker with our optional stainless steel coat rod.

Open Front Gear lockers feature our all-welded Unibody design which provides two front frame channels between sides of multiple column units and integral sides which are diamond perforated for ventilation.

SECURITY-PLUS™ VENTILATED FRONT PANEL




**UPGRADED Antimicrobial Box Door Finger Pulls** 



**UPPER HAT SHELF AND** 

12"















#### **LOCKER SIZES:**

Widths 12", 15", 18", 24", 30", 33" and 36"

Depths 12", 16", 18", 22" Column Heights 60", 72", 84"

Note: Lockers will ship in multiple column units up to 60" wide to meet individual job site conditions.

**OPTIONAL** STAINLESS STEEL COAT ROD

UNDERSIDE OF FOOT LOCKER SEAT IS REINFORCED TO SUPPORT TODAY'S ATHLETE.











SHOWN WITH OPTIONAL FULL-WIDTH SECURITY COMPARTMENT,

SHOWN WITH OPTIONAL AND STAINLESS STEEL COAT ROD, AND WALLET SECURITY BOX AND LOWER SEAT/SHELF. DOOR INCLUDES STAINLESS STEEL COAT ROD SECURITY-PLUS™ VENTILATION.







## HTHV-01 Turn-handle Ventilated Lockers

## **HGLV-02 Gravity Latch Ventilated Lockers**

3-Point projecting turn-handle latching



# **UPGRADED Antimicrobial Recessed Handle Finger Lift Cover**

All gravity lift-type latching lockers that include recessed handles include our Antimicrobial Recessed Handle Finger Lift Cover for protection against the growth of molds and bacteria

#### **FEATURES:**

BODY CONSTRUCTION: Unibody all-welded construction, 16 gauge 1-1/2" high continuous bottom with reinforcing channels welded to the underside at each side panel providing a rigid unit base, 16 gauge continuous top, 16 gauge diamond perforated sides are integral with front vertical frame, 18 gauge solid back DOORS: 14 gauge diamond perforated doors are standard. Plain, Secure-Air-Flow, and louvered door styles are available

**HANDLE:** 3-point turn-handle latching **DOOR STRIKE:** Continuous vertical door strike at both hinge and latch side

**LATCHING:** 3-point turn-handle latching engaging at frame top, bottom and center side of door, 3/8" diameter lock rods are the heaviest in the industry, 3/16" turnhandle welded to 11 gauge cam, 11 gauge lock plate keeper is welded to center side of frame **HINGES:** 16 gauge continuous piano hinge **SHELVES:** 16 gauge hat shelf for single tier











openings 60" and 72" high, 16 gauge intermediate shelves

**HOOKS:** 2-single hooks and 1-double hook is standard. 1-double hook only for triple tier and 1-double and 1-single hook for 9" wide openings 30" and higher **WARRANTY:** Lifetime

**SIZES:** See All Welded Chart for standard wardrobe lockers

#### **FEATURES:**

**BODY CONSTRUCTION:** Unibody all-welded construction, 16 gauge 1-1/2" high continuous bottom with reinforcing channels welded to the underside at each side panel providing a rigid unit base, 16 gauge continuous top, 16 gauge diamond perforated sides are integral with front vertical frame, 18 gauge solid back **DOORS:** 14 gauge diamond perforated doors are standard. Plain,

Secure-Air-Flow, Safety-View and louvered door styles are available **HANDLE**: Deep-drawn seamless stainless steel recessed handle **DOOR STRIKE**: Continuous vertical door strike at both hinge and latch side

**LATCHING:** 12 gauge latch hooks MIG welded to frame, gravity lift-type multi-point spring loaded latching: • 3-point latching for openings 48" high and higher

• 2-point latching for openings 20" high thru 36" high

HINGES: 16 gauge continuous piano hinge

**SHELVES:** 16 gauge hat shelf for single tier openings 60" and 72" high, 16 gauge intermediate shelves

**HOOKS:** 2-single hooks and 1-double hook is standard. 1-double hook only for triple tier and 1-double and 1-single hook for 9" wide

openings 30" and higher **WARRANTY**: Lifetime

SEE ABOVE CHART FOR STANDARD SIZES





#### **UPGRADED Antimicrobial Recessed Handle Finger Lift Cover**

All gravity lift-type latching lockers that include recessed handles include our Antimicrobial Recessed Handle Finger Lift Cover for protection against the growth of molds and bacteria

## **HSPV-04 Single-Point Ventilated Lockers**

Deep drawn
stainles
s steel
recesse
d
handle
with
singlepoint
latchin
g is
standar
d







Hallowell HSPV-04 lockers include a 3" wide 18 gauge full height door stiffener spot welded to the inner door face and MIG welded to the hinge side as well as to the top and bottom door flanges providing a rigid torquefree door. A 1-1/2" wide stiffener will be furnished for 9" wide HSPV-04 doors.

**FEATURES:** 

**BODY CONSTRUCTION:** Unibody all-welded construction, 16 gauge 1-1/2" high continuous bottom with reinforcing channels welded to the underside at each side panel providing a rigid unit base, 16 gauge continuous top, 16 gauge solid sides are integral with front vertical frame, 18 gauge solid back

DOORS: 14 gauge louvered doors are standard. Plain,

Secure-Air-Flow, Safety-View and diamond perforated door styles are available

**HANDLE:** Deep-drawn seamless stainless steel recessed handle **DOOR STRIKE:** Continuous vertical door strike at both hinge and latch side

**LATCHING:** 12 gauge latch hooks MIG welded to frame, gravity lift-type multi-point spring loaded latching: • 3 point latching for openings 48" high and higher

• 2-point latching for openings 20" high thru 36" high

HINGES: 16 gauge continuous piano hinge

**SHELVES:** 16 gauge hat shelf for single tier openings 60" and 72 high, 16 gauge intermediate shelves

**HOOKS:** 2-single hooks and 1-double hook is standard. 1-double hook only for triple tier and 1-double and 1-single hook for 9" wide

openings 30" and higher WARRANTY: Lifetime

SIZES: See All Welded Chart for standard wardrobe lockers

#### **FEATURES:**

BODY CONSTRUCTION: Unibody all-welded construction, 16 gauge 1-1/2" high continuous bottom with reinforcing channels welded to the underside at each side panel providing a rigid unit base, 16 gauge continuous top, 16 gauge diamond perforated sides are integral with front vertical frame, 18 gauge solid back doors: 14 gauge diamond perforated doors and full-height door stiffener are standard. Plain, Secure-Air-Flow and louvered door styles are available

**HANDLE:** Deep-drawn seamless stainless steel recessed handle is standard.

DOOR STRIKE: Continuous vertical door strike at both

hinge and latch side

**LATCHING:** Single-point maintenance-free quiet latching system, 11 gauge MIG welded latch **HINGES:** 16 gauge continuous piano hinge

SHELVES: 16 gauge hat shelf for single tier openings 60"

and 72" high, 16 gauge intermediate shelves

**HOOKS:** 2-single hooks and 1-double hook is standard. 1-double hook only for triple tier and 1-double and 1-single hook for 9"

wide openings 30" and higher

WARRANTY: Lifetime

UNIBODY ALL-WELDED LOCKERS

**SIZES:** See All Welded Chart for standard wardrobe lockers

HSPS-05 Single-Point Solid Lockers

BODY CONSTRUCTION

: Unibody allwelded construction, 16 gauge 1-1/2" high continuous bottom with reinforcing channels welded to the underside at each side panel providing a rigid unit base, 16 gauge continuous top, 16 gauge solid sides are integral with front vertical frame, 18 gauge solid back

poors: 14 gauge plain doors and a fullheight door













stiffener are standard. Secure-Air-Flow, diamond perforated and louvered door styles are available

HANDLE: Deepdeayruseagnless stainless steel recessed handle DOOR STRIKE:

Continuous vertical door strike at both hinge and latch side

#### LATCHING:

Single-point maintenance -free quiet latching system, 11 gauge MIG welded latch HINGES: 16 gauge continuous

SHELVES: 16 gauge hat shelf for single tier openings 60" and HOOKS: 2single hooks and 1-double hook is standard. 1double hook only for triple tier,1-double and 1-single hook for 9" wide



Ventilated Box Lockers

Hallowell HSPS-05 lockers include a 3" wide 18 gauge full height door stiffener spot welded to the inner door face and MIG welded to the hinge side as well as to the top and bottom door flanges providing a rigid torque-free door. A 1-1/2" wide stiffener will be furnished for 9" wide HSPS-05 doors.

72" high, 16 gauge intermediate

#### sheated RES:

piano hinge

**BODY CONSTRUCTION:** Unibody all-welded construction, 16 gauge 1-1/2" high continuous bottom with reinforcing channels welded to the underside at each side panel providing a rigid unit base. 16 gauge continuous top, 16 gauge diamond perforated sides are integral with front vertical frame, 18 gauge solid back

**DOORS:** 14 gauge diamond perforated doors are standard. Louvered, Secure-Air-Flow and plain door styles are available.

**HANDLE/LATCHING:** Single-point thru-the-door projecting finger pull handle with padlock hasp.

Optional deep-drawn seamless stainless steel recessed handle is available

HINGES: 16 gauge continuous piano hinge

SHELVES: 16 gauge hat shelf for single tier openings 60" and 72" high

SIZES: See chart below for standard box locker sizes











NOTE: 8" & 9" high box doors are top hinged with concealed 3/8" diameter continuous hinge rod

#### **UPGRADED Antimicrobial**

#### Recessed Handle Finger Lift Cover & Box Door Finger Pulls

Lift covers and finger pulls are made of a super tough nylon material which includes an Antimicrobial agent offering protection against the growth of molds and bacteria.

## **HESL-07 Equipment Storage Lockers (TA-50)**

#### **FEATURES:**

BODY CONSTRUCTION: Unibody all-welded construction, 16 gauge 1-1/2" high continuous bottom with reinforcing channels welded to the underside at each side panel providing a rigid unit base, 16 gauge continuous top, 16 gauge diamond perforated sides are integral with front vertical frame, 18 gauge solid back. Optional solid sides are

**DOORS:** 14 gauge diamond perforated doors with a full height door stiffener are standard. Secure-Air-Flow, diamond perforated and louvered door styles are available

HANDLE: 3-point turn-handle

**DOOR STRIKE:** Continuous vertical door strike at both hinge side

LATCHING: 3/16" turn-handle welded to 11 gauge cam engaging frame at top, bottom and center side of door. 3/8" diameter lock rods

HINGES: 16 gauge continuous piano hinge

SHELVES: 16 gauge hat shelf located 12" down from top, 16 gauge

lower shelf located 18" up from bottom

COAT ROD: Stainless steel full-width coat rod located under hat shelf

WARRANTY: Lifetime

Widths


Depths







Shown with optional Padlock Strike Plate



**EQUIPMENT STORAGE LOCKER SIZES** 

12", 16", 18", 22"

24", 30", 36", 48"

Equipment Storage lockers will ship in multiple

column units up to 60" wide to meet individual job

Shown with optional site conditions.

Z-Tier A unique multi-height storage with extended hanging space on one side and built in shelf on the other, its like a two tier with the space of a single tier.



















**UPGRADED** 

All gravity lift-type latching

recessed handles include

bacteria

Latch hook is welded to frame

**Antimicrobial** 

Finger Lift Cover for

protection against the

growth of molds and

В 0 D Υ C 0 Ν S Т R U C Т ı 0

Ν Κ

Single Tier,

1 wide,

1 opening

n 0 С k d 0 n Κ D W h 2 4 g а u

g e S 0

d b o

Hallowell-List.com

dy components

DOORS: 16 gauge louvered doors, 18 gauge for 9" wide, are standard. Plain, Secure-Air-Flow, Safety-View and diamond perforated door styles are available

FRAME: 16 gauge frame with 16 gauge horizontal cross member between doors on double and triple tier wardrobe lockers

**HANDLE:** Deep-drawn seamless stainless steel recessed handle door strike, continuous vertical door strike at hinge & latch side Recessed

**LATCHING:** 12 gauge latch hooks MIG welded to frame. Gravity **Handle Finger Lift** Cover

lift-type multi-point spring loaded latching: lockers that include

• 3-point latching for openings 48" high and higher

• 2-

point HINGES: 16 gauge continuous piano hinge

HOOKS: 2-single hooks and 1-double hook is standard. 1-

latching for openings 20" high thru 36" high Antimicrobial Recessed Handle



Double Tier,

2 openings

1 wide,

Triple Tier,

1 wide,

3 openings

double hook only for triple tier and 1-double and 1-single hook for 9" wide openings 30" and higher

SHELVES: Hat shelf for single tier openings 60" and 72" high NOTES: All production KD lockers are supplied without legs unless otherwise specified

WARRANTY: 2 years

SIZES: See Premium KD Chart for standard wardrobe lockers UPGRADES ALL BODY COMPONENTS TO 16 GAUGE WITH 18 GAUGE BACK



OPTION







## **Premium KD Box Lockers**

FEATURES: (DOORS 18" HIGH AND UNDER)

FRAME: 16 gauge frame

HINGES: 16 gauge continuous piano hinge



Duplex

**Two-Person** 

Double Tier,

Four Tier, 2 wide, 2 openings 2 wide, 4

openings









BODY CONSTRUCTION: Knock down (KD) with 24 gauge solid body components

DOORS: 18 gauge louvered doors are standard. Plain, Secure-Air-Flow, Safety-View Plus and diamond perforated door styles are available

HANDLE: Projecting finger pull

DOOR STRIKE: Continuous vertical door strike at both hinge and

latch side

LATCHING: Single-point thru-the-door finger pull padlock hasp

NOTES: All production KD lockers are supplied without legs unless otherwise specified. Safety-View Plus polycarbonate doors are available for 12" wide x 12" high five and six tier box doors only


WARRANTY: 2 years

SIZES: See Premium KD Chart for

standard Box lockers

GRADES ALL BODY MPONENTS TO

Box door single-point thru-thedoor finger pull padlock hasp



Optional padlock strike plates for box doors protect finish from being marred by padlock



#### **UPGRADED Antimicrobial Box Door Finger Pulls**

All box door finger pulls are made of a super tough nylon material which includes an Antimicrobial agent offering protection against the growth of molds and bacteria.







Five Tier. 1 wide, 5 openings

Six Tier, 1 wide. 6 openings

## **Premium KD Specialty Lockers**



Duplex Lockers are the most economical full length lockers available. Duplex lockers provide two completely private lockers in each frame. One hat shelf and two single wall hooks are standard in each wardrobe opening. Coat rod is optional.

#### TWO-PERSON

Two-Person Lockers provide ample storage space for two users in a

#### 4-WIDE WALL MOUNT UNIT







Stainless steel recessed handle is standard for Duplex and Two-Person



**DUPLEX** 

15" wide space. Upper box





d	and latches
0	located in
0	the
r	correspondin
S	g lower
	compartmen
I	t. Two single
0	hooks per
C	•
k	wardrobe
e	opening is
r	standard.
S	Coat rod is optional.
a	J J God Tod is optional.
r	
e	ັວັວັວັວັວັດັ
	22222

PGRADED Antimicrobial ecessed Handle Finger Lift over & Box Door Finger Pulls

ft covers and finger pulls are hade of a super tough hylon haterial which includes an ntimicrobial agent offering rotection against the growth of holds and bacteria.

PREMIUM KD LOCKER	SIZES WIDTH	DEPTH	OPENING HEI	GHT FRAME HEIGHT
WARDROBE				
SINGLE TIER	9" 12" 15" 18" 24"	12" 15" 18" 21" 24"	36" 48" 60" 72"	36" 48" 60" 72"
DOUBLE TIER	9" 12" 15" 18"	12" 15" 18" 21"	30" 36"	60" 72"
TRIPLE TIER	9" 12" 15" 18"	12" 15" 18" 21"	20" 24"	60" 72"
вох				
FOUR TIER	12" 15"	12" 15" 18"	15" 18"	60" 72"
FIVE TIER	12" 15"	12" 15" 18"	15" 14.4"	60" 72"
SIX TIER	12" 15"	12" 15" 18"	12"	72"
SPECIALTY				
TWO PERSON	15" 18"	12" 15" 18"	NA	60" 72"
DUPLEX	15"	12" 15" 18"	60" 72"	60" 72"
SIXTEEN PERSON	72"	18"	12"	78" (Includes 6" legs)
FOUR WIDE WALL MOUNT	48"	18"	12"	14-3/4"

# Standard And Whisper Quiet KD Lockers

#### **FEATURES:**

Silent Standard BODY CONSTRUCTION: Knock down (KD) with 24 gauge solid

Quiet Quiet body components

m









poors: 16 gauge plain doors (18 gauge for 9" wide), Sound deadening panel and vinyl coated latching for Whisper quiet lockers only

FRAME: 16 gauge frame with 16 gauge horizontal cross member between doors on double and triple tier wardrobe lockers

**HANDLE:** Deep drawn stainless steel recessed handle

**DOOR STRIKE:** Continuous vertical door strike at both hinge & latch side **LATCHING:** 12 gauge latch hooks MIG welded to frame. Gravity lift-type multi-point spring loaded latching:

- 3-point latching for openings 48" high and higher
- 2-point latching for openings 20" high thru 36" high

HINGES: 16 gauge continuous

piano hinge

**HOOKS:** 2-single hooks & 1-double hook is standard. 1-double hook only for triple tier & 1-double and 1-single hook for 9" wide openings 30" & higher

**SHELVES:** Hat shelf for single tier openings 60" and 72" high

**NOTES:** Production KD lockers are supplied without legs unless otherwise specified. Standard Quiet and Artisan Quiet lockers are available with plain doors only. Additional perforations/louvers in the door will increase decibel levels thus reducing the efficiency of our quiet design.

Double Tier, Double Tier, **SIZES:** See Premium KD Chart for standard wardrobe lockers

1 wide,2 openings2 openings

## UPGRADED Antimicrobial Recessed Handle Finger Lift Cover

All gravity lift-type latching lockers that include recessed handles include our Antimicrobial Recessed

Handle Finger Lift Cover for protection against the growth of molds and bacteria



## Maintenance-Free™ Quiet KD Lockers (MFQ)

#### **FEATURES:**

**BODY CONSTRUCTION:** Knock-

down, 24 gauge

BODY STYLES: Single, double and triple tier

DOOR: 16 gauge, solid

HINGES: Continuous piano type

**HANDLE:** Deep drawn stainless steel recessed handle with single-point latching. Recessed handle protects finish from being marred by padlock.

**HOOKS:** One double prong ceiling hook and two single wall hooks per single and double tier opening. One double ceiling hook for triple tier.

**COAT RODS:** Available for single tier at a nominal cost

**SHELVES:** Hat shelf for single tier openings 60" and 72"

WARRANTY: 2 years

**SIZES:** See Premium KD Chart for standard wardrobe lockers

Single Tier, Double Tier, Triple Tier,









1 wide.

1 wide. 1 wide, 1 openings 3 openings Sound



deadening panel welded to inner door face is standard on Silent Quiet lockers only

openings Deep drawn

with gravity lift-type



Ventilated top and bottom door flanges



11 gauge single-point latch

stainless steel recessed handle with single-point latching





MFQ lockers include a 3" wide 18 gauge full height door stiffener spot welded to the inner door face and MIG welded to the hinge side as well as to the top and bottom door flanges providing a rigid torque-free door. A 1-1/2" wide stiffener will be furnished for 9" wide MFQ doors.



stainless steel recessed handle

latching



12 gauge Latch hook is welded to **UPGRADES ALL BODY COMPONENTS TO 16 GAUGE 18 GAUGE BACK** 



## **Heavy-Duty Corridor KD Lockers (HDC)**


Heavy-Duty Corridor lockers, commonly known as HDC lockers, are designed to include all the great features of our Standard KD wardrobe lockers with the doors upgraded to 14 gauge.

#### **FEATURES:**

**BODY CONSTRUCTION:** Knock down with 24 gauge solid body components DOORS: 14 gauge louvered doors are standard. Plain, Secure-Air-Flow, Safety-View and diamond perforated door styles are available

FRAME: 16 gauge frame with 16 gauge horizontal cross member between doors on double and triple tier wardrobe lockers

HANDLE: Deep-drawn seamless stainless steel recessed handle door strike: Continuous vertical door strike at both hinge and latch side LATCHING: 12 gauge latch hooks MIG welded to frame. Gravity lifttype multi-point spring loaded latching:



• 2-point latching for openings 20" high thru 36" high stainless steel

HINGES: 16 gauge continuous piano hinge

recessed handle with gravity

**HOOKS:** 2-single hooks and 1-double hook is standard. 1- double hook only for lift-type latching.

triple tier and 1-double and 1- single hook for 9" wide openings 30" and higher


SHELVES: Hat shelf for single tier openings 60" and 72" high NOTES: All production KD lockers are supplied without legs unless otherwise specified











#### **UPGRADED Antimicrobial Recessed Handle Finger Lift Cover**

**COMPONENTS TO** 

Deep drawn

All gravity lift-type latching lockers that include recessed handles include our Antingic folial Recessed 1618 GAUGE WITH GAUGE BACK Handle Finger Lift Cover for protection against the growth of moids and bacteria

## Heavy-Duty Ventilated KD Lockers (HDV)

#### **FEATURES:**

BODY CONSTRUCTION (WARDROBE & BOX LOCKERS): Knock down with 16 gauge solid top, bottom and intermediate shelves, 16 gauge diamond perforated sides, 18 gauge solid back

DOORS: 14 gauge diamond perforated doors are standard. Louvered,

Security-Plus and Safety-View door styles are available

FRAME: 16 gauge frame with 16 gauge horizontal cross member between doors on

double and triple tier wardrobe lockers HINGES: 16 gauge continuous piano hinge

DOOR STRIKE: Continuous vertical door strike at both hinge and latch

WARDROBE LOCKERS (Doors 20" and higher):

HANDLE: Deep-drawn seamless stainless steel recessed handle **LATCHING:** Gravity lift-type multi-point spring loaded latching:

3-point latching for openings 48" high and higher,

• 2 point latching for openings 20" high thru 36" high **HOOKS:** 2-single hooks and 1-double hook is standard.

stainless steel recessed handle • 1- double hook only for triple tier and 1-double

• 1 - single hook for 9" wide openings 30" and higher with gravity lift-type 2 openings1 wide, Six Tier, SHELVES: BOX LOCKERS (Doors 18" high and under):16 gauge hat for single

tier openings 60" and 72" high latching for doors 20" high and higher 1 wide,

**HANDLE:** Single-point thru-the-door finger pull 6 openings

padlock hasp **HOOKS:** None

Double Tier.

**NOTES:** All production KD lockers are supplied without legs unless

otherwise specified

SIZES: See Premium KD Chart for standard wardrobe & box lockers

**UPGRADED Antimicrobial Recessed Handle Finger Lift Cover** 

All gravity lift-type latching lockers that include recessed handles include our Antimicrobial Recessed Handle Finger Lift Cover for protection against the growth of molds and bacteria



1 wide. 1 opening

1 wide, 2 openings

1 wide, 3 openings







# **QUICK**









#### **SPECIFICATIONS**


- 6" Closed Front Base (KD lockers only): Shall be fabricated of 16 gauge cold rolled sheet steel flanged on all four sides for rigidity. Front bases include projecting tabs on side flanges designed to align with holes in front legs allowing front bases to be snapped into place requiring no additional fasteners. Side bases are to be included at all exposed ends and are bolted to front and rear legs. Finish to match lockers. Available Quick-Ship from stock in 5 standard colors.
- 2 4" Continuous Z-Base (KD lockers only): Shall be fabricated from 16 gauge cold rolled sheet steel fabricated in 72" lengths, flanged at the top to form a 1-3/8" toe space and at the bottom allowing concealed fastening to the finished floor. Continuous Front Bases include holes for use with splice plates where bases are joined end-to-end. End Bases are to be included at all exposed ends. Where additional support is desired, End Bases may be substituted for splices at Continuous Front Base joints. Finish to match lockers. Available Quick-Ship from stock in 5 standard colors.
- 3 20 gauge Individual Slope Top (KD lockers only): Not less than 20 gauge cold rolled sheet steel, 18 degree pitch, fabricated to be installed individually over each locker. Slope top is formed to include a full back. Individual Slope Tops are to be installed in addition to the locker flat top. End closures are to be provided at exposed ends. Finish to match lockers. Available Quick-Ship from stock in 5 standard colors.
- 4 18 gauge Continuous Slope Top: Not less than 18 gauge cold rolled sheet steel, 18 degree pitch, in 72" lengths. A splice cover with concealed spring clip is to used to cover joints where Continuous Slope Tops are joined end-to-end. To be installed in addition to the locker flat top with end closures for support. Finish to match lockers. Available Quick-Ship from stock in 5 standard colors.
- 4 16 Gauge Continuous Slope Top: Not less than 16 gauge cold rolled sheet steel, 18 degree pitch, in 72" lengths. A splice cover with concealed spring clip is to used to cover joints where Continuous Slope Tops are joined end-to-end. To be installed in addition to the locker flat top with end closures for support. Finish to match lockers.
- 5 Recessed Trim: Fabricated of 16 gauge cold rolled sheet steel. 3" wide side trim shall be notched at the top and include a retainer to allow the 3" wide top trim to fit snugly into the side trim. Recess trim is designed to be used when the lockers are installed with the locker fronts flush with the top and side walls. The top and side trim will project 3/8" beyond the side and top walls and include return bends back to the walls. Finish to match lockers. Available Quick-Ship from stock in 5 standard colors.
- 6 Minimum Punched End Panel (KD lockers only): Shall be from 18 gauge cold rolled steel and formed to fit tightly over the universal side panel at exposed row ends. Holes are provided at perimeter for fastening to locker. Minimum Punched End Panels are designed to cover all fasteners other than those at the perimeter of the panel. Finish to match lockers. Provide at all exposed ends. Available Quick-Ship from stock in 5 standard colors.
- 7 Boxed End Panel: Shall be "Boxed" type formed from 16 gauge cold rolled steel with 1" O.D. double bends on sides and a single bend at top and bottom with no exposed holes or bolts. If lockers have slope tops, end panels must be formed with slope at top to cover the ends of the slope tops. Finish to match lockers. Provide at all exposed ends.
- 8 Fillers: Provide where indicated, of not less than 16 gauge cold rolled sheet steel, factory fabricated to and finished to match lockers. Available Quick-Ship from stock in 5 standard colors.







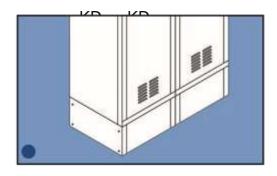


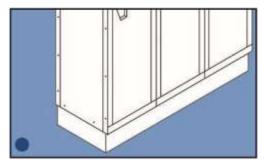


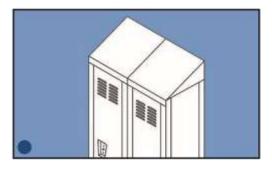


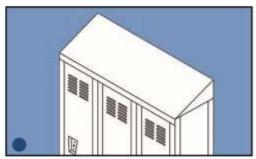

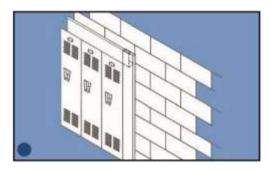





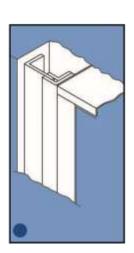



KD

Note: visit our website at www.Hallowell-List.com for complete installation details and instructions.

KD

Welded

KD KD Welded KD Welded

Welded

Padlocks, Built-in Locks & Specialty Locks

Master Lock Co.
Built-In Combination Locks

Master Lock Co.
Combination Padlocks

Available in spring-bolt and dead-bolt Available standard and masstyles, are key controlled and include ter-keyed, Master Lock padlocks multiple combination settings. can be used on all locker types.

ADA Compliant ADA Compliant






**Padlocks Available** 

















Hallowell





#### CALL 866-566-0500 FOR MORE INFORMATION

### SAFE-O-MAT® Built-In Coin, Token & Card Locks

Available in coin return and coin collect as well as token collect and card access styles.



#### Hallowell **DIGITECH™ GL Locks**

Digitech™ GL electronic locks are compatible with all Superior® gravity lift-type latching lockers. Lock fits nicely in our recessed handle



**ADA Compliant** 



Digitech RFID electronic access

**DIGITECH™ II RFID Locks** 

locks can be programmed to work with most current RFID systems



Hallowell

**ADA Compliant** 

NOTE: An ADA compliant lock must be used on any locker that is required to meet ADA guidelines.



# Master Lock Co. Built-In Key Locks

#### **DIGITECH™ H1 Locks**

Available in spring-bolt and Digitech™ electronic access locks dead-bolt styles - Available in can be programmed for shared or standard or master-keyed. permanent use

ADA Compliant Version Available

**ADA Compliant** 



#### 4805 Steel Pedestal

Fabricated from 10 gauge sheet steel with flanges welded to upright tube. Color: Tan



4825 Stainless Steel Movable



## BENCHES & PEDESTALS

## **Benches**



#### WHITE NORTHERN HARD WOOD

Locker Benches are 9-1/2" wide x 1-1/4" thick, made from laminated white northern hard wood, and finished with one coat, deep-penetrating hot sealer, and two coats of heavy body, high-impact, hot, hydraulically applied lacquer. Bench tops are standard in one foot increments from 3' thru 12'. Non-standard lengths are available on special order (pedestal requirement will be for next standard size up).

SHOWN WITH 4820 PEDESTALS

BENCH TOP LENGTH	3' - 8'	9' - 12'
PEDESTALS REQUIRED	2	3

Note: Bench top lengths over 12' will be supplied in sections



#### **PHENOLIC**

Locker Benches are 9 1/2" x 3/4" Thick phenolic material in choice of 18 standard colors. Available in 1 foot increments from 3' to 12'.

BENCH TOP LENGTH	3' - 5'	6' - 8'	9' - 12'
PEDESTALS REQUIRED	2	3	4

Pedestal space not to exceed 40" O.C.

#### SHOWN WITH 4810 PEDESTALS



## **Pedestals**













321



16 gauge stainless steel. Includes holes for permanent anchoring to floor. Color: Unpainted 8032 Adjustable Steel 4810 Heavy-Duty Cast Iron 4820 Aluminum

Movable

Pedestal Pedestal

With 6" diameter

**Pedestal With cast** 

top and

bottom. Provided

Includes

holes for aluminum

base with

three anchoring

holes optional

permanent and

concealed at top

and bottom.

anchorin

g to floor.

anchoring to floor.


Color:


Tan Color:

Tan

Color: Tan



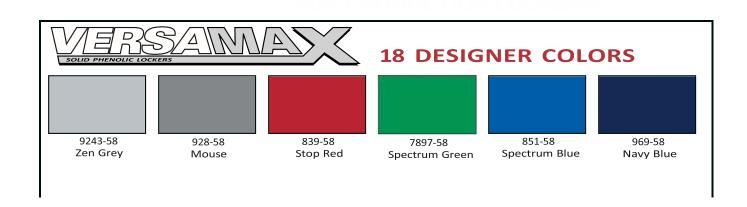

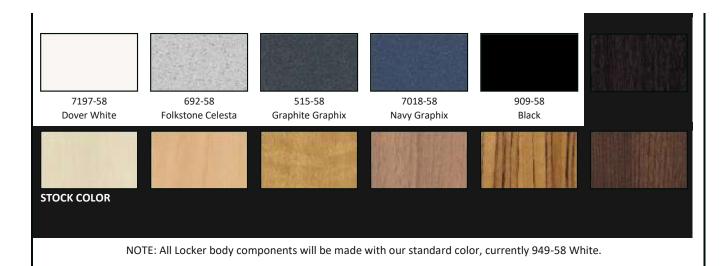



Colors shown are an approximate printed representation of the actual color and will vary depending on light source. Actual color samples are available upon request. For a more accurate color selection call or e-mail us at info@Hallowell-List.com to request actual color samples. Hallowell reserves the right to make changes to the information, illustrations, products, services, specifications, availability, plans, and terms and conditions associated with this catalog at any time, without notice, and without incurring obligations or liability of any kind.



Designer Powder Coat

Colors for Production

## **POWDER COAT COLORS**

Enhance your decor with two-tone color combinations, doors one color and frame a second color, AT NO ADDITIONAL COST.



NOTE: All body components of production KD lockers will be painted our standard neutral color, currently 729 Tan (choice of 729 Tan or 725 Dark Gray for HDV body).

# LOCKER PREMIUM FINISH UPGRADES ARE AVAILABLE FOR ALL 24 STANDARD COLORS (Additional charges apply )

#### HAMMERTONE FINISHES

Specially formulated with a unique hammer texture that is tough, highly durable and provides long lasting protection.

Note: Patterns/colors of textures and metallics will vary due to their nature.

No touch up available for hammertone finishes.





Our MedSafe™ antimicrobial finishes with Microban are specially formulated to protect against bacteria, mold, yeast & mildew for up to 20 years! Very beneficial for educational, healthcare, food processing and other hygiene conscious environments.

Colors shown are an approximate printed representation of the actual color and will vary depending on light source. Actual color samples are available upon request. For a more accurate color selection call or e-mail us at info@Hallowell-List.com to request actual color samples. Hallowell reserves the right to make changes to the information, illustrations, products, services, specifications, availability, plans, and terms and conditions associated with this catalog at any time, without notice, and without incurring obligations or liability of any kind.



# We Stock It You Sell It We Ship It... Fast! It Really Is That Easy



2823 M. JRANGE AVE. APOPKA FLORIDA 32703

866,566,0500

TEb: 407 464 38110 WWW HALLOWELD-LISTICOM