



S24TI

SWING ARM TIRE CHANGER

RIM CAPACITY
13" TO 25"



rpmtiremachines.com



S24TI


SWING ARM TIRE CHANGER

Specifications

Operating Voltage	110V, 1PH, 60Hz, 0.85kW
Wheel Clamp Capacity (Internal)	15"-25"
Wheel Clamp Capacity (External)	13"-23"
Max. Tire Diameter	48"
Rim Width Range	3" - 14"
Rotation Speed	6.5 rpm
Bead Breaker Force	2500 kg
Operating Pressure Range	115psi - 145psi
Assist Arm	Optional Bead Press

Dimensions

Weight of Machine:
650 lbs (295 kg)

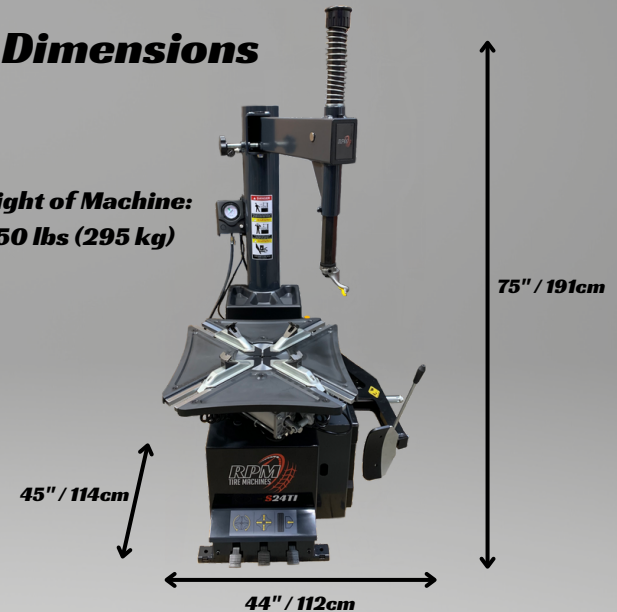

Features

- Steel jaws that clamp up to 25" rims with integrated teeth for clamping from the inside or outside of the wheel
- Built in air inflation system and powerful bead blast system for convenience and efficiency
- Bead breaker is easy to adjust between two settings for smaller or larger tires
- Two integrated inserts are built into the mount head to protect the rim from scratching
- 1 Year Parts Warranty

Standard Equipment



Plastic Rim Clamp
Covers (Set of 4)



Mount Head
Plastic Inserts




Air Filter, Regulator
& Lubricator Unit

Bead Breaker
Spade Shield



Optional

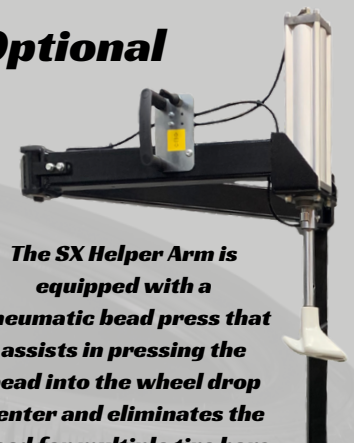

The SX Helper Arm is equipped with a pneumatic bead press that assists in pressing the bead into the wheel drop center and eliminates the need for multiple tire bars or personnel