



T24TI

TILT BACK TIRE CHANGER

RIM CAPACITY
13" TO 25"



rpmtiremachines.com



T24TI


TILT BACK TIRE CHANGER

Specifications

Operating Voltage	110V, 1PH, 60Hz, 0.85kW
Wheel Clamp Capacity (Internal)	15"-25"
Wheel Clamp Capacity (External)	13"-23"
Max. Tire Diameter	44"
Rim Width Range	3" - 14"
Rotation Speed	6.5 rpm
Bead Breaker Force	2500 kg
Operating Pressure Range	115psi - 145psi
Assist Arm	Included

Dimensions

Weight of Machine:
893 lbs (405 kg)

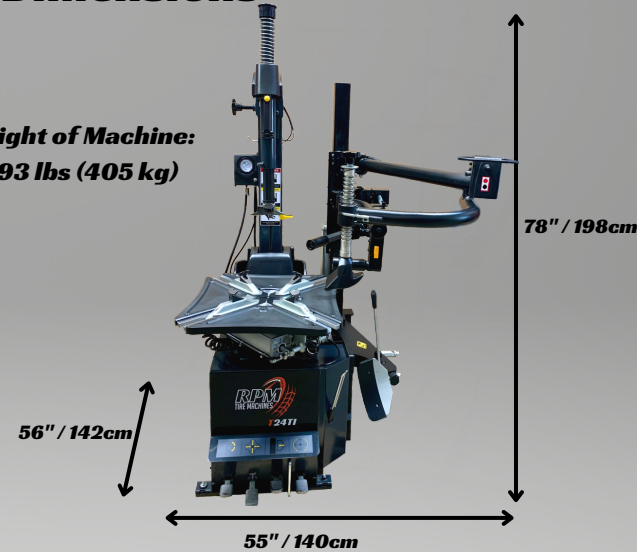

Features

- Steel jaws that clamp up to 25" rims with integrated teeth for clamping from the inside or outside of the wheel
- Built in air inflation system and powerful bead blast system for convenience and efficiency
- Bead breaker is easy to adjust between two settings for smaller or larger tires
- Pneumatic assist arm with two rollers and a bead press foot included with machine
- 1 Year Parts Warranty

Standard Equipment



Plastic Rim Clamp
Covers (Set of 4)



Mount Head
Plastic Inserts

Steel Tire Bar
w/ plastic cover



Bead Breaker
Spade Shield



The three stage bead press assist arm includes a top roller for remounting, a bottom roller for lifting, and a bead depressor foot for holding the bead in the drop centre. It also includes a rim pressing tool that can be attached to the bottom of the bead press foot.

Air Filter, Regulator
& Lubricator Unit

