



Lotus
LED
Lights

LIGHTING YOUR FUTURE



PRODUCT CATALOG
www.lotusledlights.com



TABLE OF CONTENTS

REGRESSED FIXTURES	3-8
DEEP REGRESSED FIXTURES	9-10
ADJUSTABLE GIMBALS	11-14
TRIMLESS & THIN TRIMS	15-16
FLOATING GIMBALS	17-18
SLOPPED CEILING FIXTURES	19-20
LED PANELS	21-24
FIRE RATED FIXTURES	25-26
COMMERCIAL RECESSED	27-28
INDIRECT RECESSED	29
SLIM RECESSED	30
SURFACE / J-BOX MOUNT	31-32
UNDERCABINET PUCKS & LED BARS ..	33-34
STEP LIGHTS	35
WALL SCONCE & KINETIC DOORBELL	36
LED TAPE LIGHTS	37-38
12-24V DRIVERS	39-40
DIMMERS & SWITCHES	41
ACCESSORIES	42






2" REGRESSED



- Model #: LED-1-S7W-5CCT
- Size: 2"
- Trims: White & Black, Round & Square

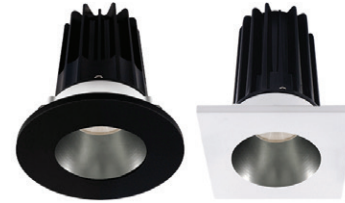

- Model #: LED-2-S15W
- Size: 2"
- Trims: 85 Combinations In Stock



- Model #: LED-1-S6W
- Size: 2"
- Trims: White & Black, Round & Square
- Options of 1/8" and 1/4" trims



- Model #: JXL-COB02
- Size: 2"
- Trims: White & Black, Smooth & Baffle

85 Combinations of Trims & Reflectors In Stock



- Model #: LED-2-S8W2
- Size: 2"
- Trims: 85 Combinations In Stock

Model:	LED-1-S6W	LED-1-S7W-5CCT	JXL-COB02
Short Description:	2" Round / Square 24 V AC/DC	2" Round / Square 7W 5CCT	2" Round / Square Economy 3CCT
Power (W):	6 W	7 W	8 W
Warm 2700 K (lm):		430	
Soft 3000 K (lm):	480	460	620 / 520
Bright 3500 K (lm):		480	
Neutral 4000 K (lm):		480	670 / 570
Daylight 5000 K (lm):		450	650 / 550
Dim to Warm:			
User Selectable CCT:		5 CCT	3 CCT 30-40-50
Input Voltage:	24 V AC / DC	120 V AC	
Dimmable Triac:		Yes	
Dimmable 0-10V:		No	
Color Rendering Index CRI:		90+	
Beam Angle:		24° / 38°	36°
Rated Life (LM70 Hours):		50,000	30,000
Warranty (Years):		3 Year	
Certifications:	ETL	ETL ES	
Fixture IP Grade:		Damp	
Cut Out:	2"	2 1/8"	2 3/4"
Dimensions (Outside):	2 1/4"	2 3/8"	3 1/8"

Model:	LED-2-S15W	LED-2-S8W2
Short Description:	2" Round / Square Designer Series High Output	2" Round / Square Designer Series
Power (W):	15 W	8 W
Warm 2700 K (lm):	980	580
Soft 3000 K (lm):	1000	600
Bright 3500 K (lm):	960	610
Neutral 4000 K (lm):	1020	620
Daylight 5000 K (lm):	960	630
Dim to Warm:	800	
User Selectable CCT:	5 CCT	
Input Voltage:	120V AC Triac Dim / 120-277V AC 0-10V Dim	120 V AC
Dimmable Triac:	Yes	
Dimmable 0-10V:	Yes	No
Color Rendering Index CRI:	90+	
Beam Angle:	24° / 38° / 60°	
Rated Life (LM70 Hours):	50,000	
Warranty (Years):	5 Year	
Certifications:	ETL ES	
Fixture IP Grade:	Wet	Damp
Cut Out:	2 3/4"	
Dimensions (Outside):	3 1/8"	



3" REGRESSED



● Model #: LED-3-S6W-5CCT-BA
● Size: 3"
● Trims: White, Round



● Model #: LL3R
● Size: 3"
● Trims: White & Black, Round



● Model #: LD3R
● Size: 3"
● Trims: White & Black, Round



● Model #: LD3S
● Size: 3"
● Trims: White & Black, Square

Model:	LED-3-S6W-5CCT-BA	LL3R
Short Description:	3" Round Regressed Baffle LED 6W 5CCT	3" Round Slim Recessed LED 11W
Power (W):	6 W	11 W
Warm 2700 K (lm):	420	780
Soft 3000 K (lm):	430	850
Bright 3500 K (lm):	460	920
Neutral 4000 K (lm):	480	940
Daylight 5000 K (lm):	450	930
Dim to Warm:		900
User Selectable CCT:	5CCT : 2700-3000-3500-4000-5000K	
Input Voltage:	120V AC	120V-347V AC
Dimmable Triac:		Yes
Dimmable 0-10V:	No	Yes
Color Rendering Index CRI:		90+
Beam Angle:	110°	38°
Rated Life (LM70 Hours):	50,000	
Warranty (Years):	3 Year	10 Year Res./ 5 Year Com.
Certifications:	cETLus, ES	cULus
Fixture IP Grade:	Damp	Wet
Cut Out:	3 1/4"	3"
Dimensions (Outside):	3 3/4"	3 1/2"

Model:	LD3R	LD3S
Short Description:	3" Round Regressed LED 15W	3" Square Regressed LED 15W
Power (W):	15 W	
Warm 2700 K (lm):	1230	
Soft 3000 K (lm):	1290	
Bright 3500 K (lm):	1350	
Neutral 4000 K (lm):	1410	
Daylight 5000 K (lm):	1450	
Dim to Warm:	1300	
User Selectable CCT:	2700-3000-3500-4000-5000K	
Input Voltage:	120V-347V AC	
Dimmable Triac:	Yes	
Dimmable 0-10V:	Yes	
Color Rendering Index CRI:	90+	
Beam Angle:	38°	
Rated Life (LM70 Hours):	50,000	
Warranty (Years):	10 Year Residential / 5 Year Commercial	
Certifications:	cULus	
Fixture IP Grade:	Wet	
Cut Out:	3 1/2"	
Dimensions (Outside):	4 1/4"	

4" - 6" REGRESSED



- Model #: AD-LED-4-S15W
- Size: 4"
- Trims: Round & Square, White & Black



- Model #: JXL-COB04
- Size: 4"
- Trims: White & Black, Smooth & Baffle



- Model #: LL4RR
- Size: 4"
- Trims: White & Black



- Model #: LL4SR
- Size: 4"
- Trims: White & Black



- Model #: LL6RR
- Size: 6"
- Trims: White & Black



- Model #: LL6SR
- Size: 6"
- Trims: White & Black

Model:	AD-LED-4-S15W	LL4RR	LL4SR
Short Description:	4" Round / Square Regressed 3K, 4K, 5CCT	4" Round Regressed Plenum	4" Square Regressed Plenum
Power (W):	15 W	14.5 W	
Warm 2700 K (lm):	910	950	
Soft 3000 K (lm):	960	1000	
Bright 3500 K (lm):	1015		
Neutral 4000 K (lm):	1050	1020	
Daylight 5000 K (lm):	1055		
Dim to Warm:	1050	850	780
User Selectable CCT:	5 CCT		
Input Voltage:	120-277 V AC	120-347 V	
Dimmable Triac:		Yes	
Dimmable 0-10V:		Yes	
Color Rendering Index CRI:		90+	
Beam Angle:	24° / 40° / 60°	90°	
Rated Life (LM70 Hours):	50,000	50,000	
Warranty (Years):	5 Year	10 Res. 5 Com.	
Certifications:	ETL ES	UL ES T24	
Fixture IP Grade:	Damp	Wet IP54	
Cut Out:	3 3/4"	4 1/4"	
Dimensions (Outside):	4 1/2"	5"	

Model:	JXL-COB04	LL6RR	LL6SR
Short Description:	4" Round / Square Economy 3CCT	6" Round Regressed Plenum	6" Square Regressed Plenum
Power (W):	15 W	17 W	18 W
Warm 2700 K (lm):		1150	
Soft 3000 K (lm):	1230/1170	1200	
Bright 3500 K (lm):			
Neutral 4000 K (lm):	1410/1360	1300	
Daylight 5000 K (lm):	1390/1290		
Dim to Warm:			
User Selectable CCT:	3 CCT 30-40-50		
Input Voltage:	120 V AC	120-347 V AC	
Dimmable Triac:		Yes	
Dimmable 0-10V:	No	Yes	
Color Rendering Index CRI:		90+	
Beam Angle:	36°	90°	
Rated Life (LM70 Hours):	30,000	50,000	
Warranty (Years):	3 Year	10 Res. 5 Com.	
Certifications:	ETL ES	UL ES T24	
Fixture IP Grade:	Damp	Wet IP54	
Cut Out:	4 1/2"	6 1/4"	
Dimensions (Outside):	4 3/4"	7"	

4" - 6" - 8" DEEP REGRESSED




● Model #: LD4S | LD4S-HO
● Size: 4"
● Trims: As Shown




● Model #: LD4R-CPL | LD4S-CPL
● Size: 4"
● Trims: White, Round & Square




● Model #: LD4R | LD4R-HO
● Size: 4"
● Trims: As Shown



● Model #: LD6R | LD6R-HO
● Size: 6"
● Trims: As Shown



● Model #: LD8R | LD8R-HO
● Size: 8"
● Trims: As Shown

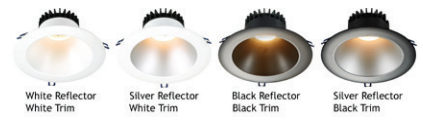

Model:	LD4R LD4R-HO	LD4S LD4S-HO	LD4R-CPL LD4S-CPL
Short Description:	4" Round Deep Regressed	4" Square Deep Regressed	4" Round & Square Polycarbonate Ocean Front
Power (W):	15 / 18 W		
Warm 2700 K (lm):	1100 / 1500		
Soft 3000 K (lm):	1200 / 1550		
Bright 3500 K (lm):	1250 / 1600		
Neutral 4000 K (lm):	1300 / 1650		
Daylight 5000 K (lm):	1400 / 1700		
Dim to Warm:	3000-2000K : 900 / 1150 3000-1800K : 980 / 1250		
User Selectable CCT:	5 CCT 2700-3000-3500-4000-5000		
Input Voltage:	120 V - 347 V AC		
Dimmable Triac:	Yes		
Dimmable 0-10V:	Yes		
Color Rendering Index CRI:	90+		
Beam Angle:	30°		
Rated Life (LM70 Hours):	50,000		
Warranty (Years):	10 Year Residential / 5 Year Commercial		
Certifications:	UL ES (Except Dim to Warm & 5CCT) T24		
Fixture IP Grade:	Wet Location IP54		
Cut Out:	4 1/2"		
Dimensions (Outside):	4 7/8"		

Model:	LD6R LD6R-HO	LD8R LD8R-HO
Short Description:	6" Round Deep Regressed	8" Round Deep Regressed
Power (W):	18 / 30 W	
Warm 2700 K (lm):	1500 / 2630	
Soft 3000 K (lm):	1550 / 2700	
Bright 3500 K (lm):	1600 / 2810	
Neutral 4000 K (lm):	1650 / 2900	
Daylight 5000 K (lm):	1700 / 3000	
Dim to Warm:	1150 - 18W only	
User Selectable CCT:	5 CCT - 18W only	
Input Voltage:	120 V - 347 V AC	
Dimmable Triac:	Yes	
Dimmable 0-10V:	Yes	
Color Rendering Index CRI:	90+	
Beam Angle:	38°	
Rated Life (LM70 Hours):	50,000	
Warranty (Years):	10 Year Residential / 5 Year Commercial	
Certifications:	UL ES (Except Dim to Warm & 5CCT) T24	
Fixture IP Grade:	Wet Location IP54	
Cut Out:	6 1/4"	8"
Dimensions (Outside):	6 3/4"	9"



2" - 3" ADJUSTABLE GIMBAL ORIGINAL LINE



- Model #: LRG2 | LRG2-HO
- Size: 2"
- Trims: Black, White & Oil Rubbed Bronze



- Model #: LL2G | LL2G-HO
- Size: 2"
- Trims: Black, White, Nickel



- Model #: LSG2 | LSG2-HO
- Size: 2"
- Trims: Black, White & Oil Rubbed Bronze

Model:	LL2G LL2G-HO	LRG2 LRG2-HO	LSG2 LSG2-HO
Short Description:	2" Round Eyeball Gimbal	2" Round Regressed Gimbal	2" Square Regressed Gimbal
Power (W):		5 W / 5.5 W	
Warm 2700 K (lm):		380 / 450	
Soft 3000 K (lm):		400 / 490	
Bright 3500 K (lm):		N/A / 500	
Neutral 4000 K (lm):		430 / 530	
Daylight 5000 K (lm):		N/A / 550	
Dim to Warm:		N/A / 430	
User Selectable CCT:			
Input Voltage:		120 V - 347 V AC	
Dimmable Triac:		Yes	
Dimmable 0-10V:		Yes	
Color Rendering Index CRI:		90+	
Beam Angle:		36°	
Rated Life (LM70 Hours):		50,000	
Warranty (Years):		10 Year Residential / 5 Year Commercial	
Certifications:		UL ES (Except Dim to Warm & 5CCT) T24	
Fixture IP Grade:		Wet Location IP54	
Cut Out:	2 1/8"	2 3/4"	
Dimensions (Outside):	2 1/2"	3"	



- Model #: LL3G | LL3G-HO
- Size: 3"
- Trims: Trims: Black, White, Nickel



- Model #: LRG3 | LRG3-HO
- Size: 3"
- Trims: Black, White & Oil Rubbed Bronze



- Model #: LSG3 | LSG3-HO
- Size: 3"
- Trims: Black, White & Oil Rubbed Bronze

Model:	LL3G LL3G-HO	LRG3 LRG3-HO	LSG3 LSG3-HO
Short Description:	3" Round Eyeball Gimbal	3" Round Regressed Gimbal	3" Square Regressed Gimbal
Power (W):		7.5 W / 11 W	
Warm 2700 K (lm):		580 / 920	
Soft 3000 K (lm):		560 / 990	
Bright 3500 K (lm):		620 / 1060	
Neutral 4000 K (lm):		630 / 1080	
Daylight 5000 K (lm):		650 / 1090	
Dim to Warm:		500 / 780	
User Selectable CCT:		5 CCT 2700-3000-3500-4000-5000	
Input Voltage:		120 V - 347 V AC	
Dimmable Triac:		Yes	
Dimmable 0-10V:		Yes	
Color Rendering Index CRI:		90+	
Beam Angle:	38°		38°/15°
Rated Life (LM70 Hours):		50,000	
Warranty (Years):		10 Year Residential / 5 Year Commercial	
Certifications:		UL ES (Except Dim to Warm & 5CCT) T24	
Fixture IP Grade:		Wet Location IP54	
Cut Out:	3"		3 1/2"
Dimensions (Outside):	3 1/4"		4 1/4"



3.5" - 4" ADJUSTABLE VENUS LINE



- Model #: AD-35-S12W-xx-REY
- Size: 3.5"
- Trims: As Shown



- Model #: AD-LED-4-S12W-xx-LREY
- Size: 4"
- Trims: White & Black, Round & Square

Model:	AD-35-S12W-xx-REY	AD-LED-4-S12W-xx-LREY
Short Description:	3.5" Round Venus Gimbal 5CCT or DTW	4" Round / Square Venus Gimbal 3K, DTW, 5CCT
Power (W):	12 W	
Warm 2700 K (lm):	780	
Soft 3000 K (lm):	880 / 820	
Bright 3500 K (lm):	890	
Neutral 4000 K (lm):	920	
Daylight 5000 K (lm):	910	
Dim to Warm:	3000K to 1800K	
User Selectable CCT:	5 CCT 2700 - 3000 - 3500 - 4000 - 5000	
Input Voltage:	120 V - 347V	
Dimmable Triac:	Yes	
Dimmable 0-10V:	Yes	
Color Rendering Index CRI:	90+	
Beam Angle:	38°	
Rated Life (LM70 Hours):	50,000	
Warranty (Years):	5 Year	
Certifications:	ETL ES	
Fixture IP Grade:	Wet Location IP54	
Cut Out:	3 3/4"	4 1/2"
Dimensions (Outside):	4 3/8"	5"

4" - 6" ADJUSTABLE GIMBAL ORIGINAL LINE



- Model #: LL4G | LL4G-HO
- Size: 4"
- Trims: Black, White & Nickel



- Model #: LRG4 | LRG4-HO
- Size: 4"
- Trims: Black, White & Oil Rubbed Bronze

- Model #: LRG6 | LRG6-HO
- Size: 6"
- Trims: Black, White & Oil Rubbed Bronze

Model:	LL4G LL4G-HO	LRG4 LRG4-HO	LRG6 LRG6-HO
Short Description:	4" Round Eyeball Gimbal	4" Round Regressed Gimbal	6" Round Regressed Gimbal
Power (W):	11.4 / 15 W		15 / 18 W
Warm 2700 K (lm):	960 / 1100		1100 / 1500
Soft 3000 K (lm):	1000 / 1200		1200 / 1550
Bright 3500 K (lm):	1020 / 1250		1250 / 1600
Neutral 4000 K (lm):	1050 / 1300		1300 / 1650
Daylight 5000 K (lm):	1100 / 1400		1400 / 1700
Dim to Warm:	3000-2000K : 800 / 900 3000-1800K : 980 / 1250 3000-2000K : 900 / 1150 3000-1800K : 1250 / 1400		
User Selectable CCT:	5 CCT 2700 - 3000 - 3500 - 4000 - 5000		
Input Voltage:	120 V - 347 V AC		
Dimmable Triac:	Yes		
Dimmable 0-10V:	Yes		
Color Rendering Index CRI:	90+		
Beam Angle:	38°		
Rated Life (LM70 Hours):	50,000		
Warranty (Years):	10 Year Residential / 5 Year Commercial		
Certifications:	UL ES (Except Dim to Warm & 5CCT) T24		
Fixture IP Grade:	Wet Location IP54		
Cut Out:	4 1/2"	5"	6"
Dimensions (Outside):	5"	5 3/4"	7 1/2"



2" - 4" TRIMLESS FIXTURES



- Model #: LED-1-S7W-5CCT-TRIMLESS
- Size: 1"
- Trims: White, Round



- Model #: LED-2-S11W-EY-T
- Size: 2"
- Trims: White & Black, Round & Square




- Model #: LED-2-S15W-T
- Size: 2"
- Trims: White & Black, Round & Square

Model:	LED-1-S7W-5CCT-TRIMLESS	LED-2-S11W-EY-T	LED-2-S15W-T
Short Description:	1" Trimless Round	2" Trimless Round / Square Adjustable Gimbal 11W	2" Trimless Round / Square 15W
Power (W):	7 W	11 W	15 W
Warm 2700 K (lm):	430	800	820
Soft 3000 K (lm):	460	850	870
Bright 3500 K (lm):	480	930	950
Neutral 4000 K (lm):	480	980	985
Daylight 5000 K (lm):	450	1000	960
Dim to Warm:		900	800
User Selectable CCT:		5 CCT 2700 - 3000 - 3500 - 4000 - 5000	
Input Voltage:		120 V - 347V	
Dimmable Triac:		Yes	
Dimmable 0-10V:		No	
Color Rendering Index CRI:		90+	
Beam Angle:		24° / 38° / 60°	
Rated Life (LM70 Hours):		50,000	
Warranty (Years):	3 Year	5 Year	
Certifications:	cETLus, Energy Star	ETL	ETL ES
Fixture IP Grade:	Insulated Ceiling & Wet Locations	Wet Location IP54	
Cut Out:	2 1/4" Round	2 5/8" Round/Square Hole	2 5/8" Square Hole
Dimensions (Outside):	3 3/4" Round	2 1/2" Round/Square	2 1/2" Square

TRIMLESS AND THIN TRIM



- Model #: LRG3-HO-IT | LRG3-HO-TT
- Size: 3"
- Trims: White & Black

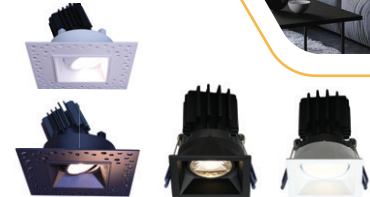

- Model #: LSG3-HO-IT | LSG3-HO-TT
- Size: 3"
- Trims: White & Black



- Model #: LD4R-IT | LD4R-HO-IT
- Size: 4"
- Trims: White, Black & Silver



- Model #: LD4R-TT | LD4R-HO-TT
- Size: 4"
- Trims: White & Black



Model:	LRG3-HO-IT	LRG3-HO-TT	LSG3-HO-IT	LSG3-HO-TT	LD4R-IT	LD4R-TT	LD4R-HO-IT	LD4R-HO-TT
Short Description:	3" Round Trimless Regressed Gimbal	3" Round Thin Trim Regressed Gimbal	3" Square Trimless Regressed Gimbal	3" Square Thin Trim Regressed Gimbal	4" Round Trimless Deep Regressed	4" Round Thin Trim Deep Regressed	4" Round Trimless Deep Regressed HO	4" Round Thin Trim Deep Regressed HO
Power (W):	11 W				15 W		18 W	
Warm 2700 K (lm):	920				1100		1500	
Soft 3000 K (lm):	990				1200		1550	
Bright 3500 K (lm):	1060				1250		1600	
Neutral 4000 K (lm):	1080				1300		1650	
Daylight 5000 K (lm):	1090				1400		1700	
Dim to Warm:	780				900		1150	
User Selectable CCT:	2700 - 3000 - 3500 - 4000 - 5000							
Input Voltage:	120 V - 347V AC							
Dimmable Triac:	Yes							
Dimmable 0-10V:	Yes							
Color Rendering Index CRI:	90+							
Beam Angle:	38°				30°			
Rated Life (LM70 Hours):	50,000							
Warranty (Years):	10 Year Residential / 5 Year Commercial							
Certifications:	c UL us, Energy Star (single CCT only)							
Fixture IP Grade:	Wet							
Cut Out:	3 1/2"	2 3/4"	3 1/2"	2 1/2" SQ	4 1/2"	3 5/8"	4 1/2"	3 5/8"
Dimensions (Outside):	4 1/4"	3 1/8"	4 1/4" SQ	3" SQ	4 7/16"	4 1/8"	4 7/16"	4 1/8"



2" - 3" - 4" - 6" FLOATING GIMBALS



NEW

Smart
Wi-Fi &
Adjustable

- Model #: LED-2-S5W-RGBCW-FG
- Size: 2"
- Trims: White & Black



- Model #: LED-2-S5W-FG
- Size: 2"
- Trims: White & Black



- Model #: LED-3-S7W-FG
- Size: 3"
- Trims: White & Black



NEW

Smart
Wi-Fi &
Adjustable

- Model #: ADS4FGSTRGBCW
- Size: 4"
- Trims: White & Black



- Model #: LED-4-S9W-FG
- Size: 4"
- Trims: White & Black



Available in
a contractor
6 pack



- Model #: LED-6-S15W-FG
- Size: 6"
- Trims: White & Black

Model:	LED-2-S5W-RGBCW-FG	LED-2-S5W-FG	LED-3-S7W-FG
Short Description:	2" Round Floating Gimbal RGB + Tuneable White	2" Round Floating Gimbal	3" Round Floating Gimbal
Power (W):	7W	5 W	7 W
Warm 2700 K (lm):	Infinite Light Colors	370	550
Soft 3000 K (lm):		380	580
Bright 3500 K (lm):		410	630
Neutral 4000 K (lm):		420	630
Daylight 5000 K (lm):		410	640
Dim to Warm:		400	3000-1800K 465
User Selectable CCT:		5 CCT 2700 - 3000 - 3500 - 4000 - 5000	
Input Voltage:	120V AC		
Dimmable Triac:	Dimmable by app only		Yes
Dimmable 0-10V:	Dimmable by app only		No
Color Rendering Index CRI:	90+		
Beam Angle:	24° / 38° / 60°		
Rated Life (LM70 Hours):	50,000		
Warranty (Years):	3 Year		
Certifications:	cETLus ES		cETLus
Fixture IP Grade:	Damp		
Cut Out:	2 3/4"		3 3/4"
Dimensions (Outside):	3 1/2"		4 1/4"

Model:	ADS4FGSTRGBCW	LED-4-S9W-FG	LED-6-S15W-FG
Short Description:	4" Round Floating Gimbal RGB + Tuneable White	4" Round Floating Gimbal	6" Round Floating Gimbal
Power (W):	7W	9 W	15 W
Warm 2700 K (lm):	Infinite Light Colors	740	1180
Soft 3000 K (lm):		790 / 770	1520 / 1220
Bright 3500 K (lm):		820	1270
Neutral 4000 K (lm):		850	1270
Daylight 5000 K (lm):		855	1180
Dim to Warm:		650	
User Selectable CCT:		5 CCT 2700 - 3000 - 3500 - 4000 - 5000	
Input Voltage:	120 V AC		120V-277 V AC
Dimmable Triac:	Dimmable by app only		Yes
Dimmable 0-10V:	Dimmable by app only	No	Yes
Color Rendering Index CRI:	90+		
Beam Angle:	24° / 38° / 60°		38°
Rated Life (LM70 Hours):	50,000		
Warranty (Years):	3 Year		
Certifications:	cETLus ES	cETLus	cETLus ES
Fixture IP Grade:	Damp		
Cut Out:	4 1/2"		6"
Dimensions (Outside):	4 7/8"		6 7/8"


4" - 5" - 6" SLOPED CEILING FIXTURES



● Model #: LD3R-4RSL
● Size: 4"
● Trims: Black & White



● Model #: LRG3-4RSL | LRG3-HO-4RSL
● Size: 4"
● Trims: Black, White & Oil Rubbed Bronze

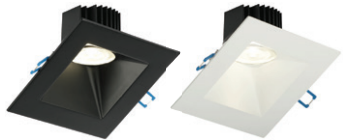

● Model #: LD3S-5SSL
● Size: 5"
● Trims: Black & White



● Model #: LSG3-5SSL | LSG3-HO-5SSL
● Size: 5"
● Trims: Black, White & Oil Rubbed Bronze



● Model #: LD4R-5R-SL30 | LD4R-HO-5R-SL30
● Size: 5"
● Trims: Black, White & Oil Rubbed Bronze



● Model #: LRG6-6RSL | LRG6-HO-6RSL
● Size: 6"
● Trims: Black, White & Oil Rubbed Bronze

Model:	LD3R-4RSL	LD3S-5SSL	LRG3-4RSL	LSG3-5SSL
Short Description:	4" Round 30° Sloped Regressed	5" Square 30° Sloped Regressed	4" Round Sloped 30° Gimbal for 5° to 55° Slopes	5" Square Sloped 30° Gimbal for 5° to 55° Slopes
Power (W):	15W		7.5 W / 11 W	
Warm 2700 K (lm):	1220		580 / 920	
Soft 3000 K (lm):	1260	1270	560 / 990	
Bright 3500 K (lm):	1330	1350	620 / 1060	
Neutral 4000 K (lm):	1380	1380	630 / 1080	
Daylight 5000 K (lm):	1390	1400	650 / 1090	
Dim to Warm:	1280	1300	500 / 780	
User Selectable CCT:	5 CCT 2700-3000-3500-4000-5000			
Input Voltage:	120 V - 347 V AC			
Dimmable Triac:	Yes			
Dimmable 0-10V:	Yes			
Color Rendering Index CRI:	90+			
Beam Angle:	38°			
Rated Life (LM70 Hours):	50,000			
Warranty (Years):	10 Year Residential / 5 Year Commercial			
Certifications:	cULus		UL ES (Except Dim to Warm & 5CCT)	
Fixture IP Grade:	Wet Location IP54			
Cut Out:	4 1/2"-5"		5"	
Dimensions (Outside):	5 3/4"	5 1/4"	5 3/4"	

Model:	LD4R-5R-SL30 LD4R-HO-5R-SL30	LRG6-6RSL LRG6-HO-6RSL
Short Description:	5" Round 30° Sloped Deep Regressed	6" Round 30° Sloped Gimbal for 10° to 50° Slopes
Power (W):	15 W / 18 W	
Warm 2700 K (lm):	1100 / 1500	
Soft 3000 K (lm):	1200 / 1550	
Bright 3500 K (lm):	1250 / 1600	
Neutral 4000 K (lm):	1300 / 1650	
Daylight 5000 K (lm):	1400 / 1700	
Dim to Warm:	3000K to 2000K and 3000K to 1800K	
User Selectable CCT:	5 CCT 2700-3000-3500-4000-5000	
Input Voltage:	120 V - 347 V AC	
Dimmable Triac:	Yes	
Dimmable 0-10V:	Yes	
Color Rendering Index CRI:	90+	
Beam Angle:	30°	38°
Rated Life (LM70 Hours):	50,000	
Warranty (Years):	10 Year Residential / 5 Year Commercial	
Certifications:	UL ES (Except Dim to Warm & 5CCT) T24	
Fixture IP Grade:	Wet Location IP54	
Cut Out:	5 1/2"	6 1/4"
Dimensions (Outside):	6 1/4"	7"

4" LED PANELS



- Model #: LL4R
- Size: 4"
- Trims: White, Black, Copper & Nickel



- Model #: LED-S9W-5CCTWH-R-BF
- Size: 4"
- Trims: White & Black
- Also available LED-S9W-2700K-6500K WH-R-BF Tuneable White 2700K TO 6500K



- Model #: LED-S9W-5CCTWH-SQ
- Size: 4"
- Trims: White



- Model #: LED-S9W
- Size: 4"
- Trims: White & Black
- Contractor 6 Pack Option. Retrofit for 4" housing model RF-LED-4-S9W-5CCTWH-PL



Contractor 6 Pack Option



- Model #: LE4R-5CCT
- Size: 4"
- Trims: White & Black
- Available in Contractor 6 Pack



- Model #: LL4S
- Size: 4"
- Trims: White & Black

Model:	LE4R-5CCT	LL4R	LL4S
Short Description:	4" Round Economy 5CCT Panel	4" Round Super Thin Ultimate	4" Square Super Thin Ultimate
Power (W):	11 W	13.5 W	13.5 W
Warm 2700 K (lm):	680	750	2700K - 800
Soft 3000 K (lm):	720	760	3000K - 850
Bright 3500 K (lm):	770		
Neutral 4000 K (lm):	780	800	4000K - 950
Daylight 5000 K (lm):	760	850	
Dim to Warm:		28-20K 35-20K	
User Selectable CCT:	5 CCT		
Input Voltage:	120V AC	120V - 347V AC or 24V DC	
Dimmable Triac:		Yes	
Dimmable 0-10V:	No	Yes	
Color Rendering Index CRI:	90+	90	80
Beam Angle:		110°	
Rated Life (LM70 Hours):	36,000	50,000	
Warranty (Years):	3 Year	10 Year Residential / 5 Year Commercial	
Certifications:	c UL us	UL ES (Except Dim to Warm & 5CCT) T24	
Fixture IP Grade:	Wet	Wet Location IP54Wet	
Cut Out:		4 1/4"	
Dimensions (Outside):	4 7/8"	5 1/4"	4 3/4"

Model:	LED-S9W-5CCTWH-R-BF	LED-S9W	LED-S9W-5CCTWH-SQ
Short Description:	4" Round Regressed Baffle 5CCT	4" Round Budget 3K, 4K or 5CCT	4" Square Budget 5CCT
Power (W):		9 W	
Warm 2700 K (lm):	685	600	650
Soft 3000 K (lm):	720	600	700
Bright 3500 K (lm):	770	620	735
Neutral 4000 K (lm):	780	620	740
Daylight 5000 K (lm):	760	620	710
Dim to Warm:			
User Selectable CCT:		5 CCT	
Input Voltage:		120 V AC	
Dimmable Triac:		Yes	
Dimmable 0-10V:		No	
Color Rendering Index CRI:		80	
Beam Angle:		110°	
Rated Life (LM70 Hours):		36,000	
Warranty (Years):		3 Year	
Certifications:		ETL ES	
Fixture IP Grade:		Damp	
Cut Out:		4 1/4"	
Dimensions (Outside):	5"	4 7/8"	

6" LED PANELS



- Model #: LL6R
- Size: 6"
- Trims: White, Black, Copper & Nickel



- Model #: LE6R-5CCT
- Size: 6"
- Trims: White & Black
- Also available in Contractor 6 pack



- Model #: LL6S
- Size: 6"
- Trims: White & Black



- Model #: LED-6-S12W-5CCTWH-R-BF
- Size: 6"
- Trims: White
- Also available LED-6-S12W-2700K-6500KWH-R-BF Tuneable White 2700K TO 6500K



- Model #: LED-6-S12W-5CCTWH-SQ
- Size: 6"
- Trims: White



- Model #: LED-6-S12W
- Size: 6"
- Trims: White
- Also available in Contractor 6 pack



Contractor 6 Pack Option

Model:	LE6R-5CCT	LL6R	LL6S
Short Description:	6" Round Super Thin Economy	6" Round Super Thin Ultimate	6" Square Super Thin Ultimate
Power (W):	14 W	17 W	17 W
Warm 2700 K (lm):	910	950	1000
Soft 3000 K (lm):	970	980	1050
Bright 3500 K (lm):	1050		
Neutral 4000 K (lm):	1070	1000	1100
Daylight 5000 K (lm):	1030	1050	
Dim to Warm:		28-20K 35-20K	
User Selectable CCT:	5 CCT		
Input Voltage:	120 V AC	120 V - 347 V AC	
Dimmable Triac:		Yes	
Dimmable 0-10V:	No	Yes	
Color Rendering Index CRI:	90+	90	80
Beam Angle:		110°	
Rated Life (LM70 Hours):	36,000	50,000	
Warranty (Years):	3 Year	10 Year Residential / 5 Year Commercial	
Certifications:	c UL us	UL ES (Except Dim to Warm & 5CCT) T24	
Fixture IP Grade:	Wet	Wet Location IP54	
Cut Out:		6 1/4"	
Dimensions (Outside):	6 7/8"	7 1/2"	6 3/4"

Model:	LED-6-S12W-5CCT-R-BF	LED-6-S12W	LED-6-S12W-5CCTWH-SQ
Short Description:	6" Round Regressed Baffle 5CCT	6" Round Budget 3K, 4K or 5CCT	6" Square Budget 5CCT
Power (W):		12 W	
Warm 2700 K (lm):	940	800	890
Soft 3000 K (lm):	990	800	940
Bright 3500 K (lm):	1050	800	1000
Neutral 4000 K (lm):	1070	820	1015
Daylight 5000 K (lm):	1040	800	980
Dim to Warm:			
User Selectable CCT:		5 CCT	
Input Voltage:		120 V AC	
Dimmable Triac:		Yes	
Dimmable 0-10V:		No	
Color Rendering Index CRI:		80	
Beam Angle:		110°	
Rated Life (LM70 Hours):		50,000	
Warranty (Years):		3 Year	
Certifications:		cETLus, Energy Star	
Fixture IP Grade:		Damp	
Cut Out:		6 1/4"	
Dimensions (Outside):	7"	6 7/8"	

4" FIRE RATED FIXTURES



● Model #: FR-LED-4-S9W-5CCT-FG
● Size: 4"
● Trims: White



● Model #: FR-LED-4-S12W-5CCT-PL
● Size: 4"
● Trims: White



● Model #: LFR-4R-RB-9W-5CCT
● Size: 4"
● Trims: White




● Model #: LFR-4S-FE-9W-5CCT
● Size: 4"
● Trims: White, Round & Square

Model:	FR-LED-4-S9W-5CCT-FG	FR-LED-4-S9W-5CCT-PL	LFR-4R-FE-9W-5CCT	LFR-4S-FE-9W-5CCT	LFR-4R-RB-9W-5CCT	LFR-4S-RB-9W-5CCT
Short Description:	4" Round Fire Rated Floating Gimbal	4" Round Fire Rated Ultra Slim	4" Round Fire Rated Ultra Slim UL	4" Square Fire Rated Ultra Slim	4" Round Fire Rated Regressed Backlit	4" Square Fire Rated Regressed Backlit
Power (W):	9 W					
Warm 2700 K (lm):	680	680	840		960	
Soft 3000 K (lm):	720	720	870		1060	
Bright 3500 K (lm):	775	775	870		1080	
Neutral 4000 K (lm):	800	800	860		1100	
Daylight 5000 K (lm):	800	800	810		1080	
User Selectable CCT:	2700 - 3000 - 3500 - 4000 - 5000K					
Input Voltage:	120V AC					
Dimmable Triac:	Yes					
Dimmable 0-10V:	No	Yes	No			
Color Rendering Index CRI:	90+					
Beam Angle:	24° / 38° / 60°	110°			100°	
Rated Life (LM70 Hours):	50,000					
Warranty (Years):	3 Year					
Certifications:	c ETL us			c UL us		
Fixture IP Grade:	Damp			Wet		
Cut Out:	4 1/4"		4"			
Dimensions (Outside):	4 7/8"	5"	5 1/8"	5 1/8" Square	5 1/8"	5 1/8" Square

6" FIRE RATED FIXTURES



● Model #: FR-LED-6-S15W-5CCT-FG
● Size: 6"
● Trims: White

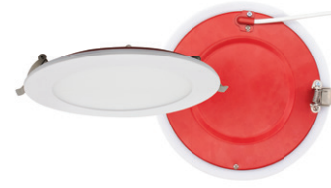

● Model #: FR-LED-6-S15W-5CCT-PL
● Size: 6"
● Trims: White



● Model #: LFR-6R-RB-14W-5CCT
● Size: 6"
● Trims: White, Round & Square

Model:	FR-LED-6-S15W-5CCT-FG	FR-LED-6-S12W-5CCT-PL	LFR-6R-FE-12W-5CCT	LFR-6S-FE-12W-5CCT	LFR-6R-RB-14W-5CCT	LFR-6S-RB-14W-5CCT
Short Description:	6" Round Fire Rated Floating Gimbal	6" Round Fire Rated Ultra Slim	6" Round Fire Rated Ultra Slim	6" Square Fire Rated Ultra Slim	6" Round Fire Rated Regressed Backlit	6" Square Fire Rated Regressed Backlit
Power (W):	15 W	12 W	14 W			
Warm 2700 K (lm):	1180	960	1500		1600	
Soft 3000 K (lm):	1270	1030	1540		1610	
Bright 3500 K (lm):	1350	1080	1600		1680	
Neutral 4000 K (lm):	1370	1100	1620		1750	
Daylight 5000 K (lm):	1350	1050	1600		1690	
User Selectable CCT:	2700 - 3000 - 3500 - 4000 - 5000K					
Input Voltage:	120V AC					
Dimmable Triac:	Yes					
Dimmable 0-10V:	Yes			No		
Color Rendering Index CRI:	90+					
Beam Angle:	38°	110°			100°	
Rated Life (LM70 Hours):	50,000					
Warranty (Years):	3 Year					
Certifications:	c ETL us			c UL us		
Fixture IP Grade:	Damp			Wet		
Cut Out:	5 1/2" to 6"		6 1/4"		6"	
Dimensions (Outside):	6 7/8"		7 1/8"	7 1/8" Square	7 1/8"	7 1/8" Square



4" - 6" - 8" - 10" COMMERCIAL RECESSED

Model #: TP120-347-RT4-C-DIM-G1-ES
Size: 4"

Model #: TP120-347-RT6-C-DIM-G1-ES
Size: 6"

Model #: TP120-347-RT8-C-DIM-G1-ES
Size: 8"

Model #: TP120-347-RT9.5-C-DIM-G1-ES
Size: 10"

Trims For All Models: White, Black & Silver Trims with White & Silver Reflector



Model:	TP120-347-RT4-C-DIM-G1-ES	TP120-347-RT6-C-DIM-G1-ES	TP120-347-RT8-C-DIM-G1-ES	TP120-347-RT9.5-C-DIM-G1-ES
Short Description:	Round 3 CCT 3 Wattage Selectable			
Size	4"	6"	8"	10"
Power (W):	5.5/8/12 W	7/10/18 W	10/15/22 W	20/25/32 W
Warm 2700 K (lm):				
Soft 3000 K (lm):	500 lm at 5.5W	700 lm at 7W	1000 lm at 10W	2000 lm at 20W
Bright 3500 K (lm):	700 lm at 8W	1000 lm at 10W	1500 lm at 15W	2500 lm at 25W
Neutral 4000 K (lm):	1000 lm at 12W	1500 lm at 18W	2000 lm at 22W	3000 lm at 32W
Daylight 5000 K (lm):				
Dim to Warm:				
User Selectable CCT:	3 CCT - 30-35-40			
Input Voltage:	120V - 347V AC 0-10V Dimmable			
Dimmable Triac:	No			
Dimmable 0-10V:	Yes			
Color Rendering Index CRI:	90+			
Beam Angle:	83°	88°	90°	92°
Rated Life (LM70 Hours):	50,000			
Warranty (Years):	5 Year			
Certifications:	UL, ES			
Fixture IP Grade:	Wet IP54			
Cut Out:	5 1/4"	7 1/2"	9 1/2"	10 1/2"
Dimensions (Outside):	5 15/16"	8 1/4"	10 1/4"	11 1/2"



Model #: DL254-4-16W-M-A5C5
Size: 4"

Model #: DL254-6-30W-M-A5C5-HO
Size: 6"

Model #: DL254-8-35W-M-A5C5-HO
Size: 8"

Model #: DL254-10-40W-M-A5C5-HO
Size: 10"

Trims For All Models: White Trim with White Reflector



Model:	DL254-4-16W-M-A5C5	DL254-6-30W-M-A5C5-HO	DL254-8-35W-M-A5C5-HO	DL254-10-40W-M-A5C5-HO
Short Description:	Round 5 CCT and 5 Wattage Selectable			
Size	4"	6"	8"	10"
Power (W):	6/8/10/12/16 W	12/16/22/26/30 W	16/22/26/30/35W	22/26/30/35/40W
Warm 2700 K (lm):	570-1490	1310-3010	1760-3550	2240-3850
Soft 3000 K (lm):	580-1550	1350-3200	1800-3690	2290-3980
Bright 3500 K (lm):	600-1640	1420-3390	1880-3910	2420-4220
Neutral 4000 K (lm):	620-1660	1460-3410	1930-3970	2470-4280
Daylight 5000 K (lm):	640-1670	1510-3450	1990-4010	2540-4360
Dim to Warm:				
User Selectable CCT:	5 CCT 2700-3000-3500-4000-5000			
Input Voltage:	120V - 347V AC 0-10V Dimmable			
Dimmable Triac:	No			
Dimmable 0-10V:	Yes			
Color Rendering Index CRI:	80			
Beam Angle:	80°	85°		90°
Rated Life (LM70 Hours):	50,000			
Warranty (Years):	5 Year			
Certifications:	UL, ES			
Fixture IP Grade:	Wet IP54			
Cut Out:	5 1/4"	7 1/2"	9 1/2"	10 1/2"
Dimensions (Outside):	5 15/16"	8 1/4"	10 1/4"	11 1/2"



4" - 6" INDIRECT RECESSED



- Model #: DS-LED-4-S12W-5CCT
- Size: 4"
- Trims: White



- Model #: DS-LED-4-S12W-5CCT-SQ
- Size: 4"
- Trims: White



- Model #: DS-LED-6-S15W-5CCT
- Size: 6"
- Trims: White

Model:	DS-LED-4-S12W-5CCT	DS-LED-4-S12W-5CCT-SQ	DS-LED-6-S15W-5CCT
Short Description:	4" Round Indirect Slim Recessed	4" Square Indirect Slim Recessed	6" Round Indirect Slim Recessed
Power (W):	12 W		15 W
Warm 2700 K (lm):	710	660	980
Soft 3000 K (lm):	750	690	995
Bright 3500 K (lm):	780	730	1045
Neutral 4000 K (lm):	770	730	1050
Daylight 5000 K (lm):	740	700	1020
Dim to Warm:	Yes		
User Selectable CCT:	5 CCT 2700-3000-3500-4000-5000		
Input Voltage:	120 V - 347V		
Dimmable Triac:	Yes		No
Dimmable 0-10V:	No		
Color Rendering Index CRI:	90+		
Beam Angle:	130°		140°
Rated Life (LM70 Hours):	50,000		
Warranty (Years):	3 Years		
Certifications:	c ETL us		
Fixture IP Grade:	Damp		
Cut Out:	4 1/4" Round Hole	4 1/4" Square Hole	5"
Dimensions (Outside):	4 3/4" Round	4 3/4" Square	5 3/4"

8" & 10" SLIM RECESSED



- Model #: LE8R-5CCT
- Size: 8"
- Trims: White & Black
- Available in Contractor 6 Pack



- Model #: LY82RCD
- Size: 8"
- Trims: White & Black



- Model #: LL8R
- Size: 8"
- Trims: White & Black



- Model #: LL10R
- Size: 10"
- Trims: White & Black

Model:	LE8R-5CCT	LY82RCD	LL8R	LL10R
Short Description:	8" Round Economy 5CCT Panel	8" Round Slim	8" Round Recessed High Output	10" Round Recessed High Output
Power (W):	18 W	33 W	40 W	50 W
Warm 2700 K (lm):	1100			
Soft 3000 K (lm):	1200	2200	4500	6500
Bright 3500 K (lm):	1250			
Neutral 4000 K (lm):	1280	2400	4700	6700
Daylight 5000 K (lm):	1250			
Dim to Warm:	Yes			
User Selectable CCT:	5 CCT			
Input Voltage:	120 V AC	120 V - 347 V AC		
Dimmable Triac:	Yes		No	
Dimmable 0-10V:	No	Yes		
Color Rendering Index CRI:	90+	80		
Beam Angle:	110°		45°	60°
Rated Life (LM70 Hours):	36,000	50,000		
Warranty (Years):	3 Year	10 Res. 5 Com.	5 Year	
Certifications:	cULus	cULus Energy Star	UL	
Fixture IP Grade:	Wet	Wet IP54	Wet Location IP65	
Cut Out:	8"		8 1/2"	11"
Dimensions (Outside):	9"		9 1/2"	12"



4" - 5" - 6" - 7" - 12" - 15" SURFACE / J-BOX MOUNT



Model #: LBL-JB10W
Size: 5"
Trims: Round & Square, White & Black



Model #: CSC3017
Size: 6"
Trims: Round White



Model #: LED-S8W-MT
Size: 4"
Trims: Round White, Black & Nickel



Model #: CSC3025
Size: 6"
Trims: Round White



Model #: ADS5R9
Size: 5"
Trims: White & Black in stock, Brushed Nickel optional



Model #: ADS7R9
Size: 7"
Trims: White & Black in stock, Brushed Nickel optional



Model #: ADS12R9
Size: 12"
Trims: White & Black in stock, Brushed Nickel optional



Model #: ADS15R
Size: 15"
Trims: White in stock, Black & Brushed Nickel optional

Model:	LBL-JB10W	LED-S8W-MT	CSC3017	CSC3025
Short Description:	5" Round & Square Recessed J-Box Mount 5CCT	4" Round Multi Fit J-box or Can, 3K, 4K or 5CCT	Round Surface Mount Backlit 3K	6" Round with Motion Sensor 3K, 4K or 3CCT
Power (W):	10 W	8 W	15 W	
Warm 2700 K (lm):	600	515		
Soft 3000 K (lm):	650	530	900	
Bright 3500 K (lm):	715	540		
Neutral 4000 K (lm):	740	560	900	
Daylight 5000 K (lm):	730	550	820	
Dim to Warm:				3CCT
User Selectable CCT:	5 CCT			
Input Voltage:	120 V AC			
Triac Dimmable:	Yes		No	
0-10V Dimmable:	No			
Color Rendering Index CRI:	90+			
Beam Angle:	100°			
Rated Life (LM70 Hours):	50,000			
Warranty (Years):	5 Year			
Certifications:	c ETL us & Energy Star			
Approved Location:	Wet IP54			
Dimensions (Outside):	5 1/4"	4 7/8"	7 3/8"	8"
Thickness:	1"	1"	1"	1 3/8"



Model:	ADS5R9	ADS7R9	ADS12R9	ADS15R
Short Description:	5" Round Surface Mount Edgelit 5CCT	7" Round Surface Mount Edgelit 3K or 4K	12" Round Surface Mount Edgelit 3K or 4K	15" Round Surface Mount Edgelit 3CCT
Power (W):	10 W	15 W	22 W	30 W
Warm 2700 K (lm):	515	1150	1320	
Soft 3000 K (lm):	540	1240	1410	1940
Bright 3500 K (lm):	575	1280	1560	
Neutral 4000 K (lm):	575	1300	1570	2090
Daylight 5000 K (lm):	560	1240	1450	1960
Dim to Warm:				
User Selectable CCT:	5 CCT			3 CCT
Input Voltage:	120 V AC	120-277 V	120 V	
Triac Dimmable:	Yes			
0-10V Dimmable:	No			
Color Rendering Index CRI:	90+			
Beam Angle:	100°			
Rated Life (LM70 Hours):	50,000			
Warranty (Years):	5 Year			
Certifications:	c ETL us & Energy Star			
Approved Location:	Wet IP54			
Dimensions (Outside):	5 3/8"	7 7/8"	12"	15"
Thickness:	5/8"	5/8"	1"	1"



UNDERCABINET PUCKS



- Model #: AD-108
 - Size: 1"
 - Trims: White & Black
- Available in 5 pack without connectors, or in 6 pack with connectors, 6 port hub and plug-in driver. Wall wash trims available.




- Model #: AD-107T
 - Size: 3"
 - Trims: White, Black and Nickel
- all 3 included in package
Available in single or 3 pack.
Wall wash trims available.



Model:	AD-108	AD-107T
Short Description:	Mini Puck Light 1" 12V	Puck Light 3" 12V / 24V
Power (W):	1 W	2.2 W
Warm 2700 K (lm):		
Soft 3000 K (lm):	70	150
Bright 3500 K (lm):		
Neutral 4000 K (lm):		170
Daylight 5000 K (lm):		
Dim to Warm:		
User Selectable CCT:		
Input Voltage:	12 V DC	12V / 24V DC
Triac Dimmable:		Yes
0-10V Dimmable:	No	Yes
Color Rendering Index CRI:		90+
Beam Angle:		100°
Rated Life (LM70 Hours):		50,000
Warranty (Years):		3 Year
Certifications:		ETL
Approved Location:		Damp
Dimensions:	1 5/16"	3"
Thickness:	5/8"	1/8"

8" - 16" - 24" - 32" UNDERCABINET LED BARS

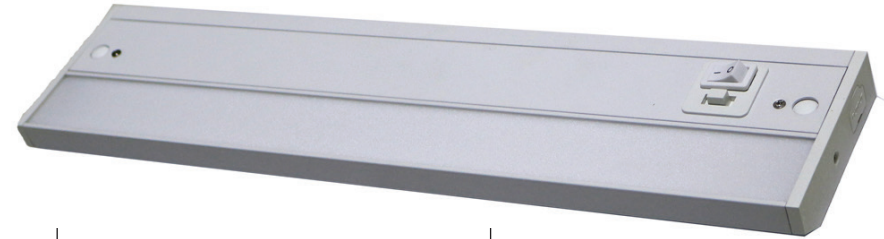

- Model #: UCL1001-8-LED
 - Size: 8"
 - Trims: White
- Model #: UCL1001-16-LED
 - Size: 16"
 - Trims: White

- Model #: UCL1001-24-LED
 - Size: 24"
 - Trims: White
- Model #: UCL1001-32-LED
 - Size: 32"
 - Trims: White


Model:	UCL1001-8-LED	UCL1001-16-LED	UCL1001-24-LED	UCL1001-32-LED
Short Description:	8" Under Cabinet Bar	16" Under Cabinet Bar	24" Under Cabinet Bar	32" Under Cabinet Bar
Power (W):	6 W	10 W	14 W	16 W
Warm 2700 K (lm):	440	880	1000	1150
Soft 3000 K (lm):	450	900	1050	1200
Bright 3500 K (lm):				
Neutral 4000 K (lm):	460	920	1100	1250
Daylight 5000 K (lm):				
Dim to Warm:				
User Selectable CCT:	3 CCT			
Input Voltage:	120V AC			
Triac Dimmable:	Yes			
0-10V Dimmable:	No			
Color Rendering Index CRI:	90+			
Beam Angle:	100°			
Rated Life (LM70 Hours):	50,000			
Warranty (Years):	5 Year			
Certifications:	ETL			
Approved Location:	Damp			
Dimensions:	8"	16"	24"	32"
Thickness:	1"			

STEP LIGHTS

- Model #: LSD | LSD09
- Size: 4.5"
- Trims: White & Black




- Model #: LSD03
- Size: 4.5"
- Trims: White & Black



- Model #: LSD04
- Size: 4.5"
- Trims: White & Black

Model:	LSD LSD09	LSD03	LSD04
Short Description:	Step Light Horizontal or Vertical Installation 3K, 4K, 5CCT & Dim to Warm	Step Light Horizontal With Motion Sensor and Photocell	Step Light Vertical With Motion Sensor and Photocell
Power (W):		2.5 W	
Warm 2700 K (lm):	83		
Soft 3000 K (lm):	125 / 87 5CCT		80
Bright 3500 K (lm):	93		
Neutral 4000 K (lm):	125 / 96 5CCT		
Daylight 5000 K (lm):	95		
Dim to Warm:	3000-2000K		
User Selectable CCT:	5 CCT		
Input Voltage:	120 V AC		
Triac Dimmable:	Yes		No
0-10V Dimmable:		No	
Color Rendering Index CRI:		90+	
Beam Angle:	60°		90°
Rated Life (LM70 Hours):		50,000	
Warranty (Years):		5 Year	
Certifications:	ETL		
Approved Location:	Wet IP54		
Dimensions:	4 1/2" x 2 3/4"		
Thickness:	2"	1"	1"

WALL SCONCES KINETIC DOOR BELL



- Model #: OD-5-1000L-5CCT
- Available in 1 or 2 side light



- Model #: LBL-KDB-1
- * Receiver available as plug-in or hard-wired




- Model #: LBL-KDB-R2


Model:	OD-5-1000L-5CCT	LBL-KDB-1	LBL-KDB-2
Short Description:	Wall Sconce	Plug-in Doorbell with Kinetic Button Wireless & Battery-less	Hard Wired Doorbell with Kinetic Button Wireless & Battery-less
LED Load Capacity (W):	15 W	0.1 / 0.6 W	
Input Voltage:	120-277V	100 - 240V AC	
Triac Dimmable:	Triac		
Other Control:	5CCT		
Warranty (Years):	5 Year	2 Year	
Certifications:	ETL	ETL, FCC	
Approved Location:	Wet	Transmitter Wet / Receiver Dry	



LED TAPE LIGHT

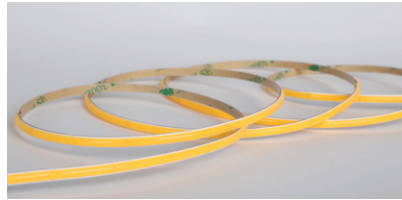


● Model #: LBL-COB-384-24V-4MM-16FT-IP20
 ● Size: 16 ft / 5 m



● Model #: LBL-COB-280-24V-8MM-100FT-IP20
 ● Size: 100 ft / 30 m



● Model #: LBL-COB-384-24V-8MM
 ● Size: 16 ft / 5 m

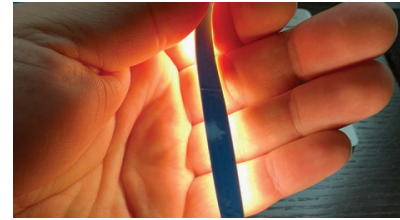

● Model #: LBL-COB-320-24V-8MM-100FT
 ● Size: 100 ft / 30 m



● Model #: LBL-COB-384-24V-10MM-IP65
 ● Size: 16 ft / 5 m



● Model #: LBL-MC-280-24V-8MM-16FT-IP20
 ● Size: 16 ft / 5 m



● Model #: LBL-MC-280-24V-8MM-16FT-IP65
 ● Size: 16 ft / 5 m

Model:	LBL-COB-384-24V-4MM-16FT-IP20	LBL-COB-280-24V-8MM-100FT-IP20	LBL-COB-384-24V-8MM
Short Description:	COB LED Strip 1.5W/ft IP20 4mm 16 ft	COB LED Strip 1.5W/ft IP20 8mm 100 ft	COB LED Strip 3W/ft IP20 8mm 16 ft
Power (W):	1.5 W / ft		3 W / ft
Warm 2700 K (lm):	120 lm/ft	100 lm/ft	300 lm/ft
Soft 3000 K (lm):	120 lm/ft	100 lm/ft	300 lm/ft
Bright 3500 K (lm):			
Neutral 4000 K (lm):	130 lm/ft	110 lm/ft	330 lm/ft
Daylight 5000 K (lm):			330 lm / ft
Input Voltage:	24 V DC		
Type:	Constant Voltage		
Color Rendering Index CRI:	90+		
Beam Angle:	180°		
Rated Life (LM70 Hours):	20,000		
Warranty (Years):	3 Year		
Certifications:	c ETL us		
IP Grade:	IP 20 - indoor dry locations		
Roll Length:	16.4 ft / 5 m	100 ft / 30 m	16.4 ft / 5 m
Maximum Connection Run:	16.4 ft / 5 m	33 ft / 10 m	16.4 ft / 5 m

Model:	LBL-COB-320-24V-8MM-100FT	LBL-COB-384-24V-10MM-IP65	LBL-MC-280-24V-8MM-16FT-IP20	LBL-MC-280-24V-8MM-16FT-IP65
Short Description:	COB LED Strip 3W/ft IP20 8mm 100 ft	COB LED Strip 3W/ft IP65 10mm 16 ft	Micro Chip LED Strip 3W/ft IP20 8mm 16 ft	Micro Chip LED Strip 3W/ft IP65 8mm 16 ft
Power (W):	3 W / ft			
Warm 2700 K (lm):			400 lm/ft	
Soft 3000 K (lm):	300 lm/ft		400 lm/ft	350 lm/ft
Bright 3500 K (lm):				
Neutral 4000 K (lm):	130 lm/ft		410 lm/ft	
Daylight 5000 K (lm):		330 lm / ft		
Input Voltage:	24 V DC			
Type:	Constant Voltage			
Color Rendering Index CRI:	90+			
Beam Angle:	180°			
Rated Life (LM70 Hours):	20,000			
Warranty (Years):	3 Year			
Certifications:	c ETL us			
IP Grade:	IP 20	IP 65 Wet	IP 20	IP 65 Wet
Roll Length:	16.4 ft / 5 m	100 ft / 30 m	16.4 ft / 5 m	
Maximum Connection Run:	16.4 ft / 5 m	33 ft / 10 m	16.4 ft / 5 m	



DC OUTPUT DRIVERS 12W TO 96W



- Model #: LBL-DC24V30W
- Output: 24V 30W
- Connection Type: Hard Wired or Plug-In



- Model #: HBL024-120-12/24-D
- Output: 12V/24V | 24W
- Connection Type: Hard Wired



- Model #: LBL-DC24V96W
- Output: 24V 96W
- Connection Type: Hard Wired or Plug-In



- Model #: WLS-PD30LU-24
- Output: 12V 12W
- Connection Type: Plug-In



- Model #: SET-12060A, SET-24060A & SET-24096A
- Output: 12V 60W, 24V 60W & 24V 96W
- Connection Type: Hard Wired
- Connection box model SET-160 optional

Model:	HBL024-120-12/24-D	WLS-PD30LU-24	LBL-DC24V30W	LBL-DC24V96W	SET-12060A	SET-24060A	SET-24096A
Short Description:	12V/24V 24W Hard Wired Driver Dimmable	12V 12W Plug-In Driver Not Dimmable	24V 30W Hard Wired or Plug-In Driver Dimmable	24V 96W Hard Wired or Plug-In Driver Dimmable	12V DC 60W Dimmable Mini Electronic Transformer	24V DC 60W Dimmable Mini Electronic Transformer	24V DC 96W Dimmable Mini Electronic Transformer
Input Voltage (V AC):	120 V DC	120V - 240V	120 V DC		120 V AC		
Output Voltage (V DC):	12 V / 24 V	12	24		12 V	24 V	
Output Wattage (W):	24 W	12 W	30 W	96 W	60 W		96 W
Dimmability:	Triac	Not Dim-	Triac	Triac & 0-10V	Triac		
Approved Location:	Damp		WET IP67		Damp		
Rated Life (Hours):	20,000			20,000			
Warranty (Years):	3 Year			3 Year			
Certifications:	ETL			cULus		c UL us	

DC OUTPUT DRIVERS 5-IN-1 DIMMABLE 60W TO 288W



- Model #: SMT-024-060VTDHV2
- Output: 24V 60W
- Connection Type: Hard Wired



- Model #: SMT-024-096VTDHV2
- Output: 24V 96W
- Connection Type: Hard Wired



- Model #: SMT-024-192VTD52JV2
- Output: 24V 192W
- Connection Type: Hard Wired



- Model #: SMT-024-288VTD52JV2
- Output: 24V 288W
- Connection Type: Hard Wired

Model:	SMT-024-060VTDHV	SMT-024-096VTDHV	SMT-024-192VTD52JV2	SMT-024-288VTD52JV2
Short Description:	Hard Wired Drivers with Wiring Compartments			
Input Voltage (V AC):	120V - 277V AC			
Output Voltage (V DC):	24V DC			
Output Wattage (W):	60 W	96 W	192 W	288 W
Dimmability:	Triac, 0-10V, 1-10V, Potentiometer, 10V PWM			
Approved Location:	Wet			
Rated Life (Hours):	50,000			
Warranty (Years):	7 Year			
Certifications:	UL			
Dimensions:	7 3/8" x 3 1/2" x 1 5/8"	8 3/4" x 3 1/2" x 1 3/4"	11" x 4 1/4" x 1 3/4"	12" x 4 1/4" x 1 3/4"



DIMMERS & SWITCHES



● Model #: DNA03AU11-600-31B1



● Model #: ERC112



● Model #: EU1254




● Model #: ERC111

Model:	DNA03AU11-600-31B1	ERC111	ERC112	EU1254
Short Description:	Slide Dimmer Triac Forward Phase No Neutral Required	Smart Dimmer	Smart Switch	Kinetic Switch
LED Load Capacity (W):	200W	200 W	250 W	N/A
Input Voltage:	120V AC	100 - 240V AC		
Dimmable Mode:	Triac Leading Edge Forward Phase			
Other Control:	N/A	Smart Control from App		
Warranty (Years):	3 Year			
Certifications:	c ETL us	ETL, FCC		
Approved Location:	Dry			


ACCESSORIES



● Flanged with Expandable Bars

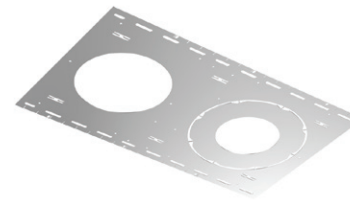

● Multi-fit Plate 6" to 10" Holes for Stud Ceiling




● 13" Long Flat Mounting Plates



● 13" Long Flanged Mounting Plates




● 26" Long Flat Mounting Plates

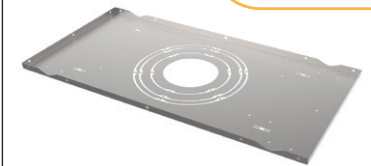

● Multi-fit Plate 4" to 10" Holes for T-Bar Ceiling



● Goof Rings from 3" to 10"



● Low Voltage Extension Cables




● Vapour Barriers



● Emergency Driver

Lotus LED Lights is closer than you think!

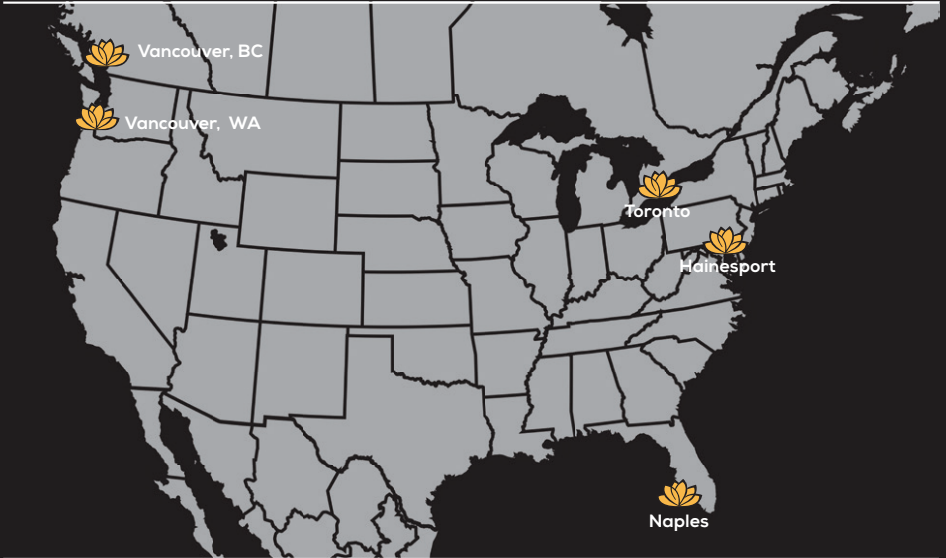

Lotus LED Lights

www.lotusledlights.com



USA: 360-200-5500

Canada: 604-538-3090

Toll Free: 1-844-24-LOTUS
(1-844-245-6887)

sales@lotusledlights.com

USA:

Lotus LED Lights
250 H Street #301
Blaine, WA 98230, USA
Warehouses: Vancouver WA,
Naples FL, Hainesport NJ

Canada:

Lotus LED Lights
1080 Cliveden Ave # 6,
Delta BC V3M 6J6, Canada
Warehouses: Delta BC,
Mississauga ON