


Seamless Steel Refillable Cylinder for compressed, mixed and liquefied gases

Ø 405x6,9 WP167bar – TP250bar

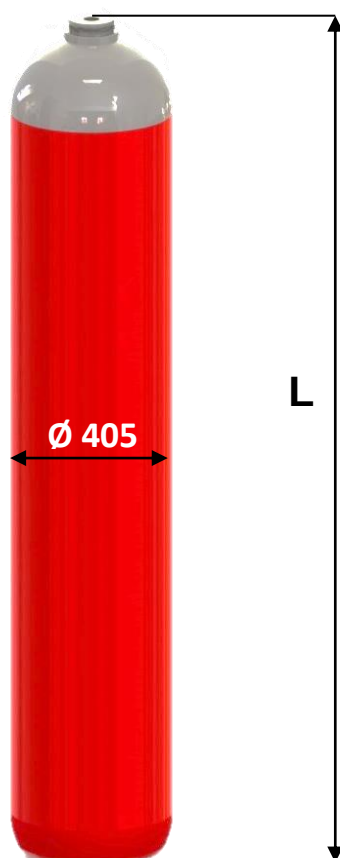

CYLINDER DIMENSION							
Water capacity [l] -2,5% +2,5%	80	120	140	160	180	190	200
All sizes from 80 to 200L are feasible for manufacturing.							
Nominal weight [Kg]	100	113	124	135	146	150	157
Net weight of the cylinder with neckring (if present) without valve, fittings, paint etc.							
Length L mm ±20	825	1160	1325	1465	1660	1745	1830
Dimension are in accordance with thread option n.1							
Neck Thread: - Alternative thread to Customer's requirement -							
Option	Internal thread			External thread			mm]
1	25E ISO 11363-1			Neckring W80-1/11"			≈35
2	1"1/4 NGT			Neckring W80-1/11"			≈35
3	-			2.5" - 12UN - 2A			≈60

DESIGN DATA		
Minimum design thickness of the cylindrical wall:		6.9 mm
Working Pressure: up to 167 bar	Hydrostatic Test Pressure: 250 bar	Burst Pressure: ≥ 400 barg
Service temperature: -50°C +65°C		
Use of cylinder for gases causing embrittlement and corrosion of the steel is forbidden. The gas contained in the cylinder must be in accordance with the standard ISO 11114-1.		
Chemical composition: Steel 34CrMo4 EN10083 part 1&3 with restrictions in accordance with ISO989-1 par.6		
Manufacturing process: Hot spinning of seamless steel tube		
Heat treatment: Quenching (with polymer) and Tempering		
Paint: Highly durable polyester powder coating (unless otherwise specified minimum paint thickness >60µm)		

Certification Standard: ISO 9809-1				
Country of Approval	Europe	USA	Canada	Russian Federation
Certification Availability	TPED approved in accordance with directive 2010/35/EU	Achievable on customer's request	Achievable on customer's request	EAC Approval <u>available</u> on customer's request