



Genuine Optimized Lubricant Delivery

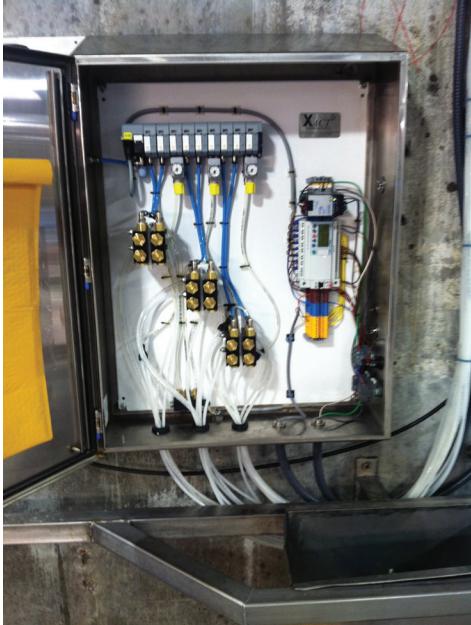

GOLD has designed a complete turnkey spray system using our modular positive displacement packages. The system comes complete with control cabinet, pumps, solenoids, logic controls, 5-Gallon reservoir with level sight, nozzles, mounting brackets, and associate tubing and fittings. All items are 304 stainless steel and are designed for extended service life in this harsh environment.


Performance Features:

- Programmed spray based on production schedules
- System produces ultra-fine, even surface coating
- Self-priming and double checked ensure no dripping

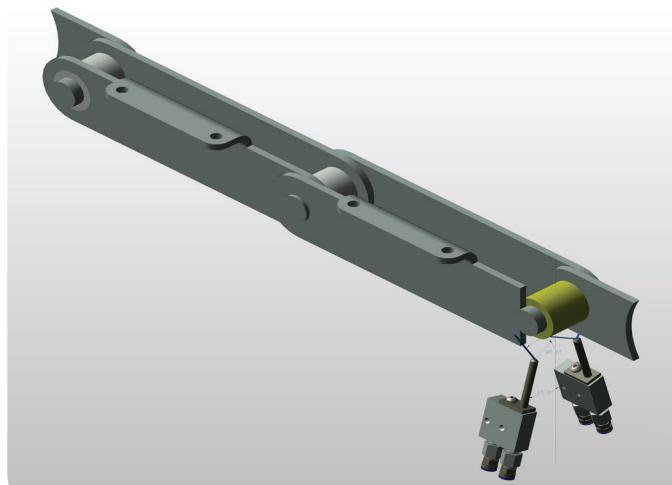

Configuration:

Two precision spray nozzles per chain. Nozzle brackets to optimize lubricant placement with overlap on the bushing surface to transfer to sprockets. As with all GOLD Solutions, the configuration can be edited by the client such that the optimum solution is provided for each application.

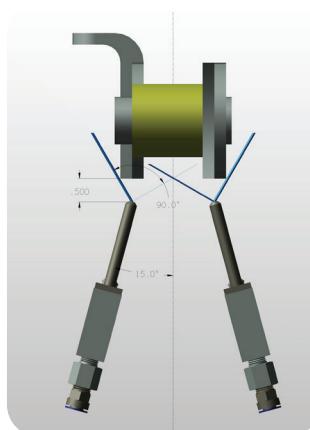

1. Accurately delivers a fine coating to surfaces
2. Targets links, bolts, bushings, and sprockets
3. Reduces fluid consumption
4. Built to deliver JAX S3D fluid to wear points.
5. Integrates easily into existing production lines
6. Is wash down and robust for long life

Solution Summary:



Part No.	GCSOLS04SPSSKZB
Availability	6-8 Weeks
Typical Install Time	6 Hours
Number of Lube Points	Four
Lubrication Intervals	Timer or Logic Controlled (Adjustable by Client)
Recommended Lubes	JAX MAGNA-KOTE S3D
Power Requirements	115 VAC 60Hz
Air Requirements	60 psi @ 1 CFM
Recommended Maintenance	Replace solenoid annually Inspect system periodically