



Configurable Grease Package
Customer Specific Grease System

Genuine Optimized Lubricant Delivery

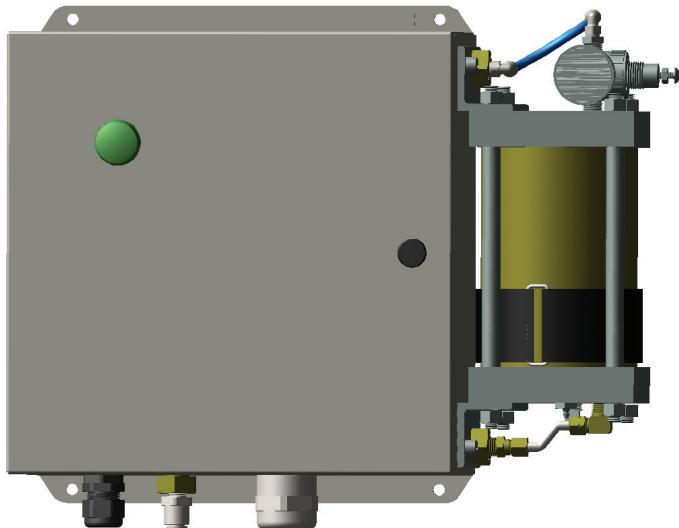

Each Client has specific needs regarding Grease Auto Lubrication. We have established a line of proven components to achieve accurate grease lubrication with long component life cycles. Our modular approach to system design allows for quick configuration of our final solution to meet the client needs.

We offer packages ranging from complete NEMA 4X wash down / IP69K compliant to simple back panel mounted configured components. Our clients tell us how turnkey or modular their requirements are and we provide the solution.

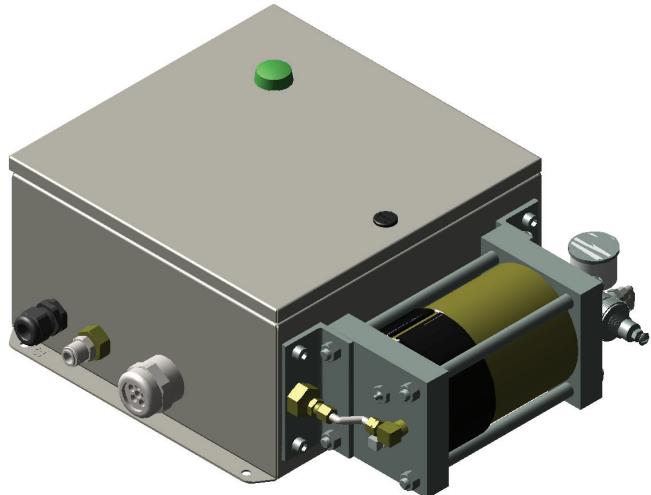

Solution Summary:



Part No.	GSCSGLSXX#VKIT
Availability	3-4 Weeks
Typical Install Time	2-5 Hours
Number of Lube Points	1 - 36 Grease Lines
Lubrication Intervals	PLR, Timer, "Slave" (Specified by Client)
Recommended Lubes	NLGI 00, 0, 1, 2, 3
Power Requirements	24VDC, 100-240 VAC
Air Requirements	60 psi @ 1 CFM
Recommended Maintenance	Replace solenoid rated duty Inspect Reservoir Monthly

System configurable:

- Control cabinet (NEMA 12 or 4X) / back panel
- Available floor mounted stand
- Pumps (electric or pneumatic)
- PLC / PLR / Timer / or absence of logic control
- Reservoir (sized for your application)
- Sensors, Lights, Feedback...
- Tubing and fittings
- Client Specific User Manual
- 90 Day Warranty of System Operation
- Mfg Extended Warranties on all utilized components