

ELEVATION CERTIFICATE

FEDERAL EMERGENCY MANAGEMENT AGENCY NATIONAL FLOOD INSURANCE PROGRAM

O.M.B. NO.
Expires N

ATTENTION: Use of this certificate does not provide a waiver of the flood insurance purchase requirement. This form is used to provide elevation information necessary to ensure compliance with applicable community floodplain management ordinances, determine the proper insurance premium rate, and/or to support a request for a Letter of Map Amendment or Revision (LOMA). **Instructions for completing this form can be found on the following pages.**

| SECTION A PROPERTY INFORMATION | | FOR INSURANCE COMPANY |
|---|-------|-----------------------|
| BUILDING OR STRUCTURE | | POLICY NUMBER |
| STREET ADDRESS (including Apt., Unit, Suite and/or Bldg. Number) OR P.O. ROUTE AND BOX NUMBER | | COMPANY NAIC NUMBER |
| 13595 LEANING OAKS DRIVE | | |
| OTHER DESCRIPTION (Lot and Block Numbers, etc.) | | |
| LOT 12, BLOCK 17, RIVER OAKS ESTATES | | |
| CITY | STATE | ZIP CODE |
| BEAUMONT | TEXAS | 77713 |

| SECTION B FLOOD INSURANCE RATE MAP (FIRM) INFORMATION | | | | | |
|--|-------------------------|----------------|---------------------------------------|--------------------|--|
| Provide the following from the proper FIRM (See Instructions): | | | | | |
| 1. COMMUNITY NUMBER 480878 | 2. PANEL NUMBER 0005 | 3. SUFFIX C | 4. DATE OF FIRM INDEX SEPT 4, 1987 | 5. FIRM ZONE AE | 6. BASE FLOOD ELEVATION (in AO Zones, use di 26.75 |

7. Indicate the elevation datum system used on the FIRM for Base Flood Elevations (BFE): NGVD '29 Other (describe on page 2)

8. For Zones A or V, where no BFE is provided on the FIRM, and the community has established a BFE for this building site, indicate the community's BFE: feet NGVD (or other FIRM datum—see Section B, Item 7).

| SECTION C BUILDING ELEVATION INFORMATION |
|---|
| 1. Using the Elevation Certificate Instructions, indicate the diagram number from the diagrams found on Pages 5 and 6 that best describes the subject building's reference level _____ |
| 2(a). FIRM Zones A1-A30, AE, AH, and A (with BFE). The top of the reference level floor from the selected diagram is at an elevation of <input type="text" value="218"/> feet NGVD (or other FIRM datum—see Section B, Item 7). |
| (b). FIRM Zones V1-V30, VE, and V (with BFE). The bottom of the lowest horizontal structural member of the reference level floor from the selected diagram, is at an elevation of <input type="text" value="218"/> feet NGVD (or other FIRM datum—see Section B, Item 7). |
| (c). FIRM Zone A (without BFE). The floor used as the reference level from the selected diagram is <input type="checkbox"/> feet above <input type="checkbox"/> feet below <input type="checkbox"/> (check one) the highest grade adjacent to the building. |
| (d). FIRM Zone AO. The floor used as the reference level from the selected diagram is <input type="checkbox"/> feet above <input type="checkbox"/> or below <input type="checkbox"/> (check one) the highest grade adjacent to the building. If no flood depth number is available, is the building's lowest floor (reference level) elevated in accordance with the community's floodplain management ordinance? <input type="checkbox"/> Yes <input type="checkbox"/> No <input type="checkbox"/> Unknown |
| 3. Indicate the elevation datum system used in determining the above reference level elevations: <input type="checkbox"/> NGVD '29 <input type="checkbox"/> Other (describe on page 2). (NOTE: If the elevation datum used in measuring the elevations is different than that used on the FIRM [see Section B, Item 7], then convert the elevations to the datum system used on the FIRM and show the conversion equation under Comments on Page 2.) |
| 4. Elevation reference mark used appears on FIRM: <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No (See Instructions on Page 4) |
| 5. The reference level elevation is based on: <input checked="" type="checkbox"/> actual construction <input type="checkbox"/> construction drawings (NOTE: Use of construction drawings is only valid if the building does not yet have the reference level floor in place, in which case this certificate will only be valid for the building during the course of construction. A post-construction Elevation Certificate will be required once construction is complete.) |
| 6. The elevation of the lowest grade immediately adjacent to the building is: <input type="text" value="217"/> feet NGVD (or other FIRM datum—see Section B, Item 7). |

| SECTION D COMMUNITY INFORMATION |
|--|
| 1. If the community official responsible for verifying building elevations specifies that the reference level indicated in Section C, Item 1 is not the "lowest floor" as defined in the community's floodplain management ordinance, the elevation of the building's "lowest floor" as defined by the ordinance is: <input type="text" value="217"/> feet NGVD (or other FIRM datum—see Section B, Item 7). |
| 2. Date of the start of construction or substantial improvement _____ |

SECTION E CERTIFICATION

certification is to be signed by a land surveyor, engineer, or architect who is authorized by state or local law to certify elevation information when the elevation information for Zones A1-A30, AE, AH, A (with BFE), V1-V30, VE, and V (with BFE) is required. Building officials who are authorized by local law or ordinance to provide floodplain management information, may also sign the certification. In the case of Zones AO and A (without a FEMA or community issued BFE), a building official, a property owner, or an insurance representative may also sign the certification.


For level diagrams 6, 7 and 8 - Distinguishing Features-If the certifier is unable to certify to breakaway/non-breakaway wall, the size, location of servicing equipment, area use, wall openings, or unfinished area Feature(s), then list the Feature(s) not shown in the certification under Comments below. The diagram number, Section C, Item 1, must still be entered.

I certify that the information in Sections B and C on this certificate represents my best efforts to interpret the data available, and that any false statement may be punishable by fine or imprisonment under 18 U.S. Code, Section 1001.

| | | |
|--------------------|--------------------------------|--------------|
| GUY A. STONECIPHER | R.P.S. 1779 | |
| SURVEYOR'S NAME | LICENSE NUMBER (or Affix Seal) | |
| LAND SURVEYOR | GUY A. STONECIPHER & ASSOC. | |
| | COMPANY NAME | |
| 6490 CALDER | BEAUMONT | TEXAS 77706 |
| | CITY | STATE ZIP |
| | 12-06-94 | 409-866-3738 |
| SIGNATURE | DATE | PHONE |

Use of this Certificate should be made of this Certificate for: 1) community official, 2) insurance agent/company, and 3) building owner.

REMARKS:

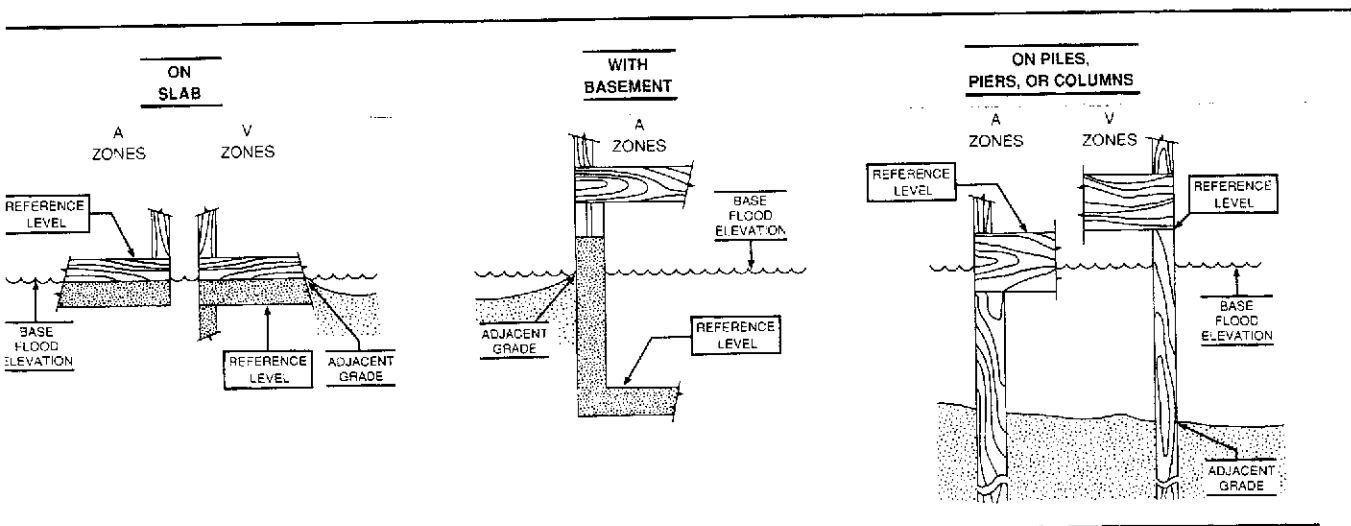

The diagrams above illustrate the points at which the elevations should be measured in A Zones and V Zones. Elevations for all A Zones should be measured at the top of the reference level floor. Elevations for all V Zones should be measured at the bottom of the lowest horizontal structural member.