

Click to see: Ductile Iron Check Valves in our Online Catalog

FLOMATIC[®] VALVES



Ductile Iron Check Valves

Submersible Pump Applications

- Model 80DI
- Model 80DICL
- Model 80DIX
- Model 80MDI/MDIX



Flomatic Valves

High Quality Valves Built to Last...

Model 80D1CL/80MD1CL

Same configuration as our popular series 80DI, the 80MD1CL incorporates CertainTeed's new patented groove lock type pipe connections called Certa-Lok™ Fusion epoxy coated inside and out including poppet assembly. This valve is corrosion resistant and Unleaded. High strength ductile iron body with stainless steel spring and NITRILE (Buna-N) seal.



Temp Max: 180°F (80C) Pressure Max: 400 PSI

Note: A Reduced port valve.

- For male threading add "M" to part number.
- BSP & BSPP threads optional.

Certa-Lok™ is a registered trademark with the Certain Teed Corporation.

80D1CL

| Size | Part No. | WGT. |
|------|----------|------|
| 3" | 7938CL | 5.0 |
| 4" | 7939CL | 8.0 |
| 5" | 4088CL | 14.0 |
| 6" | 4089CL | 35.0 |

80MD1CL

| Size | Part No. | WGT. |
|------|----------|------|
| 3" | 7938MCL | 5.0 |
| 4" | 7939MCL | 8.0 |
| 5" | 4088MCL | 14.0 |
| 6" | 4089MCL | 35.0 |

Model 80D1X

An economical high strength valve assembly. Features a ductile iron body and a double-guided ductile iron poppet, NITRILE (Buna-N) seal, stainless steel spring and fasteners. Requires a low flow well. (See flow chart)



Temp Max: 180°F (80C) Pressure Max: 400 PSI

- Designed for vertical and horizontal installations.
- To order model 80D1X with break-off plug, replace "D1X" with "XPL" in part number.
- BSP & BSPP threads optional.

80D1X

| Size | Part No. | WGT. |
|------|----------|-------|
| 3" | 7938D1X | 10.0 |
| 6" | 4089D1X | 48.0 |
| 8" | 4090D1X | 90.0 |
| 10" | 4091D1X | 148.0 |
| 12" | 4092D1X | 340.0 |

Model 80MD1

Model 80MD1 is a high strength ductile iron check valve similar to 80DI but features a male threaded inlet and female threaded outlet. Ideal for submersible pumps.



Temp Max: 180°F (80C) Pressure Max: 400 PSI

Note: A Reduced port valve.

- To order model 80MD1 with break-off plug, add "PLG" to part number.
- BSP & BSPP threads optional.

Consult factory for flow chart.

80MD1

| Size | Part No. | WGT. |
|-----------|----------|------|
| 2"M x 2"F | 4084VFD | 4.0 |
| 3"M x 3"F | 4083 | 8.0 |
| 4"M x 4"F | 4077 | 14.0 |
| 5"M x 5"F | 4075 | 48.0 |
| 6"M x 5"F | 4087 | 48.0 |
| 6"M x 6"F | 4081VFD | 40.0 |

Model 80DI TURBO

Model 80DI TURBO valves are patented high efficiency ductile iron check valves with female x female connection. Features a high strength ductile iron body and poppet, stainless steel spring, screws and shaft with Buna-N "O-Rings". Patented dual poppet design reduces headloss up to 60%.




Temp Max: 180°F (80C) Pressure Max: 400 PSI

Note: For vertical use only.

80DI TURBO

| Size | Part No. | WGT. |
|------|----------|-------|
| 6" | 4089T | 46.0 |
| 10" | 4091T | 155.0 |

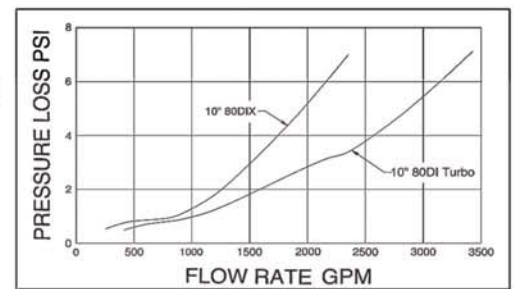

10" Model 80DI Turbo vs. 10" Model 80D1X Head Loss Comparison Chart

From America's #1 Ductile Iron Valve Manufacturer...

Operation

Strong Enough to Support Large Pumps

The 80DI series ductile iron check valve is an industry proven heavy duty in-line poppet style valve designed to prevent flow reversal. When pumping from a well, water is allowed to flow through the valve and then closes automatically when the pump is shut off to prevent backflow.

General Applications

Flomatic's ductile iron series 80DI valves are one of the most popular valves in the water well industry today. They are specifically designed for use with submersible pumps or other applications where it is necessary for the check valve to be installed in the well casing. The 80DI series valves will provide excellent service in any application where a conventional check valve is recommended and is vertically mounted. For general installations, request bulletin #810.

Model 80DI

Temp Max: 180°F (80C) Pressure Max: 400 PSI **New Pressure Rating 600 PSI 4"-8"**

High strength ductile iron body with threaded female x female connection. Features a NITRILE (Buna-N) seal, stainless steel spring and fasteners and a ductile iron poppet (1" through 1-1/2" sizes Acetal poppet). Full flow design.



Benefits

- Low Headloss
- Minimizes Water Hammer
- Lead-In Thread for Easy Installation
- Prevents Pump Reversal
- BSP & BSPP Threading Optional
- 8 Round Threads Optional

Materials

- Body..... Ductile Iron - ASTM-A536-84 (1"- 2" cast steel)
- Optional Break-Off Plug Stainless Steel
- Disc*..... Ductile Iron - ASTM-A536-84
- Rubber Disc..... Buna-N Rubber
- Follower*..... Ductile Iron - ASTM-A536-84
- Poppet Assembly Bolt/Nut..... 18-8 Stainless Steel
- Spring..... 18-8 Stainless Steel
- Finish..... Fusion Bonded NSF® Approved Powder



*1" through 1-1/2" Acetal material

80DI

| Size | Part No. | WGT. |
|--------|----------|------|
| 1" | 4031DI | .2 |
| 1-1/4" | 4032DI | .7 |
| 1-1/2" | 4033DI | 1.3 |
| 2" | 7937 | 5.0 |
| 2-1/2" | 7936 | 7.0 |
| 3" | 7938 | 10.0 |
| 4" | 7939 | 19.0 |
| 5" | 4088 | 48.0 |
| 6" | 4089 | 63.0 |
| 8" | 4090 | 92.0 |

Valve Body Strength

When a check valve is installed vertically in a riser pipe, the weight of the pipe, water column and pump below is hanging on the valve body. In deeper settings, the tensile stress on a valve placed near the surface can be high. The table on the right indicates the recommended maximum weights that each valve size will support.

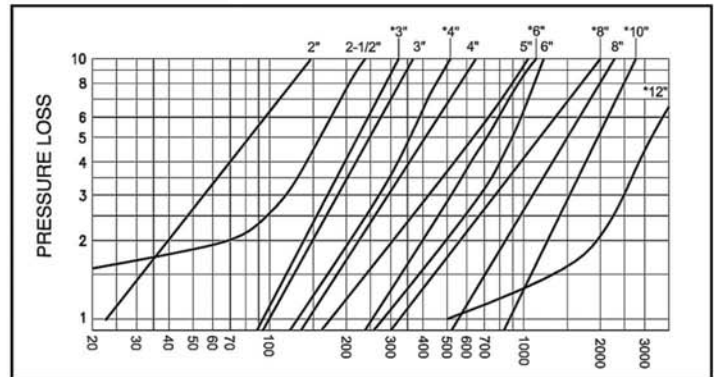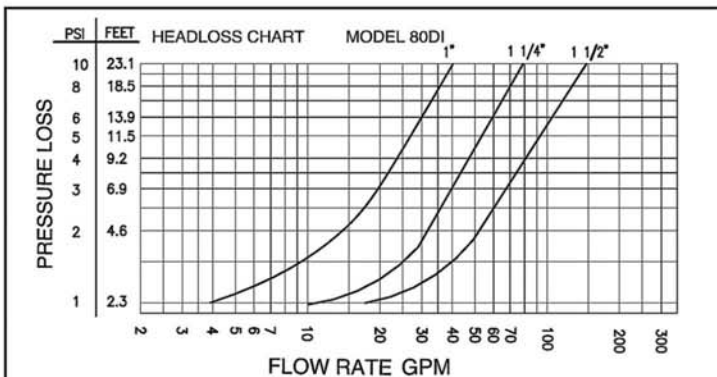


Break-Off Plug for Model 80DI Series Check Valves

Drains riser pipe when pulling pump. Stainless steel construction NITRILE (Buna-N) seal. Threaded 3/8" to assemble into valve.



Break-Off Plug

When a submersible pump is pulled, a weight is dropped into the riser pipe breaking off the plug, leaving a small drain hole.

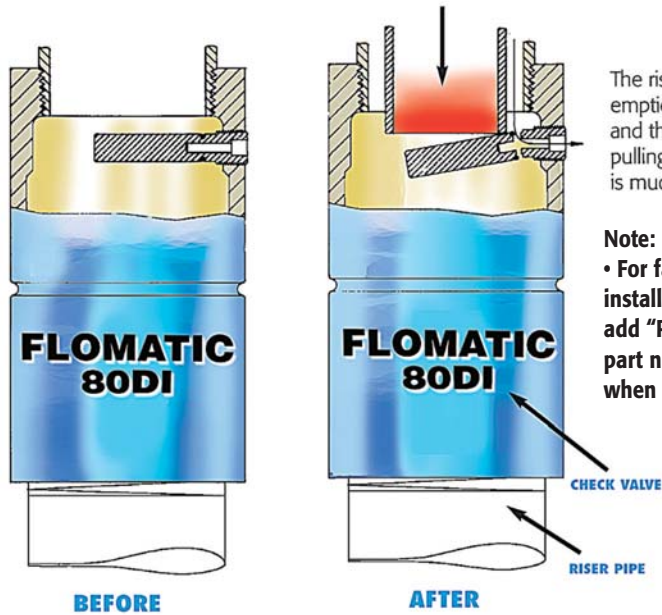

The riser pipe empties quickly and the job of pulling the pump is much easier.

Note:
• For factory installed plug, add "PLC" to part number when ordering

| Size | | Part # | A | | Min pipe size to drop | | Length of pipe | |
|---------|-----|----------|-------|-----|-----------------------|-----|----------------|--------|
| inch | mm | | inch | mm | inch | mm | feet | meters |
| 3 | 75 | 76098-6 | 3 | 75 | 1-1/2 | 40 | 10 | 3 |
| 4 | 100 | 76098-7 | 4 | 100 | 2 | 50 | 10 | 3 |
| 5 | 125 | 76098 | 5 | 125 | 2-1/2 | 65 | 10 | 3 |
| 6 | 150 | 76098 | 5 | 125 | 3 | 80 | 4 | 1.2 |
| 8 | 200 | 76098 | 5 | 125 | 4 | 100 | 4 | 1.2 |
| 10 & 12 | 250 | 76098-11 | 8-1/2 | 206 | 5 | 125 | 4 | 1.2 |

Recommended Valve Installation

Ductile Iron Valves must be installed according to Flomatic's installation instructions to prevent damage to the valve and pump. For detailed installation of check valves see Bulletin #810. A check valve should never be installed more than 25 feet above the lowest expected pumping water level in the well. Valves installed more than 25 feet above the water level will create a vacuum in the riser pipe. When the pump starts, this causes an "upthrust" problem in the pump motor and will subject the valve to extremely high opening pressures which will lead to premature failure.

In deep settings, below 400 feet, valves should be spaced at maximum 200 foot intervals to keep opening and closing pressures within reasonable limits.

Also Available from Flomatic Valves



80DI-VFD



Stainless Steel Check Valves



Swing Check Valves