
Bullet Resistant Wall Panels

UL 752 LEVEL 3 / NIJ IIIA (0108.01)

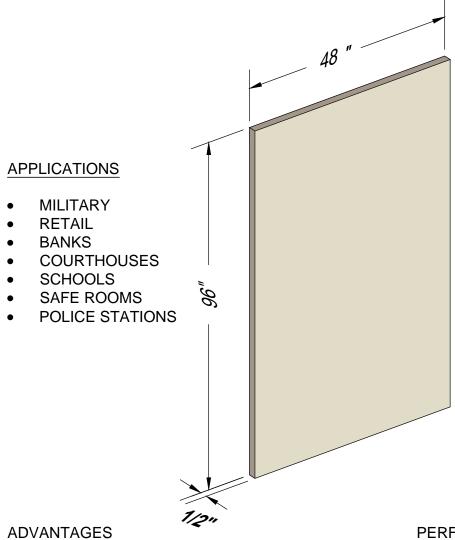

PHYSICAL PROPERTIES

- 1/2" THICK
- 5 1/4" POUNDS SQ. FOOT
- FIRE RESISTANT
- FLAT RIGID PANEL

- **AVAILABLE IN 1 TO 2 DAYS**
- **EASY TO INSTALL**
- **INSTALL OVER EXISTING WALLS**

IMPORTANT NOTES

- ALL JOINTS REQUIRE 2" + OVERLAP
- 4" WIDE BALLISTIC BATTEN STRIP AT VERTICAL JOINTS
- ALL PENETRATIONS MUST BE BALLISTIC BACKED



- UL 752 LEVEL 3 (HANDGUN)
- NIJ IIIA 0108.01 (HANDGUN)
- **RESISTANT HANDGUN UP TO .44 MAG**
- 3 SHOTS IN 12"X12" AREA
- 1 HOUR FIRE RESISTANT ASTM E119
- RESISTANT TO FORCED ENTRY

