


# Bullet Resistant Wall Panels

UL 752 LEVEL 8 / NIJ III (0108.01)

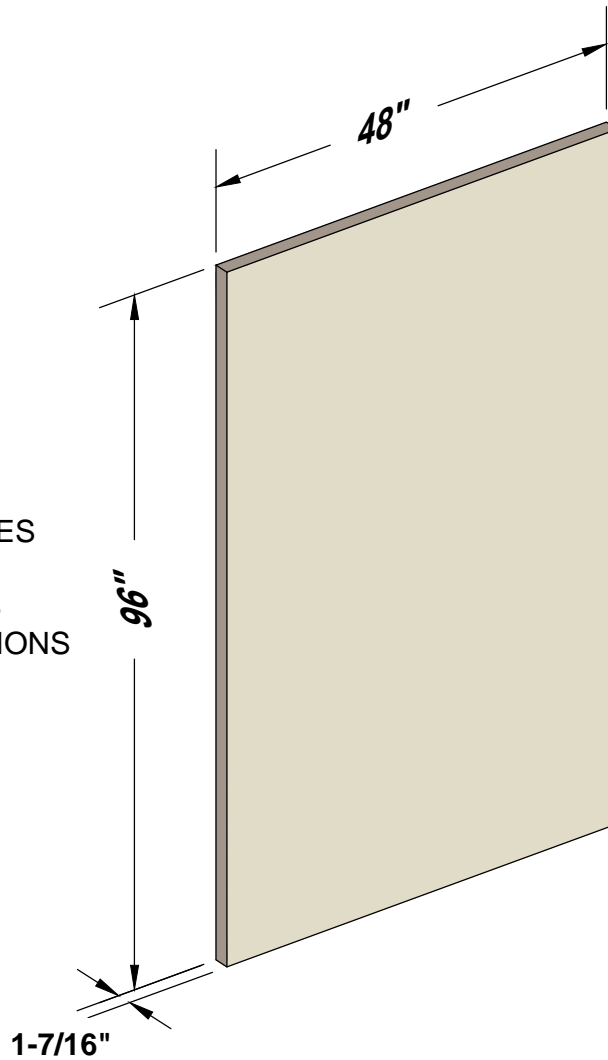

## APPLICATIONS

- MILITARY
- RETAIL
- BANKS
- COURTHOUSES
- SCHOOLS
- SAFE ROOMS
- POLICE STATIONS

## PHYSICAL PROPERTIES

- 1 7/16" THICK
- 16 POUNDS SQ. FOOT
- FIRE RESISTANT
- FLAT RIGID PANEL

## ADVANTAGES

- AVAILABLE IN 1 TO 2 DAYS
- EASY TO INSTALL
- INSTALL OVER EXISTING WALLS

## IMPORTANT NOTES

- ALL JOINTS REQUIRE 2" + OVERLAP
- 4" WIDE BALLISTIC BATTEN STRIP AT VERTICAL JOINTS
- ALL PENETRATIONS MUST BE BALLISTIC BACKED

## PERFORMANCE STANDARDS

- UL 752 LEVEL 8 (RIFLE)
- NIJ III 0108.01 (RIFLE)
- RESISTANT RIFLE UP TO 7.62X51/308 WIN
- 5 SHOTS IN 12"X12" AREA
- 1 HOUR FIRE RESISTANT ASTM E119
- RESISTANT TO FORCED ENTRY



LIBERTY SHIELDING