
Dual 96A EV Charger AC (48A+48A) or 1 hose up to 65A








POWERED BY USCharger

- 5-YEAR Turn-Key INSTALL
- SOFTWARE INTEGRATED
- SHORT LEAD TIMES
- MONTHLY AS A SERVICE OPTION
- EV PROGRAM COMPLIANT

Quality Hardware with the versitility to be applied to a wide range of projects!

Options

- 5-YEAR PRODUCT WARRANTY
- 5-YEAR SERVICE LEVEL WARRANTY
- 5-YEAR CELLULAR CONNECTIVITY
- 5-YEAR SOFTWARE LICENSES
- 5-YEAR TECH SUPPORT

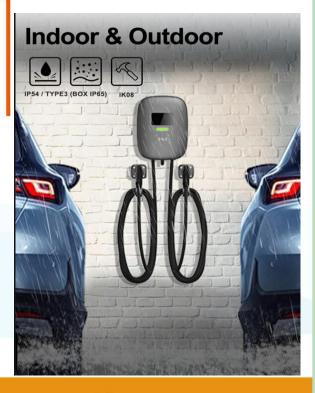

CONTACT USCharger TODAY!

INFO@USCHARGER.COM

PHONE: 561-693-7511

ENIAC ENERGY LLC. Phone: 1-561-693-7511 Email:INFO@USCharger.com

Solutions...

FUTURE PROOFING

USChargersolutions are designed so that your charger network can be effortlessly scaled to grow when needed. The solutions are modular so you can start smaller and add power later. Simply add dispensers to the upgradable power cabinet over time and save on total project cost. This product is highly configurable with a range of charger sizes and possibilities.





QUALITY & SERVICEABILITY

USChargerproducts are sturdy yet functional and are tested to last with even the roughest driver handling in the harshest environments. 90% of challenges can be solved with just 4 parts. With remote diagnostics, redundant architecture and modularity of parts, are simple to service.



INTEGRATED SOFTWARE

Our engineering team worked closely with manufactures for their entire product line-up. Software manages all power, billing and driver interaction and each comes with a 5-year software license.



NEVI ASSEMBLED IN AMERICA SKD

SEMI-KNOCK-DOWN KIT AVAILABLE TO MEET USA MADE IN AMERICA 2023 REQUIREMENTS THROUGH JULY 2024.

	DATASHEET
Model No.	USC-EVCD1/96AC
Input Voltage	208-240Vac
Frequency	50-60Hz
Amperage	48A+48A
Max. Power Output	11.5kW+11.5kW
Product Dimensions	18.5"x 13.4"x 4.4"
Protection & Standar	d
Charging Interface	SAE J1772 Compliant, Type 1 Plug
Safety Compliance	UL2594, UL2231-1/-2
Multiple Protection	UVP, OVP, RCD (CCID 20), SPD, Ground Fault Protection OCP, OTP, Control Pilot Fault Protection
Environmental	
Operating Temp.	-22°F to 122°F
Relative Humidity	Up to 95% non-condensing
Cable Length	25ft Standard

ABOUT

USCharger designs, manufactures and commercializes charging solutions and services for electric vehicles and machines operating in the most demanding conditions.